


START



- () 2.2 megohm (red-red-green).
- () 1 megohm (brown-black-green).
Use sleeving on one lead.
- () 4700 Ω (yellow-violet-red).
- () 500 pf disc.
- () 47 K Ω (yellow-violet-orange).
Use sleeving on one lead.
- () .02 μ fd disc.
- () 22 K Ω (red-red-orange).
- () 47 pf disc.
- () 47 pf disc.
- () Solder all connections and cut off excess leads.

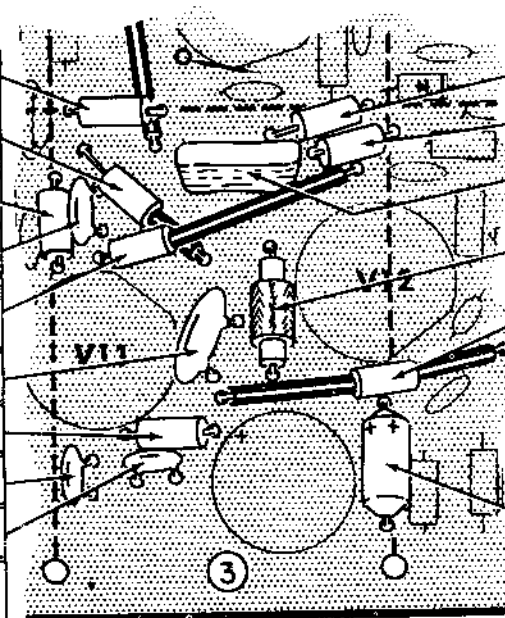

BOARD SECTION 3C

CONTINUE



- () 1 megohm (brown-black-green).
- () 100 K Ω (brown-black-yellow).
- () .47 μ fd Mylar.
- () 2 mh (#45-47) choke. Bend each lead toward the slot.
- () 2.2 megohm (red-red-green).
Use sleeving on both leads.
- NOTE: When installing electrolytic capacitors, position the positive (+) lead in the (+) marked hole in the circuit board.
- () 10 μ fd electrolytic. Note position of (+) end.
- () Solder all connections and cut off excess leads.

NOW PERFORM THE STEPS
ON PICTORIAL 1-7.

PICTORIAL 1-6