


Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------

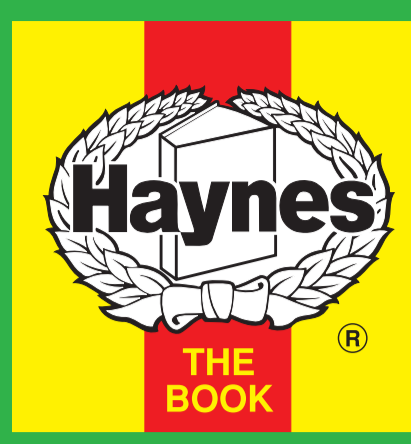

## Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

### Engine and cooling system J5, Express & Triaxle 2.0 1987 to 1991

Type		XN1TA (170C) (72kW)
Capacity (cm <sup>3</sup> ) / number of cylinders		1971 / 4
Compression ratio / pressure	bar	8.8 / _
Oil pressure	bar	2.7 [3.8]
Oil temperature	°C	90
Valve clearance - inlet	mm	0.10
Valve clearance - exhaust	mm	0.25
Firing order		1-3-4-2
No 1 cylinder position		FE
Thermostat opening temperature	°C	82
Radiator cap pressure	bar	1.0

### Fuel system J5, Express & Triaxle 2.0 1987 to 1991

Idle speed - manual [auto]	rpm	900 to 950
Fast idle speed - manual [auto]	rpm	_
CO @ idle speed [3000 rpm] - see page VI	%	1.5 to 2.0
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	≥10.0
O <sub>2</sub> @ idle speed [3000 rpm] - see page VI	%	_
Carburettor / fuel injection		Solex
Type / ref		34 PBISA16 (PEU A425)
Main jet / needle		127.5
Injection pressure	bar	_
Pump pressure	bar	0.32
Octane rating	RON	96[R]

### Ignition system J5, Express & Triaxle 2.0 1987 to 1991

Type		Electronic
Ignition coil		_
Primary resistance	ohms	0.82
Ballast resistor	ohms	_
Voltage - Tmnl 15(+) to earth	V	_
Distributor		Ducellier
Points gap (air gap)	mm	_
Dwell angle	° (%)	_
Condenser capacity	µF	_
Rotation		Clockwise
Ignition timing - basic [static	° Crankshaft @ rpm	10 BTDC @ 700 <sup>1</sup>
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	C013-D018
	° Crankshaft @ rpm	_
	° Crankshaft @ rpm	_
Centrifugal check.	° Crankshaft @ rpm	10 to 15 @ 1300
	° Crankshaft @ rpm	19 to 23 @ 1800
	° Crankshaft @ rpm	25 to 29 @ 3000
Vacuum range check	mbar	200 to 533
Maximum vacuum advance	° Crankshaft	12 to 16
Spark plugs		Bosch/Champion
Type		W7DC / N281YC
Electrode gap	mm	0.65

### Electrical system J5, Express & Triaxle 2.0 1987 to 1991

Battery	V / CC / RC	12 / 255 / 85
Alternator voltage / full load current / engine rpm		13.8 to 14.8 / _ / 3000
Starter motor current / voltage - cranking	A / V	_
- locked	A / V	330 to 400 / _

### Running gear J5, Express & Triaxle 2.0 1987 to 1991

<b>Brakes -</b>		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	_

<b>Tyres</b>		
Saloon	Size	_
Estate / Van	Size	195/75x16
Pressure - front / rear - Saloon	bar	_
- Estate / Van	bar	4.5 / 4.5

### Front suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	-0.5±1.0
Camber		+1°±30'
Castor		0±30'
King pin inclination		+11°

### Rear suspension / wheel alignment

Toe-in (+) / Toe-out (-)	mm [°]	0±1.0
Camber		0

### Torque wrench settings J5, Express & Triaxle 2.0 1987 to 1991

Cylinder head - stage 1	Nm	50, then slacken <sup>2</sup>
- stage 2	Nm	20 + 90 <sup>2</sup>
Cylinder head - stage 3	Nm	Warm up & cool, slacken <sup>2</sup>
- stage 4	Nm	20 + 90 <sup>2</sup>
Big-end bearings	Nm	40
Main bearings	Nm	75
Clutch cover	Nm	15
Flywheel [driveplate]	Nm	68
Front hubs	Nm	500
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	160
Spark plugs	Nm	25

### Capacities J5, Express & Triaxle 2.0 1987 to 1991


Engine oil & filter	litres	4.0
Gearbox - 4-speed [5-speed]	litres	1.6
Automatic transmission - refill	litres	_
Final drive	litres	WT
Cooling system	litres	9.0
Fuel tank	litres	70

### Notes and Illustrations


<sup>1</sup>7.88 ▶: 6 BTDC @ 700

<sup>3</sup>Engine 031 999 ▶: 50, slacken, then 20 + 180°. Warm up, + 35°


1: Idle speed 2: CO / Mixture

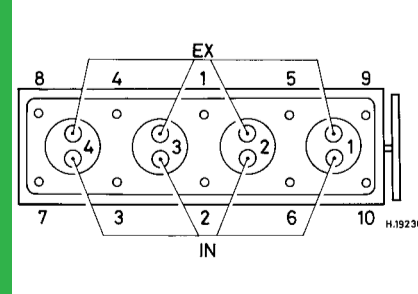

1971 cm<sup>3</sup>

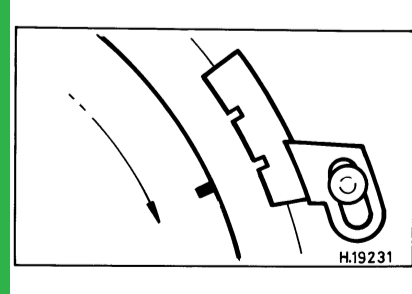

1971 cm<sup>3</sup>

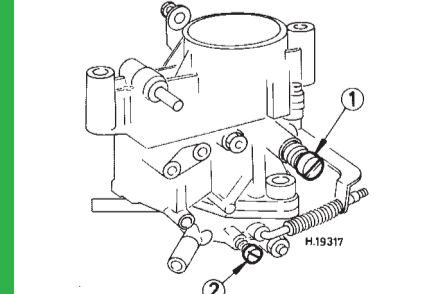

Solex PBISA