

COMMUNICATIONS MICROPHONE MC-60A

INSTRUCTION MANUAL

■ FEATURES

The MC-60A microphone is designed expressly for use with your amateur communication system. It provides excellent performance when used with any KENWOOD transceiver, thereby upgrading your existing system.

The zinc die-cast base offers high stability, and is complete with a feather-touch PTT switch, rocker UP/DOWN switch, an impedance selector switch and a built-in preamplifier.

NOTE: For UP/DOWN switch operation, refer to your transceiver's manual.

CAUTION:

1. The microphone is constructed of precision parts. Do not open the microphone, as it may result in serious damage.
2. The microphone is sensitive to shock and vibration. Treat it gently.

■ INSTALLATION


1. Battery installation (Fig. 2)
2. Remove four screws as shown.
3. Install two alkaline AA cells (not NiCd). Observe polarity.
4. Reassemble base unit.

NOTE: 1. Radios with power available at the mic connector (for autopatch microphones) will not require batteries.

2. The preamp on/off switch is located on the underside of the base unit. The preamp is on in the forward switch position.

3. Connection to your transceiver.
1. Slide the microphone into the plastic bracket.
2. Connect the short base mounted cable to the rear of the microphone.
3. Connect the retractile cord from the base to the transceiver.

4. The microphone may also be used separate from the base unit, by connecting the retractile cord directly to the mic. However, the preamp is located in the base unit. Preamplification is not possible with a direct transceiver hookup.
5. The MC-60A is supplied with a standard PG-4C 8 pin to 8 pin retractile cord. For radios with a four pin mic connector, use a PG-4A (4 pin to 8 pin) option cord. For radios with a six pin mic connector, use a PG-4B (6 pin to 8 pin) option cord.

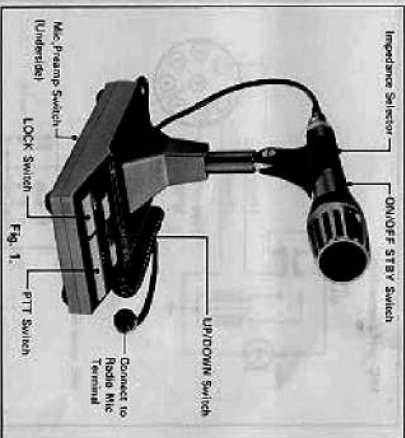

■ OPERATION


The MC-60A is equipped with a PTT switch for easy transmit/receive changeover. The PTT switch can be locked, if desired, by pressing the Lock key. To unlock the switch, simply press the Lock key once again. The Mic on/off, Lock, and PTT switches are all in parallel.

• Connection


To operate the microphone without using the stand, connect the retractile cord directly to the microphone, and use the slide-switch on the microphone for transmit/receive changeover.

• Impedance selection


The microphone impedance is selectable between 500Ω and 50kΩ by using the slide-switch on the microphone regardless of whether the stand is used. Most Tri-Kenwood HF products are 50kΩ. Some will operate from 500-50kΩ. All VHF and UHF mobile radios are 500Ω impedance.

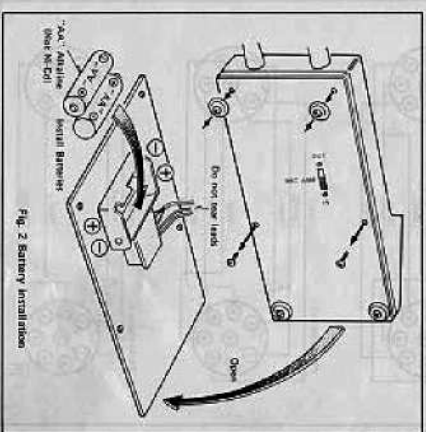


MIC unit connection

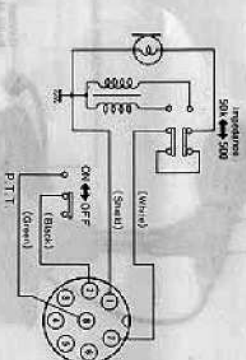


MIC stand connection

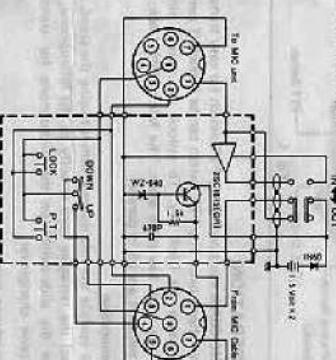

PG-4C cable connection

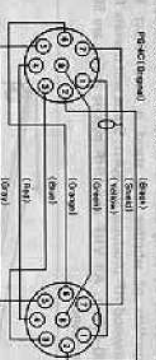

PG-4A (10 pin)

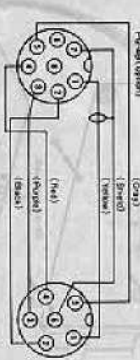

PG-4B (6 pin)



- UP/DOWN switch
The UP/DOWN switch on the base is used to select the transceiver's operating frequency.

• Microphone Preamp

This microphone may be used with any Tri-Kenwood radio. It is intended especially for FM and SSB mobile radios. The preamp is controlled by the bottom mounted switch on the base unit. Sliding the switch forward places the preamp on. Sliding the switch to the rear bypasses the preamp and disconnects the batteries. With the preamp switch on, power is always on so the microphone may be used with VOX operated equipment.

NOTE: To conserve battery power, turn the preamp off when not in use. (The amplifiers draw approximately 1 ma.)

■ SPECIFICATIONS

Type: Communication type dynamic microphone with PTT circuit.

Element: Moving coil type, unidirectional

Impedance:

50 kΩ ± 30%, 500 Ω ± 30%
slide switch selectable

Sensitivity:

10 dB - 1V_r BAF, 1000 Hz
-54.5 dB ± 3dB/50 kΩ
-71.0 dB ± 3dB/500kΩ
-56.0 dB ± 3dB/500kΩ
-71.0 dB ± 3dB/500kΩ
-50.5 dB ± 3dB/500kΩ
-59.0 dB ± 3dB/500kΩ

Frequency response:

Microphone, or
Preamp off
150 Hz - 10 kHz (-6 dB)
Preamp in
200 Hz - 7 kHz (-6 dB)
Recommended operating
distance to mic: 10 cm (4") minimum

KENWOOD CORPORATION

Group Sales Building, 7-5-2 Goshima 2-chome, Shinjuku-ku, Tokyo 160, Japan
KENWOOD U.S.A. CORPORATION
100 Bldg. 22706, 2281 East Chagrinway St., Long Beach, CA 90801, USA
KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Hertfordstrasse 16, D-8060 Hertenstein, West Germany
KENWOOD ELECTRONICS BENELUX N.V.
Mechelenweg 40 B-1500 Zaventem, Belgium
KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.
45 Woodcock Place, Lane Cove, NSW 2006, Australia
© 85705 PRINTED IN JAPAN B50-3888 04 1x04 (7)