Remington Arms Company, Inc. 870 Remington Drive PO Box 700 Madison, NC 27025-0700 (336) 548-8700 800-243-9700

REMINGTON

Arms Company, Inc.

MODEL 24 AUTOLOADING RIFLE

- Shooting Safety Commandments
- Information
- Instructions for Operation & Care of Rifle
- Components Parts Listing
- Value and Reference Book Listing

NOTE: We are pleased to accommodate your request for the Model 24 Autoloading Rifle information. The following documentation represents all information available on this model from the Remington Arms Co., Inc.

DO NOT MAKE CHANGES OR ALTERATIONS TO ANY PARTS OF A FIREARM. USE ONLY REMINGTON PARTS. NEVER MAKE AN ADJUSTMENT TO THE TRIGGER, OR CHANGE THE SHAPE OR SIZE OF THE SEAR, SEAR NOTCH, OR OTHER PARTS.

Ten Commandments of Shooting Safety


1. Always keep the muzzle pointed in a safe direction.

- Firearms should be unloaded when not in use.
 Don't rely on your gun's "safety".
 Be sure of your target and what is beyond it.
 Use correct ammunition.
 If your gun fails to fire when the trigger is pulled, handle with care!
- 8. Be sure the barrel is clear of obstructions before shooting.

7. Always wear eye and ear protection when shooting.

- 9. Do not alter or modify your gun, and have guns serviced regularly.
- 10. Learn the mechanical and handling characteristics of the firearm you are using.

<u>emington</u>



Chambered for the regular ".22 Short" cartridge


procedured of the period office chemistrated for the When the contracting to make distribut spodly in a feetier in the dente was ten 104

Markey Co. B. M. S. Walland

rve as a practical arm for the securing of ovide a great deal of pleasure and also y proprietor. For a vacation trip it will noeist, motorist, trapper and shooting galıali game. arm for the rifle enthusiast, camper HE new Remington (.22 Short) Auto loading Riffe, Model 24, is the ideal

ar that it may be obtained anywhere, even andard ".22 Short" Smokeless Greased or smok cartridge. the crossroads store in the backwoods. The Model 24 is the first Autoloading handle successfully the popular This cartridge is so pop-

coil ejects the fired shell, loads the rifle and ry to pull the trigger for each shot. The d dependable, makes possible rapid firing moving game or targets. It is only neces-The autoloading feature, which is prompt

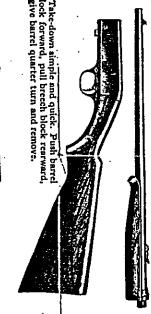




for cleaning. Push trigger plate forward and withdraw Action instantly removable

as fast as the operator desires. zine holds 15 cartridges which may be fire makes it ready for the next shot. The magi

or twigs from entering the action. 24 has the hammerless, solid breech construc empty shells out of the line of sight and away tion that is so effective in keeping dirt, rai from the shooter's face. from the underside of the receiver keeps th Like other-Remington firearms, the Med Ejectio

ment of barrel with receiver when assemble the barrel from the breech in the propy the use of tools and permits the cleaning of Repeating Shotguns insures the rigid align tem of take-down as used in The barrel may be removed instantly withou The same strong, interrupted thread sy Remington

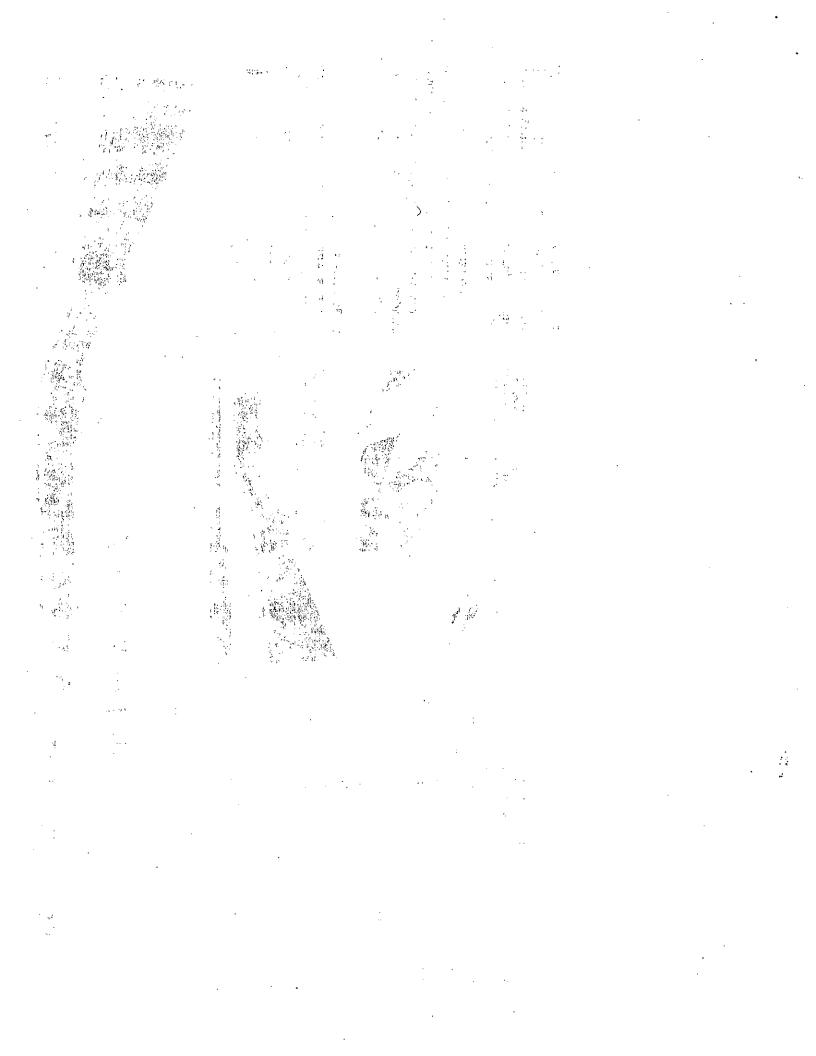

ANNOUNCEMENT

Submitting J. M. Browning's Latest Design of the
Autoloading Rifle



MODEL 24 AUTOLOADING RIFLE

Solid Breech

Hammerless

Take-down

Made for Standard .22 Caliber Short Cartridge Only

Bottom Ejector



HE Model 24 Remington Hammerless Autoloading Rifle is the product of latest design, especially intended to meet the demand for an autoloading small caliber rifle, for shooting gallery and other short range purposes, which will successfully handle the standard .22 caliber short cartridge.

This model embodies all the popular features of the modern autoloading rifle and in addition can be very easily dismounted for thoroughly cleaning and oiling the barrel and action.

It is provided with convenient safety devices, and highly recommended for all who desire a reliable arm.

REMINGTON ARMS COMPANY, Inc.

25 Broadway, Cunard Building
NEW YORK CITY

Remington

Page 69

Model 24.22 Caliber Autoloading Rifles

Chambered for two Cartridges .22 Short or .22 Long Rifle Cartridge, Not Interchangeable.



Solid Breech

Hammerless

Take-Down

HE new Remington Model 24, is the first autoloading rifle to successfully bandle .22 short Smokeless Greased or Lesmok cartridges.


It is also made to take the .22 Long Rifle Smokeless or Lesmok Cartridges.

The Model 24 has the hammerless, solid breech construction, preventing dirt, rain or twigs from entering the action which construction gives the arm a very pleasing appearance. The cartridges may be fired as fast as desired, by pulling the trigger for each shot. The recoil ejects the fired shell, loads the rifle, making it ready for the next shot.

The safety is of the Cross-bolt type, conveniently located in front portion of trigger guard for operation with trigger finger.

The strong, interrupted thread system of take-down insures the rigid alignment of barrel with receiver when assembled. The barrel may be removed instantly without the use of tools, and permits the cleaning of the barrel from the breech in the proper manner. The action is simple and strong and easily taken apart for cleaning.

To put rifle together grasp receiver firmly in right hand, insert the barrel (with fore-end projecting to left) quarterwise into the receiver as far as possible, give barrel quarter turn to right until stopped. Push barrel lock, located in lower side of fore-end, into notch in receiver to prevent barrel from loosening.

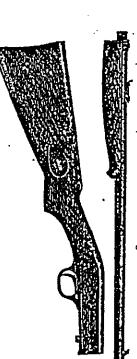

To take down, push barrel lock forward, pull breech block partly rearward, give harrel quarter turn to left and withdraw. Barrel may now be cleaned from breech in proper manner.




Chambered for the .22 Short or .22 Long Rife Cartridge Not Interchangeable.


Take-Down

Solid Breech


Hammerless

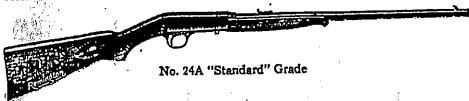

SPECIFICATIONS:-19-inch Remington steel, round barrel, half pistol grip stock of American walnut, fitted with steel butt pinte. Chambered to take the .22 short cartridge only or the .22 long rifle cartridge only. Specify which is desired. When chambered for .22 short, magazine holds fifteen cartridges, .22 long rifle, ten. One rifle is not supplied to take both cartridges. Sights regularly furnished; rear sight with screw adjustment for clevation and white metal bead front sight; top of receiver is matted. Length over all, 37 inches. Length taken down, 19 inches. Remington cartridges have been especially developed to give best results in this rifls and their use is strongly recommended. Greated eartridget should always be used. Weight about 41/4 lbs.

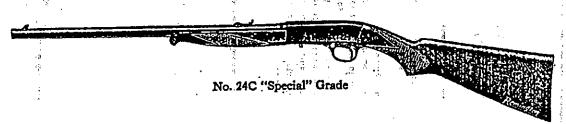

SPECIFICATIONS:-Same se No. 24A, except that stock and fore-end are of selected imported walnut, neatly checkered. Special nights adapted to this rife shown on pages 91, 92 and 93.

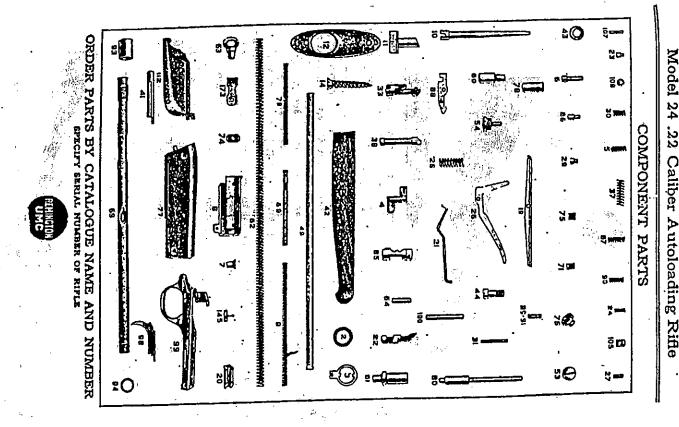

Firearms Value & Reference Books

NOTE: We do not provide information on firearms' values. You may want to have your firearm appraised by a gunsmith. The following sources may also be helpful. We do not accept responsibility for the goods or services provided by these sources.

Firearms Value Books

Blue Book of Gun Values
Blue Book Publications
8009 34th Avenue South #175
Minneapolis, MN 55425
800-877-GUNS

Flayderman's Guide to Firearm Values
Gun List
Modern Gun Values
Krause Publications
700 East State Street
Iola, WI 54990-0001
847-573-8530

Gun Trader's Guide
Stoeger Publishing Company
5 Mansard Court
Wayne, NJ 07470
973-872-9500

Reference Books

The Remington 700 John Flacy Brownells, Inc. 200 South Front Street Montezuma, IA 50171 515-623-5401 Cartridges of the World
Frank C. Barnes
Standard Catalog of Firearms
Krause Publications
700 East State Street
Iola, WI 54990-0001
847-573-8530

Shooter's Bible
Stoeger Publishing Company
5 Mansard Court
Wayne, NJ 07470
973-872-9500

Remington, America's Oldest
Gunmanker
Remington Arms Co.
PO Box 700
Madison, NC 27025
Attention: History Book
800-423-8495

and the second of the second o

en de la companya de la co

The first of the second of the

全域系统 2 11/14 13 No. of the second second e e e 1 ...

the artificial section of the sectio State of the state