

TECHNICAL REPORT



**Field device tool (FDT) interface specification –
Part 502: Communication implementation for common object model – IEC 61784
CPF 2**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

TECHNICAL REPORT



**Field device tool (FDT) interface specification –
Part 502: Communication implementation for common object model – IEC 61784
CPF 2**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

S

ICS 25.040.40; 35.100.05; 35.110

ISBN 2-8318-1058-6

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms, definitions, symbols, abbreviated terms and conventions	7
3.1 Terms and definitions	7
3.2 Symbols and abbreviated terms.....	7
3.3 Conventions	7
3.3.1 Data type names and references to data types	7
3.3.2 Vocabulary for requirements	7
4 Bus category	8
5 Access to instance and device data	8
6 Protocol specific behavior.....	8
7 Protocol specific usage of general data types	8
8 Protocol specific common data types – DTMCIPIDataSchema	8
9 Network management data types.....	11
9.1 General.....	11
9.2 Node address	11
9.3 Scanner/Master – Bus Parameter Set (CIP) – FDTCIPDTMParameterSchema	11
10 Communication data types	16
11 Channel parameter data types.....	17
12 Device identification	19
12.1 Device type identification data types – FDTCIPIdentSchema	19
12.2 Topology scan data types.....	19
12.3 Scan identification data types – FDTCIPScanIdentSchema	19
12.4 Device type identification data types – FDTCIPDeviceTypeIdentSchema.....	20
Annex A (informative) Implementation hints	21
Bibliography.....	22
Figure 1 – Part 502 of the IEC 62453 series	5
Table 1 – Protocol specific usage of general attributes	8

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

**Part 502: Communication implementation for common object model –
IEC 61784 CPF 2**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC/TR 62453-502, which is a technical report, has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation:

This part, in conjunction with the other parts of the first edition of the IEC 62453 series cancels and replaces IEC/PAS 62453-1, IEC/PAS 62453-2, IEC/PAS 62453-3, IEC/PAS 62453-4 and IEC/PAS 62453-5 published in 2006, and constitutes a technical revision.

Each part of the IEC/TR 62453-5xy series is intended to be read in conjunction with its corresponding part in the IEC 62453-3xy series.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
65E/66/DTR	65E/115/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The list of all parts of the IEC 62453 series, under the general title *Field Device Tool (FDT) interface specification*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

INTRODUCTION

This part of IEC 62453 is an interface specification for developers of FDT (Field Device Tool) components for function control and data access within a client/server architecture. The specification is a result of an analysis and design process to develop standard interfaces to facilitate the development of servers and clients by multiple vendors that need to interoperate seamlessly.

With the integration of fieldbusses into control systems, there are a few other tasks which need to be performed. In addition to fieldbus- and device-specific tools, there is a need to integrate these tools into higher-level system-wide planning- or engineering tools. In particular, for use in extensive and heterogeneous control systems, typically in the area of the process industry, the unambiguous definition of engineering interfaces that are easy to use for all those involved is of great importance.

A device-specific software component, called DTM (Device Type Manager), is supplied by the field device manufacturer with its device. The DTM is integrated into engineering tools via the FDT interfaces defined in this specification. The approach to integration is in general open for all kind of fieldbusses and thus meets the requirements for integrating different kinds of devices into heterogeneous control systems.

Figure 1 shows how IEC/TR 62453-502 is aligned in the structure of IEC 62453 series.

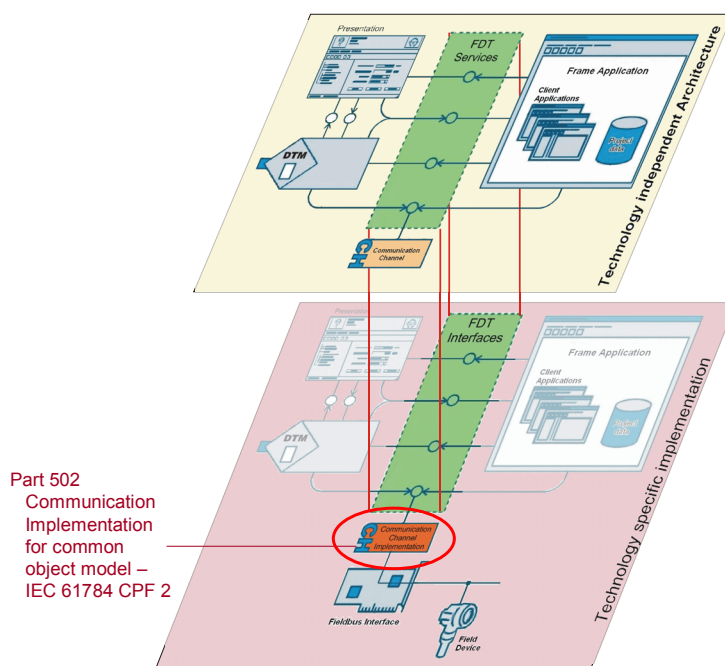


Figure 1 – Part 502 of the IEC 62453 series

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

Part 502: Communication implementation for common object model – IEC 61784 CPF 2

1 Scope

IEC/TR 62453-502, which is a technical report, provides information for integrating the CIP™ technology into the COM based implementation of FDT interface specification (IEC/TR 62453-5).

Communication Profile Family 2 (commonly known as CIP™¹) defines communication profiles based on IEC 61158-2 Type 2, IEC 61158-3-2, IEC 61158-4-2, IEC 61158-5-2, and IEC 61158-6-2, IEC 62026-3. The basic profiles CP 2/1 (ControlNet™²), CP 2/2 (EtherNet/IP™³), and CP 2/3 (DeviceNet™¹) are defined in IEC 61784-1 and IEC 61784-2. An additional communication profile (CompoNet™), also based on CIP™, is defined in [13].

This part of IEC 62453 specifies communication and other services.

This specification neither contains the FDT specification nor modifies it.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-3-2, *Industrial communication networks – Fieldbus specifications – Part 3-2: Data-link layer service definition – Type 2 elements*

IEC 61158-4-2, *Industrial communication networks – Fieldbus specifications – Part 4-2: Data-link layer protocol specification – Type 2 elements*

IEC 61158-5-2, *Industrial communication networks – Fieldbus specifications – Part 5-2: Application layer service definition – Type 2 elements*

¹ CIP™ (Common Industrial Protocol), DeviceNet™ and CompoNet™ are trade names of Open DeviceNet Vendor Association, Inc (ODVA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this standard does not require use of the trade names CIP™, DeviceNet™ or CompoNet™. Use of the trade names CIP™, DeviceNet™ or CompoNet™ requires permission of Open DeviceNet Vendor Association, Inc.

² ControlNet™ is a trade name of ControlNet International, Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNet™. Use of the trade name ControlNet™ requires permission of ControlNet International, Ltd.

³ EtherNet/IP™ is a trade name of ControlNet International, Ltd. and Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IP™. Use of the trade name EtherNet/IP™ requires permission of either ControlNet International, Ltd. or Open DeviceNet Vendor Association, Inc.

IEC 61158-6-2, *Industrial communication networks – Fieldbus specifications – Part 6-2: Application layer protocol specification – Type 2 elements*

IEC 61784-1, *Industrial communication networks – Profiles – Part 1: Fieldbus profiles*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3*

IEC 62026-3, *Low-voltage switchgear and controlgear – Controller-device interfaces (CDIs) – Part 3: DeviceNet*

IEC 62453-1:2009, *Field Device Tool (FDT) interface specification – Part 1: Overview and guidance*

IEC 62453-2:2009, *Field Device Tool (FDT) interface specification – Part 2: Concepts and detailed description*

IEC/TR 62453-41:2009, *Field Device Tool (FDT) interface specification – Part 41: Object model integration profile – Common object model*

IEC 62453-302:2009, *Field Device Tool (FDT) interface specification – Part 302: Communication profile integration – IEC 61784 CPF 2*

3 Terms, definitions, symbols, abbreviated terms and conventions

3.1 Terms and definitions

For the purpose of this document, the terms and definitions given in IEC 62453-1 and IEC 62453-2 apply.

3.2 Symbols and abbreviated terms

For the purpose of this document, the symbols and abbreviations given in IEC 62453-1, IEC 62453-2 and the following apply.

CIP™	Common Industrial Protocol	
CP	Communication Profile	[IEC 61784-1]
CPF	Communication Profile Family	[IEC 61784-1]
EDS	Electronic Data Sheet	[ISO 15745]
UML	Unified Modelling Language	[ISO/IEC 19501]

3.3 Conventions

3.3.1 Data type names and references to data types

The conventions for naming and referencing of data types are explained in IEC 62453-2 Clause A.1

3.3.2 Vocabulary for requirements

The following expressions are used when specifying requirements.

Usage of “shall” or “Mandatory”	No exceptions allowed.
---------------------------------	------------------------

Usage of “should” or “Recommended” Strong recommendation. It may make sense in special exceptional cases to differ from the described behavior.

Usage of “can” or “Optional” Function or behavior may be provided, depending on defined conditions.

4 Bus category

IEC 61784 CPF 2 protocol is identified in the attribute busCategory of the BusCategory element by the identifiers, as specified in IEC 62453-302.

5 Access to instance and device data

The elements and attributes specified in this clause are used at following methods:

- IDtmParameter::GetParameters()
- IDtmParameter::SetParameters()

All parameters defined in the Params section of the EDS shall be exposed in the ExportedVariables element.

6 Protocol specific behavior

IEC 61784 CPF 2 protocol specific requirements are specified in IEC 62453-302.

7 Protocol specific usage of general data types

Table 1 shows how general attributes are used with IEC 61784 CPF 2 devices.

Table 1 – Protocol specific usage of general attributes

Attribute	Description for use
fdt:address	All these attributes of the FDTDatatype schema are used as defined in IEC 62453-302.
fdt:protocolId	
fdt:deviceTypeId	
fdt:deviceTypeInfo	
fdt:deviceTypeInfoPath	
fdt:manufacturerId	
fdt:semanticId	
fdt:applicationDomain	
fdt:tag	

8 Protocol specific common data types – DTMCIPODataSchema

This schema specifies the protocol specific common XML elements and attributes, which are used in other schemas. The definition of the elements and attributes follows the data type definitions in IEC 62453-302.

<?xml version="1.0"?>

```

<Schema name="DTMCIPDataTypeSchema" xmlns="urn:schemas-microsoft-com:xml-data"
xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:fdt="x-schema:FDTDataTypesSchema.xml"
xmlns:dtmInfo="x-schema:DTMInformationSchema.xml">
  <!-- Version of the Schema -->
  <AttributeType name="schemaVersion" dt:type="number" default="1.0"/>
  <!-- Definition of Attributes -->
  <AttributeType name="classId" dt:type="ui2"/>
  <AttributeType name="instanceId" dt:type="ui2"/>
  <AttributeType name="attributeId" dt:type="ui1"/>
  <AttributeType name="vendorID" dt:type="ui2"/>
  <AttributeType name="deviceType" dt:type="ui2"/>
  <AttributeType name="productCode" dt:type="ui2"/>
  <AttributeType name="majorRevision" dt:type="ui1"/>
  <AttributeType name="minorRevision" dt:type="ui1"/>
  <AttributeType name="serialNumber" dt:type="bin.hex"/>
  <AttributeType name="productName" dt:type="string"/>
  <AttributeType name="cipStatus" dt:type="ui2"/>
  <AttributeType name="portNumber" dt:type="ui2"/>
  <AttributeType name="extendedIdentifier" dt:type="string"/>
  <AttributeType name="shortIdentifier" dt:type="ui1"/>
  <AttributeType name="serviceCode" dt:type="ui1"/>
  <AttributeType name="serviceName" dt:type="string"/>
  <!-- refer to CIP Spec datatype definition Vol 1 C-2 through C-6 -->
  <AttributeType name="dataType" dt:type="enumeration" dt:values="byte float double int unsigned enumerator
bitEnumerator index ascii password bitString hexString date time dateAndTime duration binary structured
dtmSpecific"/>
  <AttributeType name="ePath" dt:type="bin.hex"/>
  <AttributeType name="bitOffset" dt:type="ui4"/>
  <AttributeType name="constValue" dt:type="ui4"/>
  <AttributeType name="symbolicAddress" dt:type="string"/>
  <!--Definition of Elements-->
  <ElementType name="Service" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="serviceCode" required="yes"/>
    <attribute type="serviceName" required="no"/>
  </ElementType>

  <ElementType name="CIPObjectId" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="classId" required="yes"/>
    <attribute type="instanceId" required="yes"/>
    <attribute type="attributeId" required="no"/>
  </ElementType>

  <ElementType name="CIPSymbolicAddress" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="symbolicAddress" required="yes"/>
  </ElementType>

  <!-- See CIP Specification Appendix C-1 -->
  <ElementType name="HexAddress" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="ePath" required="yes"/>
  </ElementType>

  <ElementType name="CIPObjectAddress" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <group order="one" minOccurs="1" maxOccurs="1">
      <element type="CIPObjectId"/>
      <element type="CIPSymbolicAddress"/>
      <element type="HexAddress"/>
    </group>
  </ElementType>

  <ElementType name="ParameterReference" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:idref" required="yes"/>
    <attribute type="bitOffset" required="no"/>
  </ElementType>

```

```

<ElementType name="Constant">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="constValue" required="yes"/>
</ElementType>

<ElementType name="ExtendedIdentifier" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="extendedIdentifier" required="yes"/>
</ElementType>

<ElementType name="ShortIdentifier" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="shortIdentifier" required="yes"/>
</ElementType>

<ElementType name="CIPNodeID" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="ExtendedIdentifier"/>
    <element type="ShortIdentifier"/>
  </group>
</ElementType>

<ElementType name="LinkAddress" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="CIPNodeID" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="Segment" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="portNumber" required="yes"/>
  <element type="LinkAddress" minOccurs="1" maxOccurs="1"/>
  <element type="Segment" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="RoutingPath" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="Segment" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="CIPPath" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="RoutingPath" minOccurs="0" maxOccurs="1"/>
  <element type="CIPNodeID" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="CIPDeviceIdentity" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="vendorID" required="yes"/> <!-- Identity Object Attribute 1 -->
  <attribute type="deviceType" required="yes"/> <!-- Identity Object Attribute 2 -->
  <attribute type="productCode" required="yes"/> <!-- Identity Object Attribute 3 -->
  <attribute type="majorRevision" required="yes"/> <!-- Identity Object Attribute 4.1 -->
  <attribute type="minorRevision" required="yes"/> <!-- Identity Object Attribute 4.2 -->
  <attribute type="serialNumber" required="yes"/> <!-- Identity Object Attribute 6 -->
  <attribute type="productName" required="yes"/> <!-- Identity Object Attribute 7 -->
</ElementType>

<ElementType name="CIPDevice" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="cipStatus" required="yes"/> <!-- Identity Object Attribute 5 -->
  <element type="CIPPath" minOccurs="1" maxOccurs="1"/>
  <element type="CIPDeviceIdentity" minOccurs="1" maxOccurs="1"/>
</ElementType>

<!-- used for reserved bits anywhere -->
<ElementType name="ReservedBits" content="eltOnly" model="open">
</ElementType>

</Schema>

```

9 Network management data types

9.1 General

The elements and attributes specified in this clause are used at following methods:

- IDtmParameter:GetParameters
- IDtmParameter:SetParameters

9.2 Node address

The CIPNodeID will be stored in the busAddress attribute of the fdt:MasterSlaveBus element. This is not used for CompoNet because the master has a fixed address – since this is a mandatory element, the recommendation is to use the value “0”.

9.3 Scanner/Master – Bus Parameter Set (CIP) – FDT CIPDTMParameterSchema

Information is sent to the CIP scanner/master within the UserDefinedBus element in the BusInformation element, using the CIPNode element defined in the schema below. This information shall be set to configure the scan list of scanner/master.

```
<?xml version="1.0"?>
<Schema name="FDT CIPDTMParameterSchema" xmlns="urn:schemas-microsoft-com:xml-data"
xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:fdt="x-schema:FDTDataTypesSchema.xml" xmlns:cip="x-
schema:DTMCIPDataTypeSchema.xml" xmlns:fdtpar="x-schema:DTMParameterSchema.xml">
  <!-- Version of the Schema -->
  <AttributeType name="schemaVersion" dt:type="number" default="1.1"/>
  <!--Definition of Attributes-->
  <AttributeType name="producedConnectionSize" dt:type="ui2"/>
  <AttributeType name="consumedConnectionSize" dt:type="ui2"/>
  <AttributeType name="expectedPacketRate" dt:type="ui2"/>
  <AttributeType name="inhibitTime" dt:type="ui2"/>
  <AttributeType name="rpi" dt:type="ui4"/>
  <AttributeType name="connectionNameString" dt:type="string"/>
  <AttributeType name="helpString" dt:type="string"/>
  <AttributeType name="compoNetIOLengthUnit" dt:type="ui1"/>
  <AttributeType name="compoNetIOLength" dt:type="ui2"/>
  <!--TriggerAndTransport attributes-->
  <AttributeType name="class0" dt:type="boolean" default="0"/>
  <AttributeType name="class1" dt:type="boolean" default="0"/>
  <AttributeType name="class2" dt:type="boolean" default="0"/>
  <AttributeType name="class3" dt:type="boolean" default="0"/>
  <AttributeType name="class4" dt:type="boolean" default="0"/>
  <AttributeType name="class5" dt:type="boolean" default="0"/>
  <AttributeType name="class6" dt:type="boolean" default="0"/>
  <AttributeType name="triggerCyclic" dt:type="boolean" default="0"/>
  <AttributeType name="triggerChangeOfState" dt:type="boolean" default="0"/>
  <AttributeType name="triggerApplication" dt:type="boolean" default="0"/>
  <AttributeType name="transportTypeListenOnly" dt:type="boolean"/>
  <AttributeType name="transportTypeInputOnly" dt:type="boolean"/>
  <AttributeType name="transportTypeExclusiveOwner" dt:type="boolean"/>
  <AttributeType name="transportTypeRedundantOwner" dt:type="boolean"/>
  <AttributeType name="server" dt:type="boolean" default="0"/>
  <!--ConnectionParameters attributes-->
  <AttributeType name="fixedSizeSupported" dt:type="boolean" default="0"/>
  <AttributeType name="variableSizeSupported" dt:type="boolean" default="0"/>
  <AttributeType name="realTimeTransferFormat" dt:type="ui1" default="0"/>
  <AttributeType name="connectionTypeNULL" dt:type="boolean" default="0"/>
  <AttributeType name="connectionTypeMulticast" dt:type="boolean" default="0"/>
  <AttributeType name="connectionTypePoint2Point" dt:type="boolean" default="0"/>
  <AttributeType name="priorityLow" dt:type="boolean" default="0"/>
  <AttributeType name="priorityHigh" dt:type="boolean" default="0"/>
  <AttributeType name="priorityScheduled" dt:type="boolean" default="0"/>
  <AttributeType name="async" dt:type="ui1"/>
  <AttributeType name="maxConsumerNumber" dt:type="ui1" default="15"/>

```

```

<AttributeType name="maxSafetyConnections" dt:type="ui1"/>
<AttributeType name="maxSafetyInputCnxns" dt:type="ui1"/>
<AttributeType name="maxSafetyOutputCnxns" dt:type="ui1"/>
<AttributeType name="defaultSafetyConnections" dt:type="ui1"/>
<AttributeType name="scld" dt:type="bin.hex"/>
<AttributeType name="unld" dt:type="bin.hex"/>
<AttributeType name="defaultValue" dt:type="string"/>
<AttributeType name="defaultConnection" dt:type="boolean" default="0"/>
<AttributeType name="maxCIPConnections" dt:type="ui2"/>
<AttributeType name="maxIOConnections" dt:type="ui2"/>
<AttributeType name="maxEMConnections" dt:type="ui2"/>

<AttributeType name="offset" dt:type="i2"/>
<AttributeType name="base" dt:type="ui2"/>
<AttributeType name="multiplier" dt:type="ui2"/>
<AttributeType name="div" dt:type="ui2"/>
<AttributeType name="precision" dt:type="ui2"/>
<AttributeType name="compoNetDeviceCategory" dt:type="ui1"/>

<!--Definition of Elements-->
<ElementType name="Scaling" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="offset" required="yes"/>
  <attribute type="base" required="yes"/>
  <attribute type="multiplier" required="yes"/>
  <attribute type="div" required="yes"/>
  <attribute type="precision" required="no"/>
</ElementType>

<ElementType name="ProducedAssemblyReference" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="cip:CIPObjectAddress" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="ConsumedAssemblyReference" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="cip:CIPObjectAddress" minOccurs="1" maxOccurs="1"/>
</ElementType>

<!-- DeviceNet type of connections -->
<ElementType name="MasterSlaveConnection" content="mixed" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="producedConnectionSize" required="yes"/>
  <attribute type="consumedConnectionSize" required="yes"/>
  <attribute type="expectedPacketRate" required="no"/>
  <attribute type="inhibitTime" required="no"/>
  <element type="ConsumedAssemblyReference" minOccurs="0" maxOccurs="1"/>
  <element type="ProducedAssemblyReference" minOccurs="0" maxOccurs="1"/>
</ElementType>

<!-- forward_open type of connections -->
<ElementType name="TransportTypeListenOnly" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="transportTypeListenOnly" required="yes"/>
</ElementType>

<ElementType name="TransportTypeInputOnly" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="transportTypeInputOnly" required="yes"/>
</ElementType>

<ElementType name="TransportTypeExclusiveOwner" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="transportTypeExclusiveOwner" required="yes"/>
</ElementType>

<ElementType name="TransportTypeRedundantOwner" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="transportTypeRedundantOwner" required="yes"/>
</ElementType>

```

```

<ElementType name="TriggerAndTransport" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="class0" required="no"/>
  <attribute type="class1" required="no"/>
  <attribute type="class2" required="no"/>
  <attribute type="class3" required="no"/>
  <attribute type="class4" required="no"/>
  <attribute type="class5" required="no"/>
  <attribute type="class6" required="no"/>
  <attribute type="triggerCyclic" required="no"/>
  <attribute type="triggerChangeOfState" required="no"/>
  <attribute type="triggerApplication" required="no"/>
  <attribute type="server" required="no"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="TransportTypeListenOnly"/>
    <element type="TransportTypeInputOnly"/>
    <element type="TransportTypeExclusiveOwner"/>
    <element type="TransportTypeRedundantOwner"/>
  </group>
  <element type="cip:ReservedBits" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="ConnectionParameters" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fixedSizeSupported" required="no"/>
  <attribute type="variableSizeSupported" required="no"/>
  <attribute type="realTimeTransferFormat" required="no"/>
  <attribute type="connectionTypeNULL" required="no"/>
  <attribute type="connectionTypeMulticast" required="no"/>
  <attribute type="connectionTypePoint2Point" required="no"/>
  <attribute type="priorityLow" required="no"/>
  <attribute type="priorityHigh" required="no"/>
  <attribute type="priorityScheduled" required="no"/>
  <element type="cip:ReservedBits" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="Target2OriginatorParameters" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="rpi" required="no"/>
  <element type="ConnectionParameters" minOccurs="1" maxOccurs="1"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="Size"/>
    <element type="Format"/>
  </group>
</ElementType>

<ElementType name="Originator2TargetParameters" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="rpi" required="no"/>
  <element type="ConnectionParameters" minOccurs="1" maxOccurs="1"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="Size"/>
    <element type="Format"/>
  </group>
</ElementType>

<ElementType name="Size" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="cip:Constant" minOccurs="1" maxOccurs="1"/>
    <element type="cip:ParameterReference" minOccurs="1" maxOccurs="1"/>
  </group>
</ElementType>

<ElementType name="Format" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="cip:ParameterReference" minOccurs="1" maxOccurs="1"/>
  </group>
</ElementType>

```

```

        <element type="fdt:ChannelReference" minOccurs="1" maxOccurs="1"/>      <!-- reference to an
assembly-->
    </group>
</ElementType>

<ElementType name="Config" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="Size" minOccurs="0" maxOccurs="1"/>
    <element type="Format" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="Config1" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="Config" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="Config2" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="Config" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="CIPConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="connectionNameString" required="yes"/>
    <attribute type="helpString" required="yes"/>
    <attribute type="cip:ePath" required="yes"/>
    <attribute type="defaultConnection" required="no"/>
    <element type="Config1" minOccurs="0" maxOccurs="1"/>
    <element type="Config2" minOccurs="0" maxOccurs="1"/>
    <element type="TriggerAndTransport" minOccurs="1" maxOccurs="1"/>
    <element type="Originator2TargetParameters" minOccurs="1" maxOccurs="1"/>
    <element type="Target2OriginatorParameters" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="SafetyInputConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="async" required="yes"/>
    <attribute type="maxConsumerNumber" required="no"/>
    <element type="CIPConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="SafetyOutputConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="maxConsumerNumber" required="no"/>
    <element type="CIPConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="PolledIOConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="MasterSlaveConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="BitStrobeConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="MasterSlaveConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="COSConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="MasterSlaveConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="CyclicConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="MasterSlaveConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="MulticastPollingConnection" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="MasterSlaveConnection" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="MasterSlaveConnectionSet" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>

```

```

    <element type="PolledIOConnection" minOccurs="0" maxOccurs="1"/>
    <element type="BitStrobeConnection" minOccurs="0" maxOccurs="1"/>
    <group order="one" minOccurs="0" maxOccurs="1">
        <element type="COSConnection" minOccurs="1" maxOccurs="1"/>
        <element type="CyclicConnection" minOccurs="1" maxOccurs="1"/>
    </group>
    <element type="MulticastPollingConnection" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="CompoNetIOInfo" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="compoNetIOLengthUnit" required="yes"/>
    <attribute type="compoNetIOLength" required="yes"/>
</ElementType>

<ElementType name="CompoNetInputInfo" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="CompoNetIOInfo" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="CompoNetOutputInfo" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="CompoNetIOInfo" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="CompoNetIO" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="CompoNetInputInfo" minOccurs="0" maxOccurs="1"/>
    <element type="CompoNetOutputInfo" minOccurs="0" maxOccurs="1"/>
    <attribute type="compoNetDeviceCategory" required="yes"/>
</ElementType>

<ElementType name="Capacity" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="maxCIPConnections" required="no"/>
    <attribute type="maxIOConnections" required="no"/>
    <attribute type="maxEMConnections" required="no"/>
</ElementType>

<ElementType name="PossibleConnections" content="mixed" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="maxSafetyConnections" required="no"/>
    <attribute type="maxSafetyInputCnxns" required="no"/>
    <attribute type="maxSafetyOutputCnxns" required="no"/>
    <attribute type="defaultSafetyConnections" required="no"/>
    <element type="Capacity" minOccurs="0" maxOccurs="1"/>
    <element type="CIPConnection" minOccurs="0" maxOccurs="1"/>
    <element type="PolledIOConnection" minOccurs="0" maxOccurs="1"/>
    <element type="BitStrobeConnection" minOccurs="0" maxOccurs="1"/>
    <element type="COSConnection" minOccurs="0" maxOccurs="1"/>
    <element type="CyclicConnection" minOccurs="0" maxOccurs="1"/>
    <element type="MulticastPollingConnection" minOccurs="0" maxOccurs="1"/>
    <element type="SafetyInputConnection" minOccurs="0" maxOccurs="1"/>
    <element type="SafetyOutputConnection" minOccurs="0" maxOccurs="1"/>
    <element type="CompoNetIO" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="CurrentConnections" content="mixed" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="CIPConnection" minOccurs="0" maxOccurs="1"/>
    <element type="MasterSlaveConnectionSet" minOccurs="0" maxOccurs="1"/>
    <element type="CompoNetIO" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="AssemblyMemberDefinition" content="eltOnly" model="open">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:id" required="no"/><!-- used in the AssemblyDefinition to reference this member -->
    <attribute type="fdt:tag" required="yes"/>
    <attribute type="fdt:descriptor" required="no"/>
    <attribute type="cip:dataType" required="yes"/>

```

```

<attribute type="defaultValue" required="no"/>
<element type="Scaling" minOccurs="0" maxOccurs="1"/>
  <element type="cip:CIPObjectAddress" minOccurs="0" maxOccurs="1"/><!-- only for accessible parameters
-->
  <element type="fdt:BitEnumeratorEntries" minOccurs="0" maxOccurs="1"/>
  <element type="fdt:EnumeratorEntries" minOccurs="0" maxOccurs="1"/>
  <element type="fdt:Unit" minOccurs="0" maxOccurs="1"/>
  <element type="fdt:Ranges" minOccurs="0" maxOccurs="1"/>
  <element type="fdt:SubstituteValue" minOccurs="0" maxOccurs="1"/>
</ElementType>

<ElementType name="AssemblyMemberDefinitions" content="mixed" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="AssemblyMemberDefinition" minOccurs="0" maxOccurs="*" />
</ElementType>

<ElementType name="CIPNode" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <!-- needed for DeviceNet Safety, EthernetIP and ControlNet devices -->
  <attribute type="fdtpar:configurationData" required="no" />
  <attribute type="sclId" required="no" />
  <attribute type="unId" required="no" />
  <!-- needed for connection establishment in DeviceNet Safety -->
  <element type="cip:CIPDeviceIdentity" minOccurs="1" maxOccurs="1"/>
  <element type="cip:CIPNodeID" minOccurs="1" maxOccurs="1"/>
  <element type="PossibleConnections" minOccurs="1" maxOccurs="1"/>
  <element type="CurrentConnections" minOccurs="1" maxOccurs="1"/>
  <element type="AssemblyMemberDefinitions" minOccurs="0" maxOccurs="1"/>
</ElementType>
</Schema>

```

10 Communication data types

This schema specifies the elements and attributes which are used with the methods of IFdtCommunication.

```

<?xml version="1.0"?>
<Schema name="FDT CIP Communication Schema" xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:fdt="x-schema:FDTDataTypesSchema.xml" xmlns:cip="x-
  schema:DTMCIPDataTypesSchema.xml">
  <!-- Version of the Schema -->
  <AttributeType name="schemaVersion" dt:type="number" default="1.0"/>
  <!-- Definition of Attributes -->
  <AttributeType name="communicationReference" dt:type="uuid"/>
  <AttributeType name="statusCode" dt:type="ui1"/>
  <AttributeType name="extendedStatusCode" dt:type="bin.hex"/>
  <AttributeType name="sequenceTime" dt:type="ui4"/>
  <AttributeType name="delayTime" dt:type="ui4"/>
  <!-- Definition of Elements -->
  <ElementType name="ServiceResponse" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="cip:serviceCode" required="yes"/>
    <attribute type="statusCode" required="yes"/>
    <attribute type="extendedStatusCode" required="no"/>
  </ElementType>
  <ElementType name="ConnectRequest" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="cip:CIPPath" minOccurs="1" maxOccurs="1"/>
  </ElementType>
  <ElementType name="ConnectResponse" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="communicationReference" required="yes"/>
    <element type="cip:CIPDevice" minOccurs="1" maxOccurs="1"/>
  </ElementType>
  <ElementType name="DisconnectRequest" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>

```

```

        <attribute type="communicationReference" required="yes"/>
    </ElementType>
    <ElementType name="DisconnectResponse" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="communicationReference" required="yes"/>
    </ElementType>
    <ElementType name="DataExchangeRequest" content="eltOnly" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="communicationReference" required="yes"/>
        <attribute type="cip:serviceCode" required="yes"/>
        <element type="cip:CIPObjectAddress"/>
        <element type="fdt:CommunicationData" minOccurs="0" maxOccurs="1"/>
    </ElementType>
    <ElementType name="DataExchangeResponse" content="eltOnly" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="communicationReference" required="yes"/>
        <element type="ServiceResponse" minOccurs="1" maxOccurs="1"/>
        <element type="fdt:CommunicationData" minOccurs="0" maxOccurs="1"/>
    </ElementType>
    <ElementType name="SequenceBegin" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="sequenceTime" required="no"/>
        <attribute type="delayTime" required="no"/>
        <attribute type="communicationReference" required="yes"/>
    </ElementType>
    <ElementType name="SequenceEnd" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="communicationReference" required="yes"/>
    </ElementType>
    <ElementType name="SequenceStart" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="communicationReference" required="yes"/>
    </ElementType>
    <ElementType name="Abort" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
    </ElementType>
    <attribute type="communicationReference" required="yes"/>
    </ElementType>
    <ElementType name="FDT" content="eltOnly" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <group order="one" minOccurs="1" maxOccurs="1">
            <element type="ConnectRequest"/>
            <element type="ConnectResponse"/>
            <element type="DisconnectRequest"/>
            <element type="DisconnectResponse"/>
            <element type="DataExchangeRequest"/>
            <element type="DataExchangeResponse"/>
            <element type="SequenceBegin"/>
            <element type="SequenceEnd"/>
            <element type="SequenceStart"/>
            <element type="Abort"/>
            <element type="fdt:CommunicationError"/>
        </group>
    </ElementType>
</Schema>

```

11 Channel parameter data types

This schema specifies the elements and attributes which are used with the following methods:

- IFdtChannel::GetChannelParameters()
- IFdtChannel::SetChannelParameters()

```

<?xml version="1.0"?>
<Schema name="FDTICIPChannelParameterSchema" xmlns="urn:schemas-microsoft-com:xml-data"
xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:fdt="x-schema:FDTDataTypesSchema.xml" xmlns:cip="x-
schema:DTMCIPDataTypeSchema.xml" xmlns:fdtsystag="DTMSysTagListSchema.xml">

```

```

<!-- Version of the Schema -->
<AttributeType name="schemaVersion" dt:type="number" default="1.1"/>

<!--Definition of Attributes-->
<AttributeType name="assemblySize" dt:type="ui1"/>
<AttributeType name="memberPosition" dt:type="ui4"/>
<AttributeType name="memberSize" dt:type="ui4"/>
<AttributeType name="frameApplicationTag" dt:type="string"/>
<AttributeType name="gatewayBusCategory" dt:type="uuid"/>
<AttributeType name="protectedByChannelAssignment" dt:type="boolean"/>
<AttributeType name="helpMessage" dt:type="string"/>

<!--Definition of Elements-->
<ElementType name="AssemblyMemberReference" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:idref" required="yes"/>
  <attribute type="cip:bitOffset" required="no"/>
</ElementType>

<ElementType name="ChannelReference">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="cip:bitOffset" required="yes"/>
  <element type="fdt:ChannelReference" />
  <element type="cip:CIPObjectAddress" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="AssemblyMember" content="eltOnly" model="closed">
  <!-- could be: a non-displayed, displayed parameters or assemblies -->
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="memberPosition" required="yes"/>
  <attribute type="memberSize" required="yes"/>

  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="AssemblyMemberReference" minOccurs="0" maxOccurs="1"/>
    <element type="ChannelReference" minOccurs="0" maxOccurs="1"/>
    <element type="cip:CIPObjectAddress" minOccurs="1" maxOccurs="1"/>
    <element type="cip:Constant" minOccurs="1" maxOccurs="1"/>
  </group>
</ElementType>

<ElementType name="AssemblyMembers" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="AssemblyMember" minOccurs="0" maxOccurs=""/>
</ElementType>

<ElementType name="ServiceSet" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="cip:Service" minOccurs="1" maxOccurs=""/>
</ElementType>

<ElementType name="FDTChannel" content="eltOnly" model="closed" order="seq">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:tag" required="yes"/>
  <attribute type="fdt:id" required="yes"/>
  <attribute type="protectedByChannelAssignment" required="yes"/>
  <attribute type="fdt:dataType" required="yes"/>
  <attribute type="assemblySize" required="yes"/>
  <attribute type="fdt:signalType" required="yes"/>
  <attribute type="frameApplicationTag" required="no"/>
  <attribute type="helpMessage" required="no"/>
  <element type="fdt:SemanticInformation" minOccurs="0" maxOccurs=""/>
  <element type="ServiceSet" minOccurs="1" maxOccurs="1"/>
  <element type="cip:CIPObjectAddress" minOccurs="1" maxOccurs="1"/>
  <element type="AssemblyMembers" minOccurs="0" maxOccurs="1"/> <!--should be used if the data type is
structured -->
</ElementType>

<ElementType name="FDTChannelType" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="gatewayBusCategory" required="no"/>

```

```

    <element type="fdt:VersionInformation" minOccurs="1" maxOccurs="1"/>
  </ElementType>

  <ElementType name="FDT" content="eltOnly" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <element type="FDTChannelType" minOccurs="1" maxOccurs="1"/>
    <element type="FDTChannel" minOccurs="1" maxOccurs="1"/>
  </ElementType>
</Schema>

```

12 Device identification

12.1 Device type identification data types – FDTCIPIIdentSchema

This schema provide general elements and attributes with a protocol specific semantic for identification of CIP nodes (data types are defined in IEC 62453-302).

```

<?xml version="1.0"?>
<Schema name="FDTCIPIIdentSchema" xmlns="urn:schemas-microsoft-com:xml-data" xmlns:dt="urn:schemas-
microsoft-com:datatypes">
  <!-- Version of the Schema -->
  <AttributeType name="schemaVersion" dt:type="number" default="1.1"/>
  <!--Definition of Attributes-->
  <AttributeType name="busProtocol" dt:type="enumeration" dt:values="protocol_CIP_DeviceNet
protocol_CIP_EthernetIP protocol_CIP_ControlNet protocol_CIP_CompoNet"/>
  <AttributeType name="match" dt:type="string"/>
  <AttributeType name="nomatch" dt:type="string"/>
  <AttributeType name="idDTMSupportLevel" dt:type="enumeration" dt:values="genericSupport profileSupport
blockspecificProfileSupport specificSupport identSupport"/>
  <!--Definition of Elements-->
  <ElementType name="RegExpr" content="empty" model="closed">
    <attribute type="match" required="no"/>
    <attribute type="nomatch" required="no"/>
  </ElementType>
</Schema>

```

12.2 Topology scan data types

This schema specifies the elements and attributes which are used with the methods of IDtmEvents::OnScanResponse()

The schema describes one entry, CIPDevice (see Clause 0), in the list of scanned CIP Devices.

12.3 Scan identification data types – FDTCIPScanIdentSchema

This schema defines the elements and attributes provided by a scan response of a CIP network.

```

<Schema name="FDTCIPScanIdentSchema" xmlns="urn:schemas-microsoft-com:xml-data"
xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:cipident="x-schema:FDTCIPIIdentSchema.xml"
xmlns:fdt="x-schema:FDTDataTypesSchema.xml" xmlns:cip="x-schema:DTMCIPDataTypeSchema.xml">
  <!--Definition of Attributes-->
  <AttributeType name="schemaVersion" dt:type="number" default="1.0"/>
  <AttributeType name="resultState" dt:type="enumeration" dt:values="provisional final error"/>
  <AttributeType name="configuredState" dt:type="enumeration" dt:values="configuredAndPhysicallyAvailable
configuredAndNotPhysicallyAvailable availableButNotConfigured notApplicable"/>
  <!--Definition of elements-->
  <ElementType name="IdBusProtocol" content="eltOnly" model="closed">
    <attribute type="cipident:busProtocol" required="no"/>
    <element type="cipident:RegExpr" minOccurs="0" maxOccurs="1"/>
  </ElementType>

  <ElementType name="ScanIdentification" content="eltOnly" model="closed">
    <attribute type="configuredState" required="no"/>

```

```

    <element type="fdt:CommunicationError" minOccurs="0" maxOccurs="1"/>
    <element type="IdBusProtocol" minOccurs="1" maxOccurs="1"/>
    <element type="cip:CIPDevice" minOccurs="1" maxOccurs="1"/>
  </ElementType>

  <ElementType name="ScanIdentifications" content="eltOnly" model="closed">
    <attribute type="fdt:busCategory" required="yes"/>
    <attribute type="resultState" required="yes"/>
    <element type="ScanIdentification" minOccurs="0" maxOccurs="*/>
  </ElementType>
  <ElementType name="FDT" content="eltOnly" model="closed">
    <element type="ScanIdentifications" minOccurs="1" maxOccurs="1"/>
  </ElementType>
</Schema>

```

12.4 Device type identification data types – FDT CIPDeviceTypeIdentSchema

This schema defines elements and attributes which are used to provide protocol specific information for device types.

```

<?xml version="1.0"?>
<Schema name="FDT CIPDeviceTypeIdentSchema" xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:cipident="x-schema:FDT CIPIdentSchema.xml"
  xmlns:fdt="x-schema:FDTDataTypesSchema.xml" xmlns:cip="x-schema:DTMCIPDataTypeSchema.xml">
  <!-- Version of the Schema -->
  <AttributeType name="schemaVersion" dt:type="number" default="1.0"/>
  <!--Definition of Elements-->
  <ElementType name="IdBusProtocol" content="eltOnly" model="closed">
    <attribute type="cipident:busProtocol" required="no"/>
    <element type="cipident:RegExpr" minOccurs="0" maxOccurs="*/>
  </ElementType>
  <ElementType name="DeviceIdentification" content="eltOnly" model="closed">
    <attribute type="cipident:idDTMSupportLevel" required="yes"/>
    <element type="IdBusProtocol" minOccurs="1" maxOccurs="1"/>
    <element type="cip:CIPDeviceIdentity" minOccurs="1" maxOccurs="1"/>
  </ElementType>
  <ElementType name="DeviceIdentifications" content="eltOnly" model="closed">
    <attribute type="fdt:busCategory" required="yes"/>
    <element type="DeviceIdentification" minOccurs="0" maxOccurs="*/>
  </ElementType>
  <ElementType name="FDT" content="eltOnly" model="closed">
    <element type="DeviceIdentifications" minOccurs="1" maxOccurs="1"/>
  </ElementType>
</Schema>

```

Annex A (informative)

Implementation hints

A.1 XML Characters

XML documents cannot contain the complete set of ASCII characters; they shall contain certain set of available characters. Therefore developers shall make sure that the provided data in the transaction request and response contain only available characters especially for string data type.

For instance, Communication DTM developers shall make sure that string attributes contain valid characters (e.g. vendor name, product name, tag). If the strings received from a connected device contain invalid characters, they shall be replaced with valid characters.

A.2 Support for FDT 1.2

Inline schemas shall be used in the XML documents for topology scan and DTM parameter access interfaces.

A.3 Addressing examples in CompoNet DTMs

The following XML document is an example of the use of the “ShortIdentifier” to specify the address within the “UserDefinedBus” element for CompoNet.

```
<BusInformation xmlns="x-schema:DTMParameterSchema.xml">
  <UserDefinedBus xmlns:cip="x-schema:DTMCIPDataTypeSchema.xml"
    xmlns:cippar="x-schema:FDTMCIPDTMParameterSchema.xml">
    <cippar:CIPNode>
      <cip:CIPNodeID>
        <cip:ShortIdentifier shortIdentifier="0"/>
      </cip:CIPNodeID>
      <cippar:PossibleConnections/>
      <cippar:CurrentConnections>
        <cippar:CompoNetIO compoNetDeviceCategory="2">
          <cippar:CompoNetOutputInfo>
            <cippar:CompoNetIOInfo compoNetIOLengthUnit="2" compoNetIOLength="1"/>
          </cippar:CompoNetOutputInfo>
        </cippar:CompoNetIO>
      </cippar:CurrentConnections>
    </cippar:CIPNode>
  </UserDefinedBus>
</BusInformation>
```

The following XML document is an example of the ExtendedIdentifier contents for a Word OUT device at Node Address 5.

```
<FDT xmlns="x-schema:FDTMCIPCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml"
  xmlns:cip="x-schema:DTMCIPDataTypeSchema.xml">
  <ConnectRequest>
    <cip:CIPPath>
      <cip:CIPNodeID>
        <cip:ExtendedIdentifier extendedIdentifier="0045"/>
      </cip:CIPNodeID>
    </cip:CIPPath>
  </ConnectRequest>
</FDT>
```

Bibliography

- [1] IEC 60050 (all parts), *International Electrotechnical Vocabulary*
NOTE See also the IEC Multilingual Dictionary – Electricity, Electronics and Telecommunications (available on CD-ROM and at <<http://www.electropedia.org>>).
- [2] IEC 61131-3:2003, *Programmable controllers – Part 3: Programming languages*
- [3] IEC 61784-3-2, *Industrial communication networks – Profiles – Part 3-2: Functional safety fieldbuses – Additional specifications for CPF 2*
- [4] ISO/IEC 19501:2005, *Information technology – Open Distributed Processing – Unified Modeling Language (UML) Version 1.4.2*
- [5] ISO/IEC 7498 (all parts), *Information processing systems – Open Systems Interconnection – Basic Reference Model*
- [6] FDT Interface Specification V1.2, Order No. of FDT Joint Interest Group: 0001-0001-001
- [7] FDT Interface Specification V1.2.1, Order No. of FDT Group: 0001-0001-002
- [8] ODVA: THE CIP NETWORKS LIBRARY – Volume 1: Common Industrial Protocol (CIP™) – Edition 3.4, available at <<http://www.odva.org>>
- [9] ODVA: THE CIP NETWORKS LIBRARY – Volume 2: EtherNet/IP™ Adaptation of CIP – Edition 1.5, available at <<http://www.odva.org>>
- [10] ODVA: THE CIP NETWORKS LIBRARY – Volume 3: DeviceNet™ Adaptation of CIP – Edition 1.5, available at <<http://www.odva.org>>
- [11] ControlNet International: THE CIP NETWORKS LIBRARY – Volume 4: ControlNet™ Adaptation of CIP – Edition 1.1, available at <<http://www.controlnet.org>>
- [12] ODVA: THE CIP NETWORKS LIBRARY – Volume 5, CIP Safety™, Edition 2.1
- [13] ODVA: THE CIP NETWORKS LIBRARY – Volume 6: CompoNet™ Adaptation of CIP – Edition 1.3, available at <http://www.odva.org>
- [14] ISO 15745-2:2003, *Industrial automation systems and integration – Open systems application integration framework – Part 2: Reference description for ISO 11898-based control systems*
- [15] ISO 15745-3:2003, *Industrial automation systems and integration – Open systems application integration framework – Part 3: Reference description for IEC 61158-based control systems*

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

3, rue de Varembé
PO Box 131
CH-1211 Geneva 20
Switzerland

Tel: + 41 22 919 02 11
Fax: + 41 22 919 03 00
info@iec.ch
www.iec.ch