

FIG. 6. Component location, 6-volt adapter unit. (927430 & 927437)

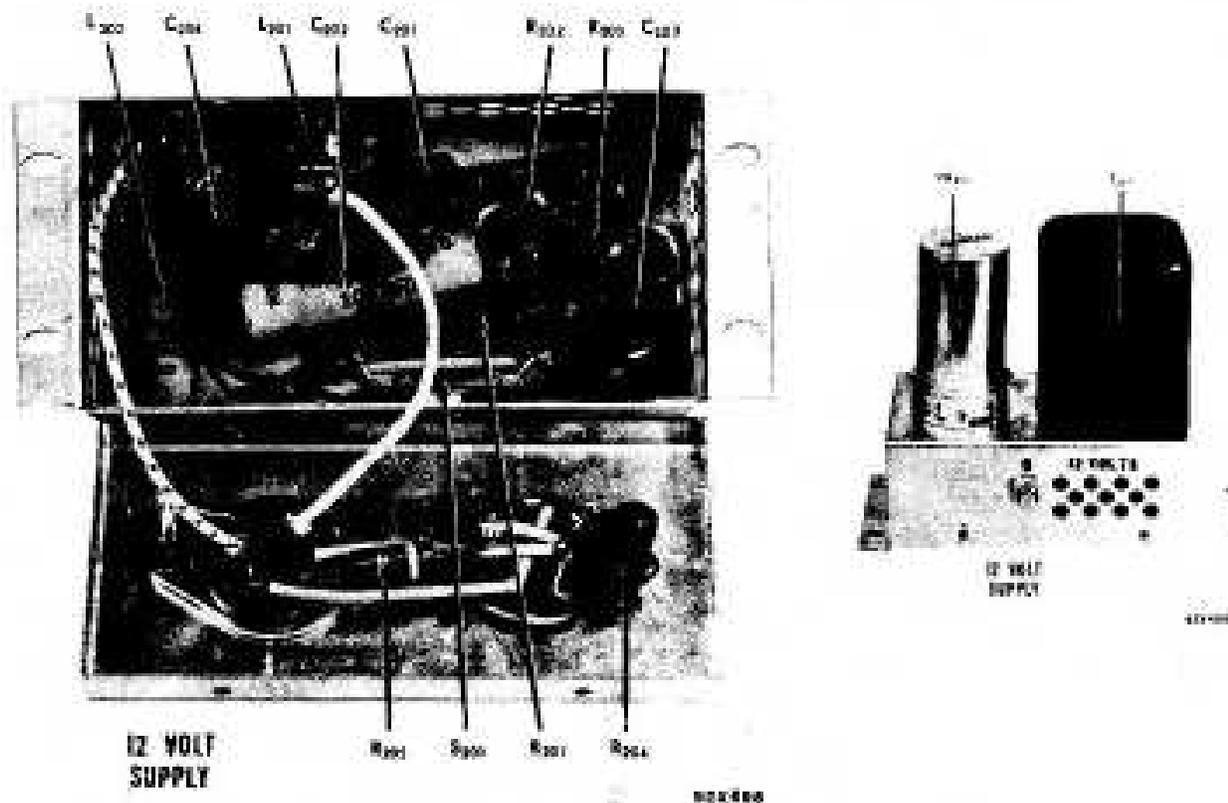


FIG. 7. Component location, 12-volt adapter unit.



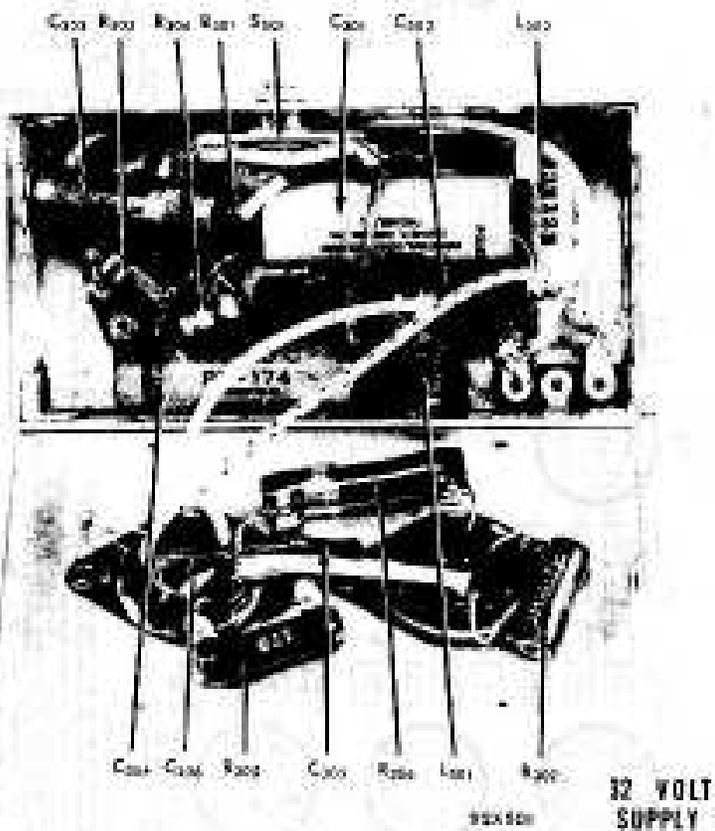


FIG. 2. Internal location, 32-volt adapter unit.

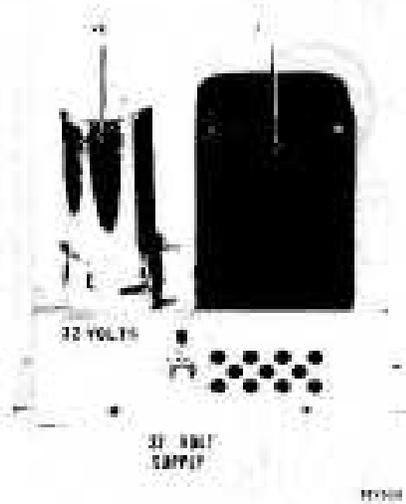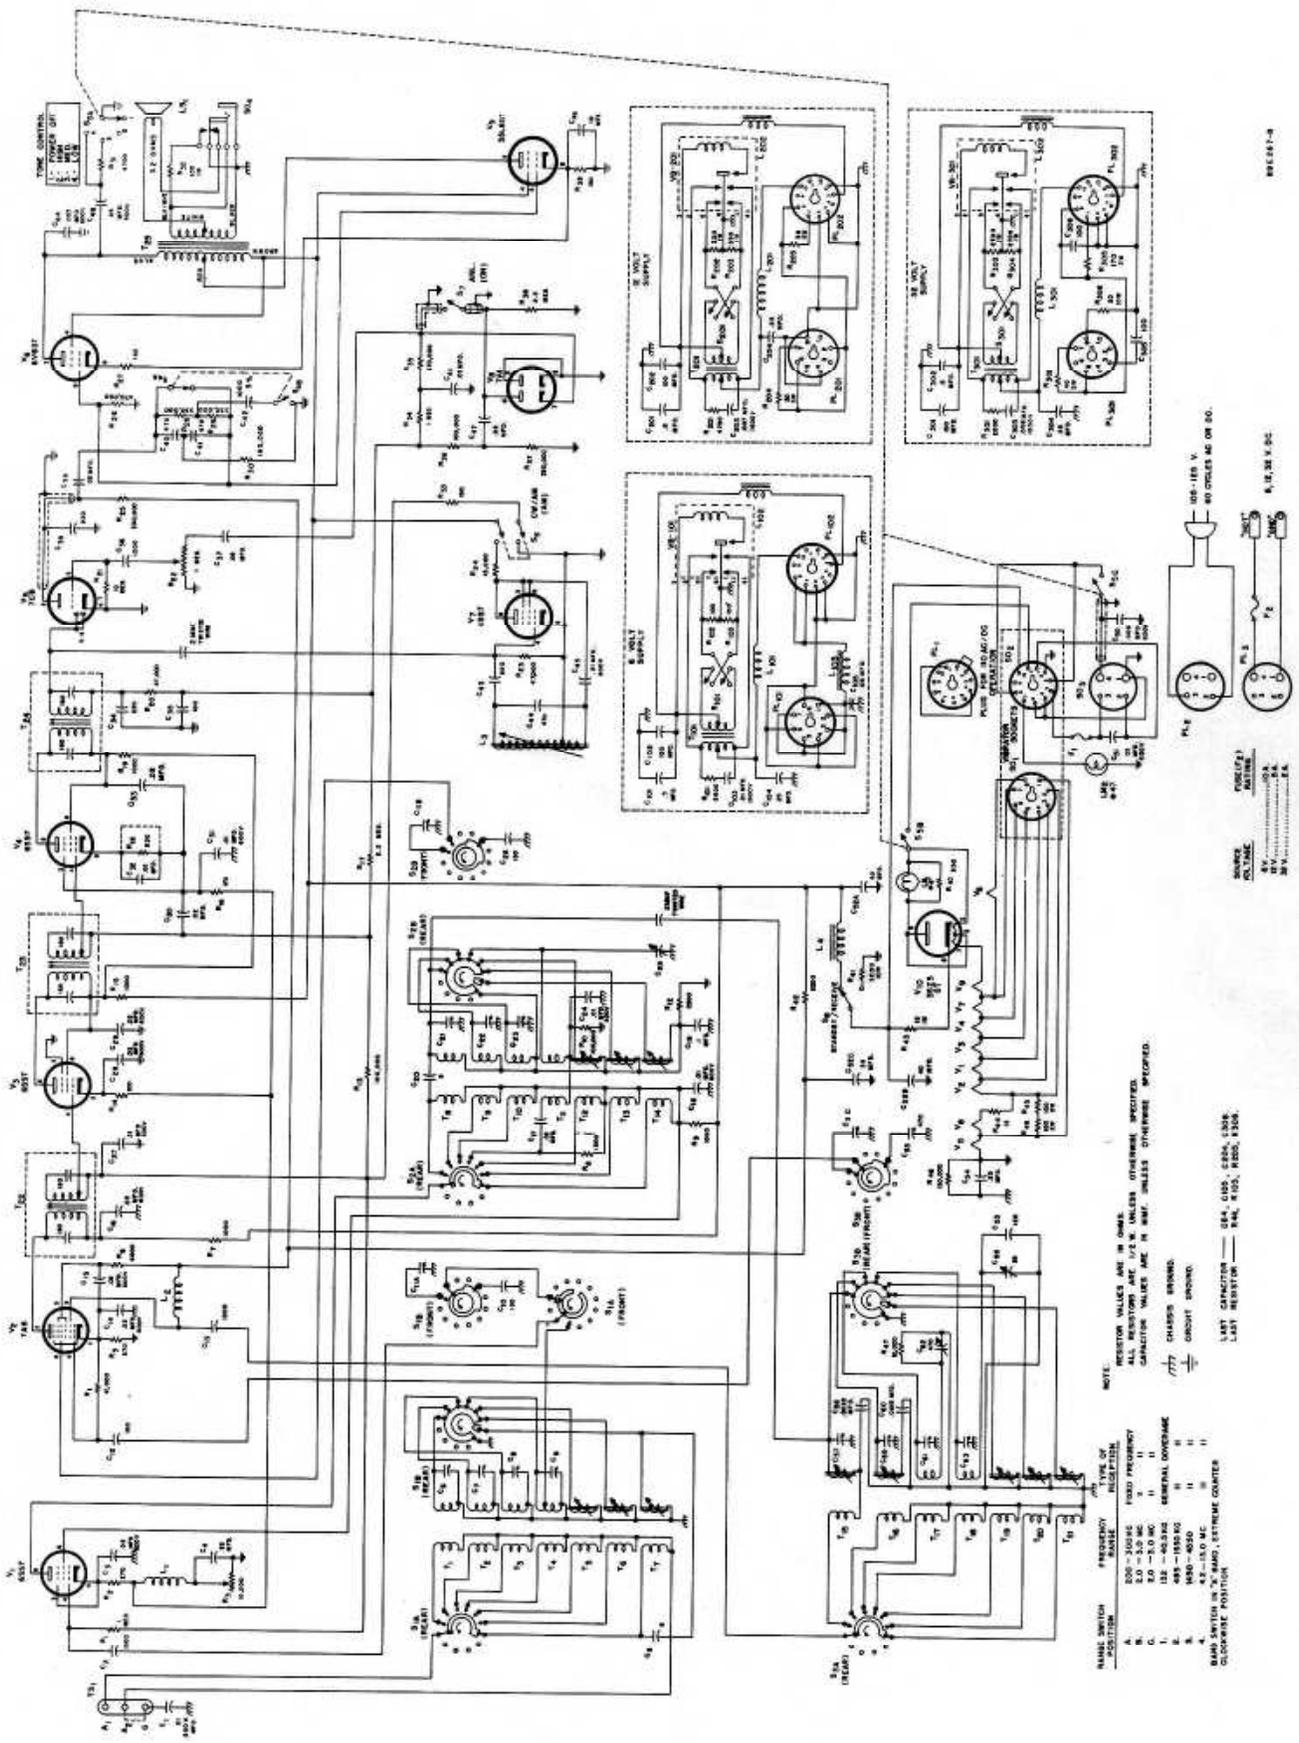

NOTE: RESISTOR VALUES ARE IN OHMS UNLESS OTHERWISE SPECIFIED.
 ALL RESISTORS ARE 1/2 W UNLESS OTHERWISE SPECIFIED.
 CAPACITOR VALUES ARE IN MMF UNLESS OTHERWISE SPECIFIED.

NAME	SWITCH POSITION	FREQUENCY RANGE	TYPE OF RECEIPTER
A	1	500-2000	1000 FREQUENCY
B	2	50-500	1000 FREQUENCY
C	3	10-100	1000 FREQUENCY
D	4	10-100	1000 FREQUENCY
E	5	10-100	1000 FREQUENCY
F	6	10-100	1000 FREQUENCY
G	7	10-100	1000 FREQUENCY
H	8	10-100	1000 FREQUENCY
I	9	10-100	1000 FREQUENCY
J	10	10-100	1000 FREQUENCY
K	11	10-100	1000 FREQUENCY
L	12	10-100	1000 FREQUENCY
M	13	10-100	1000 FREQUENCY
N	14	10-100	1000 FREQUENCY
O	15	10-100	1000 FREQUENCY
P	16	10-100	1000 FREQUENCY
Q	17	10-100	1000 FREQUENCY
R	18	10-100	1000 FREQUENCY
S	19	10-100	1000 FREQUENCY
T	20	10-100	1000 FREQUENCY
U	21	10-100	1000 FREQUENCY
V	22	10-100	1000 FREQUENCY
W	23	10-100	1000 FREQUENCY
X	24	10-100	1000 FREQUENCY
Y	25	10-100	1000 FREQUENCY
Z	26	10-100	1000 FREQUENCY

BARB SWITCH IN CLOSURE POSITION.
 100-1000 HZ DETECTOR.
 100-1000 HZ OSCILLATOR.
 100-1000 HZ DETECTOR.
 100-1000 HZ OSCILLATOR.

800000-4