


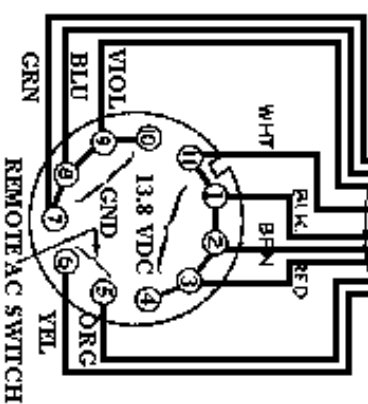

NOTES:

1. ALL SOLDER JUNCTIONS ARE TO BE SMOOTH, RESISTANCE FREE AND WELDED TOGETHER WHERE SPECIFIED.
2. CAPACITOR VALUES ARE IN μF .
3. ☐ THIS SYMBOL INDICATES CONNECTIONS TO THE CIRCUIT BOARD.
4. ☐ THIS SYMBOL INDICATES NO LEAD OR TOLLAGE. ASSUMED FROM EQUIP IDENTIFIED IN DRAWING.

WOL. 000000 MAY 1988 429.