


PICTORIAL 2-1

### PARTS MOUNTING-CHASSIS

Refer to Pictorial 2-1 for the following steps.

- ( ) Refer to Detail 2-1A, and mount the 11-pin plug at the Power Plug location using the 11-pin plug mounting ring. Position pins 1 and 11 as shown.

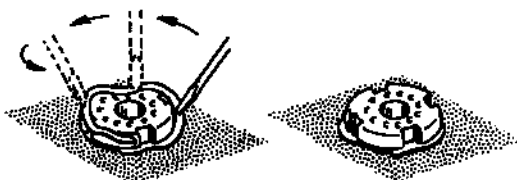


HOLD THE PLUG IN THE CHASSIS HOLE AND PLACE ONE END OF THE RING INTO THE GROOVE OF THE PLUG. USING A SCREWDRIVER, PRESS THE RING INTO THE GROOVE AROUND THE PLUG.

Detail 2-1A

- ( ) Install coil #52-25 at location L6, using the transformer mounting clip. Position the coil as shown.

- ( ) Refer to Detail 2-1B, and install 4-40 push-on nuts at the twenty circuit board mounting holes on the chassis. Be sure to position the teeth of the nuts upward as shown.

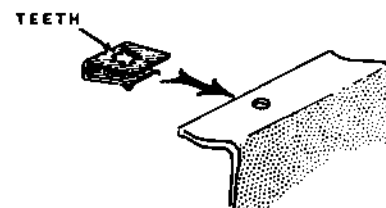

Detail 2-1B