


# SS - 64 To Kenwood TR-7800/7850 Mobile

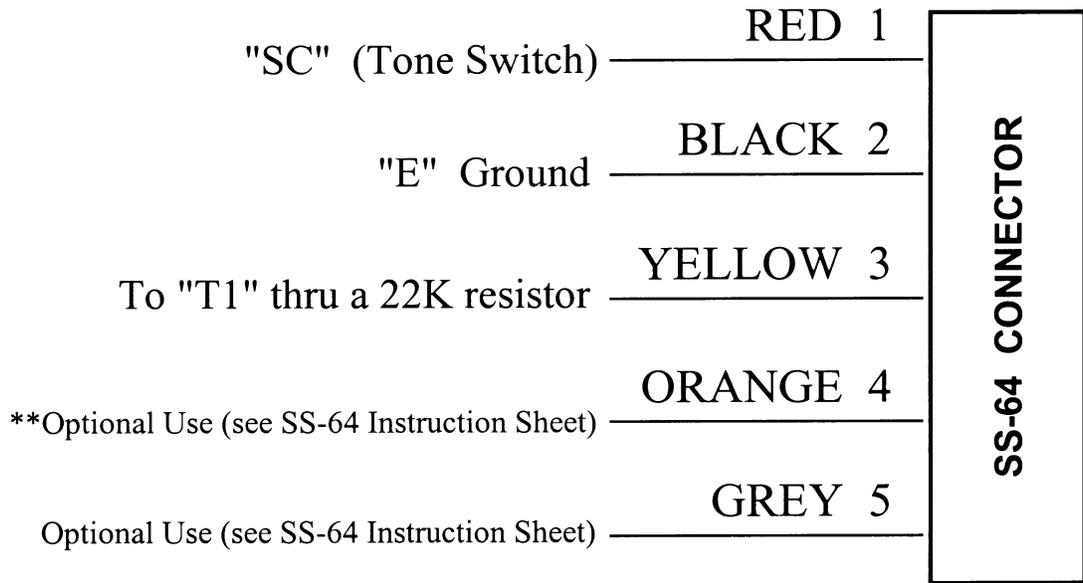

## Notes

All three connections are accessed from the front cover. There is room to mount the SS-64 behind the front faceplate.

If you want the reverse burst function, follow the directions on the SS-64 instruction sheet to install into your radio's push-to-talk.

\*\* The Orange wire must be grounded to encode tone if jumper JP-1 is out