

5. Replace the rear chassis cover, making sure that the power cord is not pinched against the case, and secure the snap latches. The transceiver is now equipped for portable operation.

IMPORTANT: When the transceiver is not used for extended periods of time, be sure to remove the batteries. Failure to do so may result in battery leakage.

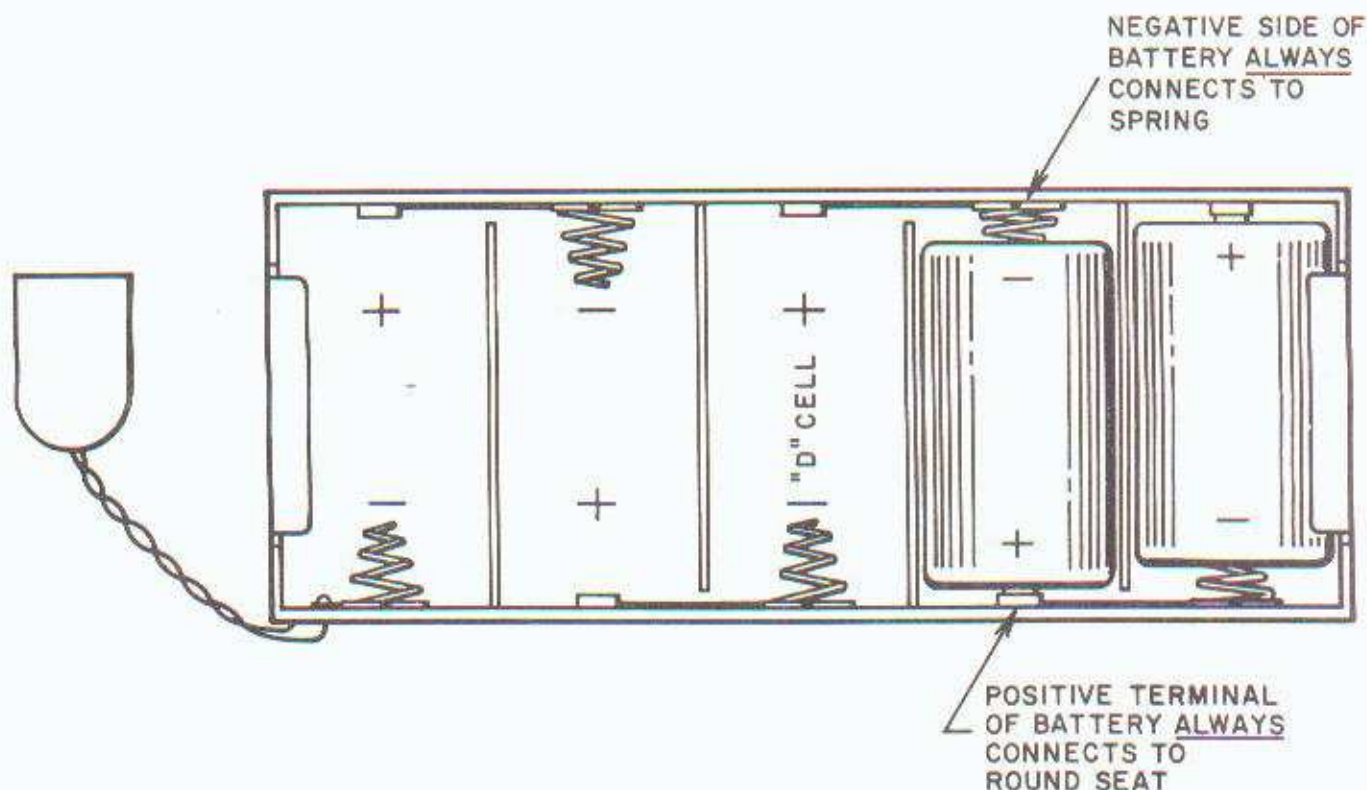


FIGURE 3

MOBILE INSTALLATION

TRANSCEIVER MOUNTING

The HA-650 may be operated from vehicles having 12-volt electrical systems. Before installing the transceiver in a car, truck, boat, etc., be sure to choose a location which is convenient to the operating controls and which will not interfere with the normal functions of the driver. The transceiver may be mounted on the underside of the instrument panel or dashboard by means of the two mounting brackets supplied. Figure 4 illustrates the correct mounting procedure.

MICROPHONE BRACKET

The design of the HA-650 prohibits mounting a microphone bracket directly to the chassis. We recommend, therefore, that the microphone bracket be attached to the mounting bracket using the screws provided (see Fig. 5).