


FIGURE 4

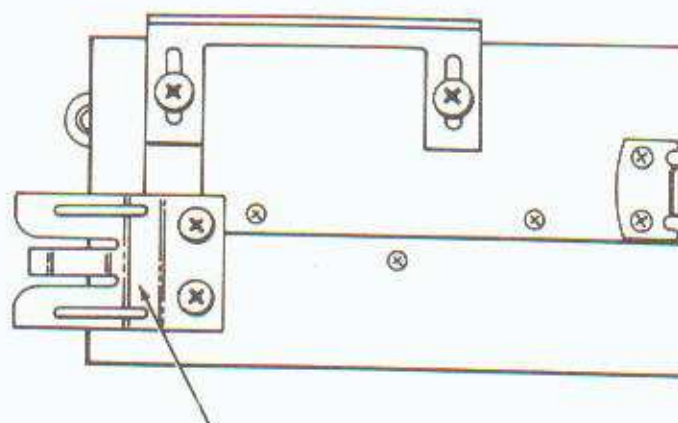

MICROPHONE BRACKET

FIGURE 5

MOBILE POWER CONNECTIONS

WARNING: As Supplied, the HA-650 Is Wired To Operate From A Battery Source Of 11.5 To 14.5 Volts DC On Negative Ground Systems. Connecting The Unit To A Positive Ground Vehicle Without Making The Necessary Internal Wiring Change Will Severely Damage The Transceiver. Before Making Any Power Connections You Must Determine Whether The Vehicle Has A Negative Or Positive Ground Electrical System And Follow The Appropriate Instructions Below.

If installed in a boat, the transceiver will not operate at maximum efficiency without a ground plate, unless the vessel has a steel hull. However, before installing the transceiver, consult a qualified marine technician regarding an adequate grounding system.