

RETURNING THE UNIT FOR REPAIR

If you wish to return the unit for repair (either in or out of warranty), we recommend that you return the transceiver to the Lafayette store from which it was purchased. If the unit is to be shipped to our main office for service, please read the instructions which follow.

SHIPPING INSTRUCTIONS

Pack the unit very carefully to avoid damage in transit, preferably in its original carton. If the original carton is not available, use a sturdy carton with at least 3 inches of shredded paper or excelsior around the unit. In the latter case, wrap the unit in paper first to avoid particles of packing material getting into it. Bear in mind that the carrier will disclaim responsibility for damage, if, in his opinion, it was caused by improper packing. INCLUDE WITH THE UNIT A LETTER EXPLAINING EXACTLY WHAT DIFFICULTIES YOU HAVE ENCOUNTERED (remember to add an additional 5¢ postage and indicate on the outside of the carton that First Class Mail is enclosed). Include your own name and address on the carton, ship by prepaid REA express (Railway Express Agency) and mark ELECTRONIC EQUIPMENT - FRAGILE.

Clearly address the carton as follows:

SERVICE DIVISION
LAFAYETTE RADIO ELECTRONICS CORP.
111 JERICHO TURNPIKE
SYOSSET, L.I., N.Y. 11791

The unit will be returned to you express collect.

SERVICE FACILITIES

This manual contains a layout diagram identifying transistors, transformers, coils, etc., and a schematic diagram. Also included are instructions for aligning the receiver and transmitter sections.

REMOVING THE TOP COVER

All adjustments may be made on the HA-650 by removing the top cover only. To do this, first remove the rear battery cover by releasing the two snap latches at the sides of the unit. Remove the battery pack and plug or external power supply cable. Then remove the two Phillips head screws on each side of the unit securing the top cover. Carefully remove the top chassis cover.

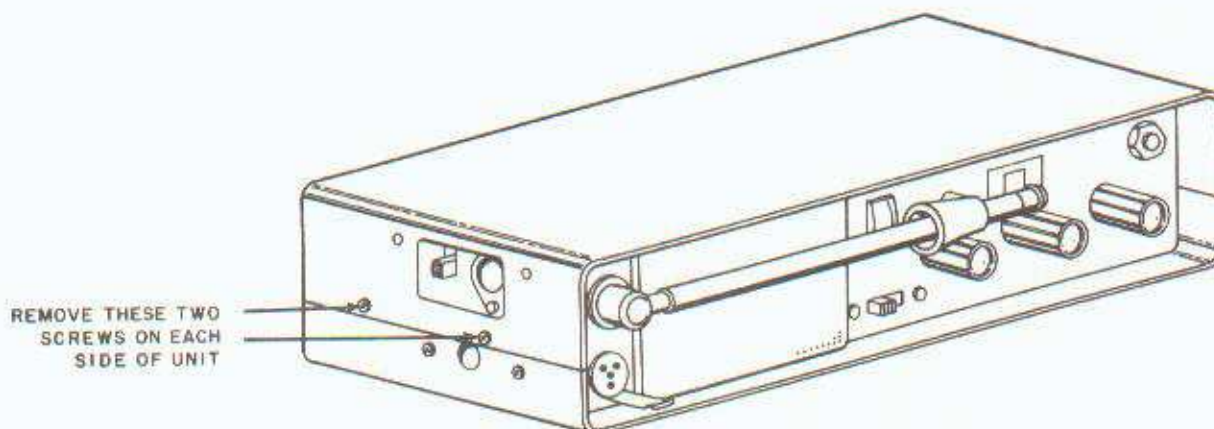


FIGURE 11