

TECHNICAL REPORT

IEC TR 61282-7

First edition
2003-01

Fibre optic communication system design guides –

Part 7: Statistical calculation of chromatic dispersion

*Guides de conception des systèmes de communications
à fibres optiques –*

*Partie 7:
Calcul statistique de la dispersion chromatique*



Reference number
IEC/TR 61282-7:2003(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site (www.iec.ch)**
- **Catalogue of IEC publications**
The on-line catalogue on the IEC web site (http://www.iec.ch/searchpub/cur_fut.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.
- **IEC Just Published**
This summary of recently issued publications (http://www.iec.ch/online_news/justpub/jp_entry.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.
- **Customer Service Centre**
If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

TECHNICAL REPORT

IEC TR 61282-7

First edition
2003-01

Fibre optic communication system design guides – Part 7: Statistical calculation of chromatic dispersion

*Guide de conception des systèmes de communications
à fibres optiques –*

*Partie 7:
Calcul statistique de la dispersion chromatique*

© IEC 2003 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

M

For price, see current catalogue

CONTENTS

FOREWORD	3
1 Scope	4
2 Normative references.....	4
3 Characterisation of chromatic dispersion coefficient versus wavelength	5
4 Characterisation of chromatic dispersion coefficient statistics versus wavelength	6
5 Calculation of the concatenation statistics for a single population of optical fibres.....	9
6 Generalisation of concatenation statistics for multiple populations – including components.	10
Figure 1 – Distribution of dispersion parameters.....	6
Figure 2 – Histogram of values at 1 560 nm	7
Figure 3 – Histogram of values at 1 530 nm	7
Figure 4 – Average dispersion coefficient versus wavelength	8
Figure 5 – Standard deviation of dispersion coefficient versus wavelength	8
Figure 6 – Fibre average	11
Figure 7 – Fibre standard deviation	11
Figure 8 – Dispersion compensator average.....	12
Figure 9 – Dispersion compensator standard deviation.....	12
Figure 10 – Combined three sigma limits.....	13
Table 1 – Computed values at two selected wavelengths	10

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC COMMUNICATION SYSTEM DESIGN GUIDES –**Part 7: Statistical calculation of chromatic dispersion**

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this technical report may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 61282-7, which is a technical report, has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
86C/429/DTR	86C/468/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until 2009-12. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

FIBRE OPTIC COMMUNICATION SYSTEM DESIGN GUIDES –

Part 7: Statistical calculation of chromatic dispersion

1 Scope

This part of IEC 61282 is a guideline providing methods of representing the process statistics of the chromatic dispersion of optical fibres and related components that may be combined in a link.

Chromatic dispersion (ps/nm) is the derivative, with respect to wavelength, of the group delay (ps) induced by the spectral content of light propagating through an optical element or fibre. Chromatic dispersion is normally a function of wavelength and can be either positive (group delay increasing with wavelength) or negative (group delay decreasing with wavelength).

The presence of chromatic dispersion can induce distortions in signals leading to bit errors depending on

- source spectral width;
- source chirp;
- bit period;
- distance.

In addition, chromatic dispersion is interactive with the effects of non-linear optical effects and second order polarisation mode dispersion (PMD). The above system impairments are beyond the scope of this technical report.

When different components or fibres are combined, the chromatic dispersion of the combination is the total of the chromatic dispersion values of the individuals, on a wavelength-by-wavelength basis. A section with high chromatic dispersion will be balanced by sections with lower values. The variation in the total dispersion of links will therefore be dependent on the distributions of the products that are used in the link. This document provides methods to calculate the distribution statistics of concatenated links based on information on the distributions of different fibre or component populations.

NOTE In the clauses that follow, examples are given for particular fibre and component types. These examples are not necessarily broadly representative.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-42: *Optical fibres – Part 1-42: Measurement methods and test procedures – Chromatic dispersion*

IEC 60793-2-50: *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

ITU-T Recommendation G.652: *Characteristics of a single-mode optical fibre cable*

ITU-T Recommendation G.655: *Characteristics of a non-zero dispersion shifted single-mode optical fibre cable*

ITU-T Recommendation G.671: *Transmission characteristics of optical components and subsystems*

ITU-T Recommendation G.691: *Optical interfaces for single-channel STM-64, STM-256 and other SDH systems with optical amplifiers*

3 Characterisation of chromatic dispersion coefficient versus wavelength

This clause outlines the characterisation of dispersion as a function of wavelength – for a given wavelength range. This function is often represented as a formula that includes parameters that can vary from fibre to fibre for a given fibre design. Characterisations of these formulas should give an indication of the wavelength range over which the formula applies. Extrapolation beyond these ranges can result in error.

For optical fibre, chromatic dispersion coefficient, D , can vary with wavelength, λ , according to a variety of formula types that are found in IEC 60793-1-42. The simplest is the linear representation which has just two parameters, zero-dispersion wavelength, λ_0 , and zero-dispersion slope, S_0 , as:

$$D(\lambda) = S_0(\lambda - \lambda_0) \quad (\text{ps/nm}\cdot\text{km}) \quad (1)$$

Measurements are based either on fitting differential group delays (DGD) or by fitting the integral to the measured group delay.

Other forms defined in 60793-1-42 are the three-term Sellmeier (Equation (2)), and the five-term Sellmeier (Equation (3)). Note that for the five-term Sellmeier, parameters, C_j , different from the zero-dispersion wavelength and slope must be fitted.

$$D(\lambda) = \frac{S_0\lambda}{4} \left(1 - \left(\frac{\lambda_0}{\lambda} \right)^4 \right) \quad (2)$$

$$D(\lambda) = 2C_1\lambda - 2C_2\lambda^{-3} + 4C_3\lambda^3 - 4C_4\lambda^{-5} \quad (3)$$

For components, similar types of expressions can be used to characterise the chromatic dispersion value, d , as a function of wavelength. For components, however, the units are most often given as ps/nm (unadjusted for length). [The use of the term “coefficient,” for fibre indicates a length normalisation.]

Even for the products for which the linear representation of Equation (1) is appropriate for each individual fibre, the combination of the distributions of the zero-dispersion wavelength and slope will normally not lead to a very clear understanding of the distribution of chromatic dispersion. Figure 1 shows such a combined distribution that illustrates a correlation between the dispersion parameters.

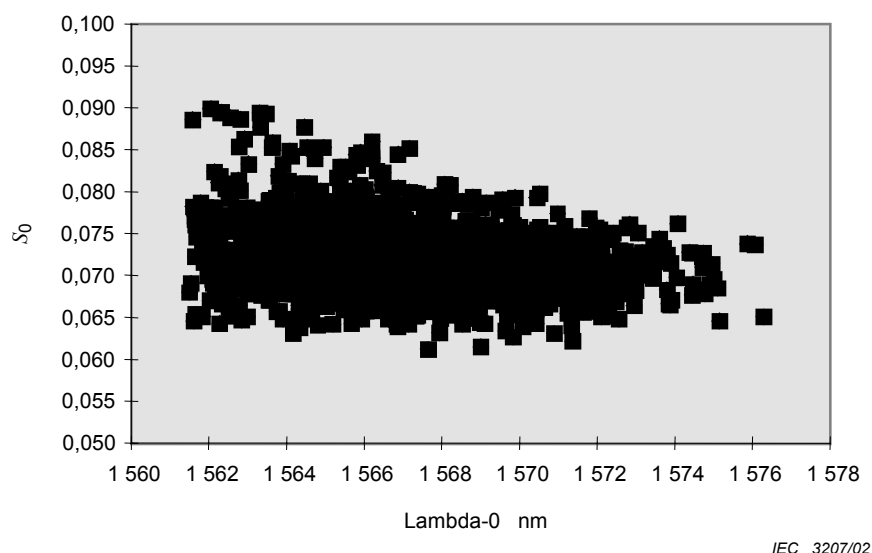


Figure 1 – Distribution of dispersion parameters

4 Characterisation of the chromatic dispersion coefficient statistics versus wavelength

This clause outlines the technique used to characterise the distribution of a single population of fibres. Similar approaches can be applied to components.

The fibre distribution shown in Figure 1 was intended for use in the wavelength range of 1530 nm to 1560 nm – a B4 type fibre (ITU-T G.655), see IEC 60793-2-50. The chromatic dispersion values for the lower end of this range are affected more by the variation of slope values for high zero-dispersion wavelength than for low zero dispersion wavelength. The combined contributions are therefore difficult to evaluate without some other means.

The characterisation methodology suitable for use in concatenation statistics for this distribution alone, or for combination with other distributions is to calculate the dispersion coefficient for each of the wavelengths in the range of the application – for each individual fibre. This creates a distribution of dispersion coefficient values for each wavelength. Figures 2 and 3 show these distributions at two selected wavelengths for the distribution shown in Figure 1.

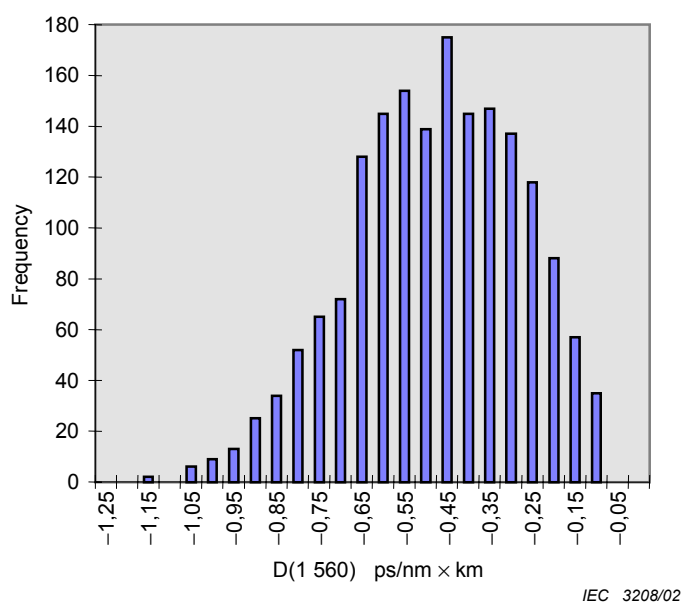


Figure 2 – Histogram of values at 1560 nm

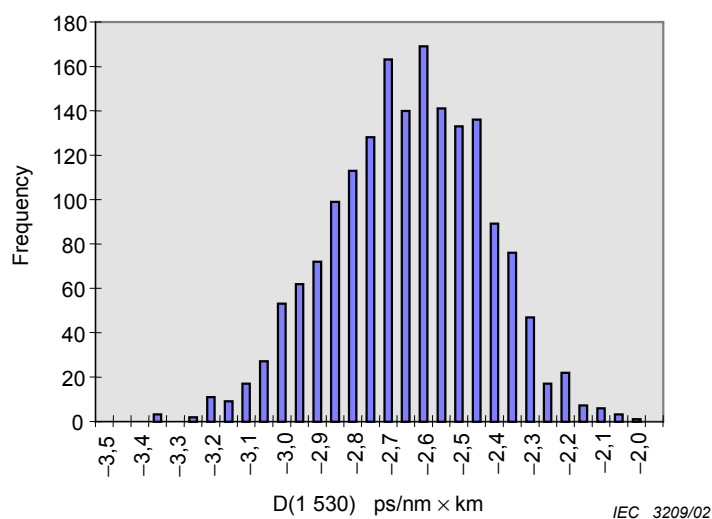


Figure 3 – Histogram of values at 1530 nm

The distribution for each wavelength is characterised with an average and a standard deviation value. These statistics are then plotted versus wavelength. Figures 4 and 5 show the relationships.

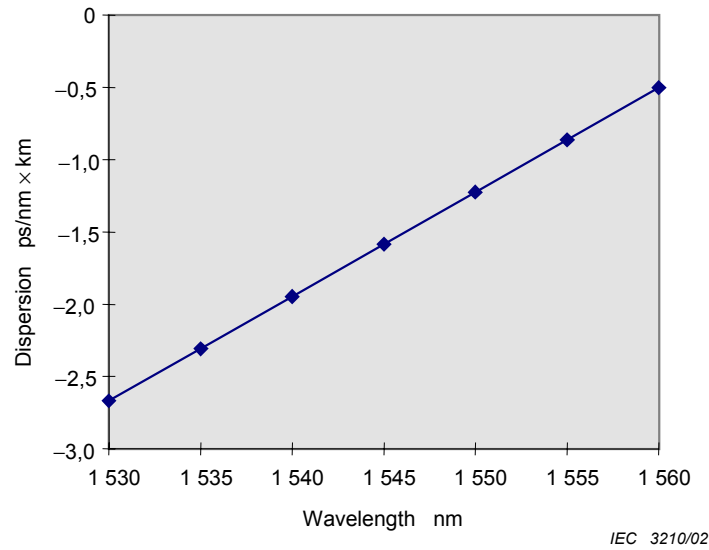


Figure 4 – Average dispersion coefficient versus wavelength

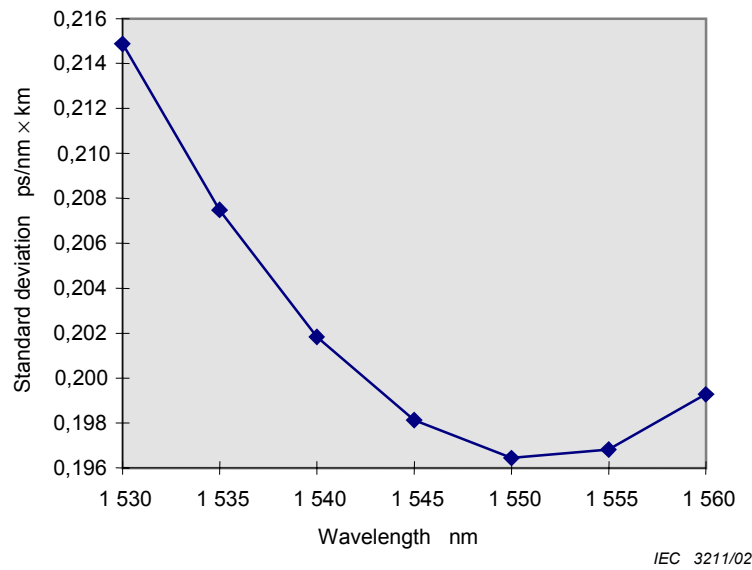


Figure 5 – Standard deviation of dispersion coefficient versus wavelength

Note that a linear relationship represents the average and a quadratic relationship represents the standard deviation. This is due in part to the linear representation of dispersion coefficient with wavelength. The other aspects of the distributions form more subtle adjustments. The data from the examples of Figures 4 and 5 can be empirically fitted to obtain formulas that represent the relationships versus wavelength, λ , (nm):

$$\mu(\lambda) = 0,072(\lambda - 1567) \quad (\text{ps/nm} \cdot \text{km}) \quad (4)$$

$$\sigma(\lambda) = 0,1964 + 3,97 \cdot 10^{-5} (\lambda - 1551,6)^2 \quad (\text{ps/nm}\cdot\text{km}) \quad (5)$$

where μ is the average and σ is the standard deviation

Similar characterisation functions are expected for distributions of installed links comprised of fibre of an unknown distribution. In this case, sample measurements of sub-sections of 20 or 40 km might be necessary determining the statistics.

Note that if actual dispersion coefficient values were available for each of the wavelengths of interest, the form of the functional dependence of chromatic dispersion to wavelength would not be an issue. The extrapolation of formulas like equations 2a and 2b beyond the wavelengths represented by the data could produce error, however.

5 Calculation of the concatenation statistics for a single population of optical fibres

This section outlines the concatenation statistics for a single distribution of fibre. These statistics are based on Gaussian assumptions and the central limit theorem. In this context, the examples are calculated at the “3 sigma” level for a risk of 0,13 % above and below the limits. Other risk levels could be selected.

Assuming equal lengths, the dispersion coefficient of the concatenation of fibres is the average of the dispersion coefficient of the individual fibres. That is:

$$\bar{D}(\lambda) = \frac{1}{n} \sum_i D(\lambda)_i \quad (6)$$

Using the central limit theorem, these averages can vary about the grand average according to a Gaussian random distribution with a standard deviation equal to the standard deviation of the population of the individual values divided by the square root of the number, n , used in the averaging process (the number of individual fibres in the link). Using a fixed probability limit on the Gaussian distribution which contains 99,7 % of the distribution, the limit of link dispersion coefficient values, D_{Tot} , is given as:

$$D_{\text{Tot}}(\lambda) = \mu(\lambda) \pm \frac{3}{\sqrt{n}} \sigma(\lambda) \quad (7)$$

Assuming a conservative value of n , associated with a maximum fibre length of L_{Cab} within a link of L_{Tot} , Equation (7) can be written as:

$$D_{\text{Tot}}(\lambda) = \mu(\lambda) \pm 3 \left(\frac{L_{\text{Cab}}}{L_{\text{Tot}}} \right)^{1/2} \sigma(\lambda) \quad (8)$$

The limits on the link dispersion value, CD_{Tot} , are just the limits of the link dispersion coefficient values times the link length:

$$CD_{\text{Tot}}(\lambda) = L_{\text{Tot}} \mu(\lambda) \pm 3 (L_{\text{Cab}} L_{\text{Tot}})^{1/2} \sigma(\lambda) \quad (9)$$

Table 1 shows the computed values for the population of the prior section for an assumed link length of 120 km and an assumed cable length of 5 km. These values are substantially below the –420 ps/nm value that would be deduced from the specifications.

Table 1 – Computed values at two selected wavelengths

Wavelength nm	$CD_{\min}$ ps/nm	$CD_{\max}$ ps/nm
1530	–336	–304
1540	–249	–219

If the distribution is based on measurements of sub-sections of installed links, replace the length, L_{Cab} , by the length of the sub-sections that were measured – or a larger value representative of the length of the longest sub-sections in the link. If the individual sub-sections or cable lengths L_i of an installed link are known, the accuracy of Equation 9 can be improved with the following substitution:

Replace $L_{Cab}L_{Tot}$ by $\sum_i L_i^2$ (10)

6 Generalisation of concatenation statistics for multiple populations – including components

This clause illustrates the extension of the concatenation to one which contains more than one fibre type and, in addition, components. The notation is expanded by subscripting the average and standard deviation functions with I, II, etc. as well as adding, for example, L_{Tot-I} , for the link length contribution of fibre type I and n_A for the number of components of type A.

The probability limits are, again, done with a probability limit associated with a Gaussian of ± 3 – but the equations are separated into the “average part” and the “standard deviation part” before combining them.

The average of the dispersion is given as:

$$\mu[CD_{Tot}(\lambda)] = L_{I-Tot}\mu_I(\lambda) + L_{II-Tot}\mu_{II}(\lambda) + n_A\mu_A(\lambda) + n_B\mu_B(\lambda) \quad (11)$$

The standard deviation of the total dispersion is given as:

$$\sigma[CD_{Tot}(\lambda)] = [L_{I-Cab}L_{I-Tot}\sigma_I^2(\lambda) + L_{II-Cab}L_{II-Tot}\sigma_{II}^2(\lambda) + n_A\sigma_A^2(\lambda) + n_B\sigma_B^2(\lambda)]^{1/2} \quad (12)$$

NOTE If the individual sub-lengths for an installed link are known, the substitution of Equation (10) can be used.

The limits are then given as:

$$CD_{Tot}(\lambda) = \mu[CD_{Tot}(\lambda)] \pm 3\sigma[CD_{Tot}(\lambda)] \quad (13)$$

Adding more fibre or component types can be done with a simple extension of the above formulas.

Note that these formulas present the situation in a fashion that could lead one to conclude that all the compensators could be co-located. In general this is not done. The compensators are normally distributed to reduce the maximum local dispersion along the link.

These formulas are illustrated for a combination of a distribution of B1.1 fibres (ITU-T G.652) (see IEC 60793-2-50) and a distribution of dispersion compensation components (ITU-T G.671). The assumed link parameters are:

L_{Tot}	400 km
L_{Cab}	10 km
n_{DC}	5

The fibre statistics are shown in Figures 6 and 7. The dispersion compensation statistics are shown in Figures 8 and 9.

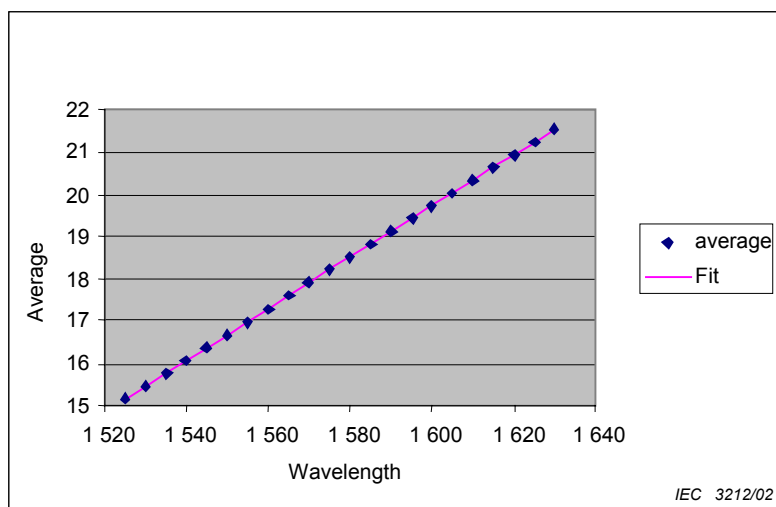


Figure 6 – Fibre average

The formula for the fitted line in Figure 6 is:

$$\mu(\lambda) = -77,403 + 0,0607 \cdot \lambda \quad (14)$$

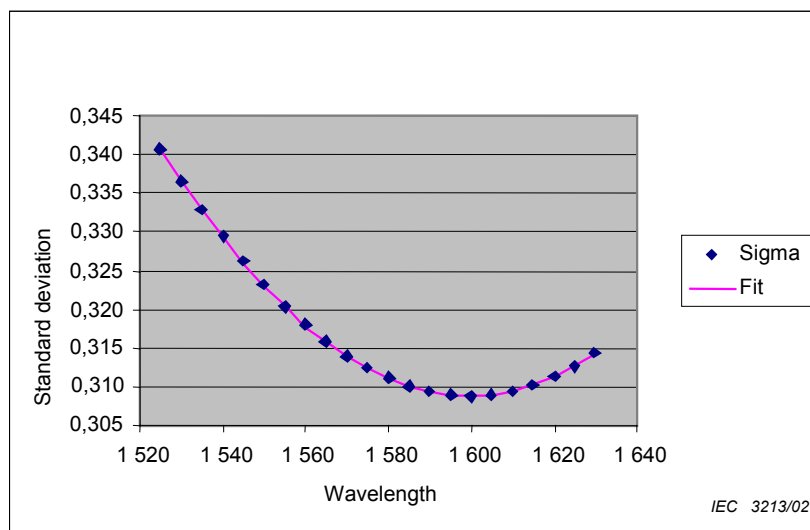


Figure 7 – Fibre standard deviation

The formula for the fitted curve in Figure 7 is:

$$\sigma(\lambda) = 15,013 - 18,384 \cdot 10^{-3} \cdot \lambda + 5,746 \cdot 10^{-6} \cdot \lambda^2 \quad (15)$$

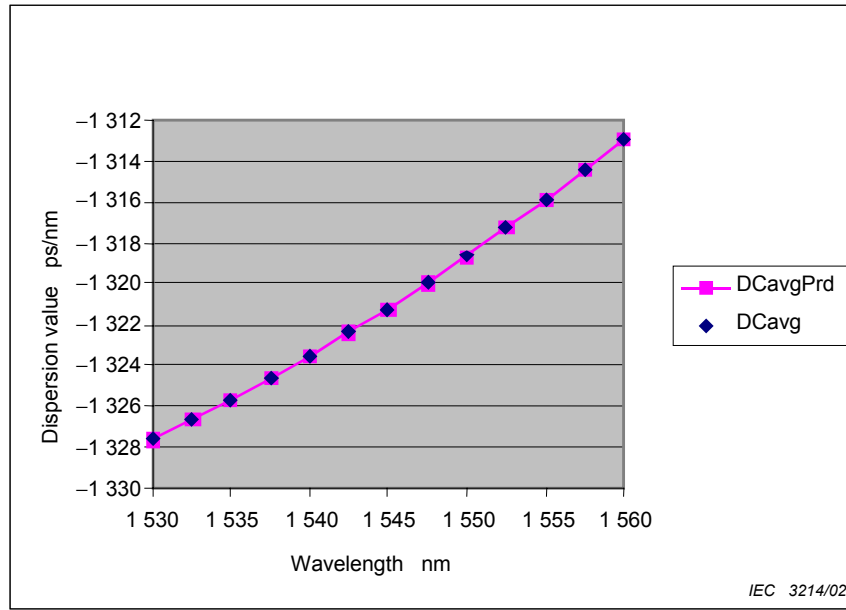


Figure 8 – Dispersion compensator average

The formula for the fitted curve in Figure 8 is:

$$\mu(\lambda) = 8,010 \cdot 10^3 - 12,5698 \cdot \lambda + 4,227 \cdot 10^{-3} \cdot \lambda^2 \quad (16)$$

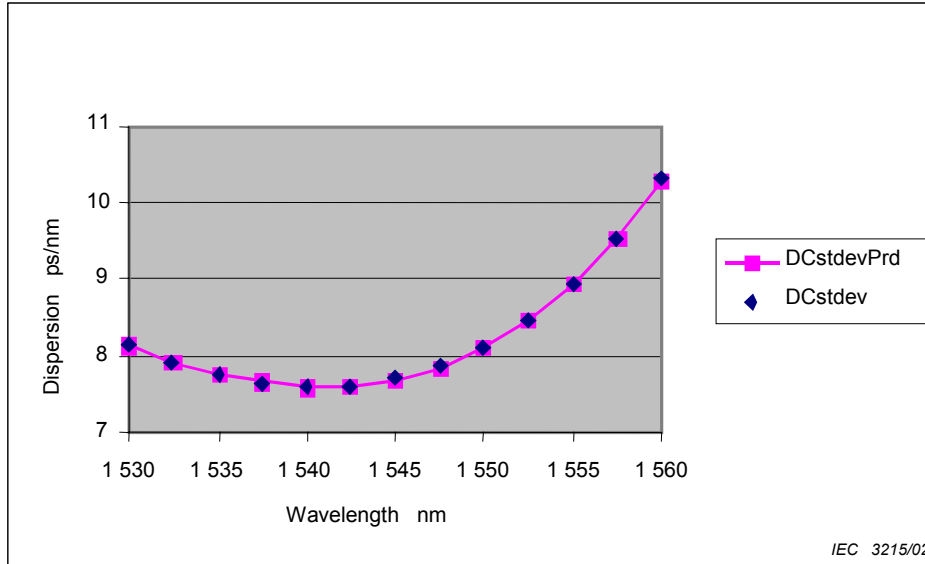


Figure 9 – Dispersion compensator standard deviation

The formula for the fitted curve in Figure 9 is:

$$\sigma(\lambda) = -3,4612 \cdot 10^5 + 6,824 \cdot 10^2 \cdot \lambda - 0,4484 \cdot \lambda^2 + 9,818 \cdot 10^{-5} \cdot \lambda^3 \quad (17)$$

Combining these statistics according to the formulas of Equations 11, 12, and 13 – and using the link assumptions (400 km fibre, 10 km cables, 5 dispersion compensators) – yields the results shown in Figure 10. Note that in Figure 10, the smaller of the two wavelength characterisation ranges is presented. Even though the range for fibre is broader, the range characterized for the compensator is not so broad.

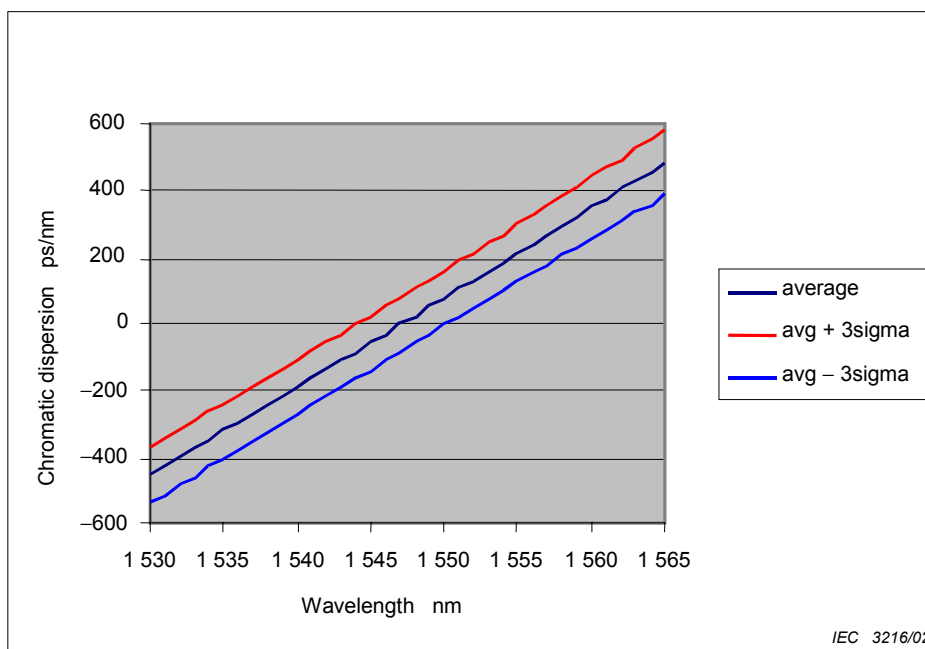


Figure 10 – Combined three sigma limits

For the C-band (1530 nm to 1565 nm), the chromatic dispersion of this compensated link is within ± 600 ps/nm. In ITU-T Recommendation, G.691, the limit for 10 Gbit/s transmission, with respect to chromatic dispersion alone, is indicated as approximately 1 000 ps/nm for transmitters and receivers that also conform to ITU-T Recommendation G.691.



Standards Survey

The IEC would like to offer you the best quality standards possible. To make sure that we continue to meet your needs, your feedback is essential. Would you please take a minute to answer the questions overleaf and fax them to us at +41 22 919 03 00 or mail them to the address below. Thank you!

Customer Service Centre (CSC)

International Electrotechnical Commission

3, rue de Varembe

1211 Genève 20

Switzerland

or

Fax to: **IEC/CSC** at +41 22 919 03 00

Thank you for your contribution to the standards-making process.

A Prioritaire

Nicht frankieren
Ne pas affranchir



Non affrancare
No stamp required

RÉPONSE PAYÉE

SUISSE

Customer Service Centre (CSC)

International Electrotechnical Commission

3, rue de Varembe

1211 GENEVA 20

Switzerland



Q1 Please report on **ONE STANDARD** and **ONE STANDARD ONLY**. Enter the exact number of the standard: (e.g. 60601-1-1)

.....

Q2 Please tell us in what capacity(ies) you bought the standard (tick all that apply). I am the/a:

- purchasing agent ☐
 librarian ☐
 researcher ☐
 design engineer ☐
 safety engineer ☐
 testing engineer ☐
 marketing specialist ☐
 other.....

Q3 I work for/in/as a:
(tick all that apply)

- manufacturing ☐
 consultant ☐
 government ☐
 test/certification facility ☐
 public utility ☐
 education ☐
 military ☐
 other.....

Q4 This standard will be used for:
(tick all that apply)

- general reference ☐
 product research ☐
 product design/development ☐
 specifications ☐
 tenders ☐
 quality assessment ☐
 certification ☐
 technical documentation ☐
 thesis ☐
 manufacturing ☐
 other.....

Q5 This standard meets my needs:
(tick one)

- not at all ☐
 nearly ☐
 fairly well ☐
 exactly ☐

Q6 If you ticked NOT AT ALL in Question 5 the reason is: (tick all that apply)

- standard is out of date ☐
 standard is incomplete ☐
 standard is too academic ☐
 standard is too superficial ☐
 title is misleading ☐
 I made the wrong choice ☐
 other

Q7 Please assess the standard in the following categories, using the numbers:

- (1) unacceptable,
 (2) below average,
 (3) average,
 (4) above average,
 (5) exceptional,
 (6) not applicable

- timeliness.....
 quality of writing.....
 technical contents.....
 logic of arrangement of contents
 tables, charts, graphs, figures.....
 other

Q8 I read/use the: (tick one)

- French text only ☐
 English text only ☐
 both English and French texts ☐

Q9 Please share any comment on any aspect of the IEC that you would like us to know:

.....



ISBN 2-8318-6789-4



ICS 33.180.01
