


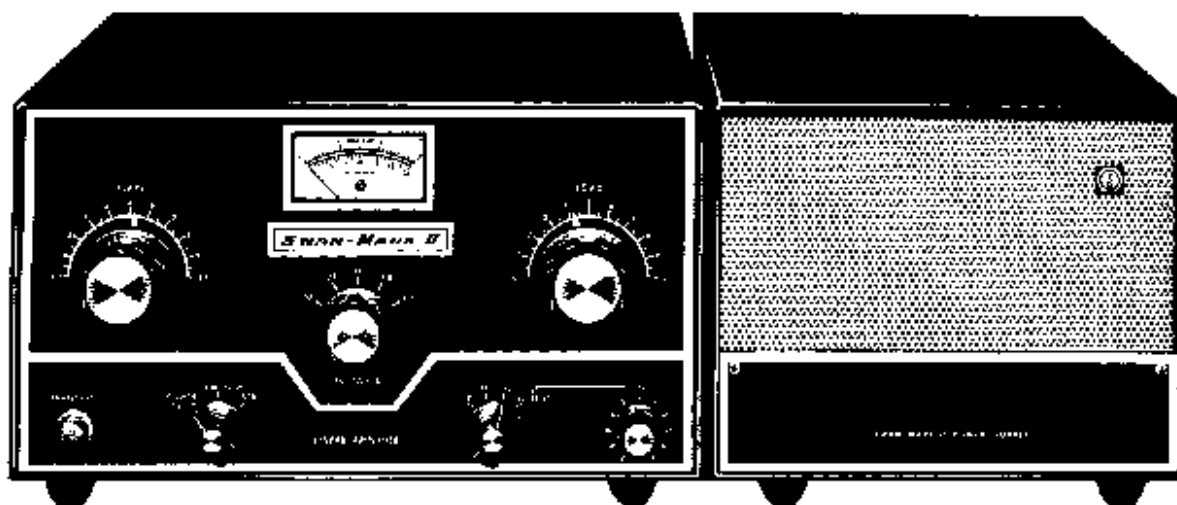

SPECIFICATIONS:

Power Rating:

2000 Watts PEP Input in Single Sideband Mode.
1000 Watts DC input on CW AM or RTTY.

5 Frequency Ranges:

1. 3,400 — 4,500 kc
2. 6,000 — 9,000 kc
3. 11,000 — 16,000 kc
4. 16,000 — 22,000 kc
5. 22,000 — 32,000 kc

Uses two Eimac 3-400Z or Amperex 8163.
Grounded Grid Triodes.

Drive Requirement:

100 Watts for maximum legal input.

Meter Selector:

Reads Plate Voltage, Plate Current, Grid Current,
and Relative Output.

Includes Transmit-Receive Relay Control for simple
operation with a Transceiver.

Wide range Pi Output Circuit matches 52 or 75 ohm

coax cable or variety of other load impedances.

Dimensions:

13" wide x 7" high x 12" deep.

Weight:

20 lbs.

POWER SUPPLY

Matching unit may be operated next to Amplifier as
illustrated, or with its 4-1/2 foot connecting cable,
may be placed on the floor.

Computer grade electrolytic capacitors, 40 mfd. fil-
tering at 2500 VDC.

Silicon Rectifiers.

AC Input: 117 or 230 volts, 50-60 cycles.

Includes quiet running fan for cool operation of all
components.

Dimensions:

9" wide x 8" high x 14" deep.

Weight:

35 lbs.

1-619-757-7525

Service Center

SWAN
ELECTRONICS CORP.
Oceanside, California