


**START**

- (✓) 360  $\mu\text{f}$  mica capacitor. Connect only one lead (S-1).
- (✓) 100 K $\Omega$  (brown-black-yellow).
- (✓) 1000  $\mu\text{f}$  mica capacitor.
- (✓) 47 K $\Omega$  (yellow-violet-orange).
- (✓) 47 K $\Omega$  (yellow-violet-orange).
- (✓) .005  $\mu\text{f}$  disc capacitor.
- (✓) 100 K $\Omega$  (brown-black-yellow).
- (✓) 18  $\mu\text{f}$  disc capacitor.
- (✓) 2-1/4" jumper.
- (✓) 100  $\Omega$  (brown-black-brown).
- (✓) 1 megohm (brown-black-green).
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 2-3/8" jumper.
- (✓) 1 megohm (brown-black-green).
- (✓) 4700  $\Omega$  (yellow-violet-red).
- (✓) 220 K $\Omega$  (red-red-yellow). Use sleeving.
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 1 megohm (brown-black-green).
- (✓) 1 megohm (brown-black-green).
- (✓) .1  $\mu\text{f}$  disc capacitor.
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 22 K $\Omega$  (red-red-orange).

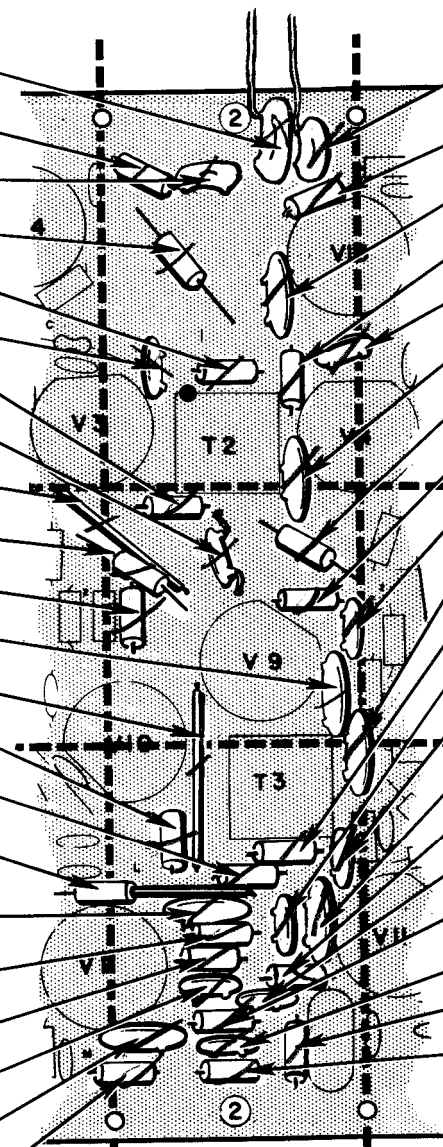

BOARD SECTIONS 2A, B and C

**PICTORIAL 4****CONTINUE**

- (✓) 100  $\mu\text{f}$  mica capacitor. Connect only one lead (S-1).
- (✓) 100 K $\Omega$  (brown-black-yellow).
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 330  $\Omega$  (orange-orange-brown).
- (✓) .005  $\mu\text{f}$  disc capacitor.
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 4700  $\Omega$  (yellow-violet-red).
- (✓) 4700  $\Omega$  (yellow-violet-red).
- (✓) .005  $\mu\text{f}$  disc capacitor.
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 220 K $\Omega$  (red-red-yellow).
- (✓) 18  $\mu\text{f}$  disc capacitor.
- (✓) 18  $\mu\text{f}$  disc capacitor.
- (✓) .02  $\mu\text{f}$  disc capacitor.
- (✓) 3300  $\Omega$  (orange-orange-red).
- (✓) 47  $\mu\text{f}$  disc capacitor.
- (✓) 1000  $\Omega$  (brown-black-red).
- (✓) 500  $\mu\text{f}$  disc capacitor.
- (✓) 10 K $\Omega$  (brown-black-orange).
- (✓) 100 K $\Omega$  (brown-black-yellow).
- ( ) Check to see that all connections are soldered, and cut off excess leads.

**FINISH**

NOW PERFORM THE STEPS  
ON PICTORIAL 5