



START

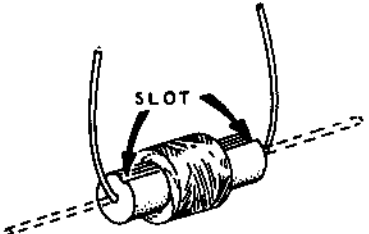

- () 1800 pf mica.
 - () 150 Ω (brown-green-brown).
 - () 47 pf disc.
 - () 22 K Ω (red-red-orange).
 - () 1 mh (#45-3) choke. Bend each lead toward the slot.
- 
- () 180 pf mica.
 - () 4700 Ω (yellow-violet-red).
 - () Solder all connections and cut off excess leads.

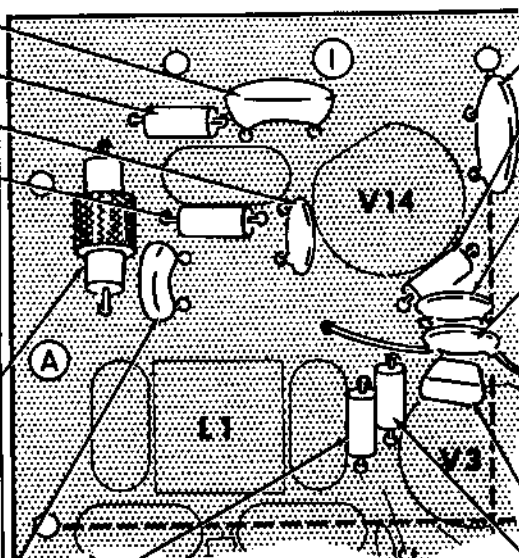

BOARD SECTION 1A

CONTINUE



- () .02 μ fd disc.
 - () 3300 Ω (orange-orange-red).
 - () .005 μ fd disc. NOTE: Do not use the .005 μ fd 1.6 KV capacitors until they are called for specifically.
 - () 500 pf disc.
- NOTE: When installing Mylar capacitors having a banded end, position the banded end as marked on the circuit board. If no mark appears on the circuit board, and/or the capacitor, the capacitor can be installed either way.
- () .1 μ fd Mylar.
 - () 220 Ω (red-red-brown).
 - () Solder all connections and cut off excess leads.

NOW PERFORM THE STEPS
ON PICTORIAL 1-3.

PICTORIAL 1-2