


START



- () .02 μ f disc.
- () 220 K Ω (red-red-yellow).
- () .005 μ f disc.
- () 1 megohm (brown-black-green).
- () 47 K Ω (yellow-violet-orange).
- () 100 K Ω (brown-black-yellow).
- () 180 pf mica.
- () .005 μ f disc.
- () 500 pf disc.
- () 100 Ω (brown-black-brown).
- () 3300 Ω (orange-orange-red).
- () 10 μ f electrolytic. Note position of (+) end.
- () .005 μ f 1.6 KV disc.
- () Solder all connections and cut off excess leads.

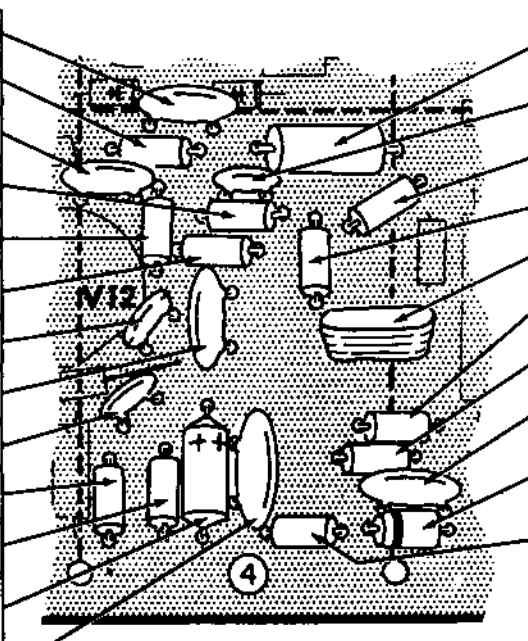

BOARD SECTION 4C

CONTINUE



- () 12 K Ω 2 watt (brown-red-orange).
- () 500 pf disc.
- () 2.2 megohm (red-red-green).
- () 10 K Ω (brown-black-orange).
- () .22 μ f Mylar.
- () 220 K Ω (red-red-yellow).
- () 100 K Ω (brown-black-yellow).
- () .02 μ f disc.
- () Silicon diode. Note position of banded end.
- () 47 K Ω (yellow-violet-orange).
- () Solder all connections and cut off excess leads.

NOW PERFORM THE STEPS
ON PICTORIAL 1-9.

PICTORIAL 1-8