

ASME B16.39-2014
(Revision of ASME B16.39-2009)

Malleable Iron Threaded Pipe Unions

Classes 150, 250, and 300

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

INTENTIONALLY LEFT BLANK

ASME B16.39-2014
(Revision of ASME B16.39-2009)

Malleable Iron Threaded Pipe Unions

Classes 150, 250, and 300

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

Two Park Avenue • New York, NY • 10016 USA

Date of Issuance: October 15, 2014

The next edition of this Standard is scheduled for publication in 2019.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this Standard. Interpretations are published on the ASME Web site under the Committee Pages at <http://cstools.asme.org/> as they are issued.

Errata to codes and standards may be posted on the ASME Web site under the Committee Pages to provide corrections to incorrectly published items, or to correct typographical or grammatical errors in codes and standards. Such errata shall be used on the date posted.

The Committee Pages can be found at <http://cstools.asme.org/>. There is an option available to automatically receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the appropriate Committee Page after selecting “Errata” in the “Publication Information” section.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not “approve,” “rate,” or “endorse” any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assumes any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Two Park Avenue, New York, NY 10016-5990

Copyright © 2014 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	iv
Committee Roster	v
Correspondence With the B16 Committee	vi
Summary of Changes	vii
1 Scope	1
2 Design	1
3 Pressure–Temperature Ratings	2
4 Size	2
5 Marking	2
6 Materials	2
7 Joints and Seats	2
8 Threading of Pipe Ends	2
9 Hydrostatic Strength	3
10 Tensile Strength	3
11 Air Pressure Test	3
12 Sampling for Air Pressure Test	3
13 Coatings	3
14 Dimensions	3
Tables	
1 Pressure–Temperature Ratings	2
2 Tensile Strength of Unions	2
3 SI Dimensions of Class 150 Malleable Iron Threaded Unions	4
4 SI Dimensions of Class 250 Malleable Iron Threaded Unions	4
5 SI Dimensions of Class 300 Malleable Iron Threaded Unions	5
Mandatory Appendices	
I Dimensions and Pressure Ratings of Unions in U.S. Customary Units	7
II References	10
Nonmandatory Appendix	
A Quality System Program	11

FOREWORD

In 1921, the American Engineering Standards Committee, later the American Standards Association (ASA), now the American National Standards Institute (ANSI), authorized the organization of a Sectional Committee on the Standardization of Pipe Flanges and Flanged Fittings, with the following organizations as joint sponsors: Heating, Piping, and Air Conditioning Contractors National Association, later the Mechanical Contractors Association of America (MCAA); Manufacturers Standardization Society of the Valve and Fittings Industry (MSS); and the American Society of Mechanical Engineers (ASME).

Threaded fittings were added to the scope of the B16 Committee, and Subcommittee No. 2 (now Subcommittee B) was made responsible for threaded fittings other than steel. Standards for cast and malleable iron fittings were approved by ASA as early as 1927.

For many years, the need for standardization of threaded malleable iron unions was met by Federal Specifications (published by the General Services Administration) and other documents published by the Association of American Railroads (AAR) and the Underwriters Laboratories (UL). As these standards continued to diverge, however, manufacturers concluded that a common practice would be desirable. Accordingly, beginning in 1967, MSS developed a standard practice embodying features of the existing standards and published it as MSS SP-76-1970.

During the next few years, ANSI recognition of the AAR and UL standards was withdrawn in favor of SP-76, and in 1975 MSS submitted its standards to Subcommittee B of American National Standards Committee B16 for consideration as an American National Standard. After several modifications and the addition of metric equivalents, the Standard was approved by the Committee, co-secretariat organizations, and ANSI. It was then published with the designation ANSI B16.39-1977.

In 1982 American National Standards Committee B16 was reorganized as an ASME Committee operating under procedures accredited by ANSI. The 1986 edition of B16.39 updated the referenced standards and specifications, established U.S. Customary units as the standard, and provided for electrodeposition as an alternative to hot dipping for any application of zinc coating. Following approval by the Standards Committee and ASME, approval as an American National Standard was given by ANSI on December 31, 1986, with the new designation ASME/ANSI B16.39-1986.

In the 1998 edition of ASME B16.39, reference standards were updated, a quality system program annex was added, and several editorial revisions were made. Following approval by ASME B16 Subcommittee B and the B16 Standards Committee, ANSI approved this American National Standard on November 20, 1998.

In the 2009 edition, metric units became the primary units in the body text and tables, with U.S. Customary units shown in parentheses or in separate tables or in an Appendix. The *D* min. values in Table 3 were replaced with the L2 values (external thread length) from ASME B1.20.2M-2006, *Pipe Threads, 60 deg, General Purpose*, and the *D* min. values in Table I-3 have been replaced with the L2 values from ASME B1.20.1-1983, *Pipe Threads, General Purpose (Inch)*.

In this 2014 edition, section 8.2 has been revised to standardize the verbiage for internal threads and safety, and to harmonize language with other B16 Standards as it relates to defining thread lengths and gage points.

Following approval by the ASME B16 Standards Committee, approval as an American National Standard was given by ANSI on June 24, 2014, with the new designation ASME B16.39-2014.

ASME B16 COMMITTEE

Standardization of Valves, Flanges, Fittings, and Gaskets

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

R. Bojarczuk, *Chair*
C. E. Davila, *Vice Chair*
C. E. O'Brien, *Secretary*

STANDARDS COMMITTEE PERSONNEL

A. Appleton , Alloy Stainless Products Co., Inc.	K. A. Hettler , U.S. Coast Guard
R. W. Barnes , Anric Enterprises, Inc.	G. A. Jolly , Flowserve/Gestra, USA
K. Barron , Ward Manufacturing	M. Katcher , Haynes International
W. B. Bedesem , Consultant	T. A. McMahon , Emerson Process Management
R. Bojarczuk , ExxonMobil Research & Engineering Co.	M. L. Nayyar , NICE
A. M. Cheta , Shell Exploration and Production Co.	C. E. O'Brien , The American Society of Mechanical Engineers
M. A. Clark , Nibco, Inc.	W. H. Patrick , The Dow Chemical Co.
G. A. Cuccio , Capitol Manufacturing Co.	D. Rahoi , Consultant
C. E. Davila , Crane Energy	R. A. Schmidt , Canadoil
F. Feng , <i>Delegate</i> , China Productivity Center for Machinery National Technical Committee	H. R. Sonderegger , Fluoroseal Valves USA
D. R. Frikken , Becht Engineering Co.	W. M. Stephan , Flexitallic LP
R. B. Hai , RBH Associates	F. Volgstadt , Volgstadt & Associates, Inc.
	D. A. Williams , Southern Co. Generation

SUBCOMMITTEE B — THREADED FITTINGS (EXCEPT STEEL), FLANGES, AND FLANGED FITTINGS

K. Barron , <i>Chair</i> , Ward Manufacturing	D. J. Hunt, Jr. , Fastenal
W. LeVan , <i>Vice Chair</i> , Cast Iron Soil Pipe Institute	A. A. Knapp , A. Knapp & Associates
C. R. Ramcharran , <i>Secretary</i> , The American Society of Mechanical Engineers	P. I. McGrath, Jr. , <i>Contributing Member</i> , Consultant
W. Bliss , Tyler Pipe Co.	J. K. Schultz , Conine Manufacturing Co., Inc.
M. A. Clark , Nibco, Inc.	G. L. Simmons , Charlotte Pipe & Foundry
J. R. Holstrom , Val-Matic Valve & Manufacturing Corp.	G. T. Walden , Wolseley

CORRESPONDENCE WITH THE B16 COMMITTEE

General. ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B16 Standards Committee
The American Society of Mechanical Engineers
Two Park Avenue
New York, NY 10016-5990

As an alternative, inquiries may be submitted via e-mail to SecretaryB16@asme.org.

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Interpretations. Upon request, the B16 Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B16 Standards Committee.

The request for interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject:	Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition:	Cite the applicable edition of the Standard for which the interpretation is being requested.
Question:	Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain proprietary names or information.

Requests that are not in this format will be rewritten in this format by the Committee prior to being answered, which may inadvertently change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

Attending Committee Meetings. The B16 Standards Committee regularly holds meetings that are open to the public. Persons wishing to attend any meeting should contact the Secretary of the B16 Standards Committee.

ASME B16.39-2014

SUMMARY OF CHANGES

Following approval by the B16 Committee and ASME, and after public review, ASME B16.39-2014 was approved by the American National Standards Institute on June 24, 2014.

ASME B16.39-2014 includes editorial changes, revisions, and corrections, which are identified by a margin designator, **(14)**, placed next to the affected area.

<i>Page</i>	<i>Location</i>	<i>Change</i>
2, 3	8.2	Revised
4	Table 3	Revised
	Table 4	Revised
5	Table 5	Revised
8	Table I-3	Revised
	Table I-4	Revised
9	Table I-5	Revised

INTENTIONALLY LEFT BLANK

MALLEABLE IRON THREADED PIPE UNIONS

Classes 150, 250, and 300

1 SCOPE

1.1 General

This Standard covers threaded malleable iron unions, Classes 150, 250, and 300. It also contains provisions for using steel for NPS $\frac{1}{8}$ unions. This Standard includes

- (a) design
- (b) pressure–temperature ratings
- (c) size
- (d) marking
- (e) materials
- (f) joints and seats
- (g) threads
- (h) hydrostatic strength
- (i) tensile strength
- (j) air pressure test
- (k) sampling
- (l) coatings
- (m) dimensions

Mandatory Appendix I provides tables in U.S. Customary units.

1.2 References

Standards and specifications adopted by reference in this Standard are shown in Mandatory Appendix II, which is part of this Standard. It is not considered practical to identify the specific edition of each referenced standard and specification in the text, when referenced. Instead, the specific editions of the referenced standards and specifications are listed in Mandatory Appendix II.

1.3 Quality Systems

Nonmandatory requirements relating to the fitting manufacturer's quality system programs are described in Nonmandatory Appendix A.

1.4 Relevant Units

This Standard states values in both SI (Metric) and U.S. Customary units. These systems of units are to be regarded separately as standard. Within the text, the U.S. Customary units are shown in parentheses or in separate tables that appear in Mandatory Appendix I. The values stated in each system are not exact equivalents; therefore, it is required that each system of units be used independently of the other. Combining values

from the two systems constitutes nonconformance with the Standard.

1.5 Service Conditions

Criteria for selection of materials suitable for particular fluid service are not within the scope of this Standard.

1.6 Convention

For determining conformance with this Standard, the convention for fixing significant digits where limits (maximum and minimum values) are specified, shall be as defined in ASTM E29. This requires that an observed or calculated value be rounded off to the nearest unit in the last right-hand digit used for expressing the limit. Decimal values and tolerances do not imply a particular method of measurement.

1.7 Denotation

1.7.1 Pressure Rating Designation. Class, followed by a dimensionless number, is the designation for pressure–temperature ratings as follows:

Class	150	250	300
-------	-----	-----	-----

1.7.2 Size. NPS, followed by a dimensionless number, is the designation for nominal fitting size. NPS is related to the reference nominal diameter, DN, used in international standards. The relationship is, typically, as follows:

NPS	DN
$\frac{1}{4}$	8
$\frac{1}{2}$	15
1	25
$1\frac{1}{4}$	32
$1\frac{1}{2}$	40
2	50
$2\frac{1}{2}$	65
3	80
4	100

2 DESIGN

The complete union shall consist of a tail or male part, a head or female part, and a union nut. The type of joint may be ball-to-cone, ball-to-ball, or ball-and-socket with metal-to-metal seating surfaces of iron, copper, or copper alloy. The threaded ends shall be male or female

Table 1 Pressure–Temperature Ratings

Temperature, °C	Pressure, bar		
	Class 150 Unions	Class 250 Unions	Class 300 Unions
–29 to 66	20.7	34.5	41.4
100	17.5	30.6	37.5
125	15.2	27.7	34.6
150	12.9	24.8	31.7
175	10.6	22.0	28.9
200	8.2	19.1	26.0
225	5.9	16.2	23.1
232	5.2	...	...
250	...	13.4	20.3
275	...	10.5	17.4
288	...	9.0	15.9

GENERAL NOTES:

(a) 1 bar = 14.5 psi = 100 kPa

(b) $^{\circ}\text{C} = \frac{^{\circ}\text{F} - 32}{1.8}$

pipe threads. The head or female part may be furnished as a coupling, an elbow, or a tee.

3 PRESSURE–TEMPERATURE RATINGS

(a) Pressure–temperature ratings are shown in Table 1 and Table I-1.

(b) Unions with copper or copper alloy seats are not intended for use where temperature exceeds 232°C (450°F).

(c) All ratings are independent of the contained fluid and are the maximum pressures at the tabulated temperatures. Intermediate ratings may be obtained by linear interpolation between the temperatures shown.

(d) The temperatures shown for the corresponding pressure rating shall be the material temperature of the pressure-retaining structure. It may be assumed that the material temperature is the same as the fluid temperature. Use of a pressure rating at a material temperature other than that of the contained fluid is the responsibility of the user and subject to the requirements of any applicable code.

4 SIZE**4.1 Nominal Pipe Size**

As applied in this Standard, the use of the phrase “nominal pipe size” or the designation NPS followed by a dimensionless number is for the purpose of identifying the end connection of unions. The number is not necessarily the same as the fitting inside diameter. The connecting pipe dimension can be found in ASME B36.10M.

Table 2 Tensile Strength of Unions

NPS	Ultimate Load, kN		
	Class 150	Class 250	Class 300
$\frac{1}{8}$	11	11	18
$\frac{1}{4}$	17	17	27
$\frac{3}{8}$	24	24	36
$\frac{1}{2}$	34	34	45
$\frac{3}{4}$	47	47	62
1	69	69	80
$1\frac{1}{4}$	95	95	100
$1\frac{1}{2}$	115	115	125
2	135	135	180
$2\frac{1}{2}$	155	155	245
3	180	180	335
4	220	220	490

5 MARKING

Unions shall be marked on the nut with the manufacturer’s name or trademark and nominal pressure class except on bar stock unions, where marking is impractical. Additional markings permitted by MSS SP-25 may be used.

6 MATERIALS

(a) The mechanical properties of the malleable iron castings shall be at least equal to those specified in ASTM A197.

(b) Steel bar stock having a yield strength of not less than 207 MPa (30 ksi) may be substituted for malleable iron in NPS $\frac{1}{8}$ unions.

(c) Insert rings may be of suitable copper or copper alloy. Where copper alloy seats are furnished, either the head or tail part of unions produced from bar stock may be solid copper alloy. Such parts must meet the tensile strength requirements listed in Table 2 and Table I-2.

7 JOINTS AND SEATS

Inserts shall be secured into the ends to become a permanent part of them with no signs of cracking. Inserted seat rings shall be of sufficient width to allow ample bearing for the seating of the male end.

8 THREADING OF PIPE ENDS**8.1 Types of Threads**

Pipe ends of head and tail parts shall be threaded with taper pipe threads (ASME B1.20.1) except that NPS $\frac{1}{8}$ unions made from bar stock may have NPSC internal straight pipe threads.

8.2 Internal Threading

All fittings with internal threads shall be threaded with taper pipe threads per ASME B1.20.1. Variations

(14)

in threading shall be limited to one turn large or one turn small from the gaging notch when using working gages. The reference point for gaging is the starting end of the fitting, provided the chamfer does not exceed the major diameter of the internal thread. When a chamfer on the internal thread exceeds this limit, the reference point becomes the last thread scratch on the chamfer cone.

9 HYDROSTATIC STRENGTH

Assembled unions shall be capable of withstanding, without rupture or leakage through the shell or at the union joint, an internal hydrostatic pressure of five times the cold 66°C (150°F) pressure rating for 1 min.

10 TENSILE STRENGTH

(a) Assembled unions shall be capable of withstanding, without rupture, the tensile loads shown in Table 2 and Table I-2.

(b) Tests shall be conducted by attaching threaded steel bars or pipe to each end of the union using the pipe threads. Bars or pipe are to be secured in a tensile testing machine. Load shall be increased at a uniform rate until the tensile load is attained.

11 AIR PRESSURE TEST

Assembled unions selected in accordance with section 12 shall be tested with air at a minimum pressure of 2.8 bar (40 psi).

12 SAMPLING FOR AIR PRESSURE TEST

A random sample of unions representative of the production lot shall be submitted for testing in accordance with section 11. The average outgoing quality level (AOQL), as defined in ANSI/ASQ Z1.4, of the established acceptable sampling plans used shall not exceed

2%. A *lot*, for purposes of this Standard, is defined as the number of unions of the same size, design, and pressure rating submitted for testing at any one time.

13 COATINGS

13.1 Malleable Iron Unions

When malleable iron unions are zinc coated, they shall be hot dipped in accordance with ASTM A153 or have an electrodeposited zinc coating conforming to ASTM B633, Type 1, Service Condition 4. Hot-dipped coatings shall be a minimum thickness of 86 µm (0.0034 in.) and applied prior to threading. Electrodeposited zinc shall be a minimum thickness of 25 µm (0.001 in.) and may be applied either before or after threading.

13.2 Steel Unions

NPS 1/8 unions made from steel bar, per para. 6(b) of this Standard, may be either uncoated or have an electrodeposited zinc coating conforming to ASTM B633, Type 1, Service Condition 4. The electrodeposited zinc coatings may be applied either before or after threading.

13.3 Union Seating Surfaces

Union seating surfaces shall not be coated.

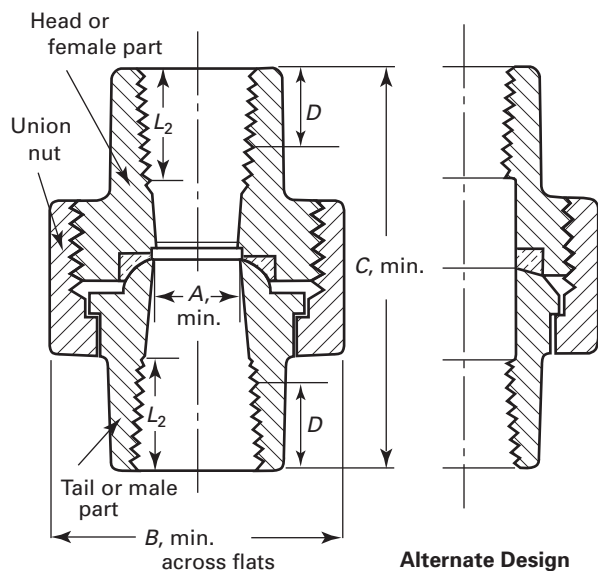
13.4 Other Coatings

Other coatings, specified by the purchaser, shall be furnished meeting the agreed requirements. Copper or copper alloy seats shall not have a zinc coating.

14 DIMENSIONS

Dimensions in millimeters are given in Tables 3 through 5. Dimensions in inches are given in Tables I-3 through I-5.

(14)

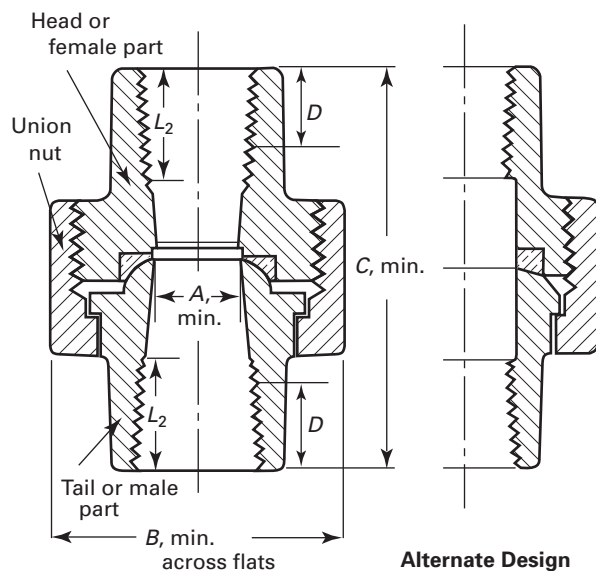
**Table 3 SI Dimensions of Class 150
Malleable Iron Threaded Unions**

NPS	A, Min.	B, Min.	C, Min.	D, Min.
1/8	5.5	23.5	32.0	6.7
1/4	9.0	28.0	36.5	10.2
3/8	13.0	32.0	41.0	10.4
1/2	15.5	37.0	43.5	13.6
3/4	20.5	43.5	49.5	13.9
1	25.5	52.5	52.5	17.3
1 1/4	33.5	63.5	57.5	18.0
1 1/2	39.5	71.5	61.0	18.4
2	51.5	86.5	70.0	19.2
2 1/2	60.5	104.5	82.0	28.9
3	76.0	120.5	89.0	30.5
4	102.5	152.5	98.0	33.0

GENERAL NOTES:

- (a) Dimensions are in millimeters.
 (b) Dimension *D* is minimum length of perfect thread. The length of useful thread (*D* plus threads with fully formed roots and flat crests) shall be not less than *L*₂ (effective length of external thread) required by ASME B1.20.1.

(14)

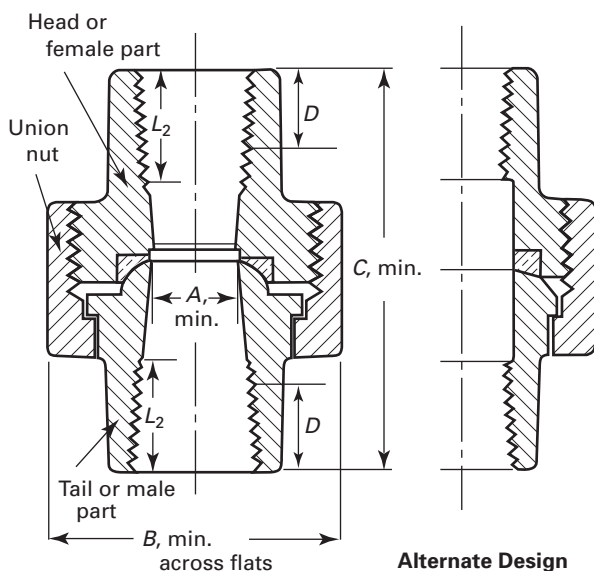
**Table 4 SI Dimensions of Class 250
Malleable Iron Threaded Unions**

NPS	A, Min.	B, Min.	C, Min.	D, Min.
1/8	5.5	23.5	32.0	7.5
1/4	7.5	28.5	39.5	11.0
3/8	10.5	32.0	43.5	12.0
1/2	13.5	37.0	46.0	14.5
3/4	19.0	43.5	52.5	16.5
1	24.0	52.5	58.5	19.0
1 1/4	32.5	65.5	66.5	21.5
1 1/2	38.0	73.5	70.5	22.0
2	49.0	88.5	79.5	25.5
2 1/2	59.0	105.5	89.5	29.5
3	73.5	126.0	97.5	31.0
4	97.0	164.5	111.5	34.0

GENERAL NOTES:

- (a) Dimensions are in millimeters.
 (b) Dimension *D* is minimum length of perfect thread. The length of useful thread (*D* plus threads with fully formed roots and flat crests) shall be not less than *L*₂ (effective length of external thread) required by ASME B1.20.1.

(14) **Table 5 SI Dimensions of Class 300
Malleable Iron Threaded Unions**



NPS	A, Min.	B, Min.	C, Min.	D, Min.
1/8	5.5	23.5	32.0	7.5
1/4	7.5	34.0	39.5	11.0
3/8	10.5	38.0	43.5	12.0
1/2	13.5	44.5	46.0	14.5
3/4	19.0	54.5	54.0	16.5
1	24.0	63.0	58.5	19.0
1 1/4	32.5	76.5	67.5	21.5
1 1/2	38.0	83.5	72.5	22.0
2	49.0	100.5	82.0	25.5
2 1/2	59.0	120.0	84.5	29.5
3	73.5	136.5	104.0	31.0
4	97.0	178.0	113.5	34.0

GENERAL NOTES:

- (a) Dimensions are in millimeters.
- (b) Dimension D is minimum length of perfect thread. The length of useful thread (D plus threads with fully formed roots and flat crests) shall be not less than L_2 (effective length of external thread) required by ASME B1.20.1.

INTENTIONALLY LEFT BLANK

MANDATORY APPENDIX I

DIMENSIONS AND PRESSURE RATINGS OF UNIONS IN U.S. CUSTOMARY UNITS

This Appendix provides tables of the standard inch dimensions and pressure ratings for unions.

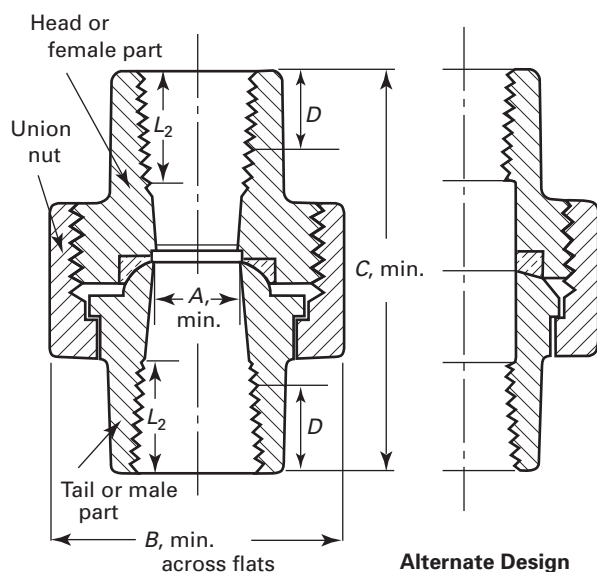
Table I-1 Pressure–Temperature Ratings

Temperature, °F	Pressure, psi		
	Class 150	Class 250	Class 300
–20 to 150	300	500	600
200	265	455	550
250	225	405	505
300	185	360	460
350	150	315	415
400	110	270	370
450	75	225	325
500	...	180	280
550	...	130	230

Table I-2 Tensile Strength of Unions

NPS	Ultimate Load, lbf		
	Class 150	Class 250	Class 300
$\frac{1}{8}$	2,500	2,500	4,000
$\frac{1}{4}$	3,800	3,800	6,000
$\frac{3}{8}$	5,300	5,300	8,000
$\frac{1}{2}$	7,700	7,700	10,000
$\frac{3}{4}$	10,600	10,600	14,000
1	15,500	15,500	18,000
$1\frac{1}{4}$	21,300	21,300	23,000
$1\frac{1}{2}$	25,800	25,800	28,000
2	30,000	30,000	40,000
$2\frac{1}{2}$	35,000	35,000	55,000
3	40,000	40,000	75,000
4	50,000	50,000	110,000

(14)

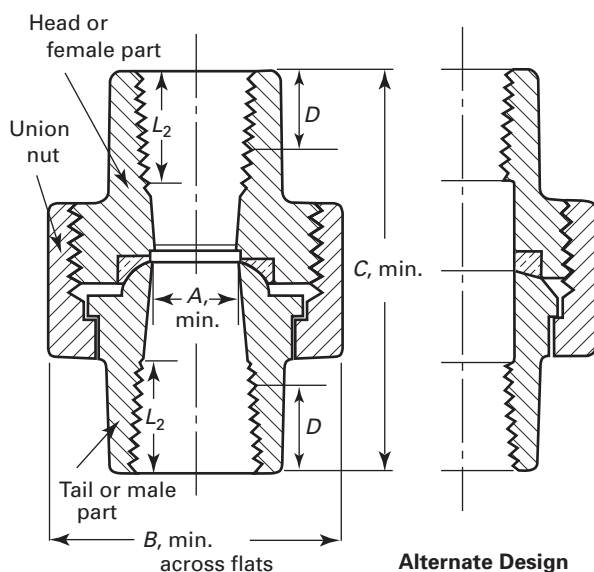
**Table I-3 Dimensions of Class 150
Malleable Iron Threaded Unions**

NPS	A, Min.	B, Min.	C, Min.	D, Min.
1/8	0.21	0.93	1.26	0.26
1/4	0.36	1.10	1.44	0.40
3/8	0.52	1.26	1.61	0.41
1/2	0.61	1.45	1.72	0.53
3/4	0.80	1.71	1.94	0.55
1	1.00	2.07	2.06	0.68
1 1/4	1.31	2.50	2.26	0.71
1 1/2	1.55	2.82	2.41	0.72
2	2.03	3.41	2.75	0.76
2 1/2	2.38	4.12	3.22	1.14
3	3.00	4.75	3.50	1.20
4	4.03	6.00	3.85	1.30

GENERAL NOTES:

- (a) Dimensions are in inches.
 (b) Dimension *D* is minimum length of perfect thread. The length of useful thread (*D* plus threads with fully formed roots and flat crests) shall be not less than *L*₂ (effective length of external thread) required by ASME B1.20.1.

(14)

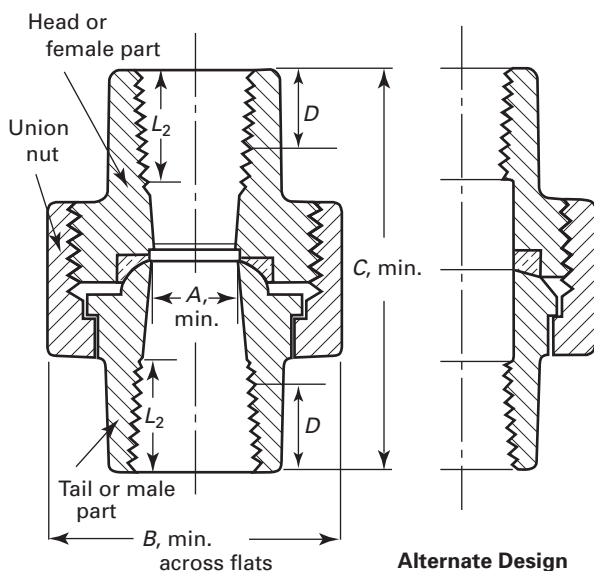
**Table I-4 Dimensions of Class 250
Malleable Iron Threaded Unions**

NPS	A, Min.	B, Min.	C, Min.	D, Min.
1/8	0.21	0.93	1.26	0.30
1/4	0.30	1.11	1.55	0.43
3/8	0.42	1.26	1.71	0.47
1/2	0.54	1.45	1.81	0.57
3/4	0.74	1.71	2.07	0.64
1	0.95	2.07	2.31	0.75
1 1/4	1.27	2.57	2.62	0.84
1 1/2	1.50	2.89	2.78	0.87
2	1.93	3.48	3.13	1.00
2 1/2	2.32	4.15	3.52	1.17
3	2.90	4.96	3.84	1.23
4	3.82	6.47	4.39	1.33

GENERAL NOTES:

- (a) Dimensions are in inches.
 (b) Dimension *D* is minimum length of perfect thread. The length of useful thread (*D* plus threads with fully formed roots and flat crests) shall be not less than *L*₂ (effective length of external thread) required by ASME B1.20.1.

(14) **Table I-5 Dimensions of Class 300
Malleable Iron Threaded Unions**



NPS	A, Min.	B, Min.	C, Min.	D, Min.
$\frac{1}{8}$	0.21	0.93	1.26	0.30
$\frac{1}{4}$	0.30	1.33	1.55	0.43
$\frac{3}{8}$	0.42	1.50	1.71	0.47
$\frac{1}{2}$	0.54	1.76	1.81	0.57
$\frac{3}{4}$	0.74	2.15	2.12	0.64
1	0.95	2.48	2.31	0.75
$1\frac{1}{4}$	1.27	3.02	2.66	0.84
$1\frac{1}{2}$	1.50	3.28	2.85	0.87
2	1.93	3.96	3.23	1.00
$2\frac{1}{2}$	2.32	4.72	3.33	1.17
3	2.90	5.37	4.09	1.23
4	3.82	7.00	4.47	1.33

GENERAL NOTES:

- Dimensions are in inches.
- Dimension D is minimum length of perfect thread. The length of useful thread (D plus threads with fully formed roots and flat crests) shall be not less than L_2 (effective length of external thread) required by ASME B1.20.1.

MANDATORY APPENDIX II

REFERENCES

The following is a list of publications referenced in this Standard. Unless otherwise stated, the latest edition of ASME publications shall apply.

ANSI/ASQC Z1.4-2003, Sampling Procedures and Tables for Inspection by Attributes

Publisher: American Society for Quality (ASQ), P.O. Box 3005, Milwaukee, WI 53201-3005 (www.asq.org)

ASME B1.20.1, Pipe Threads, General Purpose (Inch)
ASME B36.10M, Welded and Seamless Wrought Steel Pipe

Publisher: The American Society of Mechanical Engineers (ASME), Two Park Avenue, New York, NY 10016-5990; Order Department: 22 Law Drive, P.O. Box 2900, Fairfield, NJ 07007-2900 (www.asme.org)

ASTM A153/A153M-95, Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM B633-2007, Specification for Electrodeposited Coatings of Zinc on Iron and Steel

ASTM A197/A197M-2000 (R2006), Specification for Cupola Malleable Iron

Publisher: American Society for Testing and Materials (ASTM International), 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959 (www.astm.org)

ISO 9000: 2005, Quality management systems — Fundamentals and vocabulary¹

ISO 9001: 2000, Quality management systems — Requirements¹

ISO 9004: 2000, Quality management systems — Guidelines for performance improvements¹

Publisher: International Organization for Standardization (ISO), 1, ch. de la Voie-Creuse, Case postale 56, CH-1211 Genève 20, Switzerland/Suisse (www.iso.org)

MSS SP-25-1998, Standard Marking System for Valves, Fittings, Flanges, and Unions

Publisher: Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS), 127 Park Street, NE, Vienna, VA 22180 (www.mss-hq.org)

¹ May also be obtained from the American National Standards Institute (ANSI), 25 West 43rd Street, New York, NY 10036.

NONMANDATORY APPENDIX A QUALITY SYSTEM PROGRAM

The products manufactured in accordance with this Standard shall be produced under a quality system program following the principles of an appropriate standard from the ISO 9000 series.¹ A determination of the need for registration, certification, or both, of the product

¹ The series is also available from the American National Standards Institute (ANSI) and the American Society for Quality (ASQ) as American National Standards that are identified by the prefix "Q," replacing the prefix "ISO." Each standard of the series is listed under References in Mandatory Appendix II.

manufacturer's quality system program by an independent organization shall be the responsibility of the manufacturer. Detailed documentation demonstrating program compliance shall be available to the purchaser at the manufacturer's facility. A written, summarized description of the program used by the product manufacturer shall be available to the purchaser upon request. The product manufacturer is defined as the entity whose name or trademark appears on the product in accordance with the marking or identification requirements of this Standard.

INTENTIONALLY LEFT BLANK

B16 AMERICAN NATIONAL STANDARDS FOR PIPING, PIPE FLANGES, FITTINGS, AND VALVES

Gray Iron Pipe Flanges and Flanged Fittings (Classes 25, 125, and 250)	B16.1-2010
Malleable Iron Threaded Fittings: Classes 150 and 300	B16.3-2011
Gray Iron Threaded Fittings: Classes 125 and 250	B16.4-2011
Pipe Flanges and Flanged Fittings NPS ½ Through NPS 24 Metric/Inch Standard	B16.5-2013
Factory-Made Wrought Butt welding Fittings	B16.9-2012
Face-to-Face and End-to-End Dimensions of Valves	B16.10-2009
Forged Fittings, Socket-Welding and Threaded	B16.11-2011
Cast Iron Threaded Drainage Fittings	B16.12-2009 (R2014)
Ferrous Pipe Plugs, Bushings, and Locknuts with Pipe Threads	B16.14-2013
Cast Copper Alloy Threaded Fittings	B16.15-2013
Cast Copper Alloy Solder Joint Pressure Fittings	B16.18-2012
Metallic Gaskets for Pipe Flanges: Ring-Joint, Spiral-Wound, and Jacketed	B16.20-2012
Nonmetallic Flat Gaskets for Pipe Flanges	B16.21-2011
Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings	B16.22-2013
Cast Copper Alloy Solder Joint Drainage Fittings: DWV	B16.23-2011
Cast Copper Alloy Pipe Flanges and Flanged Fittings: Classes 150, 300, 600, 900, 1500, and 2500	B16.24-2011
Butt welding Ends	B16.25-2012
Cast Copper Alloy Fittings for Flared Copper Tubes	B16.26-2013
Wrought Copper and Wrought Copper Alloy Solder-Joint Drainage Fittings — DWV	B16.29-2012
Manually Operated Metallic Gas Valves for Use in Gas Piping Systems Up to 125 psi (Sizes NPS ½ Through NPS 2)	B16.33-2012
Valves — Flanged, Threaded, and Welding End	B16.34-2013
Orifice Flanges	B16.36-2009
Large Metallic Valves for Gas Distribution: Manually Operated, NPS 2½ (DN 65) to NPS 12 (DN 300), 125 psig (8.6 bar) Maximum	B16.38-2012
Malleable Iron Threaded Pipe Unions: Classes 150, 250, and 300	B16.39-2014
Manually Operated Thermoplastic Gas Shutoffs and Valves in Gas Distribution Systems	B16.40-2013
Ductile Iron Pipe Flanges and Flanged Fittings: Classes 150 and 300	B16.42-2011
Manually Operated Metallic Gas Valves for Use in Aboveground Piping Systems Up to 5 psi	B16.44-2012
Large Diameter Steel Flanges NPS 26 Through NPS 60 Metric/Inch Standard	B16.47-2011
Line Blanks	B16.48-2010
Factory-Made Wrought Steel Butt welding Induction Bends for Transportation and Distribution Systems	B16.49-2012
Wrought Copper and Copper Alloy Braze-Joint Pressure Fittings	B16.50-2013
Copper and Copper Alloy Press-Connect Pressure Fittings	B16.51-2013

The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complimentary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763).

INTENTIONALLY LEFT BLANK

ASME Services

ASME is committed to developing and delivering technical information. At ASME's Information Central, we make every effort to answer your questions and expedite your orders. Our representatives are ready to assist you in the following areas:

ASME Press	Member Services & Benefits	Public Information
<i>Codes & Standards</i>	Other ASME Programs	Self-Study Courses
Credit Card Orders	Payment Inquiries	Shipping Information
IMEchE Publications	Professional Development	Subscriptions/Journals/Magazines
Meetings & Conferences	Short Courses	Symposia Volumes
Member Dues Status	Publications	Technical Papers

How can you reach us? It's easier than ever!

There are four options for making inquiries* or placing orders. Simply mail, phone, fax, or E-mail us and an Information Central representative will handle your request.

<i>Mail</i>	<i>Call Toll Free</i>	<i>Fax—24 hours</i>	<i>E-Mail—24 hours</i>
ASME	US & Canada: 800-THE-ASME	973-882-1717	Infocentral@asme.org
22 Law Drive, Box 2900	(800-843-2763)	973-882-5155	
Fairfield, New Jersey	Mexico: 95-800-THE-ASME		
07007-2900	(95-800-843-2763)		
	Universal: 973-882-1167		

* Information Central staff are not permitted to answer inquiries about the technical content of this code or standard. Information as to whether or not technical inquiries are issued to this code or standard is shown on the copyright page. All technical inquiries must be submitted in writing to the staff secretary. Additional procedures for inquiries may be listed within.

INTENTIONALLY LEFT BLANK

INTENTIONALLY LEFT BLANK

ASME B16.39-2014

ISBN 978-0-7918-6963-5



L04914