

ASME B18.29.1-2010

[Revision of ASME B18.29.1-1993 (R2007)]

Helical Coil Screw Thread Inserts — Free Running and Screw Locking (Inch Series)

AN AMERICAN NATIONAL STANDARD



INTENTIONALLY LEFT BLANK

ASME B18.29.1-2010
[Revision of ASME B18.29.1-1993 (R2007)]

Helical Coil Screw Thread Inserts— Free Running and Screw Locking (Inch Series)

AN AMERICAN NATIONAL STANDARD



Three Park Avenue • New York, NY • 10016 USA

Date of Issuance: August 16, 2010

This Standard will be revised when the Society approves the issuance of a new edition. There will be no addenda issued to this edition.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this document. Periodically, certain actions of the ASME B18 Committee may be published as Cases. Cases and interpretations are published on the ASME Web site under the Committee Pages at <http://cstools.asme.org> as they are issued.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not “approve,” “rate,” or “endorse” any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Three Park Avenue, New York, NY 10016-5990

Copyright © 2010 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	iv
Committee Roster	v
Correspondence With the B18 Committee	vi
1 Introductory Notes	1
2 STI Tapped Hole	2
3 Helical Coil Insert	2
4 Inspection and Quality Assurance	3
Figure	
1 Insert Configuration	5
Tables	
1 STI Threaded Hole Data	6
2 Chemical Composition	9
3 Insert Length Data	10
4 Insert Dimensions	12
5 Self-Locking Torque	14
Nonmandatory Appendices	
A Insert Length Selection	15
B Screw Thread Insert Taps	16
C STI Thread Plug Gages	17
D Installation	18

FOREWORD

Although this is the first ASME standard covering helical coil screw thread inserts, they have been in use for many years. The helical coil screw thread insert was invented in the 1930s and found initial acceptance in aircraft manufactured and serviced by the Allied Air Forces during World War II.

Since that time, applications for helical coil inserts have come into broad usage in aerospace, automotive, and industrial original equipment design, production salvage (repair), and in-service repair.

Although this usage did include metric spark plug sizes, the regular metric series was delineated in Europe in the 1950s, and came into production in the inch-using countries in the 1960s.

Subcommittee 29, Threaded Inserts, met initially in May 1989 after authorization by the ASME B18 Committee to proceed with development of standards covering screw thread inserts.

Following approval by the B18 Committee, the proposal was submitted to the American National Standards Institute for approval. The 1993 edition was approved by ANSI on February 4, 1993.

In 2008, an update of this Standard was initiated by the ASME B18.29 Subcommittee. After needed revisions and additions were clearly identified, ballots were properly undertaken. Ballots resulted in changes related to the ballot comments. In 2009, this Standard was approved by the B18.29 Subcommittee and the B18 Committee.

This revision was approved by the American National Standards Institute (ANSI) on February 25, 2010.

ASME B18 COMMITTEE

Standardization of Bolts, Nuts, Rivets, Screws, Washers, and Similar Fasteners

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

J. Greenslade, *Chair*
D. S. George, *Vice Chair*
R. D. Strong, *Vice Chair*
C. J. Gomez, *Secretary*

STANDARDS COMMITTEE PERSONNEL

V. Cartina , Autocraft Industrial	W. H. Kopke , Consultant
D. A. Clever , Consultant	W. J. Lutkus , Emhart Teknologies
A. P. Cockman , Ford Motor Co.	D. McCrindle , Canadian Fasteners Institute
C. A. Dugal de la Garza , TSP, Inc.	M. D. Prasad , <i>Contributing Member</i> , Global M&F Solutions, Inc.
D. S. George , ND Industries	S. Savoji , ITW Medalist
C. J. Gomez , The American Society of Mechanical Engineers	W. Schevey , <i>Contributing Member</i> , BGM Fastener Co., Inc.
J. Greenslade , Industrial Fasteners Institute	Q. M. Smith III , Oregon DOT
J. J. Grey , <i>Contributing Member</i> , Fastener Consulting Services, Inc.	W. R. Stevens , Ramco
B. Hasiuk , <i>Contributing Member</i> , Defense Supply Center Philadelphia	R. D. Strong , Consultant
A. Herskovitz , Consultant	S. W. Vass , Consultant
J. Hubbard , Leland-Powell Fasteners, Inc.	C. B. Wackrow , MNP Corp.
J. Jennings , <i>Contributing Member</i> , Naval Surface Warfare Center	W. K. Wilcox , Consultant
W. H. King , Porteous Fastener Co.	C. B. Williamson , Fastenal Co.
J. F. Koehl , <i>Contributing Member</i> , Spirol International Corp.	C. J. Wilson , Consultant
	R. B. Wright , <i>Contributing Member</i> , Wright Tool Co.
	J. G. Zeratsky , National Rivet and Manufacturing Co.

SUBCOMMITTEE 29 — THREADED INSERTS

A. L. Guzman , <i>Secretary</i> , The American Society of Mechanical Engineers	A. J. Knudtson , Alcoa Fastening Systems
R. L. Davis , Kato Fastening Systems, Inc.	J. Loconte III , <i>Contributing Member</i> , Alcoa Fastening Systems
D. S. George , ND Industries	W. J. Lutkus , Emhart Teknologies
W. Giannakakos , Black & Decker	J. F. McCarrick , Defense Supply Center Philadelphia
J. Greenslade , Industrial Fasteners Institute	A. Qaqish , Kato Fastening Systems, Inc.
A. Herskovitz , Consultant	Q. M. Smith III , Oregon DOT
J. Jennings , Naval Surface Warfare Center	D. J. Soscia , General Dynamics Electric Boat Corp.
M. Keller , Consultant	R. D. Strong , Consultant
	W. K. Wilcox , Consultant
	C. J. Wilson , Consultant

CORRESPONDENCE WITH THE B18 COMMITTEE

General. ASME standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B18 Standards Committee
The American Society of Mechanical Engineers
Three Park Avenue
New York, NY 10016-5990
<http://go.asme.org/Inquiry>

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued for the purpose of providing alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee Web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the standard, the paragraph, figure or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the standard to which the proposed Case applies.

Interpretations. Upon request, the B18 Standards Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B18 Standards Committee.

The request for an interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject:	Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition:	Cite the applicable edition of the Standard for which the interpretation is being requested.
Question:	Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain proprietary names or information.

Requests that are not in this format may be rewritten in the appropriate format by the Committee prior to being answered, which may inadvertently change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not “approve,” “certify,” “rate,” or “endorse” any item, construction, proprietary device, or activity.

Attending Committee Meetings. The B18 Standards Committee regularly holds meetings, which are open to the public. Persons wishing to attend any meeting should contact the Secretary of the B18 Standards Committee.

HELICAL COIL SCREW THREAD INSERTS— FREE RUNNING AND SCREW LOCKING (INCH SERIES)

1 INTRODUCTORY NOTES

1.1 Scope

1.1.1 This Standard delineates the dimensional data for the inch series helical coil screw thread inserts and the threaded holes into which they are installed. Both free-running and screw-locking types having unified fine and unified coarse thread series from size #1 through 1½ in. are covered. Appendices that describe insert selection, STI (screw thread insert) taps, gages and gaging, insert installation, and removal tooling are also included.

1.1.2 The inclusion of dimensional data in this Standard is not intended to imply that all products described are stock sizes. Consumers should consult with manufacturers concerning availability.

1.2 References

The latest editions of the following documents form a part of this Standard to the extent specified herein.

Army A-A-59158, Tools for Inserting and Extracting Helical Coil Wire Screw Thread Inserts

Publisher: IHS Inc., 15 Inverness Way East, Englewood, CO 80112 (www.ihs.com)

ASME B1.1, Unified Inch Screw Threads (UN and UNR Thread Form)

ASME B1.2, Gages and Gaging for Unified Inch Screw Threads

ASME B1.3, Screw Thread Gaging Systems for Acceptability — Inch and Metric Screw Threads (UN, UNR, UNJ, M, and MJ)

ASME B18.18.2, Inspection and Quality Assurance for High-Volume Machine Assembly Fasteners

ASME B46.1, Surface Texture, Surface Roughness, Waviness, and Lay

ASME B47.1, Gage Blanks

ASME B94.9, Taps: Ground and Cut Threads

ASME Y14.5M, Dimensioning and Tolerancing

ASME Y14.36, Surface Texture Symbols

Publisher: The American Society of Mechanical Engineers (ASME), Three Park Avenue, New York, NY 10016; Order Department: 22 Law Drive, P.O. Box 2900, Fairfield, NJ 07007-2900 (www.asme.org)

ASTM E 290, Standard Test Methods for Bend Testing of Material for Ductility

ASTM B 209-02, Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

ASTM A 370, Standard Test Methods and Definitions for Mechanical Testing of Steel Products

Publisher: American Society for Testing and Materials (ASTM International), 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428 (www.astm.org)

SAE AMS4120, Aluminum Alloy, Rolled or Cold Finished Bars, Rods, and Wire, 4.4Cu–1.5Mg–0.60Mn (2024), Solution Heat Treated and Naturally Aged (T4), Solution Heat Treated, Cold Worked, and Naturally Aged (T351)

SAE AS5272, Lubricant, Solid Film, Heat Cured, Corrosion Inhibiting Procurement Specification

SAE AS8879, Screw Threads — UNJ Profile, Inch Controlled Radius Root with Increased Minor Diameter

SAE J417, Hardness Tests and Hardness Number Conversions.

Publisher: Society of Automotive Engineers (SAE International), 400 Commonwealth Drive, Warrendale, PA 15096-0001 (www.sae.org)

1.3 Description

Helical coil inserts are screw thread bushings coiled from wire of diamond shaped cross-sections. The inserts are screwed into STI tapped holes to form nominal size internal threads. Inserts are installed by torquing through a diametral tang. This tang is notched for removal after installation.

In the free state, the inserts are larger in diameter than the tapped hole into which they are installed. In the assembly operation, the torque applied to the tang reduces the diameter of the leading coil and permits it to enter the tapped thread. The remaining coils are reduced in diameter as they, in turn, are screwed into the tapped hole. When the torque or rotation is stopped, the coils expand with a spring-like action, anchoring the insert in place against the tapped hole.

1.4 Class of Fit

Since helical coil inserts are flexible, the class of fit of the final assembly is a function of the size of the tapped hole. Helical coil STI taps are available for both tolerance Classes 2B and 3B tapped holes. Tolerance Class 2B tapped holes provide maximum production tolerances, but result in lower locking torques when screw locking inserts are used. The higher and more consistent torques given in Table 5 are met by the screw locking inserts when assembled and tested in tolerance Class 3B tapped holes in accordance with section 2.

1.5 Compatibility

Assembled helical coil inserts will mate properly with items having UN external threads in accordance with ASME B1.1. In addition, due to the radius on the crest of the insert at the minor diameter, the assembled insert will mate with UNJ profile external threaded parts with controlled radius root threads per SAE AS8879.

1.6 Types of Inserts

1.6.1 Free-Running. The free-running insert provides a smooth, hard, and free-running thread.

1.6.2 Screw-Locking. The screw-locking insert provides a resilient locking thread produced by a series of chords on one or more of the insert coils.

2 STI TAPPED HOLE

The tapped hole into which the insert is installed shall be in accordance with ASME B1.1, except that diameters are larger to accommodate the wire cross-section of the insert. Dimensions of the STI tapped holes are shown in Table 1 and calculated per Note (3) of Table 1.

2.1 Screw Thread Designation

2.1.1 Designation for Tapped Hole. The drawing note for the STI threaded hole per Table 1 to accept the helical coil insert shall be in accordance with the following example:

EXAMPLE: $\frac{1}{4}$ -20 UNC-2B STI thread 0.430 min. depth, per ASME B18.29.1.

2.1.2 Designation for a Helical Coil Insert. Designation of the helical coil insert on parts lists, spares lists, purchase orders, etc., shall be in accordance with the following examples:

EXAMPLES:

- (1) ASME B18.29.1, $\frac{1}{4}$ -20 UNC 0.375 long helical coil free-running insert.
- (2) ASME B18.29.1, #10-32 UNF 0.380 long helical coil screw-locking insert.

2.1.3 Designation for STI Threaded Hole Including Installed Helical Coil Insert. The drawing note for the STI threaded hole per Table 1, having a helical coil insert

installed, shall be in accordance with the following example:

EXAMPLES:

- (1) $\frac{1}{4}$ -20 UNC-2B STI thread 0.430 deep.
- (2) ASME B18.29.1, $\frac{1}{4}$ -20 UNC 0.375 long helical coil free-running insert.

2.2 Gages and Gaging

Acceptance of the threaded hole is determined by gaging with STI GO, NOT GO (HI), and plain cylindrical gages designed and applied in accordance with System 21 of ASME B1.3 (see Nonmandatory Appendix C).

3 HELICAL COIL INSERT

3.1 Insert Material

Chemical composition of the inserts is austenitic corrosion resistant (stainless) steel within the limits of Table 2.

3.2 Properties

3.2.1 Tensile Strength. Wire, before coiling into inserts, shall have tensile strength not lower than 150,000 psi, determined in accordance with ASTM A 370.

3.2.2 Bending. Wire shall withstand, without cracking, bending in accordance with ASTM E 290 at room temperature through an angle of 180 deg around a diameter equal to twice the cross-sectional dimension of the wire in the plane of the bend.

3.2.3 Workmanship. The formed wire shall be of uniform quality and temper; smooth, clean, free from kinks, waviness, splits, cracks, laps, seams, scale, segregation, and other defects that may impair the serviceability of the insert.

3.3 Coatings

3.3.1 Red Dye Identification. Screw-locking inserts are dyed red for identification. The red dye may completely or partially cover the insert. However, it must be sufficient to identify the insert when it is installed in the tapped hole.

3.3.2 Dry Film Lubricant Coating. When specified, dry film lubricant coating can be applied to helical coil inserts. It shall meet the requirements of para. 3.3.2.1 and para. 3.3.2.2. Color of dry film lubricated insert is dark gray to black.

3.3.2.1 Dry Film Material. The lubricant shall meet the requirements of SAE AS5272, Type I.

3.3.2.2 Thickness. The coating shall be uniformly deposited on the insert with minimum thickness being complete coverage. The maximum thickness shall be the avoidance of "bridging" between coils. Slight fill-in

between closely wound coils that immediately separate as the coils are axially pulled apart by hand, shall not be considered “bridging.”

3.4 Configuration and Dimensions

Insert configurations shall be in accordance with Fig. 1, and dimensions shall be in accordance with Tables 3 and 4.

3.4.1 Nominal Length. Each nominal insert size is standardized in five lengths which are multiples of the insert’s nominal diameter. These are 1, 1½, 2, 2½, and 3 times nominal diameter.

Each nominal length is the minimum through-hole length (material thickness), without countersink, into which that insert can be installed. The nominal insert length is a reference value and cannot be measured.

3.4.2 Assembled Length. Actual assembled length of the insert equals nominal length minus ½ pitch to minus ¾ pitch, with insert installed in a basic STI threaded hole. It cannot be measured in the insert’s free state.

4 INSPECTION AND QUALITY ASSURANCE

Unless otherwise specified by the purchaser, the inspection of inserts shall be in accordance with ASME B18.18.2 with inspection level 3 for a 15-cycle torque test as described in para. 4.2.3.

4.1 Inspection (Nondestructive)

4.1.1 Examination of the Product. Inserts shall be visually examined for conformance with drawings and workmanship requirements in accordance with ASME B18.18.2.

4.1.2 Threads. The inserts, when assembled in STI threaded holes conforming to Table 1, shall form threads conforming to ASME B1.1, tolerance Class 3B or Class 2B except for the locking feature of screw-locking inserts. The assembled insert, both types, shall accept and function with parts having external UNJ threads per SAE AS8879.

NOTE: Accuracy of the finished thread, when the insert is installed, is dependent upon the accuracy of the tapped hole. If the finished tapped hole gages satisfactorily, the installed insert will be within the thread tolerance when the insert meets the requirements of the Standard. It is, therefore, not necessary to gage the installed insert. After the insert is installed, the GO thread plug gage may not enter freely because the insert may not have been fully seated in the tapped hole. However, the insert should become seated after a bolt or screw is installed and tightened.

4.1.3 Tang Removal Notch. The tang removal notch shall be located as shown in Fig. 1 and shall be of such depth that the part may be installed without failure of the tang, and that the tang may be removed, after assembly, without affecting the function of the installed insert.

4.2 Screw-Locking Insert Self-Locking Torque (Destructive) Testing

The screw-locking insert, when assembled in threaded holes conforming to Table 1 and tested in accordance with the following paragraphs, shall provide a frictional lock to retain the bolt threads within the torque limits specified in Table 5.

4.2.1 Torque Test Bolts. Assembled screw-locking inserts shall be torque-tested with bolts in accordance with ASME B1.1, cadmium plated, or have other coating with a similar coefficient of friction and a hardness of 36 HRC to 44 HRC. The bolts selected for this test shall be of sufficient length so the thread run out does not enter the insert and that a minimum of one full thread extends past the end of the insert when the bolt is fully seated. Acceptability of bolt threads shall be determined based on System 22 of ASME B1.3 (see Note below).

NOTE: Until a replacement for cadmium plating on the torque test bolts (as specified in para. 4.2.1) is found, and test data completed, an alternate coating, lubricant, or both, can be used to perform the torque test (values may be different from those obtained using cad plated screws) based on agreement between the customer and the insert supplier.

4.2.2 Torque Test Block. The insert to be tested shall be installed in a Class 3B threaded hole conforming to Table 1 in a test block made from 2024-T4 (SAE AMS4120, ASTM B 209-02) aluminum alloy. After installation, the tang shall be removed. The surface of the test block from which the insert is assembled shall be marked to indicate the radial location where the assembled insert begins.

4.2.3 Torque Test Method. The torque test shall consist of a 15-cycle, room temperature test. A new bolt or screw and a new tapped hole shall be used for each complete 15-cycle test. Bolts must assemble freely, with the fingers, up to the locking coil or coils. The bolt shall be engaged and disengaged from the assembled insert for 15 full installation and removal cycles. The test shall be run at less than 40 rpm to yield a dependable measure of torque and avoid heating of the bolt. A bolt shall be considered fully installed when three threads extend past the end of the locking coils of the insert. The removal cycle shall be considered complete when the locking coils are disengaged.

4.2.3.1 Maximum Locking Torque. Maximum locking torque shall be the highest torque value encountered on any installation or removal cycle and shall not exceed the values specified in Table 5. Maximum locking torque readings shall be taken on the first and seventh installation cycles and on the fifteenth removal cycle.

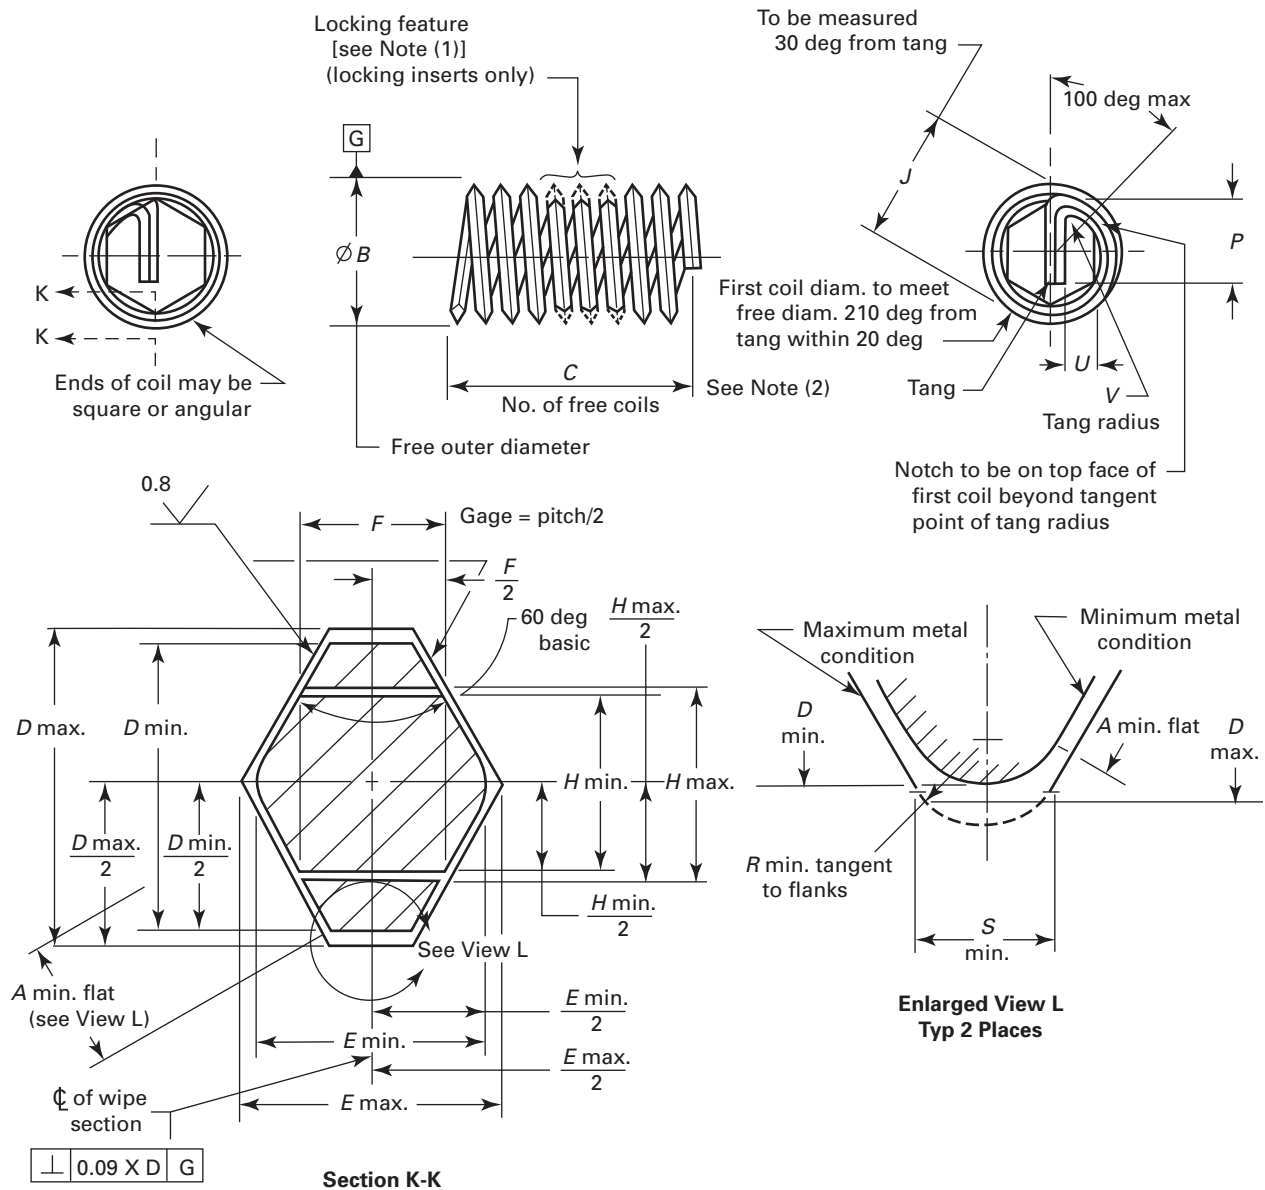
4.2.3.2 Minimum Breakaway Torque. Minimum breakaway torque shall be the torque required to overcome static friction when 100% of the locking feature is engaged and the bolt or screw is not seated (no axial

load). It shall be recorded at the start of the fifteenth removal cycle. The torque value for any cycle shall be not less than the applicable value shown in Table 5.

4.3 Acceptance

The inserts shall be considered to have failed if, at the completion of any of the tests and inspection, any of the following conditions exist:

- (a) a break or crack in the insert
- (b) installation or removal torque exceeds the maximum locking torque value in Table 5
- (c) breakaway torque less than the values in Table 5
- (d) movement of the insert beyond ± 90 deg relative to the TOP surface when installing or removing the test bolt
- (e) seizure or galling of the insert or test bolt
- (f) tang not broken off which interferes with the test bolt at installation
- (g) tang breaks off during insert installation

Fig. 1 Insert Configuration**GENERAL NOTES:**

- Assembled length of insert to be measured from notch.
- Dimensions apply before supplementary coating (see Tables 4 and 5).
- Surface texture; symbols per ASME Y14.36, requirements per ASME B46.1.
- Dimensions and tolerancing; ASME Y14.5.

NOTES:

- Number of locking coils, spacing of locking coils, number of locking deformations, shape and orientation optional. Locking feature for 1, 1.5, and 2 diameter length inserts symmetrically positioned about the center of insert, and for 2.5 and 3 diameter length inserts at 1 diameter from tang end of insert.
- Number of free coils to be counted from notch.

Diagram illustrating the design of a double-flute tap with a bottoming style tap on the left and a plug style tap on the right. The diagram shows the tap profile, cutting edge, and various dimensions. Key dimensions include:

- G : Total length of the tap.
- T : Cutting length of the tap.
- 1 pitch tap end clearance: Distance from the cutting edge to the end of the cutting length.
- 2 pitch incomplete threads: Distance from the cutting edge to the end of the incomplete threads.
- 4 pitch incomplete threads: Distance from the cutting edge to the end of the incomplete threads.

1000

Table 1 STI Threaded Hole Data (Cont'd)

Nominal Thread Size	G Minimum Drilling Depth for Each Insert Length [Note (1)]										Countersink M Diameter (120 deg ± 5 deg Including Angle)				Pitch Diameter				Min. Major Dia.		7 Minimum Tapping Depth [Note (2)]					
	G Minimum Drilling Depth for Each Insert Length [Note (1)]										M Diameter (120 deg ± 5 deg Including Angle)				Pitch Diameter				Min. Major Dia.		7 Minimum Tapping Depth [Note (2)]					
	Plug Taps										Bottoming Taps				Minor Diameter				3B		2B		Insert Length			
1D	1.5D	2D	2.5D	3D	1D	1.5D	2D	2.5D	3D	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	2B, 3B Dia.	1D	1.5D	2D	2.5D	3D			
Unified Coarse (UNC) (Cont'd)																										
1¼ (1.250)-7	2.107	2.732	3.357	3.982	4.607	1.821	2.446	3.071	3.696	4.321	1.41	1.44	1.2809	1.2980	1.3428	1.3490	1.3515	1.4356	1.390	2.020	2.640	3.270	3.890			
1⅜ (1.375)-6	2.375	3.062	3.750	4.437	5.125	2.042	2.726	3.417	4.104	4.792	1.56	1.59	1.4110	1.4310	1.4832	1.4900	1.4926	1.5915	1.540	2.230	2.920	3.600	4.290			
1½ (1.500)-6	2.500	3.250	4.000	4.750	5.500	2.167	2.917	3.667	4.417	5.167	1.69	1.72	1.5360	1.5560	1.6082	1.6151	1.6177	1.7165	1.670	2.420	3.170	3.920	4.670			
Unified Fine (UNF)																										
2 (0.086)-64	0.223	0.266	0.309	0.352	0.395	0.149	0.192	0.235	0.278	0.321	0.09	0.11	0.0894	0.0947	0.0962	0.0974	0.0981	0.1063	0.100	0.145	0.190	0.230	0.275			
3 (0.099)-56	0.256	0.305	0.355	0.404	0.454	0.170	0.220	0.269	0.319	0.368	0.11	0.14	0.1029	0.1086	0.1106	0.1119	0.1126	0.1222	0.120	0.170	0.220	0.270	0.310			
4 (0.112)-48	0.293	0.349	0.405	0.461	0.517	0.195	0.251	0.307	0.363	0.419	0.14	0.17	0.1166	0.1229	0.1256	0.1271	0.1279	0.1391	0.130	0.190	0.240	0.300	0.360			
6 (0.138)-40	0.357	0.426	0.495	0.564	0.633	0.238	0.307	0.376	0.445	0.514	0.17	0.20	0.1435	0.1503	0.1543	0.1560	0.1569	0.1705	0.160	0.230	0.300	0.370	0.440			
8 (0.164)-36	0.413	0.495	0.577	0.659	0.741	0.275	0.357	0.439	0.521	0.603	0.20	0.23	0.1701	0.1771	0.1821	0.1840	0.1849	0.2001	0.190	0.270	0.360	0.440	0.520			
10 (0.190)-32	0.472	0.568	0.662	0.758	0.852	0.315	0.410	0.505	0.600	0.695	0.23	0.26	0.1968	0.2041	0.2103	0.2123	0.2133	0.2306	0.220	0.320	0.410	0.510	0.600			
1¼ (0.250)-28	0.589	0.714	0.839	0.964	1.089	0.393	0.518	0.648	0.768	0.893	0.29	0.32	0.2577	0.2646	0.2732	0.2754	0.2765	0.2964	0.290	0.410	0.540	0.660	0.790			
5/16 (0.3125)-24	0.718	0.874	1.030	1.186	1.342	0.479	0.635	0.791	0.947	1.103	0.36	0.39	0.3215	0.3288	0.3395	0.3421	0.3433	0.3666	0.350	0.510	0.670	0.820	0.980			
3/8 (0.375)-24	0.625	0.812	1.000	1.187	1.375	0.542	0.729	0.917	1.104	1.292	0.42	0.45	0.3840	0.3910	0.4020	0.4047	0.4059	0.4291	0.420	0.600	0.790	0.980	1.170			
7/16 (0.4375)-20	0.738	0.957	1.176	1.395	1.614	0.638	0.857	1.076	1.295	1.514	0.50	0.53	0.4483	0.4561	0.4700	0.4731	0.4744	0.5025	0.490	0.710	0.930	1.140	1.360			
1/2 (0.500)-20	0.800	1.050	1.300	1.550	1.800	0.700	0.950	1.200	1.450	1.700	0.56	0.59	0.5108	0.5186	0.5325	0.5357	0.5371	0.5650	0.550	0.800	1.050	1.300	1.550			
9/16 (0.5625)-18	0.895	1.176	1.457	1.738	2.019	0.784	1.065	1.346	1.627	1.908	0.63	0.66	0.5745	0.5826	0.5986	0.6020	0.6035	0.6347	0.620	0.900	1.180	1.460	1.740			
5/8 (0.625)-18	0.958	1.271	1.583	1.895	2.208	0.847	1.160	1.472	1.785	2.097	0.69	0.72	0.6370	0.6451	0.6611	0.6646	0.6661	0.6972	0.680	0.990	1.310	1.620	1.930			
3/4 (0.750)-16	1.125	1.500	1.875	2.250	2.625	1.000	1.375	1.750	2.125	2.500	0.82	0.85	0.7635	0.7720	0.7906	0.7945	0.7961	0.8312	0.810	1.190	1.560	1.940	2.310			
7/8 (0.875)-14	1.304	1.741	2.179	2.616	3.054	1.161	1.598	2.036	2.473	2.911	0.96	0.99	0.8905	0.8994	0.9214	0.9257	0.9274	0.9678	0.950	1.380	1.820	2.260	2.700			
1 (1.000)-12	1.500	2.000	2.500	3.000	3.500	1.333	1.833	2.333	2.833	3.333	1.10	1.13	1.0181	1.0281	1.0542	1.0590	1.0608	1.1083	1.080	1.580	2.080	2.580	3.080			
1⅛ (1.125)-12	1.625	2.187	2.750	3.312	3.875	1.453	2.021	2.583	3.146	3.708	1.22	1.25	1.1431	1.1531	1.1792	1.1841	1.1860	1.2333	1.210	1.770	2.330	2.900	3.460			
1¼ (1.250)-12	1.750	2.375	3.000	3.625	4.250	1.583	2.208	2.833	3.458	4.083	1.35	1.38	1.2681	1.2781	1.3042	1.3092	1.3112	1.3583	1.330	1.960	2.580	3.210	3.830			
1⅜ (1.375)-12	1.875	2.562	3.250	3.937	4.625	1.708	2.395	3.083	3.771	4.458	1.47	1.50	1.3931	1.4031	1.4292	1.4343	1.4364	1.4833	1.460	2.150	2.830	3.520	4.210			
1½ (1.500)-12	2.000	2.750	3.500	4.250	5.000	1.833	2.583	3.333	4.083	4.833	1.60	1.63	1.5181	1.5281	1.5542	1.5595	1.5615	1.6083	1.580	2.330	3.080	3.830	4.580			
Undefined Special (UNS)																										
1 (1.000)-14	1.429	1.929	2.429	2.929	3.429	1.286	1.786	2.286	2.786	3.286	1.08	1.11	1.0155	1.0243	1.0464	1.0508	1.0527	1.0928	1.070	1.570	2.070	2.570	3.070			

Table 1 STI Threaded Hole Data (Cont'd)

GENERAL NOTE: Thread diameters are calculated as follows:

(a) *pitch diameter*

pitch diameter, min. = pitch diameter, min., of nominal thread + 2 × *H* max.
pitch diameter, max. = pitch diameter, max., of nominal thread + 2 × *H* min.

where *H* min. and *H* max. are from Table 4 and Fig. 1

(b) *major/minor diameter*

major diameter, min. = pitch diameter, min. + 0.649519 pitch
minor diameter, min. = pitch diameter, min. – 0.433013 pitch
minor diameter, max. = minor diameter, min. + tolerance

where tolerance is selected from the appropriate table in ASME B1.1 with basic major diameter equal to the minimum major diameter of the STI thread

NOTES:

(1) The minimum drilling depths allow for

(a) countersinking the drilled hole to prevent a featheredge at the start of the tapped hole.

(b) 0.75 pitch to 1.5 pitch of insert “set-down” to allow for maximum production tolerance.

(c) dimensions are shown for both plug and bottoming taps. Plug taps $\frac{5}{16}$ in. and smaller have a male center and the drilled hole depth dimensions allow for this length (one-half of the diameter of the bolt). Calculation of dimension *G* is as follows:

(1) for plug taps $\frac{5}{16}$ in. and smaller,

$G = \text{insert nominal length} + 0.5 \times \text{bolt nominal diameter} + 4 \text{ pitch (tap chamfer)} + 1 \text{ pitch (tap end clearance)} + 1 \text{ pitch (allowance for countersink and maximum insert set-down)}$

(2) for plug taps $\frac{3}{8}$ in. and larger,

$G = \text{insert nominal length} + 4 \text{ pitch (tap chamfer)} + 1 \text{ pitch (tap end clearance)} + 1 \text{ pitch (allowance for countersink and maximum insert set-down)}$

(3) for bottoming taps,

$G = \text{insert nominal length} + 2 \text{ pitch (tap chamfer)} + 1 \text{ pitch (tap end clearance)} + 1 \text{ pitch (allowance for countersink and maximum insert set-down)}$

(2) The minimum tapping depth (dimension *T*) is the minimum for countersink holes with insert set-down of 1.5 pitch maximum (see figure in Table 1). The calculation for dimension *T* is
 $T = \text{insert nominal length} + 1 \text{ pitch}$

Table 2 Chemical Composition

Element	Analysis, %	Check Analysis	
		Under, Min.	Over, Max.
Carbon	0.15 max.	...	0.01
Manganese	2.00 max.	...	0.04
Silicon	1.00 max.	...	0.05
Phosphorous	0.045 max.	...	0.01
Sulphur	0.035 max.	...	0.005
Chromium	17.00 to 20.00	0.20	0.20
Nickel	8.00 to 10.50	0.15	0.15
Molybdenum	0.75 max.	...	0.05
Copper	0.75 max.	...	0.05
Iron	Remainder		

GENERAL NOTE: Suitable grades of material are within the UNS S30000 series.

Table 3 Insert Length Data

Nominal Thread Size	1 x Diameter				1½ x Diameter				2 x Diameter				2½ x Diameter				3 x Diameter			
	Nom-inal	Assembled		C, Ref.	Nom-inal	Assembled		C, Ref.	Nom-inal	Assembled		C, Ref.	Nom-inal	Assembled		C, Ref.	Nom-inal	Assembled		C, Ref.
		Max.	Min.			Max.	Min.			Max.	Min.			Max.	Min.			Max.	Min.	
Unified Coarse (UNC)																				
1 (0.073)-64	0.073	0.065	0.061	2¼	0.110	0.102	0.098	4⅞	0.146	0.138	0.134	6⅞	0.182	0.174	0.170	8⅞	0.219	0.211	0.207	10⅞
2 (0.086)-56	0.086	0.077	0.073	3	0.129	0.120	0.116	5¼	0.172	0.163	0.159	7⅜	0.215	0.206	0.202	9⅞	0.258	0.249	0.245	11⅞
3 (0.099)-48	0.099	0.089	0.083	2⅞	0.148	0.138	0.133	5	0.198	0.188	0.182	7¼	0.248	0.238	0.232	9⅞	0.297	0.287	0.281	11½
4 (0.112)-40	0.112	0.100	0.093	2¾	0.168	0.156	0.149	4¾	0.224	0.212	0.205	6¾	0.280	0.268	0.261	8⅞	0.336	0.324	0.317	10⅞
5 (0.125)-40	0.125	0.113	0.106	3¼	0.188	0.175	0.169	5½	0.250	0.238	0.231	7¾	0.312	0.300	0.293	10	0.375	0.363	0.356	12¼
6 (0.138)-32	0.138	0.122	0.115	2¾	0.207	0.191	0.184	4¾	0.276	0.260	0.253	6⅞	0.345	0.329	0.322	8⅞	0.414	0.398	0.391	10⅞
8 (0.164)-32	0.164	0.148	0.141	3½	0.246	0.230	0.223	6	0.328	0.312	0.305	8¾	0.410	0.394	0.387	10¾	0.492	0.476	0.469	13¼
10 (0.190)-24	0.190	0.169	0.159	2⅞	0.285	0.264	0.254	5	0.380	0.359	0.349	7⅞	0.475	0.454	0.444	9¼	0.570	0.549	0.539	11⅜
12 (0.216)-24	0.216	0.195	0.185	3½	0.324	0.303	0.293	6	0.432	0.411	0.401	8¾	0.540	0.519	0.509	10⅞	0.648	0.627	0.617	13⅞
¼ (0.250)-20	0.250	0.225	0.212	3⅞	0.375	0.350	0.338	5¾	0.500	0.475	0.462	8	0.625	0.600	0.588	10¾	0.750	0.725	0.712	12¾
5/16 (0.3125)-18	0.312	0.284	0.271	4	0.469	0.440	0.427	6⅝	0.625	0.597	0.583	9¼	0.781	0.753	0.740	11⅞	0.938	0.909	0.896	14⅝
3/8 (0.375)-16	0.375	0.344	0.328	4⅜	0.562	0.531	0.516	7¼	0.750	0.718	0.703	10	0.928	0.906	0.891	12⅞	1.125	1.093	1.078	15¾
7/16 (0.4375)-14	0.438	0.402	0.384	4½	0.656	0.621	0.603	7⅜	0.875	0.839	0.821	10¼	1.094	1.058	1.040	13⅞	1.312	1.277	1.259	16⅞
½ (0.500)-13	0.500	0.462	0.442	4⅞	0.750	0.712	0.693	7⅞	1.000	0.962	0.942	11	1.250	1.212	1.192	14⅞	1.500	1.462	1.442	17⅞
9/16 (0.5625)-12	0.562	0.521	0.500	5⅞	0.844	0.802	0.781	8¼	1.125	1.083	1.062	11½	1.406	1.364	1.344	14¾	1.688	1.646	1.625	17⅞
5/8 (0.625)-11	0.625	0.580	0.557	5¼	0.938	0.892	0.869	8½	1.250	1.205	1.182	11¾	1.562	1.517	1.494	15	1.875	1.830	1.807	18¾
¾ (0.750)-10	0.750	0.700	0.675	5⅞	1.125	1.075	1.050	9⅞	1.500	1.450	1.425	13	1.875	1.825	1.800	16½	2.250	2.000	2.175	20⅞
7/8 (0.875)-9	0.875	0.819	0.792	6¼	1.312	1.257	1.229	10	1.750	1.694	1.667	13¾	2.188	2.132	2.104	17½	2.625	2.569	2.542	21¼
1 (1.000)-8	1.000	0.938	0.906	6⅝	1.500	1.438	1.406	10⅞	2.000	1.938	1.906	14	2.500	2.438	2.406	17¾	3.000	2.938	2.906	21⅝
1⅞ (1.125)-7	1.125	1.054	1.018	6⅞	1.688	1.616	1.580	9⅞	2.250	2.179	2.143	13⅝	2.812	2.741	2.705	17½	3.375	3.304	3.268	21¼
1¼ (1.250)-7	1.250	1.179	1.143	7	1.875	1.804	1.768	11¼	2.500	2.249	2.393	15⅞	3.125	3.054	3.018	19½	3.750	3.697	3.643	23¼
1⅜ (1.375)-6	1.375	1.292	1.250	6½	2.062	1.979	1.938	10½	2.750	2.667	2.625	14⅞	3.438	3.354	3.312	18¾	4.125	4.402	4.000	22¼
1½ (1.500)-6	1.500	1.417	1.375	7¼	2.250	2.167	2.125	11½	3.000	2.917	2.875	15⅞	3.750	3.667	3.625	20⅞	4.500	4.417	4.375	24¼
Unified Fine (UNF)																				
2 (0.086)-64	0.086	0.078	0.074	3½	0.129	0.121	0.117	5⅞	0.172	0.164	0.160	8⅞	0.215	0.207	0.203	10¾	0.258	0.250	0.246	13⅞
3 (0.099)-56	0.099	0.090	0.086	3⅞	0.143	0.139	0.135	5⅝	0.198	0.189	0.185	8	0.248	0.239	0.234	10⅝	0.297	0.288	0.284	12⅝
4 (0.112)-48	0.112	0.102	0.096	3⅞	0.168	0.158	0.152	5⅞	0.224	0.214	0.208	7⅞	0.280	0.270	0.264	10¼	0.336	0.326	0.320	12½
6 (0.138)-40	0.138	0.126	0.119	3½	0.207	0.195	0.188	6	0.276	0.264	0.257	8⅞	0.345	0.333	0.326	10¾	0.414	0.402	0.393	13¼
8 (0.164)-36	0.164	0.150	0.143	3⅞	0.246	0.232	0.225	6½	0.328	0.314	0.307	9⅞	0.410	0.396	0.389	11⅝	0.492	0.554	0.171	14¼
10 (0.190)-32	0.190	0.174	0.167	4⅞	0.285	0.269	0.262	6⅞	0.380	0.364	0.357	9½	0.475	0.459	0.452	12¼	0.570	0.402	0.547	14⅞
¼ (0.250)-28	0.250	0.232	0.223	5	0.375	0.357	0.348	8¼	0.500	0.482	0.473	11⅞	0.625	0.607	0.598	14½	0.750	0.732	0.723	17⅞
5/16 (0.3125)-24	0.312	0.291	0.281	5½	0.469	0.447	0.438	8⅞	0.625	0.604	0.594	12¼	0.781	0.760	0.750	15⅝	0.938	0.916	0.906	19
3/8 (0.375)-24	0.375	0.354	0.344	6⅞	0.562	0.541	0.531	11	0.750	0.729	0.719	15	0.938	0.917	0.906	19⅞	1.125	1.104	1.094	23⅞
7/16 (0.4375)-20	0.438	0.412	0.400	6⅝	0.656	0.631	0.619	10⅝	0.875	0.850	0.838	14⅝	1.094	1.068	1.056	18½	1.312	1.287	1.275	22½

Table 3 Insert Length Data (Cont'd)

Nominal Thread Size	1 x Diameter					1½ x Diameter					2 x Diameter					2½ x Diameter					3 x Diameter				
	Nom-inal	Assembled			C, Ref.	Nom-inal	Assembled			C, Ref.	Nom-inal	Assembled			C, Ref.	Nom-inal	Assembled			C, Ref.	Nom-inal	Assembled			C, Ref.
		Max.	Min.				Max.	Min.				Max.	Min.				Max.	Min.				Max.	Min.		
Unified Fine (UNF) (Cont'd)																									
½ (0.500)-20	0.500	0.475	0.462	7⅛	0.750	0.725	0.712	12⅜	1.000	0.975	0.962	16⅞	1.250	1.225	1.212	21⅜	1.500	1.475	1.462	25⅞					
9⁄16 (0.5625)-18	0.562	0.534	0.521	8	0.844	0.815	0.802	12½	1.125	1.097	1.083	17⅞	1.406	1.378	1.365	21¾	1.688	1.659	1.646	26¼					
5⁄8 (0.625)-18	0.625	0.597	0.583	9	0.938	0.909	0.896	14⅞	1.250	1.222	1.208	19¼	1.562	1.534	1.521	24¼	1.875	1.847	1.833	29⅞					
¾ (0.750)-16	0.750	0.719	0.703	9¾	1.125	1.094	1.078	15⅞	1.500	1.469	1.453	20⅞	1.875	1.844	1.828	26	2.250	2.218	2.203	31½					
7⁄8 (0.875)-14	0.875	0.839	0.821	9⅞	1.312	1.276	1.259	15½	1.750	1.714	1.696	21⅞	2.188	2.151	2.134	26⅝	2.625	2.589	2.571	32⅓					
1 (1.000)-12	1.000	0.958	0.938	9⅝	1.500	1.458	1.438	15	2.000	1.958	1.938	20½	2.500	2.458	2.438	26	3.000	2.958	2.938	31½					
1⅛ (1.125)-12	1.125	1.083	1.062	11⅞	1.688	1.645	1.625	17¼	2.250	2.208	2.188	23⅞	2.812	2.770	2.750	29½	3.375	3.333	3.312	35¾					
1¼ (1.250)-12	1.250	1.208	1.188	12½	1.875	1.833	1.812	19⅜	2.500	2.458	2.438	26¼	3.125	3.083	3.062	33	3.750	3.708	3.688	39⅞					
1⅜ (1.375)-12	1.375	1.333	1.312	13¾	2.062	2.020	2.000	21⅜	2.750	2.708	2.688	28⅞	3.438	3.395	3.375	36½	4.125	4.083	4.062	44					
1½ (1.500)-12	1.500	1.458	1.438	15¼	2.250	2.208	2.188	23½	3.000	2.958	2.938	31⅝	3.750	3.708	3.688	39⅞	4.500	4.458	4.438	48½					
Unified Special (UNS)																									
1 (1.000)-14	1.000	0.964	0.946	11½	1.500	1.464	1.446	17⅞	2.000	1.964	1.946	24¼	2.500	2.464	2.446	30⅝	3.000	2.964	2.946	37					

Table 4 Insert Dimensions

Nominal Thread Size	A		B		D		E		Gage, F	H		J		P		Q, deg	R Min.	S		U		V Max.
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.			Min.	Max.			
Unified Coarse (UNC)																						
1 (0.073)-64	0.0028	0.095	0.103	0.0139	0.0169	0.0107	0.0137	0.00781	0.00975	0.01015	0.092	0.103	0.055	0.075	75-150	0.0028	0.0049	0.060	0.017	0.010		
2 (0.086)-56	0.0033	0.110	0.119	0.0163	0.0193	0.0126	0.0156	0.00893	0.01120	0.01160	0.103	0.111	0.062	0.085	75-150	0.0032	0.0056	0.071	0.025	0.011		
3 (0.099)-48	0.0043	0.128	0.139	0.0196	0.0226	0.0152	0.0182	0.01042	0.01313	0.01353	0.120	0.139	0.070	0.090	75-150	0.0038	0.0065	0.085	0.026	0.013		
4 (0.112)-40	0.0068	0.144	0.159	0.0241	0.0271	0.0189	0.0219	0.01250	0.01584	0.01624	0.144	0.159	0.070	1.105	25-100	0.0045	0.0078	0.043	0.027	0.013		
5 (0.125)-40	0.0068	0.158	0.173	0.0241	0.0271	0.0189	0.0219	0.01250	0.01584	0.01624	0.158	0.173	0.078	1.108	25-100	0.0045	0.0078	0.049	0.029	0.013		
6 (0.138)-32	0.0076	0.178	0.193	0.0295	0.0338	0.0233	0.0273	0.01563	0.01985	0.02030	0.178	0.193	0.091	1.135	25-100	0.0056	0.0098	0.055	0.031	0.017		
8 (0.164)-32	0.0076	0.205	0.220	0.0295	0.0338	0.0233	0.0273	0.01563	0.01985	0.02030	0.205	0.220	0.117	1.153	20-100	0.0056	0.0098	0.068	0.040	0.019		
10 (0.190)-24	0.0120	0.244	0.259	0.0410	0.0449	0.0305	0.0365	0.02083	0.02656	0.02706	0.244	0.259	0.138	1.183	15-90	0.0075	0.0130	0.071	0.040	0.022		
12 (0.216)-24	0.0120	0.270	0.285	0.0410	0.0449	0.0305	0.0365	0.02033	0.02656	0.02706	0.270	0.285	0.154	1.189	20-80	0.0075	0.0130	0.084	0.051	0.026		
1/4 (0.250)-20	0.0164	0.310	0.330	0.0500	0.0540	0.0378	0.0438	0.02500	0.03198	0.03248	0.310	0.330	0.182	1.238	20-80	0.0090	0.0156	0.094	0.057	0.031		
5/16 (0.3125)-18	0.0176	0.380	0.400	0.0560	0.0600	0.0416	0.0486	0.02778	0.03558	0.03608	0.375	0.400	0.214	1.291	20-80	0.0100	0.0174	0.122	0.080	0.032		
3/8 (0.375)-16	0.0215	0.452	0.472	0.0636	0.0677	0.0477	0.0547	0.03125	0.04009	0.04059	0.445	0.472	0.269	1.354	20-80	0.0113	0.0195	0.149	0.100	0.032		
7/16 (0.4375)-14	0.0267	0.526	0.551	0.0730	0.0770	0.0545	0.0625	0.03571	0.04589	0.04639	0.518	0.551	0.313	1.416	20-80	0.0129	0.0223	0.179	0.115	0.012		
1/2 (0.500)-13	0.0273	0.597	0.622	0.0758	0.0829	0.0593	0.0673	0.03846	0.04946	0.04996	0.586	0.622	0.348	1.463	20-80	0.0139	0.0240	0.212	0.140	0.056		
9/16 (0.5625)-12	0.0334	0.669	0.694	0.0861	0.0900	0.0649	0.0729	0.04167	0.05363	0.05413	0.656	0.676	0.390	1.521	20-80	0.0150	0.0260	0.234	0.160	0.056		
5/8 (0.625)-11	0.0351	0.742	0.767	0.0909	0.0980	0.0715	0.0795	0.04545	0.05855	0.05905	0.727	0.747	0.421	1.572	20-80	0.0164	0.0284	0.267	0.179	0.072		
3/4 (0.750)-10	0.0402	0.881	0.906	0.1007	0.1079	0.0795	0.0875	0.05000	0.06445	0.06495	0.840	0.885	0.453	1.640	60-120	0.0180	0.0312	0.331	0.219	0.072		
7/8 (0.875)-9	0.0465	1.022	1.052	0.1124	0.1199	0.0892	0.0972	0.05556	0.07167	0.07217	0.991	1.026	0.500	1.734	60-120	0.0200	0.0347	0.385	0.267	0.102		
1 (1.000)-8	0.0544	1.166	1.196	0.1264	0.1350	0.1004	0.1094	0.06250	0.08069	0.08119	1.135	1.170	0.526	1.781	60-120	0.0226	0.0391	0.438	0.310	0.106		
1 1/8 (1.125)-7	0.0645	1.315	1.355	0.1451	0.1546	0.1160	0.1250	0.07143	0.09229	0.09279	1.260	1.315	0.557	1.843	60-120	0.0258	0.0446	0.480	0.355	0.103		
1 1/4 (1.250)-7	0.0645	1.443	1.483	0.1451	0.1546	0.1160	0.1250	0.07143	0.09229	0.09279	1.366	1.416	0.679	1.937	60-120	0.0258	0.0446	0.536	0.424	0.110		
1 3/8 (1.375)-6	0.0775	1.598	1.643	0.1695	0.1799	0.1368	0.1458	0.08333	0.10775	0.10825	1.545	1.598	0.689	1.993	60-120	0.0301	0.0521	0.573	0.423	0.112		
1 1/2 (1.500)-6	0.0775	1.727	1.772	0.1695	0.1799	0.1368	0.1458	0.08333	0.10775	0.10825	1.676	1.727	0.811	1.187	60-120	0.0301	0.0521	0.661	0.500	0.114		
Unified Fine (UNF)																						
2 (0.086)-64	0.0028	0.110	0.119	0.0139	0.0169	0.0107	0.0137	0.00781	0.00975	0.01015	0.103	0.111	0.062	0.080	75-150	0.0028	0.0049	0.069	0.024	0.011		
3 (0.099)-56	0.0033	0.131	0.146	0.0163	0.0193	0.0126	0.0156	0.00893	0.01120	0.01160	0.124	0.146	0.072	0.090	75-150	0.0032	0.0056	0.083	0.031	0.012		
4 (0.112)-48	0.0043	0.174	0.162	0.0196	0.0226	0.0152	0.0182	0.01042	0.01313	0.01353	0.134	0.162	0.060	0.095	75-150	0.0038	0.0065	0.093	0.034	0.013		
6 (0.138)-40	0.0068	0.173	0.193	0.0241	0.0271	0.0189	0.0219	0.01250	0.01584	0.01624	0.173	0.193	0.100	1.130	25-100	0.0045	0.0078	0.057	0.033	0.018		
8 (0.164)-36	0.0059	0.204	0.224	0.0261	0.0301	0.0203	0.0243	0.01389	0.01764	0.01804	0.204	0.224	0.117	1.147	20-100	0.0050	0.0087	0.069	0.043	0.019		
10 (0.190)-32	0.0076	0.236	0.256	0.0295	0.0338	0.0233	0.0273	0.01563	0.01985	0.02030	0.236	0.256	0.130	1.182	15-90	0.0056	0.0093	0.084	0.058	0.025		
1/4 (0.250)-28	0.0085	0.306	0.326	0.0347	0.0387	0.0253	0.0313	0.01786	0.02270	0.02320	0.306	0.326	0.173	1.244	15-70	0.0064	0.0112	0.111	0.071	0.032		
5/16 (0.3125)-24	0.0120	0.380	0.400	0.0410	0.0449	0.0305	0.0365	0.02083	0.02656	0.02706	0.359	0.400	0.203	1.291	15-55	0.0075	0.0130	0.138	0.094	0.036		
3/8 (0.375)-24	0.0120	0.448	0.468	0.0410	0.0449	0.0305	0.0365	0.02083	0.02656	0.02706	0.422	0.468	0.235	1.353	15-75	0.0075	0.0130	0.169	0.125	0.032		
7/16 (0.4375)-20	0.0164	0.524	0.549	0.0500	0.0540	0.0378	0.0438	0.02500	0.03198	0.03248	0.494	0.549	0.281	1.416	15-75	0.0090	0.0156	0.198	0.141	0.042		

Table 4 Insert Dimensions (Cont'd)

Nominal Thread Size	A		B		D		E		Gage, F	H		J		P		Q, deg	R Min.	S Min.	U		V Max.
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.								
Unified Fine (UNF) (Cont'd)																					
1/2 (0.500)-20	0.0164	0.592	0.617	0.0500	0.0540	0.0378	0.0438	0.02500	0.03198	0.03248	0.556	0.617	0.313	0.479	15-75	0.0090	0.0156	0.229	0.172	0.042	
9/16 (0.5625)-18	0.0176	0.666	0.691	0.0560	0.0600	0.0416	0.0486	0.02778	0.03558	0.03608	0.625	0.691	0.344	0.541	15-75	0.0100	0.0174	0.256	0.196	0.056	
5/8 (0.625)-18	0.0176	0.733	0.758	0.0560	0.0600	0.0416	0.0486	0.02778	0.03558	0.03608	0.688	0.758	0.375	0.588	15-75	0.0100	0.0174	0.287	0.227	0.072	
3/4 (0.750)-16	0.0215	0.876	0.901	0.0636	0.0677	0.0477	0.0547	0.03125	0.04009	0.04059	0.820	0.901	0.453	0.562	15-75	0.0113	0.0195	0.345	0.280	0.072	
7/8 (0.875)-14	0.0267	1.021	1.051	0.0730	0.0770	0.0545	0.0625	0.03571	0.04589	0.04639	0.955	1.051	0.495	0.640	15-75	0.0129	0.0223	0.402	0.330	0.104	
1 (1.000)-12	0.0334	1.169	1.199	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.094	1.119	0.526	0.728	15-75	0.0150	0.0260	0.450	0.380	0.106	
1 1/8 (1.125)-12	0.0334	1.304	1.334	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.219	1.334	0.557	0.819	10-70	0.0150	0.0260	0.523	0.432	0.108	
1 1/4 (1.250)-12	0.0334	1.439	1.469	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.344	1.374	0.679	0.941	10-70	0.0150	0.0260	0.589	0.491	0.110	
1 3/8 (1.375)-12	0.0334	1.575	1.610	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.469	1.504	0.689	1.001	10-70	0.0150	0.0260	0.652	0.553	0.112	
1 1/2 (1.500)-12	0.0334	1.710	1.745	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.594	1.629	0.811	1.123	10-70	0.0150	0.0260	0.718	0.612	0.114	
Unified Special (UNS)																					
1 (1.000)-14	0.0267	1.156	1.186	0.0730	0.0770	0.0545	0.0625	0.03571	0.04589	0.04639	1.080	1.186	0.525	0.750	15-75	0.0129	0.0223	0.464	0.382	0.166	

Table 5 Self-Locking Torque

Nominal Thread Size	Maximum Locking Torque Installation or Removal	Minimum Breakaway Torque
Unified Coarse (UNC)		
1 (0.073)-64	15.0 ozf-in.	2.0 ozf-in.
2 (0.086)-56	20.0 ozf-in.	3.0 ozf-in.
3 (0.099)-48	32.0 ozf-in.	7.0 ozf-in.
4 (0.112)-40	48.0 ozf-in.	10.0 ozf-in.
5 (0.125)-40	75.2 ozf-in.	13.0 ozf-in.
6 (0.138)-32	6.0 lbf-in.	1.0 lbf-in.
8 (0.164)-32	9.0 lbf-in.	1.5 lbf-in.
10 (0.190)-24	13.0 lbf-in.	2.0 lbf-in.
12 (0.216)-24	24.0 lbf-in.	3.0 lbf-in.
1/4 (0.250)-20	30.0 lbf-in.	4.5 lbf-in.
5/16 (0.3125)-18	60.0 lbf-in.	7.5 lbf-in.
3/8 (0.375)-16	80.0 lbf-in.	12.0 lbf-in.
7/16 (0.4375)-14	100.0 lbf-in.	16.5 lbf-in.
1/2 (0.500)-13	150.0 lbf-in.	24.0 lbf-in.
9/16 (0.5625)-12	200.0 lbf-in.	30.0 lbf-in.
5/8 (0.625)-11	300.0 lbf-in.	40.0 lbf-in.
3/4 (0.750)-10	400.0 lbf-in.	60.0 lbf-in.
7/8 (0.875)-9	600.0 lbf-in.	82.0 lbf-in.
1 (1.000)-8	800.0 lbf-in.	110.0 lbf-in.
1 1/8 (1.125)-7	900.0 lbf-in.	137.0 lbf-in.
1 1/4 (1.250)-7	1,000.0 lbf-in.	165.0 lbf-in.
1 3/8 (1.375)-6	1,150.0 lbf-in.	185.0 lbf-in.
1 1/2 (1.500)-6	1,350.0 lbf-in.	210.0 lbf-in.
Unified Fine (UNF)		
2 (0.086)-64	20.0 ozf-in.	3.0 ozf-in.
3 (0.099)-56	32.0 ozf-in.	7.0 ozf-in.
4 (0.112)-48	48.0 ozf-in.	10.0 ozf-in.
6 (0.138)-40	6.0 lbf-in.	1.0 lbf-in.
8 (0.164)-36	9.0 lbf-in.	1.5 lbf-in.
10 (0.190)-32	13.0 lbf-in.	2.0 lbf-in.
1/4 (0.250)-28	30.0 lbf-in.	3.0 lbf-in.
5/16 (0.3125)-24	60.0 lbf-in.	6.5 lbf-in.
3/8 (0.375)-24	80.0 lbf-in.	9.5 lbf-in.
7/16 (0.4375)-20	100.0 lbf-in.	14.0 lbf-in.
1/2 (0.500)-20	150.0 lbf-in.	18.0 lbf-in.
9/16 (0.5625)-18	200.0 lbf-in.	24.0 lbf-in.
5/8 (0.625)-18	300.0 lbf-in.	32.0 lbf-in.
3/4 (0.750)-16	400.0 lbf-in.	50.0 lbf-in.
7/8 (0.875)-14	600.0 lbf-in.	70.0 lbf-in.
1 (1.000)-12	800.0 lbf-in.	90.0 lbf-in.
1 1/8 (1.125)-12	900.0 lbf-in.	117.0 lbf-in.
1 1/4 (1.250)-12	1,000.0 lbf-in.	143.0 lbf-in.
1 3/8 (1.375)-12	1,150.0 lbf-in.	165.0 lbf-in.
1 1/2 (1.500)-12	1,350.0 lbf-in.	190.0 lbf-in.
Unified Special (UNS)		
1 (1.000)-14	800.0 lbf-in.	90.0 lbf-in.

NONMANDATORY APPENDIX A

INSERT LENGTH SELECTION

A-1 ENGAGED LENGTH OF BOLT

Normally, the engaged length of bolt in an insert is determined by strength considerations.

A-2 MATERIAL STRENGTHS

The standard engineering practice of balancing the tensile strength of the bolt material against the shear strength of the parent or boss material also applies to helical coil inserts. Tables A-1 and A-2 will aid in developing the full load value of the bolt rather than stripping the parent or tapped material.

In using these tables, the following factors must be considered:

(a) The parent material shear strengths are for room temperature. Elevated temperatures call for significant shear value reductions; compensation should be made when required. Shear values are appropriate because the parent material is subject to shearing stress at the major diameter of the tapped threads.

(b) When parent material shear strength falls between two tabulated values, use the lower of the two.

(c) Bolt thread length, overall length, insert length, and full tapped thread depth must be adequate to insure full thread engagement when assembled in order to comply with its design function.

Table A-1 Insert Length Selection

Parent Material Shear Strength, psi	Bolt Designation				ASTM A 574, Socket Head Cap Screw
	SAE J429, Grade 2	SAE J429, Grade 5 1 in. and Less	SAE J429, Grade 5 Over 1 in.	SAE J429, Grade 8	
	Insert Length in Terms of Diameters				
15,000	2½	3	3	...	...
20,000	2	2½	2½	3	...
25,000	1½	2	2	2½	3
30,000	1½	2	1½	2	2½
40,000	1	1½	1½	1½	2
50,000	1	1	1	1½	1½

Table A-2 Hardness Number Conversion

Bolt Property Class	Maximum Rockwell Hardness	Maximum Tensile Strength, psi
SAE Grade 2	B100	117,000
SAE Grade 5, 1 in. and smaller	34 HRC	153,000
SAE Grade 5, over 1 in.	30 HRB	138,000
SAE Grade 8	39 HRC	176,000
Socket head cap screw	45 HRC	215,000

GENERAL NOTE: Bolt strength upon which insert length recommendations are based are developed by taking the maximum hardness allowed and the equivalent tensile strength from SAE J417, Hardness Tests and Hardness Number Conversions. These are shown in Table A-2.

NONMANDATORY APPENDIX B

SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.

NONMANDATORY APPENDIX C

STI THREAD PLUG GAGES

C-1 U.S. PRACTICE

U.S. gage manufacturers produce metric series gages using inch dimensions converted from the basic dimensions

C-2 BLANKS

STI gage blanks are in accordance with ASME B47.1, Gage Blanks.

C-3 GAGE DESIGN

STI gages are designated in accordance with ASME B1.2, Gages and Gaging for Unified Inch Screw Threads.

C-4 GAGE TOLERANCES

X tolerances are applied to all metric STI gages in accordance with ASME B1.2, Gages and Gaging for Unified Inch Screw Threads.

NONMANDATORY APPENDIX D

INSTALLATION

D-1 INSERT INSTALLATION

Helical coil inserts are greater in diameter than the STI tapped holes into which they are installed. The installation process applies torque to the tang to reduce the diameter of the leading coil and permit it to enter the tapped hole. The remaining coils are reduced in diameter as they, in turn, are screwed into the tapped hole. When the torque or rotation is stopped, the insert coil expands with a spring-like action to anchor the insert permanently in place against the threads of the tapped hole.

Finer pitch inserts are proportionally larger (before installation) than coarse pitch inserts and, thus, have to be “prewound” to a smaller diameter for installation. Large, coarse pitch inserts (and inserts) need only a threaded mandrel tool for installation.

D-2 STRIP FEED

Helical coil inserts are normally furnished in bulk containers. However, they are also normally available in feeding belts known as strip feed.

Strip feed consists of a belt or strip of pliable plastic such as polyethylene through which holes have been punched, and into which the helical coil inserts are positioned, the ends of the inserts protruding from each side of the strip. The strip is coiled on a reel or spool.

The purpose for, and advantage of strip feed is to ease handling of the insert and to increase installation rates.

Inserting tools are available for handling strip feed, wherein the strip passes through a slot in the prewinder thus locating each insert for engagement with the mandrel. After each insert has been driven through the tool and installed into the work, the strip indexes the next insert into position. Helical coil inserts are normally available in strip feed in sizes up through 8 mm nominal diameter.

D-3 INSERTING TOOLS

D-3.1 Hand-Inserting Tools

Various types of hand inserting tools are available. Examples are shown in Table D-1.

These hand-inserting tools will install helical coil inserts up to 3 diameters long for thread sizes up through $\frac{7}{8}$ in. UNC and UNF. Inserts 1 in. and larger will install inserts up to 2 diameters long. Inserts 1 in. and larger in size that are more than 2 diameters in length require special tools for installation.

D-3.2 Power-Inserting Tools: Air Driven

For installing large quantities of helical coil inserts, power-inserting tools are available. A typical tool is comprised of the following three basic assemblies:

(a) a reversible air motor that provides the driving torque

(b) an adapter that couples the motor to the front end assembly

(c) front end assembly that holds the insert and, in operation, reduces the diameter of the insert (prewinds), then drives it into its tapped hole

A foot activated air valve may be used as an alternative to the hand activated lever.

Two sizes of adapters are available — one for the smaller range of thread sizes and one for the larger sizes. These tools will install 1, 1.5, and 2 diameter length inserts. Front end assemblies are also available for longer length inserts or larger sizes. Examples of air driven power-inserting tools are shown in Table D-2.

D-3.3 Power-Inserting Tools: Electric

Electric power tools are available for use where electric power is preferred over air. The slender configuration of the mandrels allows them to reach into constricted areas. Electric power meets the requirements of clean room operations. Some operators prefer electric power because it is quieter and the tool is lighter. Examples of electric power-inserting tools are shown in Table D-3.

D-4 TANG BREAK-OFF TOOLS

If the bolt is to engage the full length of the insert, the driving tang must be removed to eliminate interference with the end of the assembled bolt. Tang break-off tools are available in several types.

D-4.1 Spring Actuated Manual Tang Break-Off Tool

Spring actuated tang break-off tools are available for use with inserts through $\frac{1}{2}$ in. nominal diameter. Their operation is automatic, having a spring loaded, easily triggered punch that strikes a sharp, uniform blow against the tang of the installed insert.

Examples are shown in Table D-4.

D-4.2 Rod Type Tang Break-Off Tool

Rod type tools are available for use with inserts through $\frac{1}{2}$ in. nominal diameter. They are actuated by the tap of a hammer. Examples are shown in Table D-5.

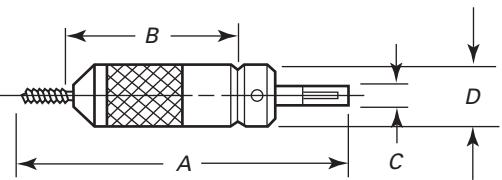
D-4.3 Long Nose Pliers

For insert nominal sizes larger than $\frac{1}{2}$ in., use long nose pliers, bending the tang up and down to snap it off at the notch.

D-5 EXTRACTING TOOLS

Examples of tools to remove helical coil inserts are shown in Table D-6. These operate by applying the tool to the insert, striking the head of the tool a light blow and turning counterclockwise while maintaining steady downward pressure.

Table D-1-1 Hand Insert Tools: Type II UNF

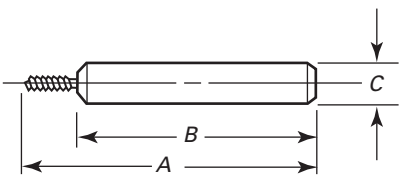


Size	A	B	C	D
#1-64	$2\frac{5}{8}$	$\frac{3}{4}$	$\frac{3}{16}$	$\frac{7}{16}$
#2-64	$2\frac{5}{8}$	$\frac{3}{4}$	$\frac{3}{16}$	$\frac{7}{16}$

GENERAL NOTES:

- (a) Reference Standard: A-A-59158
- (b) All dimensions are in inches unless otherwise indicated.

Table D-1-2 Hand Insert Tools: Type II UNC

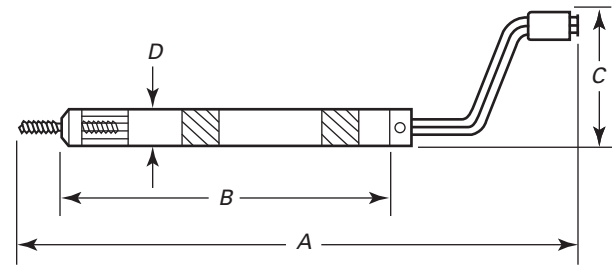


Size	A	B	C
#2-56	$2\frac{7}{16}$	2	$\frac{5}{16}$
#3-48	$2\frac{7}{16}$	2	$\frac{5}{16}$

GENERAL NOTES:

- (a) Reference Standard: A-A-59158
- (b) All dimensions are in inches unless otherwise indicated.

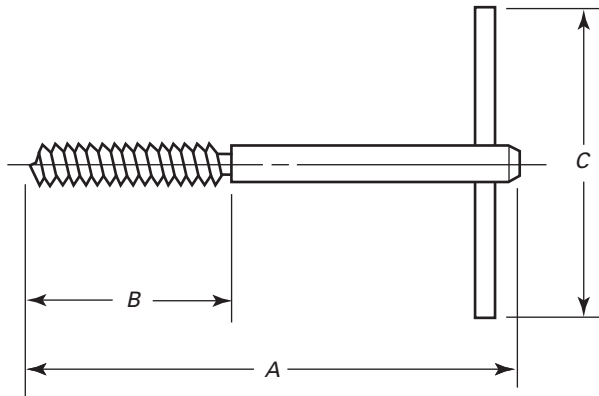
Table D-1-3 Hand Insert Tools: Type III UNC and UNF



Size	A	B	C	D
#2-56	$2\frac{3}{4}$	$1\frac{1}{2}$	$2\frac{1}{8}$	$\frac{5}{16}$
#3-48	$2\frac{3}{4}$	$1\frac{1}{2}$	$2\frac{1}{8}$	$\frac{5}{16}$
#3-56	$7\frac{15}{32}$	$4\frac{5}{8}$	$2\frac{9}{32}$	$\frac{3}{8}$
#4	$7\frac{15}{32}$	$4\frac{5}{8}$	$2\frac{9}{32}$	$\frac{3}{8}$
#5	$7\frac{15}{32}$	$4\frac{5}{8}$	$2\frac{9}{32}$	$\frac{3}{8}$
#6	$7\frac{15}{32}$	$4\frac{5}{8}$	$2\frac{9}{32}$	$\frac{3}{8}$
#8	$7\frac{15}{32}$	$4\frac{5}{8}$	$2\frac{9}{32}$	$\frac{3}{8}$
#10	$7\frac{15}{32}$	$4\frac{5}{8}$	$2\frac{9}{32}$	$\frac{15}{32}$
#12	$7\frac{31}{32}$	$4\frac{5}{8}$	$2\frac{17}{32}$	$\frac{33}{64}$
$\frac{1}{4}$	$7\frac{31}{32}$	$4\frac{5}{8}$	$2\frac{17}{32}$	$\frac{33}{64}$
$\frac{5}{16}$	$7\frac{31}{32}$	$4\frac{5}{8}$	$3\frac{23}{32}$	$\frac{5}{8}$
$\frac{3}{8}$	$7\frac{31}{32}$	5	$3\frac{23}{32}$	$\frac{45}{64}$
$\frac{7}{16}$	$8\frac{15}{32}$	$5\frac{1}{4}$	$3\frac{23}{32}$	$\frac{25}{32}$
$\frac{1}{2}$	$8\frac{15}{32}$	$5\frac{1}{2}$	$3\frac{23}{32}$	$\frac{7}{8}$

GENERAL NOTES:

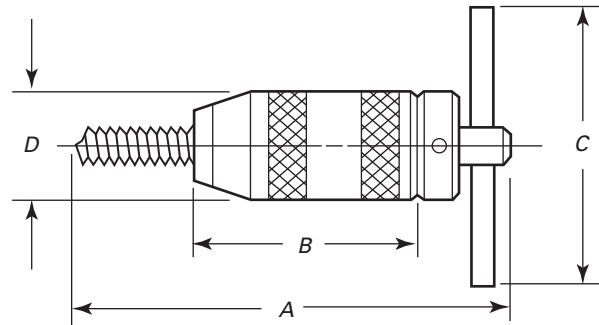
- (a) Reference Standard: A-A-59158
- (b) All dimensions are in inches unless otherwise indicated.

Table D-1-4 Hand Insert Tools: Type IV UNC

Size	A	B	C
$\frac{9}{16}$	$4\frac{7}{8}$	$1\frac{13}{16}$	4
$\frac{5}{8}$	$4\frac{7}{8}$	2	4
$\frac{3}{4}$	$4\frac{7}{8}$	$2\frac{3}{8}$	4
$\frac{7}{8}$	$4\frac{7}{8}$	$2\frac{3}{4}$	$4\frac{1}{2}$
1	$4\frac{7}{8}$	$2\frac{1}{8}$	$4\frac{1}{2}$
$1\frac{1}{8}$	$6\frac{3}{4}$	$2\frac{1}{2}$	6
$1\frac{1}{4}$	$6\frac{3}{4}$	$2\frac{3}{4}$	6
$1\frac{3}{8}$	$6\frac{3}{4}$	3	6
$1\frac{1}{2}$	$6\frac{3}{4}$	$3\frac{1}{4}$	6

GENERAL NOTES:

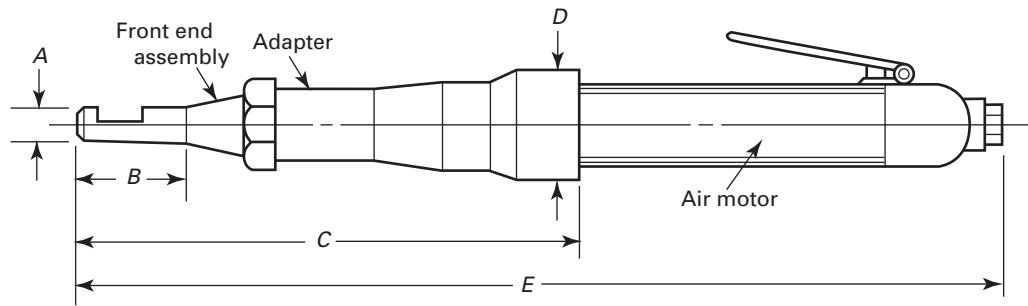
- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

Table D-1-5 Hand Insert Tools: Type V

Size	A	B	C	D
$\frac{9}{16}$	$5\frac{3}{8}$	$2\frac{7}{8}$	4	$1\frac{1}{8}$
$\frac{5}{8}$	$5\frac{3}{8}$	$2\frac{7}{8}$	4	$1\frac{1}{8}$
$\frac{3}{4}$	6	$2\frac{7}{8}$	4	$1\frac{1}{2}$
$\frac{7}{8}$	$6\frac{3}{8}$	$2\frac{7}{8}$	$4\frac{1}{2}$	$1\frac{1}{2}$
1	$5\frac{7}{8}$	$2\frac{7}{8}$	$4\frac{1}{2}$	$1\frac{5}{8}$
$1\frac{1}{8}$	$6\frac{5}{16}$	$3\frac{1}{16}$	$4\frac{1}{2}$	2
$1\frac{1}{4}$	$6\frac{13}{16}$	$3\frac{5}{16}$	6	2
$1\frac{3}{8}$	$7\frac{5}{16}$	$3\frac{9}{16}$	6	$2\frac{1}{4}$
$1\frac{1}{2}$	$7\frac{13}{16}$	$3\frac{13}{16}$	6	$2\frac{1}{4}$

GENERAL NOTES:

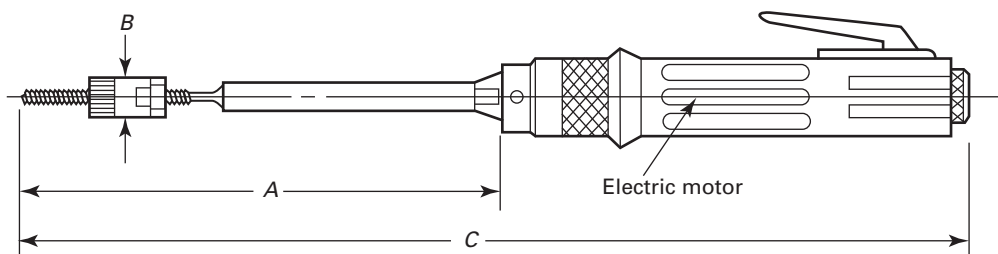
- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

Table D-2 Air Power Inserting Tools

Size UNC and UNF	For Bulk Inserts		For Strip Feed Inserts		C	D	E
	A	B	A	B			
#2	...	...	5/16	7/16	4 7/16	1 1/4	9 13/16
#4	1/4	9/16	3/8	15/16	4 7/16	1 1/4	9 13/16
#5	9/32	9/16	3/8	15/16	4 7/16	1 1/4	9 13/16
#6	5/16	9/16	1/2	15/16	4 7/16	1 1/4	9 13/16
#8	11/32	9/16	1/2	15/16	4 7/16	1 1/4	9 13/16
#10	3/8	29/32	1/2	15/16	4 7/16	1 1/4	9 13/16
1/4	27/64	29/32	5/8	1 3/8	4 7/16	1 1/4	9 13/16
5/16	9/16	1 1/8	11/16	1 1/8	5 3/4	1 1/4	11 1/8
3/8	11/16	1 11/32	...	...	6 1/32	1 1/4	11 13/32
7/16	3/4	1 17/32	...	...	6 13/32	1 1/4	11 25/32
1/2	13/16	1 25/32	...	...	6 11/16	1 1/4	12 1/16

GENERAL NOTES:

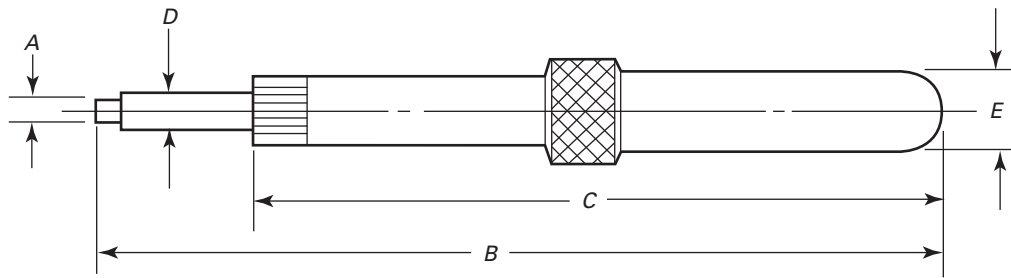
- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

Table D-3 Electric Power Installation Tools

Size	A	B	C
#2-56 UNC	4	5/16	12 3/4
#4-40 UNC	4	5/16	12 3/4
#6-32 UNC	4	5/16	12 3/4
#8-32 UNC	4	5/16	12 3/4

GENERAL NOTES:

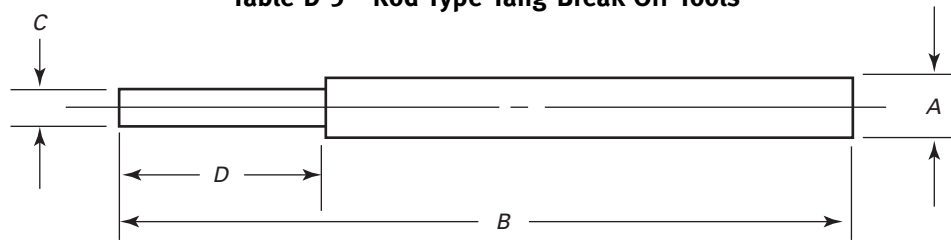
- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

Table D-4 Manual Tang Break-Off Tools: Spring Actuated

Size	A	B	C	D	E
#1 (0.073)	0.052	5 $\frac{1}{4}$	5	...	$\frac{1}{2}$
#2 (0.086) and #3 (0.099)	0.058	5 $\frac{7}{16}$	5	...	$\frac{1}{2}$
#4 (0.112) and #5 (0.125)	0.076	5 $\frac{1}{2}$	5	...	$\frac{1}{2}$
#6 (0.138)	0.089	5 $\frac{9}{16}$	5	...	$\frac{1}{2}$
#8 (0.164)	0.112	5 $\frac{5}{8}$	5	...	$\frac{1}{2}$
#10 (0.190) and #12 (0.216)	0.125	5 $\frac{3}{4}$	5	...	$\frac{1}{2}$
$\frac{1}{4}$ (0.250)	0.154	5 $\frac{13}{16}$	5	...	$\frac{1}{2}$
$\frac{5}{16}$ (0.3125)-18	0.120	5 $\frac{13}{16}$	4 $\frac{29}{32}$	0.223	$\frac{5}{8}$
$\frac{3}{8}$ (0.375)-16	0.187	5 $\frac{15}{16}$	4 $\frac{29}{32}$	0.283	$\frac{5}{8}$
$\frac{7}{16}$ (0.4375)-14	0.229	7 $\frac{7}{32}$	6 $\frac{3}{32}$	0.334	$\frac{3}{4}$
$\frac{1}{2}$ (0.500)-13	0.292	7 $\frac{11}{32}$	6 $\frac{3}{32}$	0.392	$\frac{3}{4}$
$\frac{5}{16}$ (0.3125)-24	0.120	5 $\frac{13}{16}$	4 $\frac{29}{32}$	0.251	$\frac{5}{8}$
$\frac{3}{8}$ (0.375)-24	0.187	5 $\frac{15}{16}$	4 $\frac{29}{32}$	0.303	$\frac{5}{8}$
$\frac{7}{16}$ (0.4375)-20	0.229	7 $\frac{7}{32}$	6 $\frac{3}{32}$	0.360	$\frac{3}{4}$
$\frac{1}{2}$ (0.500)-20	0.292	7 $\frac{11}{32}$	6 $\frac{3}{32}$	0.414	$\frac{3}{4}$

GENERAL NOTES:

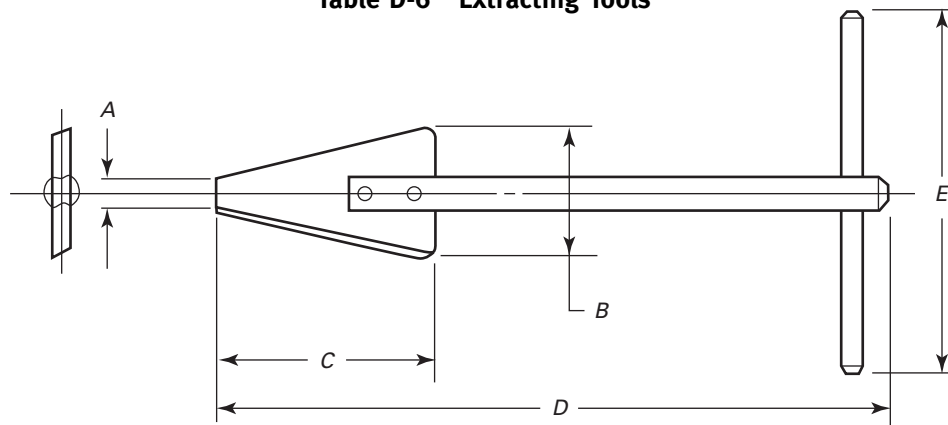
- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

Table D-5 Rod-Type Tang Break-Off Tools

Size	A	B	C	D
#2 (0.086)	$\frac{1}{4}$	4	0.058	$\frac{3}{8}$
#3 (0.099)	$\frac{1}{4}$	4	0.058	$\frac{3}{8}$
#4 (0.112)	$\frac{1}{4}$	4	0.076	$\frac{1}{2}$
#5 (0.125)	$\frac{1}{4}$	4	0.086	$\frac{9}{16}$
#6 (0.138)	$\frac{1}{4}$	4	0.089	$\frac{5}{8}$
#8 (0.164)	$\frac{1}{4}$	4	0.112	$\frac{11}{16}$
#10 (0.190)	$\frac{1}{4}$	4	0.125	$\frac{3}{4}$
#12 (0.216)	$\frac{1}{4}$	4	0.150	$\frac{15}{16}$
$\frac{1}{4}$ (0.250)	$\frac{1}{4}$	4	0.176	1
$\frac{5}{16}$ (0.3125)	$\frac{1}{4}$	4	0.230	$1\frac{1}{8}$
$\frac{3}{8}$ (0.375)	$\frac{9}{32}$	4	...	...
$\frac{7}{16}$ (0.4375)	$\frac{11}{32}$	4	...	...
$\frac{1}{2}$ (0.500)	$\frac{25}{64}$	4	...	...

GENERAL NOTES:

- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

Table D-6 Extracting Tools

Nominal Thread Size Range	A	B	C	D	E
#2 (0.086)	0.078	...	$\frac{5}{8}$	$4\frac{1}{4}$	3
#3 (0.099) through #8 (0.164)	0.078	0.375	$\frac{5}{8}$	$4\frac{1}{4}$	3
#10 (0.190) through $\frac{3}{8}$ (0.375)	0.145	0.375	$\frac{9}{16}$	$4\frac{1}{4}$	3
$\frac{7}{16}$ (0.4375) through 1 (1.000)	0.360	1.000	$1\frac{5}{8}$	$5\frac{1}{16}$	4
$1\frac{1}{8}$ (1.125) through $1\frac{1}{2}$ (1.500)	0.970	1.500	$1\frac{5}{16}$	$6\frac{1}{8}$	4

GENERAL NOTES:

- (a) Reference Standard: A-A-59158
 (b) All dimensions are in inches unless otherwise indicated.

B18 AMERICAN NATIONAL STANDARDS FOR BOLTS, NUTS, RIVETS, SCREWS, WASHERS, AND SIMILAR FASTENERS

Small Solid Rivets	B18.1.1-1972 (R2006)
Large Rivets	B18.1.2-1972 (R2006)
Metric Small Solid Rivets	B18.1.3M-1983 (R2006)
Square and Hex Bolts and Screws (Inch Series)	B18.2.1-1996 (R2005)
Square and Hex Nuts (Inch Series)	B18.2.2-1987 (R2005)
Metric Hex Cap Screws	B18.2.3.1M-1999 (R2005)
Metric Formed Hex Screws	B18.2.3.2M-2005
Metric Heavy Hex Screws	B18.2.3.3M-1979 (R2001)
Metric Hex Flange Screws	B18.2.3.4M-2001 (R2006)
Metric Hex Bolts	B18.2.3.5M-1979 (R2006)
Metric Heavy Hex Bolts	B18.2.3.6M-1979 (R2006)
Metric Heavy Hex Structural Bolts	B18.2.3.7M-1979 (R2006)
Metric Hex Lag Screws	B18.2.3.8M-1981 (R2005)
Metric Heavy Hex Flange Screws	B18.2.3.9M-2001 (R2006)
Metric Hex Nuts, Style 1	B18.2.4.1M-2002 (R2007)
Metric Hex Nuts, Style 2	B18.2.4.2M-2005
Metric Slotted Hex Nuts	B18.2.4.3M-1979 (R2006)
Metric Hex Flange Nuts	B18.2.4.4M-1982 (R2005)
Metric Hex Jam Nuts	B18.2.4.5M-2008
Metric Heavy Hex Nuts	B18.2.4.6M-1979 (R2003)
Metric Flanged 12-Point Head Screws	B18.2.5M-2009
Fasteners for Use in Structural Applications	B18.2.6-2009
Metric 12-Spline Flange Screws	B18.2.7.1M-2002 (R2007)
Clearance Holes for Bolt, Screws, and Studs	B18.2.8-1999 (R2005)
Straightness Gage and Gaging for Bolts and Screws	B18.2.9-2007
Socket Cap, Shoulder, and Set Screws, Hex and Spline Keys (Inch Series)	B18.3-2003 (R2008)
Socket Head Cap Screws (Metric Series)	B18.3.1M-1986 (R2008)
Metric Series Hexagon Keys and Bits	B18.3.2M-1979 (R2008)
Hexagon Socket Head Shoulder Screws (Metric Series)	B18.3.3M-1986 (R2008)
Hexagon Socket Button Head Cap Screws (Metric Series)	B18.3.4M-1986 (R2008)
Hexagon Socket Flat Countersunk Head Cap Screws (Metric Series)	B18.3.5M-1986 (R2008)
Metric Series Socket Set Screws	B18.3.6M-1986 (R2008)
Round Head Bolts (Inch Series)	B18.5-1990 (R2003)
Metric Round Head Short Square Neck Bolts	B18.5.2.1M-2006
Metric Round Head Square Neck Bolts	B18.5.2.2M-1982 (R2005)
Wood Screws (Inch Series)	B18.6.1-1981 (R2008)
Slotted Head Cap Screws, Square Head Set Screws, and Slotted Headless Set Screws (Inch Series)	B18.6.2-1998 (R2005)
Machine Screws and Machine Screw Nuts	B18.6.3-2003 (R2008)
Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws (Inch Series)	B18.6.4-1998
Metric Thread-Forming and Thread-Cutting Tapping Screws	B18.6.5M-2000 (R2005)
Metric Machine Screws	B18.6.7M-1999 (R2005)
General Purpose Semi-Tubular Rivets, Full Tubular Rivets, Split Rivets and Rivet Caps	B18.7-2007
Metric General Purpose Semi-Tubular Rivets	B18.7.1M-2007
Clevis Pins and Cotter Pins (Inch Series)	B18.8.1-1994 (R2000)
Taper Pins, Dowel Pins, Straight Pins, Grooved Pins, and Spring Pins (Inch Series)	B18.8.2-2000
Spring Pins: Coiled Type, Spring Pins: Slotted, Machine Dowel Pins: Hardened Ground, and Grooved Pins (Metric Series)	B18.8.100M-2000 (R2005)
Cotter Pins, Headless Clevis Pins, and Headed Clevis Pins (Metric Series)	B18.8.200M-2000 (R2005)
Plow Bolts	B18.9-2007
Track Bolts and Nuts	B18.10-1982 (R2005)
Miniature Screws	B18.11-1961 (R2005)
Glossary of Terms for Mechanical Fasteners	B18.12-2001 (R2006)
Screw and Washer Assemblies — Sems (Inch Series)	B18.13-1996 (R2008)
Screw and Washer Assemblies: Sems (Metric Series)	B18.13.1M-1998 (R2003)
Forged Eyebolts	B18.15-1985 (R2008)
Prevailing-Torque Type Steel Metric Hex Nuts and Hex Flange Nuts	B18.16M-2004 (R2009)

Serrated Hex Flange Locknuts 90,000 psi (Inch Series)	B18.16.4-2008
Nylon Insert Locknuts (Inch Series)	B18.16.6-2008
Inspection and Quality Assurance for General Purpose Fasteners	B18.18.1-2007
Inspection and Quality Assurance for High-Volume Machine Assembly Fasteners	B18.18.2-2009
Inspection and Quality Assurance for Special Purpose Fasteners	B18.18.3M-1987 (R2005)
Inspection and Quality Assurance for Fasteners for Highly Specialized Engineered Applications	B18.18.4M-1987 (R2005)
Inspection and Quality Assurance Plan Requiring In-Process Inspection and Controls.	B18.18.5M-1998 (R2009)
Quality Assurance Plan for Fasteners Produced in a Third Party Accreditation System	B18.18.6M-1998 (R2009)
Quality Assurance Plan for Fasteners Produced in a Customer Approved Control Plan	B18.18.7M-1998 (R2009)
Washers: Helical Sprin-Lock, Tooth Lock, and Plain Washers (Inch Series).	B18.21.1-2009
Lock Washers (Metric Series)	B18.21.2M-1999 (R2005)
Double Coil Helical Spring Lock Washers for Wood Structures	B18.21.3-2008
Metric Plain Washers.	B18.22M-1981 (R2005)
Part Identifying Number (PIN) Code System for B18 Fastener Products	B18.24-2004
Square and Rectangular Keys and Keyways.	B18.25.1M-1996 (R2008)
Woodruff Keys and Keyways	B18.25.2M-1996 (R2008)
Square and Rectangular Keys and Keyways: Width Tolerances and Deviations Greater Than Basic Size	B18.25.3M-1998 (R2008)
Tapered and Reduced Cross Section Retaining Rings (Inch Series)	B18.27-1998 (R2005)
Helical Coil Screw Thread Inserts — Free Running and Screw Locking (Inch Series).	B18.29.1-2010 (R2007)
Helical Coil Screw Thread Inserts: Free Running and Screw Locking (Metric Series)	B18.29.2M-2005
Open-End Blind Rivets With Break Mandrels (Metric Series)	B18.30.1M-2000 (R2005)
Metric Continuous and Double-End Studs.	B18.31.1M-2008
Continuous and Double-End Studs.	B18.31.2-2008
Threaded Rods (Inch Series).	B18.31.3-2009

The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complimentary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763).

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

INTENTIONALLY LEFT BLANK

ASME B18.29.1-2010

ISBN 978-0-7918-3297-4



9 780791 832974



M14310