



Standard Test Method for (Analytical Procedure) for Determining Transmissivity and Storage Coefficient of Nonleaky Confined Aquifers by the Modified Theis Nonequilibrium Method¹

This standard is issued under the fixed designation D4105/D4105M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

^{ε1} NOTE—Editorially corrected designation to match the units of measurement statement in September 2015.

1. Scope*

1.1 This test method covers an analytical procedure for determining transmissivity and storage coefficient of a nonleaky confined aquifer under conditions of radial flow to a fully penetrating well of constant flux. This test method is a shortcut procedure used to apply the Theis nonequilibrium method. The Theis method is described in Test Method [D4106](#).

1.2 This test method, along with others, is used in conjunction with the field procedure given in Test Method [D4050](#).

1.3 *Limitations*—The limitations of this test method are primarily related to the correspondence between the field situation and the simplifying assumptions of this test method (see [5.1](#)). Furthermore, application is valid only for values of u less than 0.01 (u is defined in [Eq 2](#), in [8.6](#)).

1.4 All observed and calculated values shall conform to the guidelines for significant digits and rounding established in Practice [D6026](#).

1.4.1 The procedures used to specify how data are collected/recorded or calculated, in this standard are regarded as the industry standard. In addition, they are representative of the significant digits that generally should be retained. The procedures used do not consider material variation, purpose for obtaining the data, special purpose studies, or any considerations for the user's objectives; and it is common practice to increase or reduce significant digits of reported data to be commensurate with these considerations. It is beyond the scope of this standard to consider significant digits used in analytical methods for engineering design.

1.5 *Units*—The values stated in either SI Units or inch-pound units are to be regarded separately as standard. The values in each system may not be exact equivalents; therefore

each system shall be used independently of the other. Combining values from the two systems may result in nonconformance with the standard. Reporting of test results in units other than SI shall not be regarded as nonconformance with this test method.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

- [D653 Terminology Relating to Soil, Rock, and Contained Fluids](#)
- [D3740 Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction](#)
- [D4043 Guide for Selection of Aquifer Test Method in Determining Hydraulic Properties by Well Techniques](#)
- [D4050 Test Method for \(Field Procedure\) for Withdrawal and Injection Well Testing for Determining Hydraulic Properties of Aquifer Systems](#)
- [D4106 Test Method for \(Analytical Procedure\) for Determining Transmissivity and Storage Coefficient of Nonleaky Confined Aquifers by the Theis Nonequilibrium Method](#)
- [D6026 Practice for Using Significant Digits in Geotechnical Data](#)

3. Terminology

3.1 Definitions:

3.1.1 For common definitions of terms in this standard, refer to Terminology [D653](#).

¹ This test method is under the jurisdiction of ASTM Committee [D18](#) on Soil and Rock and is the direct responsibility of Subcommittee [D18.21](#) on Groundwater and Vadose Zone Investigations.

Current edition approved April 15, 2015. Published May 2015. Originally approved in 1991. Last previous edition approved in 2008 as D4105 – 96 (2008). DOI: 10.1520/D4105_D4105M-15E01.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard

3.2 Symbols and Dimensions:

- 3.2.1 K [LT^{-1}]*—hydraulic conductivity.*
- 3.2.2 K_{xy} *—hydraulic conductivity in the horizontal direction.*
- 3.2.3 K_z *—hydraulic conductivity in the vertical direction.*
- 3.2.4 T [L^2T^{-1}]*—transmissivity.*
- 3.2.5 S *—dimensionless storage coefficient.*
- 3.2.6 Ss [L^{-1}]*—specific storage.*
- 3.2.7 s [L]*—drawdown.*
- 3.2.8 Q [L^3T^{-1}]*—discharge.*
- 3.2.9 r [L]*—radial distance from control well.*
- 3.2.10 t [T]*—time.*
- 3.2.11 b [L]*—thickness of the aquifer.*
- 3.2.12 u *—dimensionless time parameter.*

4. Summary of Test Method

4.1 This test method describes an analytical procedure for analyzing data collected during a withdrawal or injection well test. The field procedure (see Test Method **D4050**) involves pumping a control well at a constant rate and measuring the water level response in one or more observation wells or piezometers. The water-level response in the aquifer is a function of the transmissivity and coefficient of storage of the aquifer. Alternatively, the test can be performed by injecting water at a constant rate into the aquifer through the control well. Analysis of buildup of water level in response to injection is similar to analysis of drawdown of water level in response to withdrawal in a confined aquifer. Drawdown of water level is analyzed by plotting drawdown against factors incorporating either time or distance from the control well, or both, and matching the drawdown response with a straight line.

4.2 *Solution*—The solution given by Theis (**1**)³ can be expressed as follows:

$$s = \frac{Q}{4\pi T} \int_u^\infty \frac{e^{-y}}{y} dy \quad (1)$$

where:

$$u = \frac{r^2 S}{4Tt} \quad (2)$$

and:

$$\int_u^\infty \frac{e^{-y}}{y} dy = W(u) = -0.577216 - \log_e u \quad (3)$$

$$+ u - \frac{u^2}{2!2} + \frac{u^3}{3!3} - \frac{u^4}{4!4} + \dots$$

4.3 The sum of the terms to the right of $\log_e u$ in the series of **Eq 3** is not significant when u becomes small.

NOTE 1—The errors for small values of u , from Kruseman and DeRidder (**1**) are as follows:

Error less than, %:	1	2	5	10
For u smaller than:	0.03	0.05	0.1	0.15

³ The boldface numbers in parentheses refer to a list of references at the end of this standard.

The value of u decreases with increasing time, t , and decreases as the radial distance, r , decreases. Therefore, for large values of t and reasonably small values of r , the terms to the right of $\log_e u$ in **Eq 3** may be neglected as recognized by Theis (**2**) and Jacob (**3**). The Theis equation can then be written as follows:

$$s = \frac{Q}{4\pi T} \left[-0.577216 - \ln \left(r^2 \frac{S}{4Tt} \right) \right] \quad (4)$$

from which it has been shown by Lohman (**4**) that

$$T = \frac{2.3Q}{4\pi \Delta s / \Delta \log_{10} t} \quad (5)$$

and:

$$T = -\frac{2.3Q}{2\pi \Delta s / \Delta \log_{10} r} \quad (6)$$

where:

- $\Delta s / \Delta \log_{10} t$ = the drawdown (measured or projected) over one log cycle of time, and
- $\Delta s / \Delta \log_{10} r$ = the drawdown (measured or projected) over one log cycle of radial distance from the control well.

5. Significance and Use

5.1 Assumptions:

5.1.1 Well discharges at a constant rate, Q .

5.1.2 Well is of infinitesimal diameter and fully penetrates the aquifer, that is, the well is open to the full thickness of the aquifer.

5.1.3 The nonleaky aquifer is homogeneous, isotropic, and areally extensive. A nonleaky aquifer receives insignificant contribution of water from confining beds.

5.1.4 Discharge from the well is derived exclusively from storage in the aquifer.

5.1.5 The geometry of the assumed aquifer and well conditions are shown in **Fig. 1**.

5.2 Implications of Assumptions:

5.2.1 Implicit in the assumptions are the conditions of radial flow. Vertical flow components are induced by a control well that partially penetrates the aquifer, that is, not open to the aquifer through its full thickness. If the control well does not

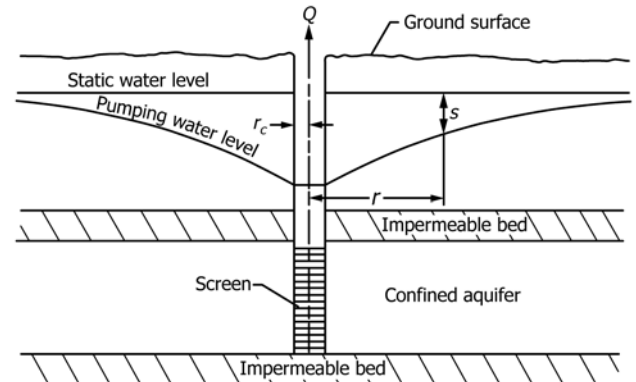


FIG. 1 Cross Section Through a Discharging Well in a Nonleaky Confined Aquifer

fully penetrate the aquifer, the nearest piezometer or partially penetrating observation well should be located at a distance, r , beyond which vertical flow components are negligible, where according to Reed (5)

$$r = \frac{1.5b}{\sqrt{\frac{K_z}{K_{xy}}}} \quad (7)$$

This section applies to distance-drawdown calculations of transmissivity and storage coefficient and time-drawdown calculations of storage coefficient. If possible, compute transmissivity from time-drawdown data from wells located within a distance, r , of the pumped well using data measured after the effects of partial penetration have become constant. The time at which this occurs is given by Hantush (6) by:

$$t = b^2 s / 2T (K_z / K_r) \quad (8)$$

Fully penetrating observation wells may be placed at less than distance r from the control well. Observation wells may be on the same or on various radial lines from the control well.

5.2.2 The Theis method assumes the control well is of infinitesimal diameter. Also, it assumes that the water level in the control well is the same as in the aquifer contiguous to the well. In practice these assumptions may cause a difference between the theoretical drawdown and field measurements of drawdown in the early part of the test and in and near the control well. Control well storage is negligible after a time, t , given by the following equation after weeks (7).

$$t = \frac{25 r_c^2}{T} \quad (9)$$

where:

r_c = the radius of the control well in the interval that includes the water level changes.

5.2.3 *Application of Theis Nonequilibrium Method to Unconfined Aquifers:*

5.2.3.1 Although the assumptions are applicable to confined conditions, the Theis solution may be applied to unconfined aquifers if drawdown is small compared with the saturated thickness of the aquifer or if the drawdown is corrected for reduction in thickness of the aquifer and the effects of delayed gravity yield are small.

5.2.3.2 *Reduction in Aquifer Thickness*—In an unconfined aquifer, dewatering occurs when the water levels decline in the vicinity of a pumping well. Corrections in drawdown need to be made when the drawdown is a significant fraction of the aquifer thickness as shown by Jacob (8). The drawdown, s , needs to be replaced by s' , the drawdown that would occur in an equivalent confined aquifer, where:

$$s' = s - \frac{s^2}{2b} \quad (10)$$

5.2.3.3 *Gravity Yield Effects*—In unconfined aquifers, delayed gravity yield effects may invalidate measurements of drawdown during the early part of the test for application to the Theis method. Effects of delayed gravity yield are negligible in partially penetrating observation wells at a distance, r , from the control well, where:

$$r = \frac{b}{\sqrt{\frac{K_z}{K_{xy}}}} \quad (11)$$

after the time, t , as given in the following equation from Neuman (9):

$$t = 10S_y \frac{r^2}{T} \quad (12)$$

where:

S_y = the specific yield.

For fully penetrating observation wells, the effects of delayed yield are negligible at the distance, r , in Eq 11 after one tenth of the time given in the Eq 12.

NOTE 2—The quality of the result produced by this standard is dependent on the competence of the personnel performing it, and the suitability of the equipment and facilities used. Agencies that meet the criteria of Practice D3740 are generally considered capable of competent and objective testing/sampling/inspection/etc. Users of this standard are cautioned that compliance with Practice D3740 does not in itself assure reliable results. Reliable results depend on many factors; Practice D3740 provides a means of evaluating some of those factors.

NOTE 3—The injection of water into an aquifer may be regulated or require regulatory approvals. Withdrawal of contaminated waters may require that the removed water be properly treated prior to discharge.

6. Apparatus

6.1 Analysis of data from the field procedure (see Test Method D4050) by this test method requires that the control well and observation wells meet the requirements specified in 6.2 – 6.4.

6.2 *Control Well*—Screen the control well in the aquifer and equip with a pump capable of discharging water from the well at a constant rate for the duration of the test. Preferably, screen the control well throughout the full thickness of the aquifer. If the control well partially penetrates the aquifer, take special precaution in the placement or design of observation wells (see 5.2.1).

6.3 *Observation Wells*—Construct one or more observation wells or piezometers at a distance from the control well. Observation wells may be partially open or fully open throughout the thickness of the aquifer.

6.4 *Location of Observation Wells*—Locate observation wells at various distances from the control well within the area of influence of pumping. However, if vertical flow components are significant and if partially penetrating observation wells are used, locate them at a distance beyond the effect of vertical flow components (see 5.2.1). If the aquifer is unconfined, constraints are imposed on the distance to partially penetrating observation wells and the validity of early time measurements (see 5.2.3).

7. Procedure

7.1 The overall procedure consists of conducting the field procedure for withdrawal or injection well tests described in Test Method D4050 and analysis of the field data as addressed in this test method.

7.2 Use a graphical procedure to solve for transmissivity and coefficient of storage as described in 8.2.



8. Calculation

8.1 Plot drawdown, s , at a specified distance on the arithmetic scale and time, t , on the logarithmic scale.

8.2 Plot drawdown, s , for several observation wells at a specified time on the arithmetic scale and distance on the logarithmic scale.

8.3 For convenience in calculations, by choosing drawdown, Δs_r , as that which occurs over one log cycle of time:

$$\Delta \log_{10} t = \log_{10} \left(\frac{t_2}{t_1} \right) = 1 \quad (13)$$

and, similarly for convenience in calculations, by choosing the drawdown, Δs_r , as that which occurs over one log cycle of distance,

$$\Delta \log_{10} r = \log_{10} \left(\frac{r_2}{r_1} \right) = 1 \quad (14)$$

8.4 Calculate transmissivity using the semilog plot of drawdown versus time by the following equation derived from Eq 5:

$$t = 2.3Q/2\pi\Delta s_r \quad (15)$$

or calculate transmissivity using the semilog plot of drawdown versus radial distance from control well by the following equation derived from Eq 6:

$$T = -\frac{2.3Q}{2\pi\Delta s_r} \quad (16)$$

8.5 Determine the coefficient of storage from these semilog plots of drawdown versus time or distance by a method proposed by Jacob (2) where:

$$s = \frac{2.3Q}{4\pi T} \log_{10} \left(\frac{2.25Tt}{r^2 S} \right) \quad (17)$$

Taking $s = 0$ at the zero-drawdown intercept of the straight-line semilog plot of time or distance versus drawdown,

$$S = \frac{2.25Tt}{r^2} \quad (18)$$

where:

either r or t = the value at the zero-drawdown intercept.

8.6 To apply the modified Theis nonequilibrium method to thin unconfined aquifers, where the drawdown is a significant fraction of the initial saturated thickness, apply a correction to the drawdown in solving for T and S (see 5.2.3.2).

8.7 This test method is applicable only for values of $u < 0.01$, that is:

$$u = \frac{r^2 S}{4Tt} < 0.01 \quad (19)$$

It is seen from Eq 19 that u decreases as time increases, other things being equal. Because S is in the numerator, the value of u is much smaller for a confined aquifer, whose storage coefficient may range from only about 10^{-5} to 10^{-3} , than for an unconfined aquifer, whose specific yield may be from 0.1 to 0.3. To compensate for this, t must be greater by several orders of magnitude in testing an unconfined aquifer than testing a confined aquifer.

8.7.1 In a drawdown-time test (s versus $\log_{10} t$ or $\log_{10} t/r^2$), data points for any particular distance will begin to fall on a straight line only after the time is sufficiently long to satisfy the above criteria. In a drawdown-distance test (s versus $\log_{10} r$), the well must be pumped long enough that the data for the most distant observation well satisfy the requirements; then only the drawdowns at or after this value of t may be analyzed on a semilogarithmic plot for one particular value of t .

NOTE 4—The analyst may also find it useful to analyze the data using the Theis nonequilibrium procedure (see Test Method D4106).

NOTE 5—Commercially available software is available from several sources that can perform the calculation and plotting.

9. Report: Test Data Sheets/Forms

9.1 Report as a minimum the information described below. The report of the analytical procedure will include information from the report on test method selection (see Guide D4043) and the field testing procedure (see Test Method D4050).

9.1.1 *Introduction*—The introductory section is intended to present the scope and purpose of the recovery method for determining transmissivity and storativity in a nonleaky confined aquifer. Summarize the field hydrogeologic conditions and the field equipment and instrumentation including the construction of the control well and observation wells and piezometers, the method of measurement of discharge and water levels, and the duration of the test and pumping rate. Discuss rationale for selecting the modified Theis method.

9.1.2 *Hydrogeologic Setting*—Review the information available on the hydrogeology of the site; interpret and describe the hydrogeology of the site as it pertains to the selection of this method for conducting and analyzing an aquifer test. Compare the hydrogeologic characteristics of the site as it conforms and differs from the assumptions in the solution to the aquifer test method.

9.1.3 *Equipment*—Report the field installation and equipment for the aquifer test, including the construction, diameter, depth of screened interval, and location of control well and pumping equipment, and the construction, diameter, depth, and screened interval of observation wells.

9.1.4 Describe the methods of observing water levels, pumping rate, barometric changes, and other environmental conditions pertinent to the test. Include a list of measuring devices used during the test, the manufacturers name, model number, and basic specifications for each major item, and the name and date and method of the last calibration, if applicable.

9.1.5 *Testing Procedures*—State the steps taken in conducting pre-test, drawdown, and recovery phases of the test. Include the date, clock time, and time since pumping started or stopped for measurements of discharge rate, water levels, and other environmental data recorded during the testing procedure.

9.1.6 *Presentation and Interpretation of Test Results:*

9.1.6.1 *Data*—Present tables of data collected during the test. Show methods of adjusting water levels for barometric changes and calculation of drawdown and residual drawdown.

9.1.6.2 *Data Plots*—Present data plots used in analysis of the data.

9.1.6.3 Evaluate qualitatively the determinations of transmissivity and coefficient of storage on the basis of the

adequacy of instrumentation, observations of stress and response, and the conformance of the hydrogeologic conditions, and the performance of the test to the assumptions of the method.

10. Precision and Bias

10.1 *Precision*—Test data on precision is not presented due to the nature of the material (groundwater) tested by this test method. It is either not feasible or too costly at this time to have ten or more laboratories participated in a round-robin testing program. It is not practicable to specify the precision of this

test method because the response of aquifer systems during aquifer tests is dependent upon ambient system stresses.

10.2 *Bias*—There is no accepted reference value for this test method, therefore bias cannot be determined. No statement can be made about bias because no true reference values exist.

11. Keywords

11.1 aquifer tests; aquifers; confined aquifers; control wells; groundwater; hydraulic properties; observation wells; storage coefficient; transmissivity; unconfined aquifers

REFERENCES

- (1) Kruseman, G. P., and DeRidder, N. A., “*Analysis and Evaluation of Pumping Test Data*,” ILRI Publication 47, 1990, p. 377.
- (2) Theis, C. V., “The Relation Between the Lowering of the Piezometric Surface and the Rate and Duration of Discharge of a Well Using Ground-Water Storage,” *American Geophysical Union Transactions*, Vol 16, Part 2, 1935, pp. 519–524.
- (3) Jacob, C. E., “Flow of Ground Water,” in *Engineering Hydraulics*, Proceedings of the Fourth Hydraulics Conference, June 12–15, 1949, New York, John Wiley and Sons, Inc., 1950, pp. 321–386.
- (4) Lohman, S. W., “Ground-Water Hydraulics,” U.S. Geological Survey Professional Paper 708, 1972.
- (5) Reed, J. E., “Type Curves for Selected Problems of Flow to Wells in Confined Aquifers,” *U.S. Geological Survey Techniques of Water-Resources Investigations*, Book 3, Chapter B3, 1980.
- (6) Hantush, M. S., and Jacob, C. E., “Non-Steady Radial Flow in an Infinite Leaky Aquifer,” *American Geophysical Union Transactions*, Vol 36, No. 1, 1955, pp. 95–100.
- (7) Papadopoulos, S. S., and Cooper, H. H., Jr., “Drawdown in a Well of Large Diameter,” *Water Resources Research*, Vol 1, 1967, pp. 241–244.
- (8) Jacob, C. E., “Determining Permeability of Water-Table Aquifers,” in Bentall, Ray, compiler, *Methods of Determining Permeability, Transmissibility, and Drawdown*, U.S. Geological Survey Water-Supply Paper 1536-I, 1963, pp. 272–292.
- (9) Neuman, S. P., “Effect of Partial Penetration on Flow in Unconfined Aquifers Considering Delayed Gravity Response,” *Water Resources Research*, Vol 10, No. 2, 1974, pp. 303–312.

SUMMARY OF CHANGES

In accordance with Committee D18 policy, this section identifies the location of changes to this standard since the last edition (1996 (Reapproved 2008)) that may impact the use of this standard.

- | | |
|--|---|
| <ol style="list-style-type: none"> (1) Deleted terminology that is already in D653. (2) Added D653 and D6026 to list of referenced documents. (3) Added SI units notes, D3740 notes. (4) Revised Precision and Bias to current format. | <ol style="list-style-type: none"> (5) Edits made throughout to comply with the D18 Procedures Preparation Manual. (6) Added new note on commercially available software for calculations and plotting. |
|--|---|

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; http://www.copyright.com/