

# INTERNATIONAL STANDARD

**IEC**  
**60139**

Second edition  
2000-12

---

---

## **Preparation of outline drawings for cathode-ray tubes, their components, connections and gauges**

*Préparation des dessins d'encombrement  
des tubes à rayons cathodiques, de leurs composants,  
de leurs connexions et de leurs calibres*



Reference number  
IEC 60139:2000(E)

## Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

## Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

## Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site ([www.iec.ch](http://www.iec.ch))**
- **Catalogue of IEC publications**  
The on-line catalogue on the IEC web site ([www.iec.ch/catlg-e.htm](http://www.iec.ch/catlg-e.htm)) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.
- **IEC Just Published**  
This summary of recently issued publications ([www.iec.ch/JP.htm](http://www.iec.ch/JP.htm)) is also available by email. Please contact the Customer Service Centre (see below) for further information.
- **Customer Service Centre**  
If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: [custserv@iec.ch](mailto:custserv@iec.ch)  
Tel: +41 22 919 02 11  
Fax: +41 22 919 03 00

# INTERNATIONAL STANDARD

# IEC 60139

Second edition  
2000-12

---

---

## **Preparation of outline drawings for cathode-ray tubes, their components, connections and gauges**

*Préparation des dessins d'encombrement  
des tubes à rayons cathodiques, de leurs composants,  
de leurs connexions et de leurs calibres*

© IEC 2000 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission 3, rue de Varembé Geneva, Switzerland  
Telefax: +41 22 919 0300 e-mail: [inmail@iec.ch](mailto:inmail@iec.ch) IEC web site <http://www.iec.ch>



Commission Electrotechnique Internationale  
International Electrotechnical Commission  
Международная Электротехническая Комиссия

PRICE CODE

U

*For price, see current catalogue*

# CONTENTS

	Page
FOREWORD .....	4
Clause	
1 Scope .....	5
2 Normative references .....	5
3 Definitions .....	5
3.1 Terms and definitions .....	5
3.2 Units and symbols .....	8
4 General requirements .....	8
4.1 Required views .....	8
4.2 General rules and guidelines for the outline drawings .....	8
5 Specific requirements .....	9
5.1 Specific requirements of CRT outline drawings .....	9
5.1.1 Front view of the CRT .....	9
5.1.2 Top view of the CRT .....	9
5.1.3 Side view of the CRT .....	9
5.1.4 Diagonal view of the CRT .....	10
5.1.5 Clearance regions for the band junctions .....	10
5.1.6 Mounting lugs .....	10
5.1.7 Clearance region for integral neck components .....	10
5.2 Specific requirements for glass outline drawings .....	10
5.2.1 CRT panel .....	10
5.2.2 CRT funnel .....	11
5.2.3 Reference line gauge .....	11
5.2.4 Beam clearance gauge .....	11
5.3 Specific requirements of CRT connection drawings .....	11
5.3.1 CRT base mechanical outline .....	12
5.3.2 CRT base connection table .....	12
5.3.3 CRT anode outline drawings .....	12

## Specimen outline drawings

Figure 1 – Front view of the CRT .....	13
Figure 2 – Top view of the CRT .....	14
Figure 3 – Side view of the CRT .....	15
Figure 4 – Diagonal view of the CRT .....	16
Figure 5 – Clearance regions for the band junctions .....	17
Figure 6 – Mounting lug detail .....	18
Figure 7 – Clearance region for integral neck components .....	19
Figure 8 – CRT panel contour defined by radii .....	20
Figure 9 – CRT panel contour defined by equation .....	21
Figure 10 – CRT funnel .....	22

	Page
Figure 11 – CRT funnel contour table .....	23
Figure 12 – Yoke reference line gauge defined by equation.....	24
Figure 13 – Yoke reference line gauge defined by radii .....	25
Figure 14 – Beam clearance gauge defined by equation.....	26
Figure 15 – Beam clearance gauge defined by radii .....	27
Figure 16 – CRT base mechanical outline .....	28
Figure 17 – Example of CRT base connection table .....	29
Figure 18 – CRT anode button .....	30

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**PREPARATION OF OUTLINE DRAWINGS FOR CATHODE-RAY TUBES,  
THEIR COMPONENTS, CONNECTIONS AND GAUGES**

## FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60139 has been prepared by IEC technical committee 39: Electronic tubes.

This second edition cancels and replaces the first edition, published in 1962, and constitutes a technical revision.

The text of this standard is based on the following documents:

FDIS	Report on voting
39/254/FDIS	39/256/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

The committee has decided that the contents of this publication will remain unchanged until 2005. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

## PREPARATION OF OUTLINE DRAWINGS FOR CATHODE-RAY TUBES, THEIR COMPONENTS, CONNECTIONS AND GAUGES

### 1 Scope

This International Standard gives guidance on the preparation of outline drawings of cathode-ray tubes (CRTs), tube components, tube sub-assemblies and ancillary components with the object of encouraging the same practice when publications are prepared in different countries. These recommendations are contained in the specimen drawings, descriptive text and in the tables of required dimensions.

### 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of IEC and ISO maintain registers of currently valid International Standards.

IEC 60027-1:1995, *Letter symbols to be used in electrical technology – Part 1: General*

IEC 60050 (all parts), *International Electrotechnical Vocabulary (IEV)*

IEC 60617 (all parts), *Graphical symbols for diagrams*

ISO 1000: *SI units and recommendations for the use of their multiples and of certain other units*

### 3 Definitions

#### 3.1 Terms and definitions

For the purpose of this International Standard, the following definitions apply.

##### 3.1.1

##### **anode button**

conductive contact which provides electrical continuity from the outside of the insulating envelope to the anode electrode inside the tube

##### 3.1.2

##### **axes of the CRT**

##### 3.1.2.1

##### **principal axis**

axis perpendicular to the panel and the phosphor screen which passes through the centre point of the panel, the funnel, deflection yoke region and the electron gun

### **3.1.2.2**

#### **major axis**

axis in the direction of the longer dimension of the CRT screen which passes through and is perpendicular to the principal axis, normally the horizontal axis

### **3.1.2.3**

#### **minor axis**

axis along the shorter dimension of the CRT screen which passes through and is perpendicular to the principal axis, normally the vertical axis

### **3.1.2.4**

#### **diagonal axis**

axis connecting opposite corners of the CRT screen

### **3.1.3**

#### **band**

hardware that surrounds the CRT panel and 1) holds the mounting lugs and implosion safety hardware to the CRT, 2) applies compressive loads to the panel for mechanical safety and 3) contains the panel glass temporarily in the event of breakage

NOTE This band may be mechanically tensioned and joined at a junction; it may be joined to the CRT with resin, or it may also be a single piece that is thermally shrunk over the panel (so called shrink-fit).

### **3.1.4**

#### **beam clearance**

clearance between the electron beam path and the flare region of the funnel connecting the CRT neck to the body of the funnel

NOTE Prevention of beam impact on the glass is critical for proper operation.

### **3.1.5**

#### **centre face thickness (CFT)**

thickness of the panel at its centre

### **3.1.6**

#### **corner angle**

angle between the major axis and a diagonal of the nominal screen of the design aspect ratio

### **3.1.7**

#### **deflection angles**

angles subtended by the major axis, minor axis and diagonal dimensions of the screen as viewed from yoke reference line

### **3.1.8**

#### **design aspect ratio**

design value of the ratio of the long to short dimensions of a rectangular area, typically expressed as a ratio of whole integers such as "4 by 3" or "16 by 9"

### **3.1.9**

#### **diagonal**

line joining opposing corners

### **3.1.10**

#### **frit seal line**

line formed by the frit joint between the panel and funnel

### **3.1.11**

#### **heel radius**

radius of the blend between the principal panel surface and the panel skirt



**3.1.12****integral neck components**

devices attached to the neck and/or funnel of the CRT by the manufacturer

**3.1.13****lug**

mounting hardware that has a blade section generally furnished with a mounting hole to receive a mounting bolt

**3.1.14****magnetic shield**

ferromagnetic cone, roughly the shape of the funnel, that excludes external magnetic fields from the electron beam region

**3.1.15****mould-match line**

line of maximum dimension of the moulded part, located at the mating plane of the two halves of a mould

**3.1.16****mounting system**

hardware attached to the CRT that facilitates mounting the CRT

**3.1.17****projected screen dimensions**

screen dimensions as they appear to a viewer outside the CRT (at infinite distance)

NOTE The dimensions are projected along optical paths from the screen surface onto a plane perpendicular to the principal CRT axis.

**3.1.18****reference line**

yoke reference line

fundamental plane for measurement and control of the funnel geometry

**3.1.19****sagittal height**

height from a plane tangential to the surface (of the panel) at its centre

**3.1.20****screen diagonal**

diagonal of the largest rectangle of the design aspect ratio inscribed within the screen boundary

**3.1.21****useful screen dimensions**

projected dimensions of the inner surface of the glass panel determined useful by the CRT glass manufacturer

**3.1.22****useful phosphor screen dimensions**

projected dimensions of the phosphor screen determined useful by the CRT manufacturer

**3.1.23****z-axis**

axis of a CRT component or CRT gauge typically aligned with the principal axis of the CRT

### 3.1.24

#### **Z-point**

reference point on the external surface of the panel along the diagonal

## 3.2 Units and symbols

Units, graphical symbols and letter symbols should, wherever possible, be taken from the publications listed in clause 2 of this standard.

When further items are required they should be derived in accordance with the principles of these publications.

## 4 General requirements

This standard prescribes the outline drawing views and the dimensions and descriptions required for documenting a generic CRT design. The recommendations for each drawing are specified in 5.1, 5.2, 5.3 and specimen drawings are shown in figure 1 through figure 18.

If the phosphor screen extent is hidden by the band, the degree of vignetting should be indicated on one of the views.

### 4.1 Required views

In general, the views required to describe a rectangular CRT shall be the front, top, side and diagonal. When the implosion protection and mounting system is integral to the tube, a second front view and the mounting lug outline drawing may be included.

The components of the CRT (panel, funnel, base, reference line gauge, beam clearance gauge and ancillary equipment) are part of the outline drawing information.

Monochrome and projection CRTs may not require all of the entries. If the dimensions mentioned in the tabular layout below the specimen outline drawings are applicable to the tube to be described, they shall be given on the outline sheet.

If the CRT has appendages or features not described in this standard, additional views shall be included to fully describe them.

### 4.2 General rules and guidelines for the outline drawings

The specific guidelines for each drawing have been chosen based on balancing the amount of detail and quantity of dimensions on each drawing. If future designs require more or less detail on certain views, it is appropriate to relocate dimensional information to other views so long as the information is retained in an unambiguous manner.

The drawing shall show all dimensions necessary to assure clearances and mating with auxiliary accessories.

Drawings need not be drawn to scale, but they shall be roughly in proportion and, where necessary for clarity, an enlarged detail drawing shall be used.

Angles shall be indicated as follows:

- a) by quoting the value in degrees and minutes and seconds or in decimal notation. Where this is not practical, the value may be quoted in fractions of degrees;
- b) where it is self-evident that a number of angles are of equal value, the value of only one of those angles shall be quoted.

## 5 Specific requirements

### 5.1 Specific requirements of CRT outline drawings

The following views and related dimensions shall be included where appropriate. Where it is possible to combine this data into fewer views, this is permissible. Where additional types of dimensions are deemed useful, they may be included.

Each of the following subclauses identifies the suggested data for a drawing. Data can be shown on other drawings if it is more convenient.

#### 5.1.1 Front view of the CRT

The front view shall provide values for the following list of dimensions, as shown in figure 1:

- dimension of the CRT including mounting system;
- clearance for the band junction when positioned on the minor or major axis;
- distances between the centres of the CRT mounting holes;
- design aspect ratio;
- dimensions of the minimum, nominal and maximum useful phosphor screen;
- curvature of the useful phosphor (if not straight);
- location of the "Z-point";
- electron gun positions (designated R, G, B);
- clock position of the anode connector.

#### 5.1.2 Top view of the CRT

The top (or bottom) view shall show the anode connector and provide values for the following list of dimensions, as shown in figure 2:

- neck outside diameter;
- location for the convergence device;
- area for reliable contact to the outer conductive coating;
- major axis dimensions of the band;
- base and anode connector type designations.

#### 5.1.3 Side view of the CRT

The side view shall provide values for the following list of dimensions, as shown in figure 3:

- overall length of the CRT;
- reference line location;
- frit seal line location;
- anode contact location;
- description of the implosion system (i.e. tension band, shrink fit, etc.).

#### 5.1.4 Diagonal view of the CRT

The diagonal view shall provide values for the following list of dimensions, as shown in figure 4:

- reference line gauge designation;
- sagittal height of panel at the “Z-point”;
- location of the mounting lug;
- location of the band;
- maximum dimension of the CRT forward of the mounting lug.

#### 5.1.5 Clearance regions for the band junctions

The clearance regions for the band junction view shall provide values for the following list of dimensions, as shown in figure 5:

- tube dimensions including band but not junction;
- tube dimensions including junction;
- location of the junction.

#### 5.1.6 Mounting lugs

The mounting lug view shall provide an adequate description of the mounting lug for interfacing to the cabinet. The drawing is for illustration purposes only and the choice of the best dimensions to indicate the shape of the blade and foot of the mounting lug is left to the registrant. The drawing shall include the following items, as shown in figure 6:

- diameter of the mounting lug hole;
- thickness of the mounting lug;
- outline.

#### 5.1.7 Clearance region for integral neck components

A view of the clearance regions for tubes having integral neck components shall provide definition of the extent of such components. The drawing, figure 7, is for illustration purposes only and the choice of the best dimensions to indicate this clearance space is left to the registrant.

### 5.2 Specific requirements for glass outline drawings

The glass parts and their gauges shall be shown in adequate detail to show the outside surface of the finished CRT.

#### 5.2.1 CRT panel

The outline drawing of the panel shall provide values for the following list of dimensions:

- dimensions of the panel along the axes at the mould match line;
- centre face thickness;
- overall height of the panel;
- angle to the corner of the panel from the major axis;
- dimensions of the minimum useful screen outline;
- inside and outside panel contours (by blended radii or equations).

Two specimen drawings are shown, figure 8 for the contour defined by the blended radii method and figure 9 for the contour defined by the equation method.

### 5.2.2 CRT funnel

The outline drawing of the funnel shall provide values for the following list of dimensions:

- dimensions of the funnel along the axes at the mould match line;
- neck diameter;
- anode button type designation;
- location of the anode button;
- location of the reference line from the seal edge;
- angle from the major axis to the corner of the funnel;
- corner radius;
- outside contour.

Two specimen drawings are shown, figure 10 for the general dimensions and figure 11 for the contour definition table.

### 5.2.3 Reference line gauge

The outline drawing for a reference line gauge shall provide values for the following list of dimensions:

- gauge diameters;
- gauge heights;
- contour definition (by blended radii or by equation).

Two specimen drawings are shown, figure 12 using the equation method and figure 13 for the blended radii method.

### 5.2.4 Beam clearance gauge

The outline drawing for a beam clearance gauge shall provide values for the following list of dimensions:

- gauge diameters;
- gauge heights;
- contour definition (by blended radii or by equation).

Two specimen drawings are shown, figure 14 for the surface defined by the equation method and figure 15 for the surface defined by the blended radii method.

## 5.3 Specific requirements of CRT connection drawings

The CRT base has a high degree of variability in non-critical dimensions. Drawings are expected to be variable and figures 16 and 17 are for illustration. The anode contact geometry may be variable. The outline drawings should provide information as to the metal contact and its surrounding glass contours.

### **5.3.1 CRT base mechanical outline**

The CRT base mechanical outline shall provide values for the following list of dimensions, as illustrated in figure 16:


- pin circle diameter;
- pin diameters;
- pin length;
- pin 1 position with respect to the major axis of the CRT;
- critical details of guide surfaces, keyways, fillets, silos, etc.

### **5.3.2 CRT base connection table**

The CRT base connection table shall indicate the electron gun electrode connected to each base pin, as illustrated in figure 17.

### **5.3.3 CRT anode outline drawings**

The anode contact views shall indicate the dimensional features of the anode connector adequately to permit design of the mating connector, as shown in figure 18.

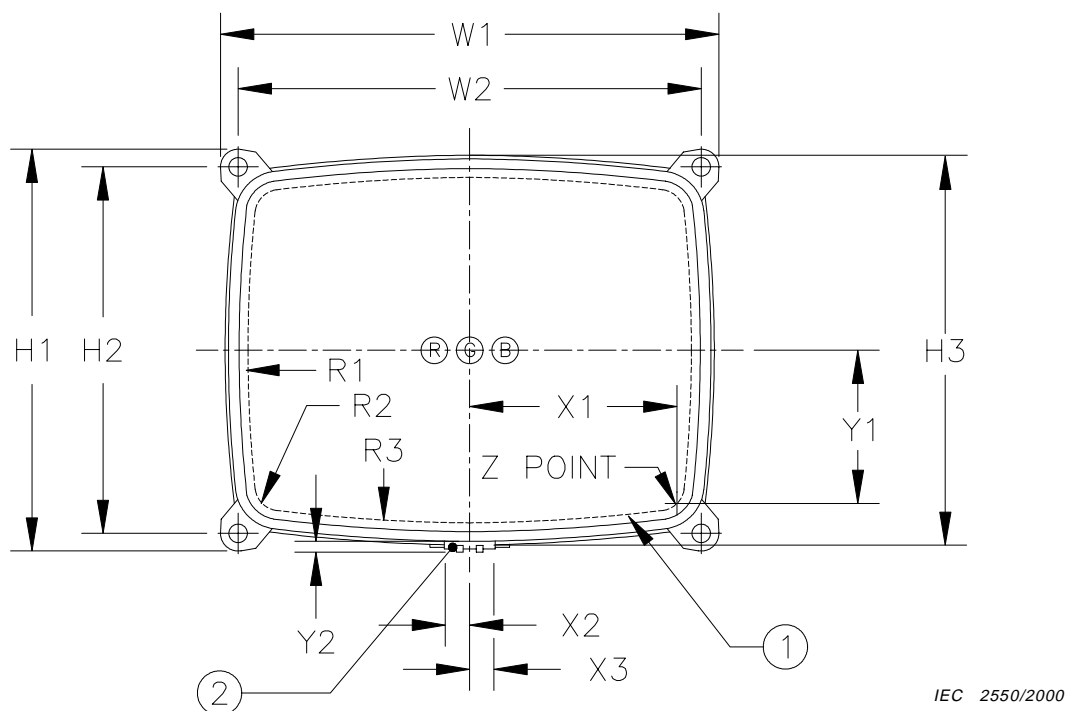


IEC 2550/2000

**Key**

- ① Useful phosphor screen outline; diagonal (D), width (W) and height (H)
- ② Clearance region for band junction

Designation	Description	Dimension type
W1	Width of the CRT including mounting system	Max.
H1	Height of the CRT including mounting system	Max.
H3	Height including band but excluding junction	Max.
W2	Width of the centres of the CRT mounting lug holes	Nom.
H2	Height of the centres of the CRT mounting lug holes	Nom.
D	Useful phosphor screen diagonal	Min., Nom., Max.
W	Useful phosphor screen width	Min., Nom., Max.
H	Useful phosphor screen height	Min., Nom., Max.
X1	Major axis coordinate of the "Z-point"	Nom.
Y1	Minor axis coordinate of the "Z-point"	Nom.
R1	Side radius of the useful screen edge (if not straight)	Nom.
R2	Corner radius of the useful screen edge (if not straight)	Nom.
R3	Bottom radius of the useful screen edge (if not straight)	Nom.
<b>Clearance for band junction (see 5.1.5 and figure 5 for alternate configuration)</b>		
X2	Lateral extent left of centre	Max.
X3	Lateral extent right of centre	Max.
Y2	Thickness	Max.
R,G,B	Electron gun sequence (left-to-right order)	
<b>Design aspect ratio</b>		
	Design aspect ratio of the useful phosphor screen (W:H)	Nom.

**Figure 1 – Front view of the CRT**

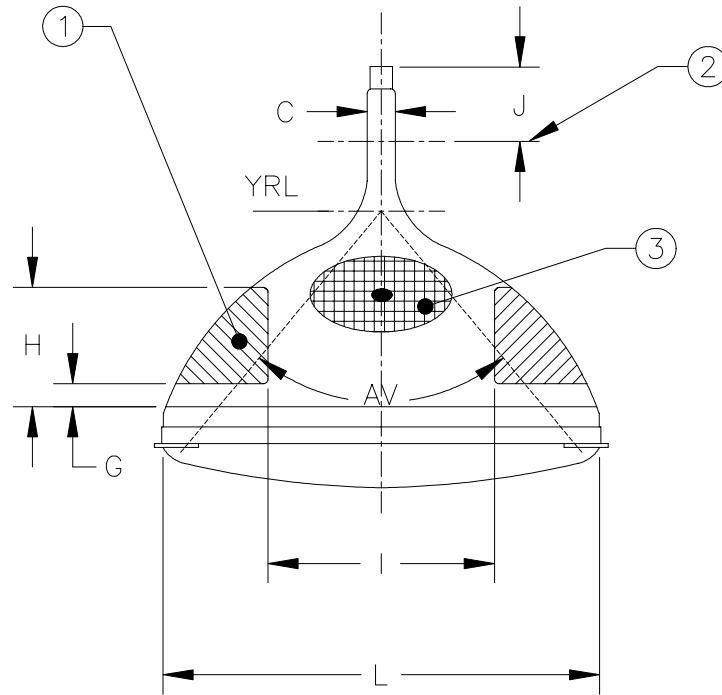

IEC 2551/2000


**Key**

- ① Contact area of external conductive coating
- ② Plane of beam correction device
- ③ Insulating coating

Designation	Description	Dimension type
C	Neck outside diameter	Tol.
J	Distance from the plane for locating the beam correction device to end of base	Nom.
<b>Contact area of external conductive coating</b>		
G	Seal line to nearest edge	Max.
H	Seal line to farthest edge	Tol.
I	Opening for anode contact	Max.
<b>Major axis dimensions of the band (excluding clearance for the junction)</b>		
L	Width at the panel mould-match line including the band	Max.
<b>Connector type designation</b>		
	Base type designation	
	Anode type designation	
<b>Deflection angle</b>		
AV	Major axis deflection angle	Nom.

**Figure 2 – Top view of the CRT**

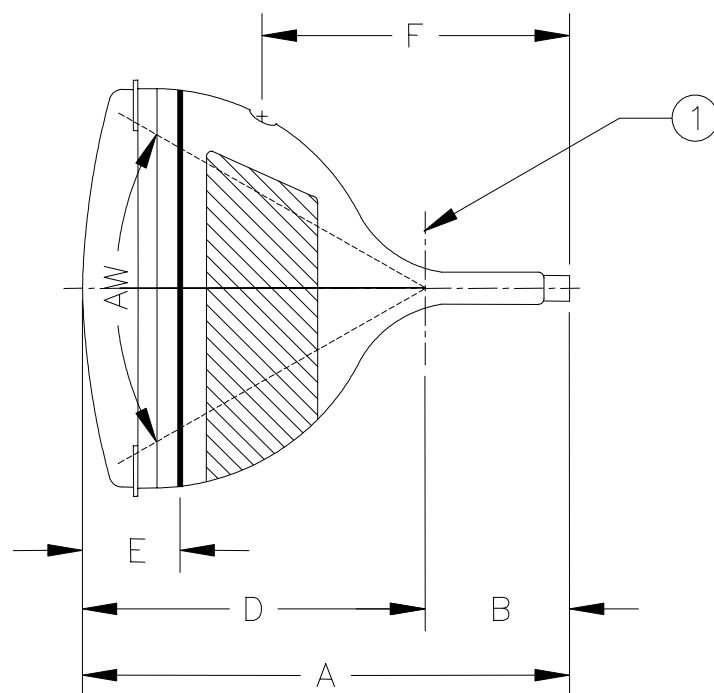


**Key**

IEC 2552/2000

① Yoke reference line

Designation	Description	Dimension type
A	Overall length	Min., Max.
B	Reference line from end of base	Nom.
D	Centre face to reference line	Nom.
E	Centre of face to frit seal line	Nom.
F	Anode contact to end of base	Nom.
Text	Description of the implosion system	
AW	Minor axis deflection angle	Nom.

**Figure 3 – Side view of the CRT**

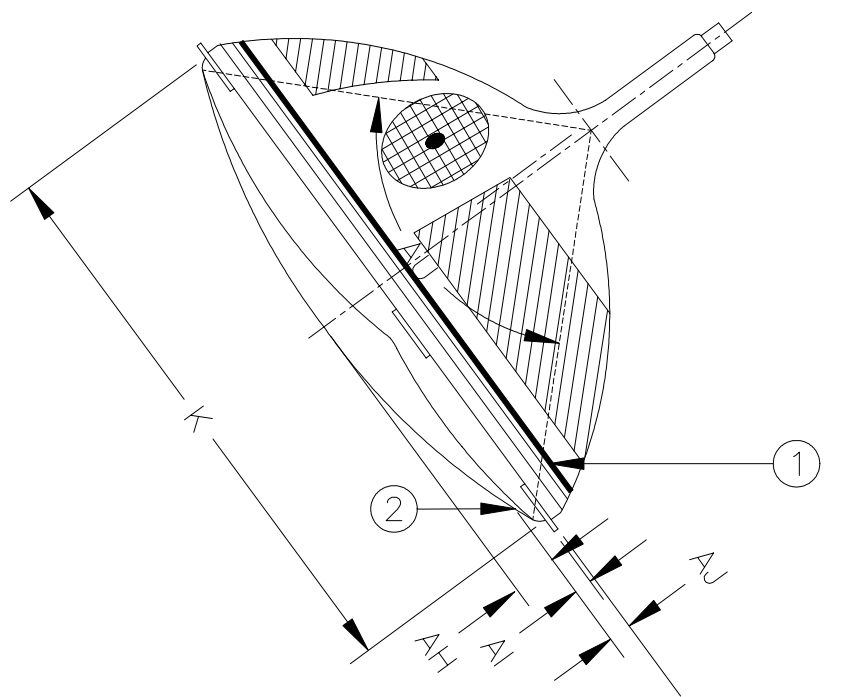


IEC 2553/2000

Key

- ① Seal line
- ② Z-point

Designation	Description	Dimension type
	Reference line gauge designation	
Sagittal height at minimum screen diagonal and lug location		
AH	Projected distance from centre of face to Z-point along the tube axis	Nom.
AI	Z-point to front of lug	Tol.
AJ	Z-point to front edge of band	Min.
Dimension at the mould match line including hardware forward of the mounting lug plane		
K	Diagonal axis	Max.
AU	Diagonal deflection angle	Nom.


Figure 4 – Diagonal view of the CRT

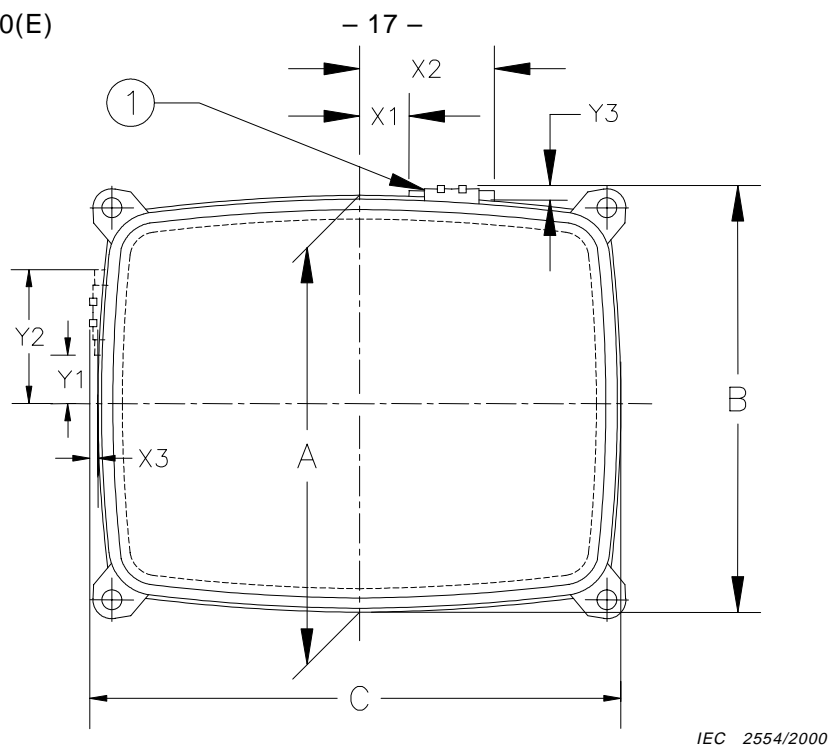**Key**

- ① Clearance for band junction

Designation	Description	Dimension type
A	Height of tube including band but not junction	Max.
<b>Case of top or bottom junction mounting</b>		
X1	Axis to nearest edge	Min.
X2	Axis to farthest edge	Max.
Y3	Thickness	Max.
B	Height of tube including band junctions	Max.
<b>Case of left or right junction mounting</b>		
Y1	Axis to nearest edge	Min.
Y2	Axis to farthest edge	Max.
X3	Thickness	Max.
C	Width of tube including band junction	Max.


**Figure 5 – Clearance regions for the band junctions**

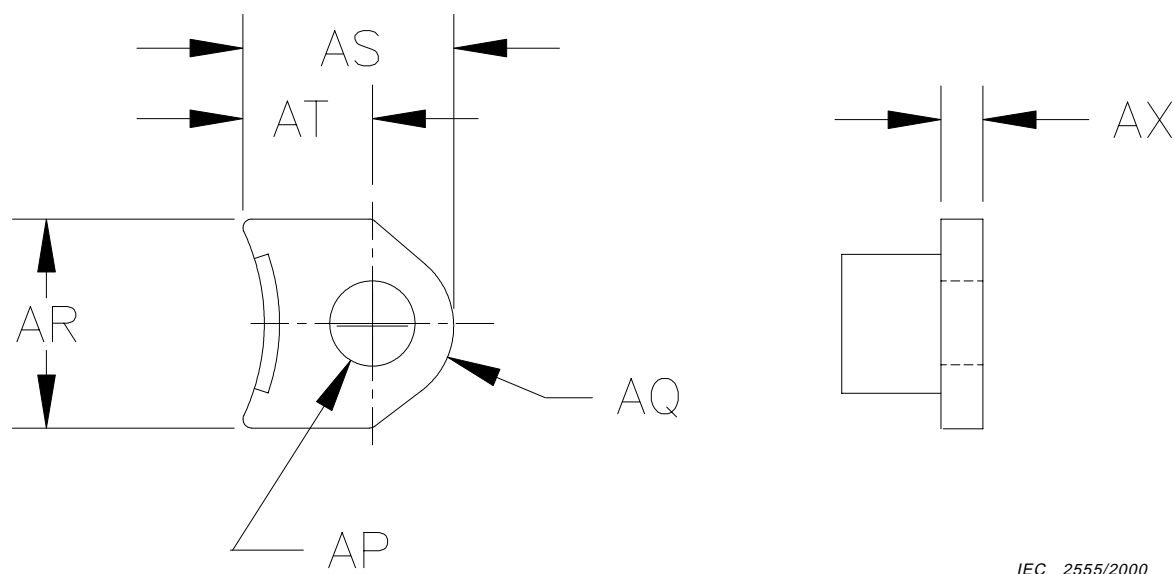

IEC 2555/2000



Designation	Description	Dimension type
AP	Hole diameter	Tol.
AX	Thickness	Tol.
AQ, AR, AS, AT	The choice of the other dimensions sufficient to describe the outline of the lug is left to the discretion of the registrant	Max.

Figure 6 – Mounting lug detail

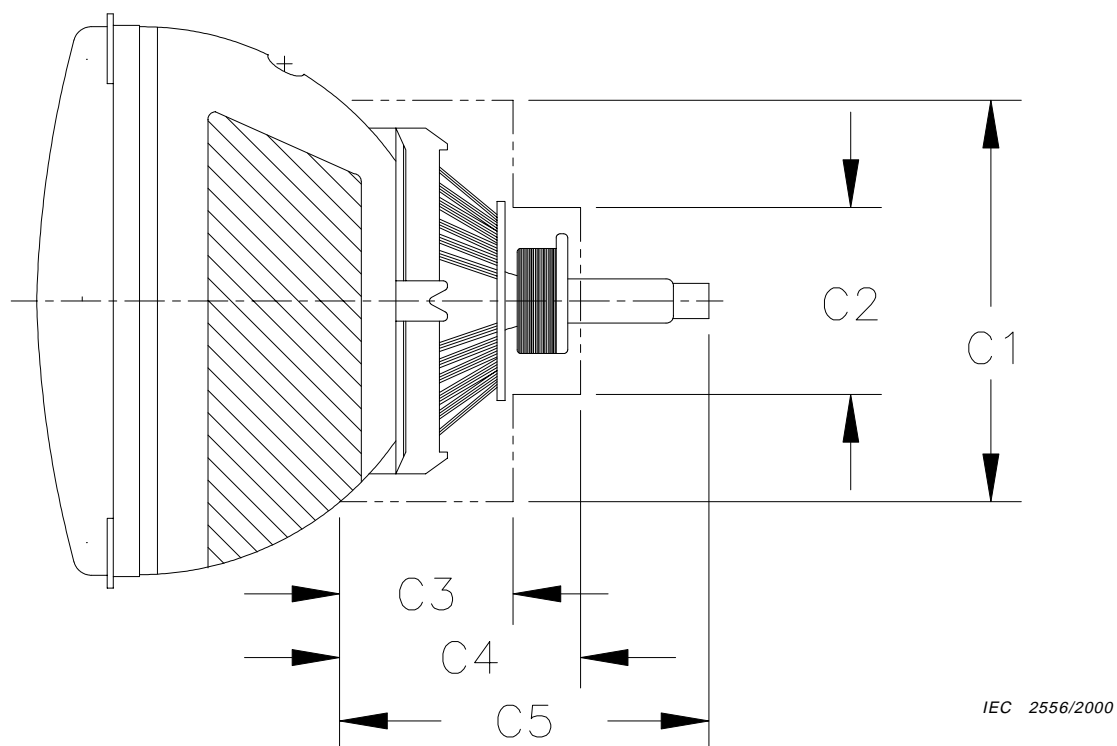

Designation	Description	Dimension type
C1, C2, C3, C4, C5	The choice of the dimensions to describe the volume that should remain clear for the neck components is left to the discretion of the registrant.	Max.

**Figure 7 – Clearance region for integral neck components**

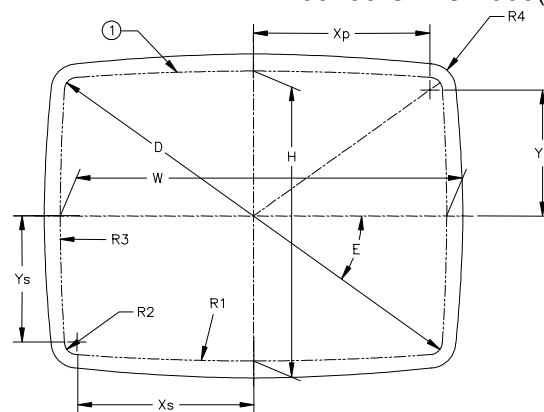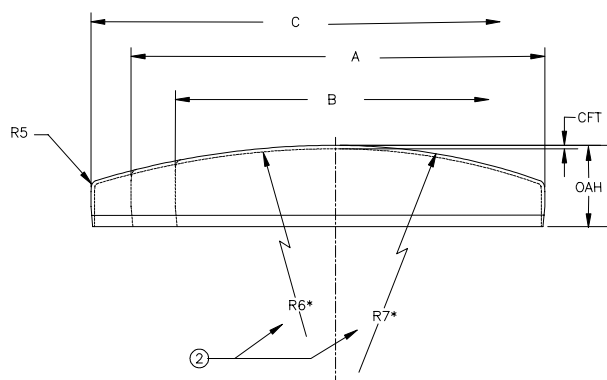


IEC 2557/2000

# Key

- ① Useful screen outline
- ② If surface is compound, show all radii and their origins

Designation	Description	Dimension type
A	Dimension of the panel across the major axis at mould match line	Max.
B	Dimension of the panel across the minor axis at mould match line	Max.
C	Dimension of the largest diagonal of the panel	Max.
CFT	Centre face thickness	Nom.
OAH	Overall height of the panel along the tube axis	Nom.
D	Useful screen diagonal along the corner angle	Min., Nom., Max.
E	Corner angle	Nom.
H	Useful screen height	Min., Nom., Max.
W	Useful screen width	Min., Nom., Max.
R1	Top and bottom radii of useful screen outline	Nom.
R2	Corner radii of useful screen outline (if not square cornered)	Nom.
R3	Side radii of useful screen outline	Nom.
Xs	Major axis co-ordinate of the centre of the corner radii of the useful screen	Nom.
Ys	Minor axis co-ordinate of the centre of the corner radii of the useful screen	Nom.
Xp	Major axis co-ordinate of the centre of the corner radii of the panel	Nom.
Yp	Minor axis co-ordinate of the centre of the corner radii of the panel	Nom.
R4	Outside corner radii at mould match line	Nom.
R5	Outside heel radius of the panel	Nom.
R6	Radius of curvature of the screen surface of the panel	Nom.
R7	Radius of curvature of the outside contour of the panel	Nom.


Figure 8 – CRT panel contour defined by radii

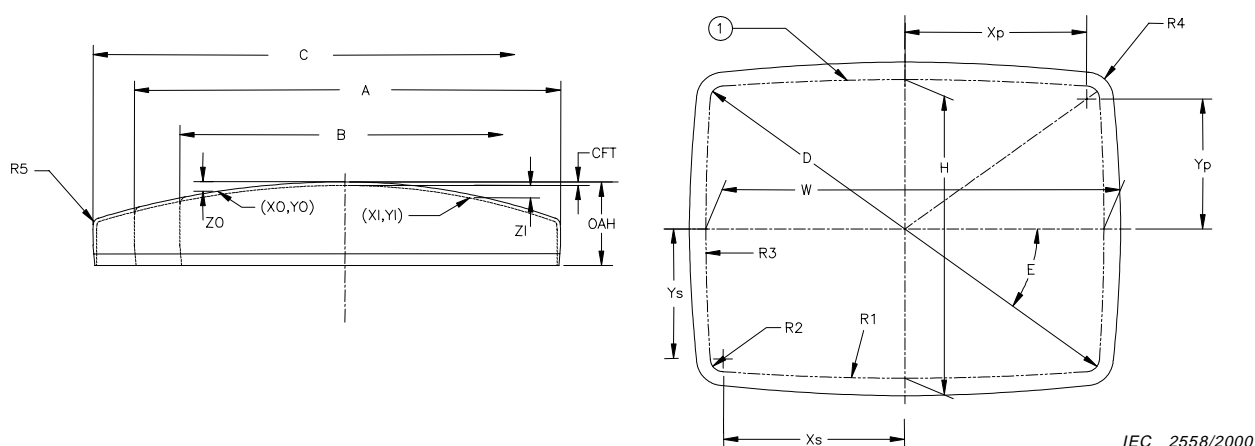**Key**

- ① Useful screen outline dimensions: D, H and W

Designation	Description	Dimension type
A	Dimension of the major axis at the mould match line	Max.
B	Dimension of the minor axis at the mould match line	Max.
C	Largest diagonal dimension at the mould match line	Max.
CFT	Centre face thickness	Nom.
OAH	Overall height of the panel along the tube axis	Nom.
D	Useful screen diagonal along the corner angle	Min., Nom., Max.
E	Corner angle	Nom.
H	Useful screen height	Min., Nom., Max.
W	Useful screen width	Min., Nom., Max.
R1	Top and bottom radii of useful screen outline	Nom.
R2	Corner radii of useful screen outline (if not square cornered)	Nom.
R3	Side radii of useful screen outline	Nom.
Xs	Major axis co-ordinate of the centre of the corner radii of the useful screen	Nom.
Ys	Minor axis co-ordinate of the centre of the corner radii of the useful screen	Nom.
Xp	Major axis co-ordinate of the centre of the corner radii of the panel	Nom.
Yp	Minor axis co-ordinate of the centre of the corner radii of the panel	Nom.
R4	Outside corner radii at the mould match line	Nom.
R5	Outside heel radius	Nom.
ZI(XI,YI)	Equation of the inside panel contour	Nom.
ZO(XO,YO)	Equation of the outside panel contour	Nom.

**Figure 9 – CRT panel contour defined by equation**

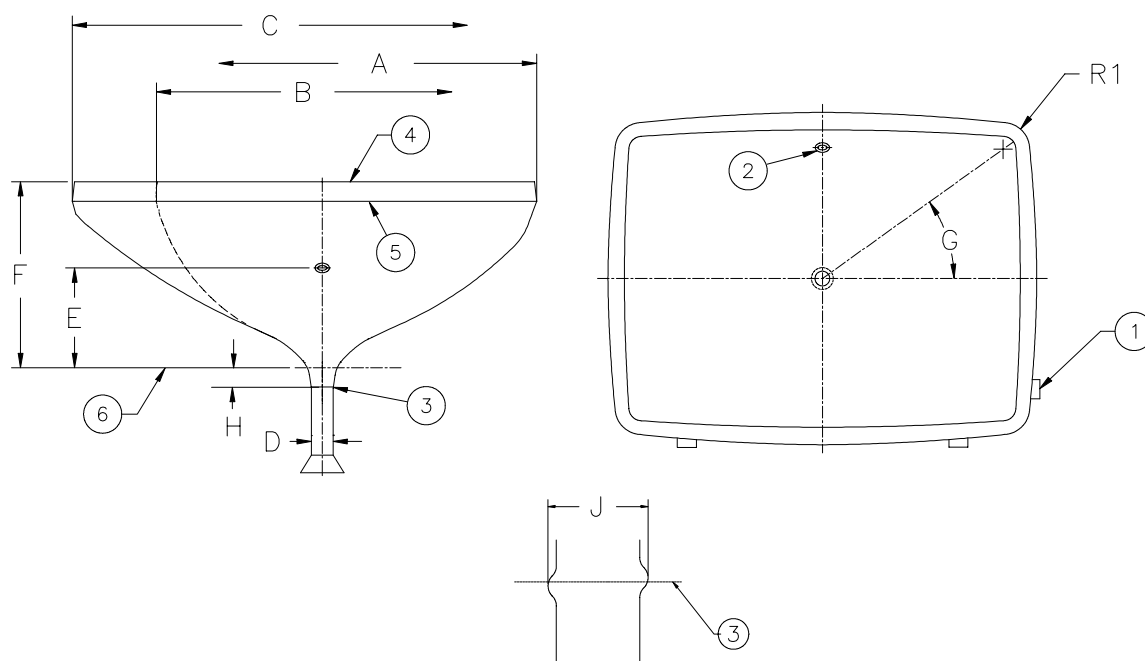

IEC 2559/2000



# Key

- ① Alignment pad
- ② Anode button (show actual location)
- ③ Neck splice line
- ④ Seal edge
- ⑤ Mould match line
- Reference line

Designation	Description	Dimension type
A	Major axis dimension at the mould match line	Max.
B	Minor axis dimension at the mould match line	Max.
C	Diagonal axis dimension at the mould match line	Max.
D	Neck diameter	Max.
E	Distance from the anode button from the reference line	Nom.
F	Distance from the reference line to the seal edge	Nom.
G	Angle between the diagonal and major axes	Nom.
H	Distance from the YRL to the neck splice	Nom.
J	Maximum diameter of the neck at the splice line	Nom.
R1	Outside corner radii at mould match line	Nom.
–	Reference line gauge designation	
–	Beam clearance gauge designation	

Figure 10 – CRT funnel

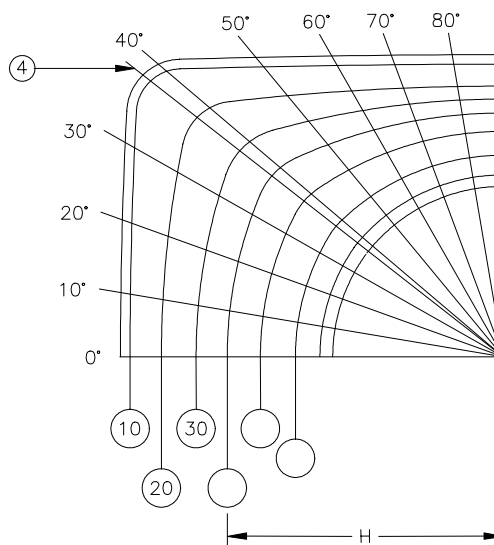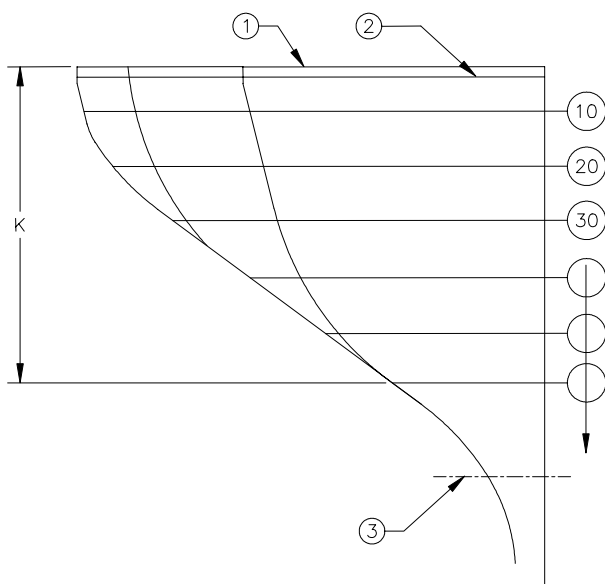


**Key**

- ① Seal edge
- ② Mould match line
- ③ Reference line
- ④ Diagonal

IEC 2560/2000

Distance from seal edge (K)	Major axis 0°	10°	20°	30°	Diagonal axis	40°	50°	60°	70°	80°	Minor axis 90°
Mould match											
10											
20											
...			Radial co-ordinates of the outside funnel contour (H) at the elevation from the seal edge (K) specified in the left column and at the angle from the major axis specified at the top of the column.								
...											
...											
...											
...											
...											
...											
...											
...											
...											
Reference line											

**Figure 11 – CRT funnel contour table**

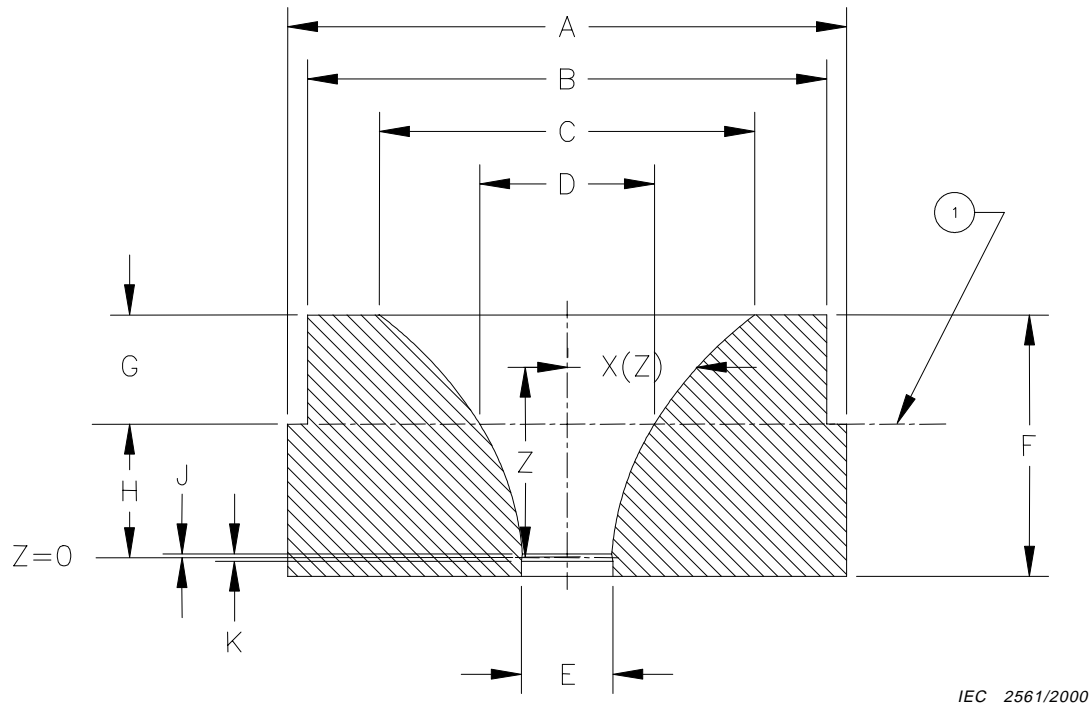


IEC 2561/2000

**Key**

- ① Reference line

Designation	Description	Dimension type
A	Diameter of the neck side of the gauge	Nom.
B	Diameter of the flare side of the gauge	Nom.
C	Diameter of the flare opening	Nom.
D	Diameter at the reference line	Nom.
E	Diameter of the neck side opening (relieved)	Nom.
F	Overall gauge height	Nom.
G	Height of gauge above the reference line	Nom.
H	Distance from reference line to Z axis origin	Nom.
J	Length of chamfer above Z axis origin	Nom.
K	Total length of chamfer	Nom.
X(Z)	Equation of the gauge contour	Nom.


**Figure 12 – Yoke reference line gauge defined by equation**

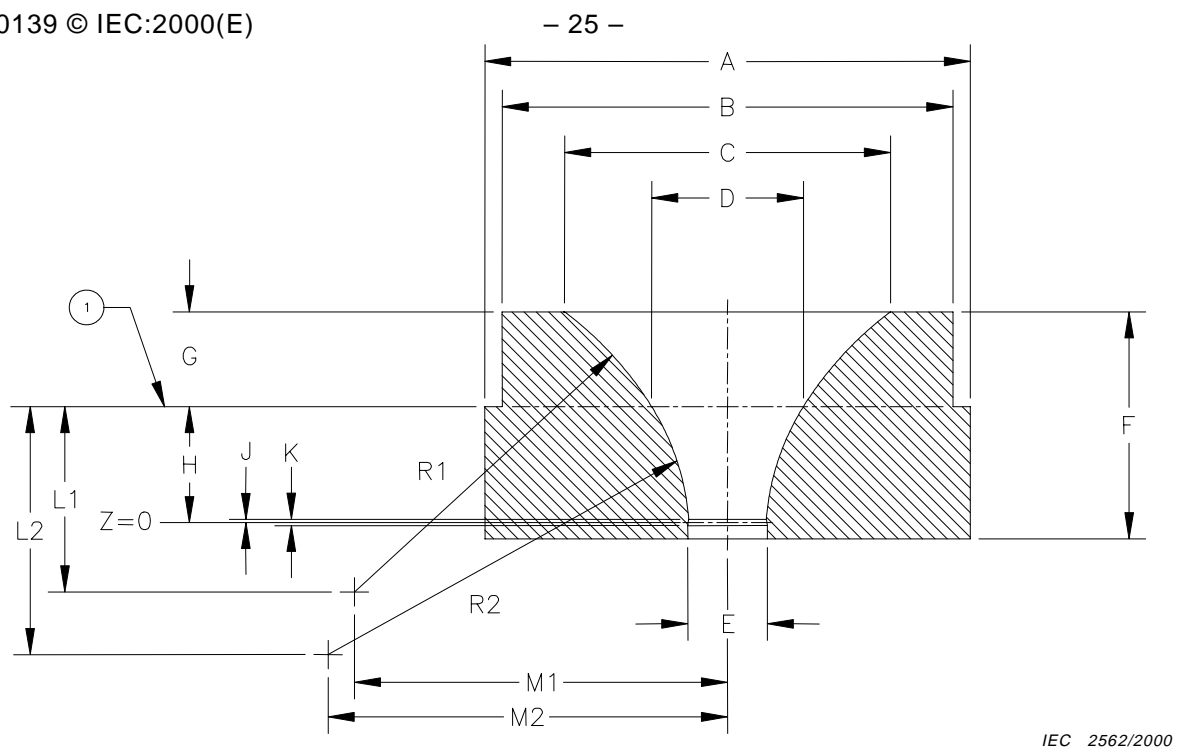**Key**

① Reference line

Designation	Description	Dimension type
A	Diameter of the base	Nom.
B	Diameter of the top	Nom.
C	Diameter of the bulb side opening	Nom.
D	Diameter at the reference line	Nom.
E	Diameter of the neck side opening (relieved)	Nom.
F	Overall gauge height	Nom.
G	Height of gauge above the reference line	Nom.
H	Distance from reference line to Z axis origin	Nom.
J	Length of chamfer above Z axis origin	Nom.
K	Total length of chamfer	Nom.
L1	Distance from reference line to centre of contour radius	Nom.
M1	Offset of the centre of the contour radius	Nom.
R1	Radius of the contour	Nom.
L2, M2, R2, etc.	Additional sets of contour radius dimensions (as appropriate)	Nom.

**Figure 13 – Yoke reference line gauge defined by radii**

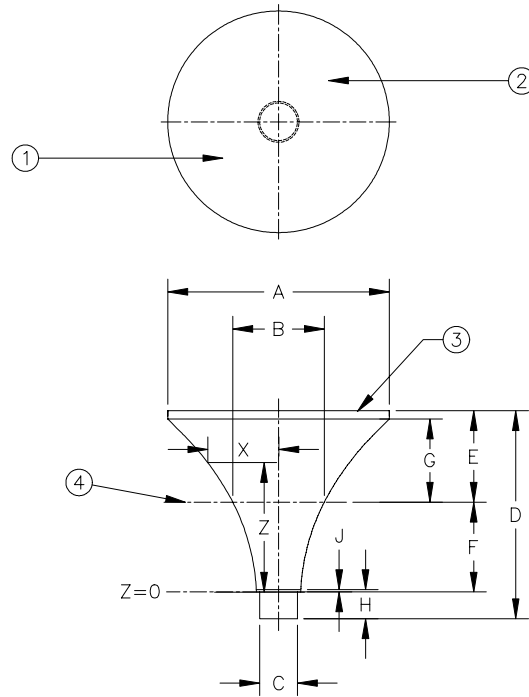


IEC 2563/2000

**Key**

- ① If gauge is fluted, show flute definition, extent
- ② If gauge is not round, describe
- ③ Bottom of gauge
- ④ Reference line

Designation	Description	Dimension type
A	Diameter of the flare side of the gauge	Nom.
B	Diameter of the gauge at the reference line	Nom.
C	Diameter of the neck side gauge extension	Nom.
D	Overall height of the gauge	Nom.
E	Height of the gauge from the reference line on the flare side	Nom.
F	Distance from reference line to the Z-axis origin	Nom.
G	Length of active gauge surface on the flare side of the reference line	Nom.
J	Length of the extension above the Z axis origin	Nom.
H	Total length of the extension	Nom.
X(Z)	Equation of gauge contour radius at level Z	Nom.


**Figure 14 – Beam clearance gauge defined by equation**

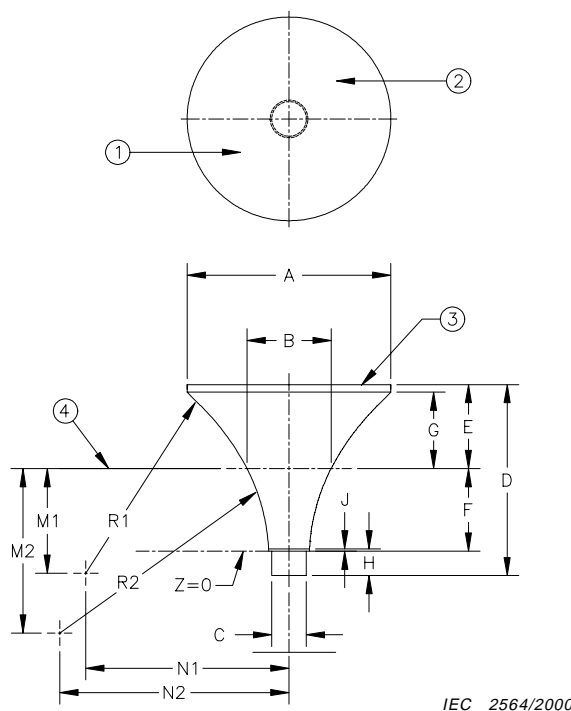**Key**

- ① If gauge is fluted, show flute definition, extent
- ② If gauge is not round, describe
- ③ Bottom of gauge
- ④ Reference line

Designation	Description	Dimension type
A	Diameter of the flare side of the gauge	Nom.
B	Diameter of the gauge at the reference line	Nom.
C	Diameter of the neck side gauge extension	Nom.
D	Overall height of the gauge	Nom.
E	Height of the gauge from the reference line on the flare side	Nom.
F	Distance from reference line to the Z-axis origin	Nom.
G	Length of the active gauge surface on the flare side of the reference line	Nom.
H	Total length of the extension	Nom.
J	Length of the extension above the Z axis origin	Nom.
M1	Distance from the reference line to the centre of the contour radius	Nom.
N1	Offset of the centre of the contour radius from the gauge axis	Nom.
R1	Radius of the contour	Nom.
M2, N2, R2, etc.	Additional sets of contour radius dimensions (as appropriate)	Nom.


**Figure 15 – Beam clearance gauge defined by radii**

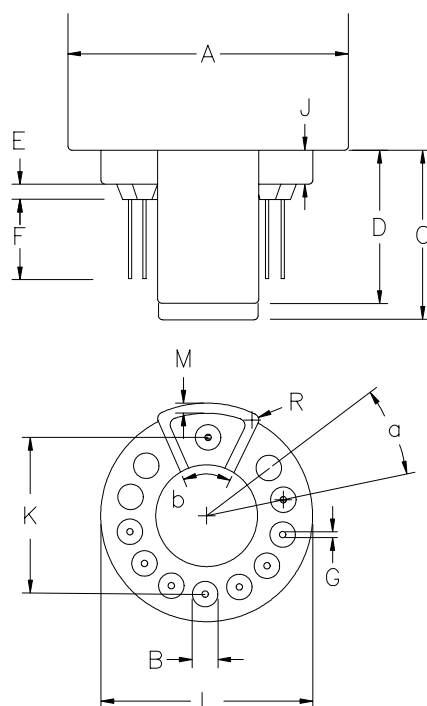

IEC 2565/2000

Designation	Description	Dimension type
A	CRT neck diameter	Max.
B	Pin support fillet diameter	Max.
C	Base height	Tol.
D	Silo height	Max.
E	Pin support fillet height	Tol.
F	Exposed pin length	Max.
G	Pin diameter	Tol.
J	Wafer height	Nom.
K	Pin circle diameter	Tol.
L	Wafer diameter	Max.
M	Silo wall thickness	Tol.
R	Silo fillet radius	Nom.
a	Pin spacing angle (or half angle)	Nom.
b	Silo extent angle (or half angle)	Nom.
Base orientation (pin 1 to major axis of the CRT in degrees)		Nom.


Figure 16 – CRT base mechanical outline

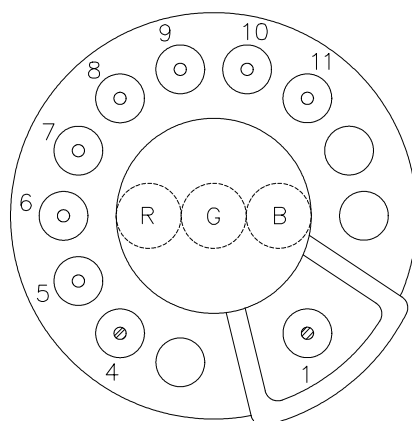

IEC 2566/2000

Pin number	Electrode
Pin 1	Grid no. 3
Pin 4	IC (do not use)
Pin 5	Grid no. 1
Pin 6	Cathode of green beam
Pin 7	Grid no. 2
Pin 8	Cathode of red beam
Pin 9	Heater
Pin 10	Heater
Pin 11	Cathode of blue beam
Pin 12	IC (do not use)

Figure 17 – Example of CRT base connection table

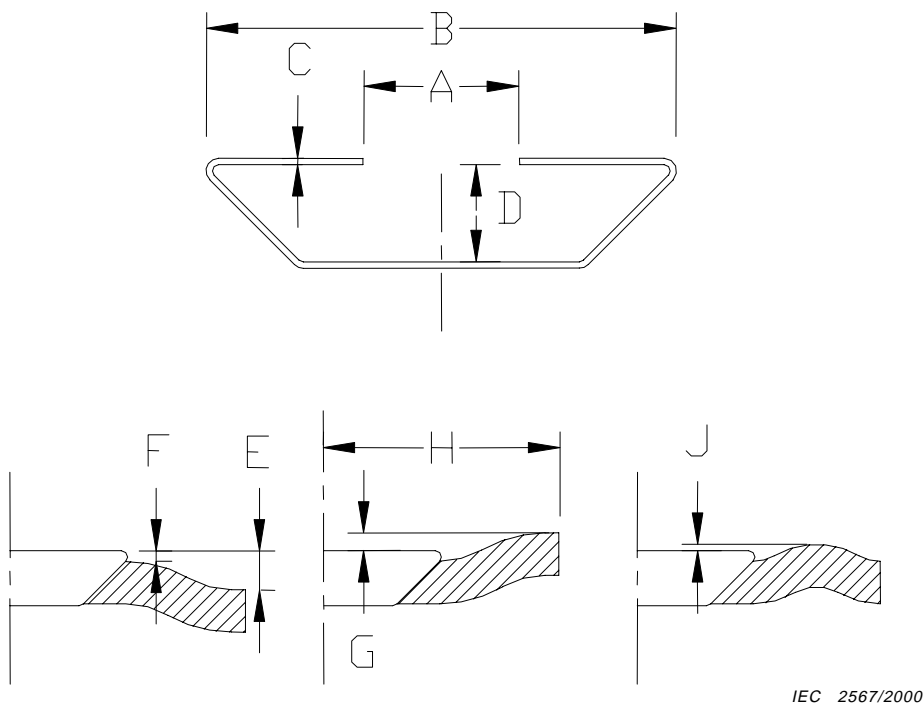

Designation	Description	Dimension type
A	Connector opening diameter	Min., Max.
B	Outside diameter	Max.
C	Connector metal thickness	Nom.
D	Recess depth	Min.
E	Height of connector rim above funnel body	Max.
F	Height of connector rim above adjacent glass	Max.
G	Height of funnel body above connector rim	Max.
H	Radius of disturbed funnel glass	Max.
J	Height of adjacent glass above connector rim	Max.

Figure 18 – CRT anode button





## Standards Survey

The IEC would like to offer you the best quality standards possible. To make sure that we continue to meet your needs, your feedback is essential. Would you please take a minute to answer the questions overleaf and fax them to us at +41 22 919 03 00 or mail them to the address below. Thank you!

Customer Service Centre (CSC)

**International Electrotechnical Commission**

3, rue de Varembé  
1211 Genève 20  
Switzerland

or

Fax to: **IEC/CSC** at +41 22 919 03 00

Thank you for your contribution to the standards-making process.

**A Prioritaire**

Nicht frankieren  
Ne pas affranchir



Non affrancare  
No stamp required

**RÉPONSE PAYÉE**

**SUISSE**

Customer Service Centre (CSC)  
**International Electrotechnical Commission**  
3, rue de Varembé  
1211 GENEVA 20  
Switzerland



**Q1** Please report on **ONE STANDARD** and **ONE STANDARD ONLY**. Enter the exact number of the standard: (e.g. 60601-1-1)

.....

**Q2** Please tell us in what capacity(ies) you bought the standard (tick all that apply). I am the/a:

- purchasing agent ☐  
 librarian ☐  
 researcher ☐  
 design engineer ☐  
 safety engineer ☐  
 testing engineer ☐  
 marketing specialist ☐  
 other.....

**Q3** I work for/in/as a:  
(tick all that apply)

- manufacturing ☐  
 consultant ☐  
 government ☐  
 test/certification facility ☐  
 public utility ☐  
 education ☐  
 military ☐  
 other.....

**Q4** This standard will be used for:  
(tick all that apply)

- general reference ☐  
 product research ☐  
 product design/development ☐  
 specifications ☐  
 tenders ☐  
 quality assessment ☐  
 certification ☐  
 technical documentation ☐  
 thesis ☐  
 manufacturing ☐  
 other.....

**Q5** This standard meets my needs:  
(tick one)

- not at all ☐  
 nearly ☐  
 fairly well ☐  
 exactly ☐

**Q6** If you ticked NOT AT ALL in Question 5 the reason is: (tick all that apply)

- standard is out of date ☐  
 standard is incomplete ☐  
 standard is too academic ☐  
 standard is too superficial ☐  
 title is misleading ☐  
 I made the wrong choice ☐  
 other .....

**Q7** Please assess the standard in the following categories, using the numbers:

- (1) unacceptable,  
 (2) below average,  
 (3) average,  
 (4) above average,  
 (5) exceptional,  
 (6) not applicable

- timeliness.....  
 quality of writing.....  
 technical contents.....  
 logic of arrangement of contents .....  
 tables, charts, graphs, figures.....  
 other .....

**Q8** I read/use the: (tick one)

- French text only ☐  
 English text only ☐  
 both English and French texts ☐

**Q9** Please share any comment on any aspect of the IEC that you would like us to know:

.....  
 .....  
 .....  
 .....  
 .....  
 .....  
 .....  
 .....  
 .....  
 .....





ISBN 2-8318-5550-0



---

**ICS 31.100**

---