

INTERNATIONAL STANDARD

IEC
61169-16

QC 222400

First edition
2006-12

Radio-frequency connectors –

Part 16:

Sectional specification –

**RF coaxial connectors with inner diameter of outer
conductor 7 mm (0,276 in) with screw coupling –**

Characteristics impedance 50 Ω (75 Ω) (type N)



Reference number
IEC 61169-16:2006(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)
- **Catalogue of IEC publications**
The on-line catalogue on the IEC web site (www.iec.ch/searchpub) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.
- **IEC Just Published**
This summary of recently issued publications (www.iec.ch/online_news/justpub) is also available by email. Please contact the Customer Service Centre (see below) for further information.
- **Customer Service Centre**
If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 61169-16

QC 222400

First edition
2006-12

Radio-frequency connectors –

Part 16:

Sectional specification –

**RF coaxial connectors with inner diameter of outer
conductor 7 mm (0,276 in) with screw coupling –
Characteristics impedance 50 Ω (75 Ω) (type N)**

© IEC 2006 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembe, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

V

For price, see current catalogue

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 IEC type designation	7
4 Interface dimensions	7
4.1 Dimensions – General purpose connectors – Grade 2	7
5 Mechanical gauges and standard test connectors.....	12
5.1 Mechanical gauges.....	12
5.2 Standard test connectors – Grade 0	13
6 Overall dimensions.....	17
7 Quality assessment procedures.....	17
7.1 General.....	17
7.2 Ratings and characteristics	17
7.3 Test schedule and inspection requirements	20
7.4 Procedures.....	22
8 Instructions for preparation of detail specifications	22
8.1 General.....	22
8.2 Identification of the Detail specification	22
8.3 Identification of the component.....	23
8.4 Performance.....	23
8.5 Marking, ordering information and related matters	23
8.6 Selection of tests, test conditions and severities.....	23
8.7 Blank detail specification pro-forma for type N connector	24
Annex A (informative) Guidance information for interface dimensions of 75 Ω characteristic impedance general purpose connectors	29
Figure 1 – Connector with pin centre contact	8
Figure 2 – Details of pin centre contact	8
Figure 3 – Connector with socket centre contact	10
Figure 4 – Details of socket centre contact	10
Figure 5 – Gauge rings for outer contact of pin connector	12
Figure 6 – Gauge and test pins for socket centre contact	13
Figure 7 – Standard test connector with pin centre contact	14
Figure 8 – Details of pin centre contact	14
Figure 9 – Standard test connector with socket centre contact	16
Figure 10 – Details of socket centre contact	16
Figure A.1 – Details of pin centre contact.....	29
Table 1 – Dimensions for connector with pin centre contact.....	9
Table 2 – Dimensions for connector with socket centre contact.....	11
Table 3 – Dimensions for test pins for socket centre contact.....	13
Table 4 – Dimensions for standard test connector with pin centre contact.....	15

Table 5 – Dimensions for standard test connector with socket centre contact	17
Table 6 – Ratings and characteristics	18
Table 7 – Acceptance tests	20
Table 8 – Periodic tests	21

INTERNATIONAL ELECTROTECHNICAL COMMISSION

RADIO-FREQUENCY CONNECTORS –

Part 16: Sectional specification – RF coaxial connectors with inner diameter of outer conductor 7 mm (0,276 in) with screw coupling – Characteristics impedance 50 Ω (75 Ω) (type N)

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61169-16 has been prepared by subcommittee 46F: R.F. and microwave passive components, of IEC technical committee 46: Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories.

This part of IEC 61169 cancels and replaces IEC 60169-16 published in 1982 and Amendment 1 (1996). This edition constitutes a technical revision.

This edition included the following significant technical changes with respect to IEC 60169-16:

Clauses 7 and 8 have been totally re-written and Clause 9 has been removed. Clause 7 currently includes test schedules and Clause 8 gives indications to fill a Blank Detail Specification (BDS).

The text of this standard is based on the following documents:

FDIS	Report on voting
46F/54/FDIS	46F/59/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The QC numbers that appear on the front cover of this publication are the specification numbers in the IEC Quality Assessment System for Electronic Components (IECQ).

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61169 series, under the general title *Radio frequency connectors*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

RADIO-FREQUENCY CONNECTORS –

Part 16: Sectional specification – RF coaxial connectors with inner diameter of outer conductor 7 mm (0,276 in) with screw coupling – Characteristics impedance 50 Ω (75 Ω) (type N)

1 Scope

This part of IEC 61169, which is a Sectional Specification (SS), provides information and rules for the preparation of Detail Specifications (DS) for pin and socket R.F. coaxial connectors, with screw coupling mechanism, for low to medium power applications. The connector is commonly known as the "type N".

Three versions of the 50 Ω characteristic impedance type N connector are included, each version being mateable with each of the others.

The general purpose connector (grade 2) derived from the specifications MIL-C17B and MIL-C-39012 may preferably be used with R.F. cable 60096 IEC 50-7 up to about 12 GHz maximum frequency.

The high performance connector (grade 1) is particularly suitable for microwave applications when lower reflection factors than are offered by the general purpose connector are required. The connectors may also be suitable for microwave components. The tolerances of the interface dimensions lie between those for grade 0 and grade 2, and are chosen to give the performance required. Some grade 1 connectors conforming to this specification may be used up to 18 GHz maximum frequency.

The standard test connector (grade 0) has a closely controlled interface to provide a reference for the measurement of connectors, cable assemblies, components and equipment with the above two interfaces. It may also be used as a microwave connector in situations when the most precise interface for use up to 18 GHz maximum frequency is required.

A 75 Ω characteristic impedance connector is given in Annex A even though the use of 75 Ω type N connectors is strongly deprecated.

Accidental cross-coupling of 75 Ω with 50 Ω connectors can destructively damage the 75 Ω version, but in view of the extensive use of a number of marginally different 75 Ω versions, the interface now given provides common design guidance. 75 Ω connectors should be clearly identified.

This specification indicates the recommended performance characteristics to be considered when writing a DS and covers test schedules and inspection requirements.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60096-2:1988, *Radio-frequency cables – Part 2: Relevant cable specifications*

IEC 61169-1:1992, *Radio-frequency connectors – Part 1: Generic specification – General requirements and measuring methods*

Amendment 1 (1996)

Amendment 2 (1997)

ISO 263:1973, *ISO inch screw threads – General plan and selection for screws, bolts and nuts – Diameter range 0.06 to 6 in*

3 IEC type designation

Connectors conforming to this specification shall be designated by:

- a) the reference to this specification: 61169-16 IEC;
- b) characteristic impedance 50 Ω (75 Ω);
- c) number of the grade :
 - grade 0 = standard test connector = G 0;
 - grade 1 = high performance connector = G 1;
 - grade 2 = general purpose connector
 - if grade 2 is required, no grade designation is necessary;
- d) a group of figures specifying the climatic category (see 7.2.5).

Example:

61169-16 IEC-50-G 0 denotes a standard test connector, type N, 50 Ω .

4 Interface dimensions

4.1 Dimensions – General purpose connectors – Grade 2

4.1.1 General

Inch dimensions are original dimensions.

NOTE The values for dimensions in millimetres derived from those in inches are not necessarily exact (according to ISO 3701¹), but they should be considered as acceptable alternatives to the original values.

All undimensioned pictorial configurations are for reference purposes only.

¹ This document has been withdrawn.

4.1.2 Connector with pin centre contact

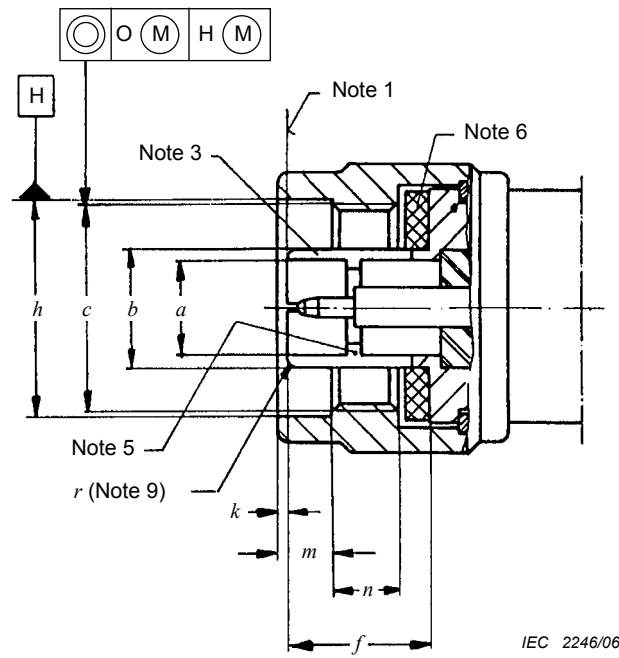


Figure 1 – Connector with pin centre contact (for notes and dimensions, see Table 1)

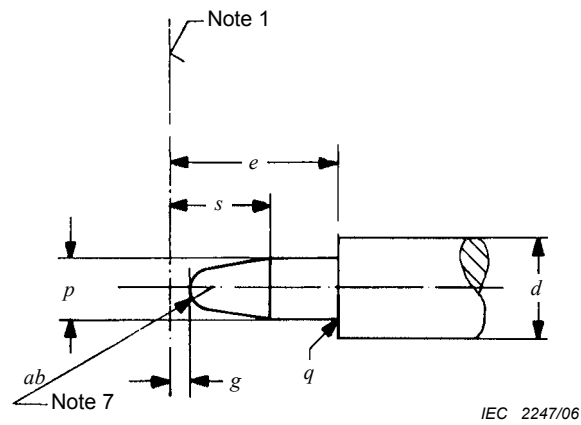


Figure 2 – Details of pin centre contact (for notes and dimensions, see Table 1)

Table 1 – Dimensions for connector with pin centre contact

Reference	mm		inches		Note
	Min.	Max.	Min.	Max.	
<i>a</i>	7,00 nom.		0,275 6 nom.		2, diam.
<i>b</i>	–	8,027	–	0,316	3/10, diam.
<i>c</i>	–	–	5/8-24 UNEF-2B		4
<i>d</i>	3,04 nom.		0,120 nom.		2, diam.
<i>e</i>	5,33	–	0,210	–	6
<i>f</i>	9,25	–	0,364	–	
<i>g</i>	0,0	1,57	0,0	0,062	10, diam.
<i>h</i>	16,0	–	0,630	–	
<i>k</i>	0,41	1,52	0,016	0,060	8
<i>m</i>	4,013	4,267	0,158	0,168	10, diam.
<i>n</i>	4,5	–	0,177	–	
<i>p</i>	1,600	1,676	0,063	0,066	radius
<i>q</i>	–	0,1	–	0,004	9
<i>r</i>	0,15	–	0,006	–	
<i>s</i>	2,79	3,56	0,110	0,140	7, radius
<i>ab</i>	–	0,64	–	0,025	

NOTE 1 Mechanical and electrical reference plane.

NOTE 2 Diameter of outer and centre contact to provide nominal (50 Ω) characteristic impedance to meet electrical performance requirements.

NOTE 3 Slots or other forms of resilience optional. If slotted, indicated dimension *b* should not exceed 8,38 mm (0,330 in). Gauging requirements (see 5.1.1) to be met.

NOTE 4 Thread 5/8-24 UNEF-2B (according to ISO 263).

NOTE 5 Compensation for inductance of inner conductor gap in mated pair of connectors optional.

NOTE 6 Dimensions given assume no sealing gasket fitted. If sealing is required, dimension *f* (Figure 1) should be arranged so that with the gasket chosen adequate pressure is applied to the front face (dimensions *w* and *x*) of the socket connector (Figure 2) to ensure adequate sealing.

NOTE 7 Radius or chamfer, shape of tip optional. 0,25 mm (0,010 in) maximum flat permitted.

NOTE 8 Applies with nut biased forward.

NOTE 9 External form of leading edge of outer contact optional, but connector should meet electrical and mechanical performance requirements.

NOTE 10 Diameters *b*, *h* and *p* and thread *c* should be gauged to ensure that on MMC, each feature is on or can take up a common axis.

4.1.3 Connector with socket centre contact

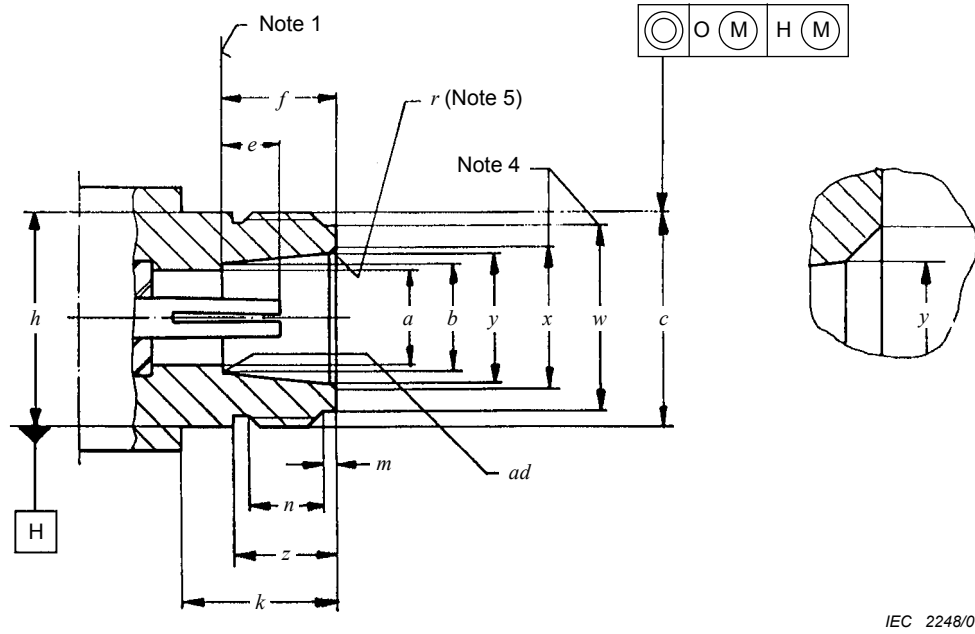


Figure 3 – Connector with socket centre contact (for notes and dimensions, see Table 2)

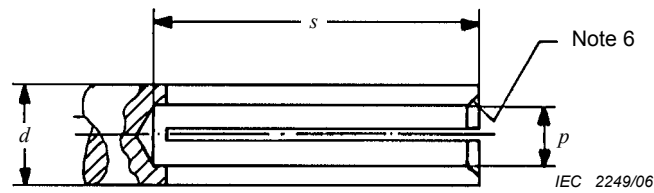


Figure 4 – Details of socket centre contact (for notes and dimensions, see Table 2)

Table 2 – Dimensions for connector with socket centre contact

Reference	mm		inches		Note
	Min.	Max.	Min.	Max.	
<i>a</i>	–	7,06	–	0,278	2, diam.
<i>b</i>	8,027	8,13	0,316	0,320	diam.
<i>c</i>	–	–	5/8-24 UNEF-2A		3
<i>d</i>	3,04 nom.		0,120 nom.		2, diam.
<i>e</i>	4,75	5,26	0,187	0,207	
<i>f</i>	9,05	9,19	0,356	0,362	
<i>h</i>	–	15,93	–	0,627	diam.
<i>k</i>	10,72	–	0,422	–	
<i>m</i>	1,19	1,96	0,047	0,077	
<i>n</i>	4,37	–	0,172	–	7
<i>p</i>	–	–	–	–	6, diam.
<i>r</i>	–	1,2	–	0,047	5
<i>s</i>	5,33	–	0,210	–	
<i>w</i>	–	–	–	–	4, diam.
<i>x</i>	–	–	–	–	4, diam.
<i>y</i>	8,53	8,74	0,336	0,344	diam.
<i>z</i>	6,76	–	0,266	–	
<i>ad</i>	–	0,13	–	0,005	radius

NOTE 1 Mechanical and electrical reference plane.

NOTE 2 Nominal inner diameter of outer conductor 7,0 mm (0,275 6 in). Diameter of outer and centre contact to provide nominal (50 Ω) characteristic impedance to meet electrical performance requirements.

NOTE 3 Thread 5/8-24 UNEF-2A (according to ISO 263).

NOTE 4 If sealing is required, dimension *f* (Figure 1) should be arranged so that with the gasket chosen, adequate pressure is applied to the front face (dimensions *w* and *x*) of the socket connector (Figure 3) to ensure adequate sealing.

NOTE 5 Radius only to ensure satisfactory sealing, but if chamfer is used, it should not encroach into minimum material condition of the design using the radius.

NOTE 6 Centre contact design is optional. It should however, meet the gauging requirements of 5.1.2 and relevant reflection factor requirements of Clause 3 using grade 0 connector in accordance with Figure 7.

NOTE 7 Applies to length of thread and not undercut.

5 Mechanical gauges and standard test connectors

5.1 Mechanical gauges

5.1.1 Connectors with pin centre contact

5.1.1.1 Gauge for outer contact of pin connector

See Figure 5.

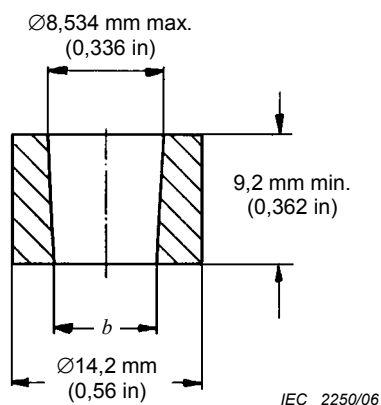


Figure 5a




Figure 5b

Figure 5 – Gauge rings for outer contact of pin connector

5.1.1.2 Test sequence

For slotted outer contacts, a steel test ring (Figure 5a) with an inner diameter b of 8,027 mm (0,316 in) maximum shall be placed over the outer electrical contact of the connector.

Insertion force: 113 N maximum.

This is a sizing operation.

After this a steel test ring (Figure 5b) with an inner diameter b of 8,23 mm (0,324 in) shall be placed over the outer electrical contact. All contact fingers shall touch the diameter b in the region of the tip ends.

The minimum withdrawal force shall be 2 N.


Recommended mass of the gauge: 200 g.

The gauge shall be retained in a vertical downward position.

5.1.2 Connectors with socket centre contact

5.1.2.1 Gauge and test pins for socket centre contact

See Figure 6.



The pins shall be made of steel.

Figure 6 – Gauge and test pins for socket centre contact (for notes and dimensions, see Table 3)

Table 3 – Dimensions for test pins for socket centre contact

Reference	Pin No. 1				Pin No. 2			
	mm		inches		mm		inches	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
<i>pl</i>	–	5,33	–	0,210	–	5,33	–	0,210
<i>pm</i>	3,18	–	0,125	–	3,18	–	0,125	–
<i>pp</i>	–	0,25	–	0,01	–	0,25	–	0,01
<i>p</i>	1,676 ^{+0,005} _{–0}		0,066 0 ^{+0,000 2} _{–0}		1,600 ⁺⁰ _{–0,005}		0,0630 ⁺⁰ _{–0,000 2}	
<i>a</i>	38° ± 2°				38° ± 10°			
NOTE Test pin No. 2 shall have a 0,4 μm (16 μin) finish on the cylindrical surface of length <i>pm</i> . It is recommended that this pin has a mass of 56 g.								

5.1.2.2 Test sequence

The test sequence consists of:

- Gauging: Insert pin No. 1 once.
- Insertion force: When inserting pin No. 1 once more: the insertion force shall be 9 N maximum.
- Retaining: Insert pin No. 2 once: the retention force shall be 0,56 N minimum.

5.2 Standard test connectors – Grade 0

5.2.1 General

In order to carry out the reflection factor measurement according to 9.2.1 of IEC 61169-1, the measuring equipment should be provided with standard test connectors.

NOTE The values for dimensions in millimeters derived from those in inches are not necessarily exact (according to ISO 370) but they are to be considered as acceptable alternatives to the original values.

5.2.2 Standard test connector with pin centre contact

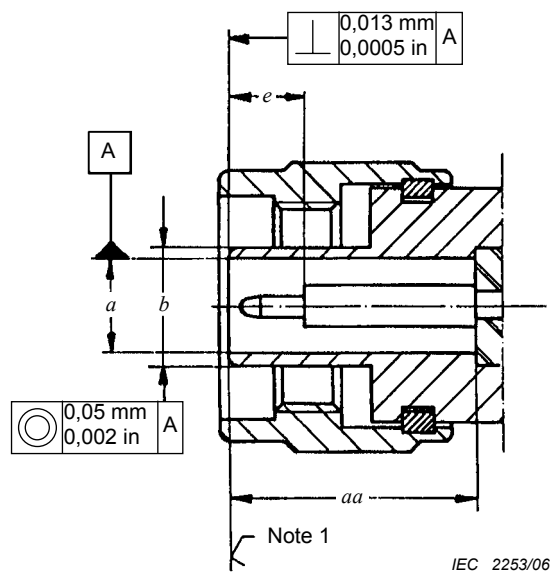


Figure 7 – Standard test connector with pin centre contact
(for notes and dimensions, see Table 4)

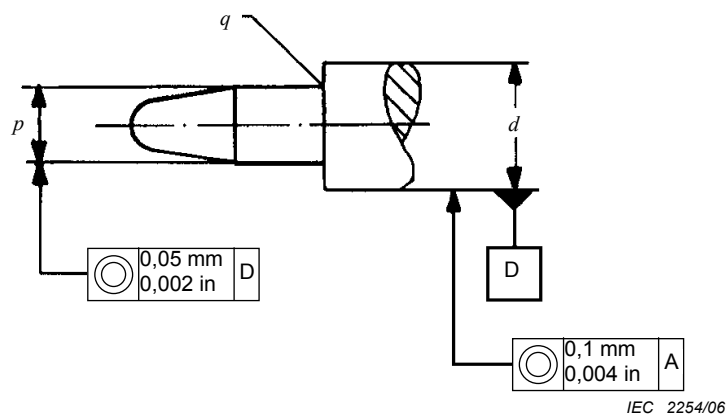


Figure 8 – Details of pin centre contact
(for notes and dimensions, see Table 4)

Table 4 – Dimensions for standard test connector with pin centre contact

Reference	mm		inches		Note
	Min.	Max.	Min.	Max.	
<i>a</i>	6,99	7,01	0,275 1	0,276 1	2, diam.
<i>b</i>	7,98	8,04	0,314 0	0,316	diam.
<i>d</i>	3,04 nom.		0,120 nom.		2, diam.
<i>e</i>	5,28	5,36	0,208	0,211	
<i>p</i>	1,638	1,664	0,064 5	0,065 5	diam.
<i>q</i>	–	0,076	–	0,003	radius
<i>aa</i>	10	–	0,394	–	3
Dimensions not indicated in this Table are to be found in the Table 1. NOTE 1 Mechanical and electrical reference plane. Surface roughness 0,8 µm (32 µin). NOTE 2 Diameter of outer and centre contact chosen to achieve a ratio $\frac{a}{d} = 2,302\ 9$ to provide characteristic impedance of $50,00 \pm 0,15\ \Omega$. NOTE 3 Minimum distance to insulating bead.					

5.2.3 Standard test connector with socket centre contact

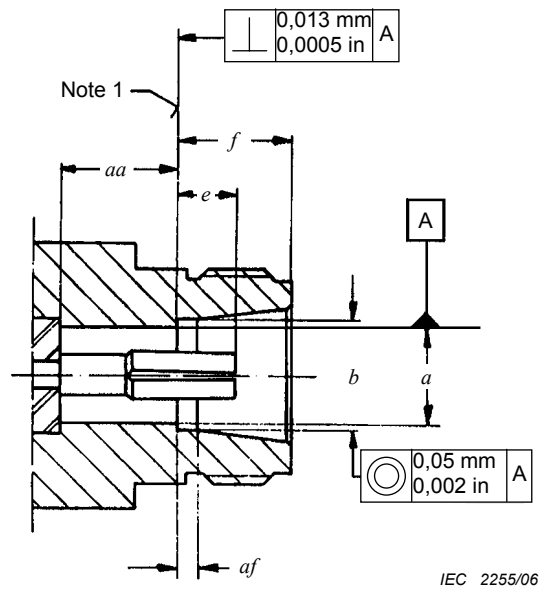


Figure 9 – Standard test connector with socket centre contact
(for notes and dimensions, see Table 5)

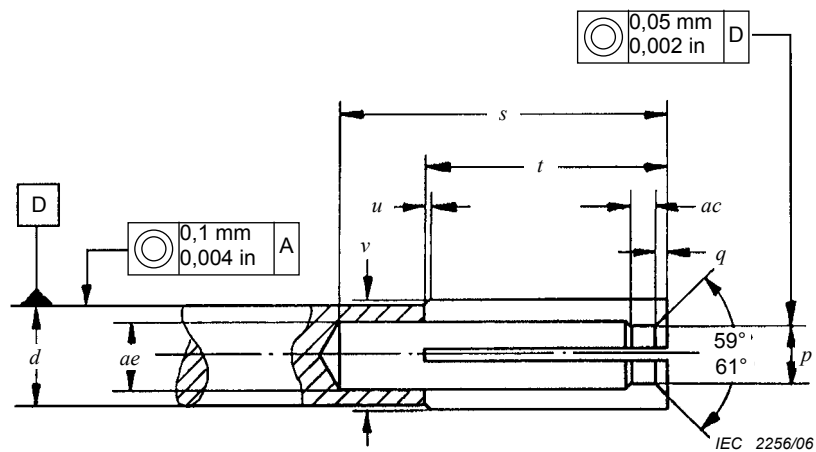


Figure 10 – Details of socket centre contact
(for notes and dimensions, see Table 5)

Table 5 – Dimensions for standard test connector with socket centre contact

Reference	mm		inches		Note
	Min.	Max.	Min.	Max.	
<i>a</i>	6,99	7,01	0,275 1	0,276 1	2, diam.
<i>b</i>	8,05	8,1	0,317	0,319	diam.
<i>d</i>	3,04 nom.		0,120 nom.		2, diam.
<i>e</i>	5,18	5,26	0,204	0,207	
<i>f</i>	9,07	9,17	0,357	0,361	
<i>p</i>	1,651 nom.		0,065 0 nom.		6, diam.
<i>q</i>	0,13	0,20	0,005	0,008	3
<i>s</i>	9,7	–	0,380	–	
<i>t</i>	8,28	8,53	0,326	0,336	5
<i>u</i>	0	0,15	0	0,006	
<i>v</i>	3,05	3,08	0,120 2	0,121 2	6, diam.
<i>aa</i>	4,47	–	0,176	–	4
<i>ac</i>	0,38	0,89	0,015	0,035	
<i>ae</i>	1,80	1,91	0,071	0,075	
<i>af</i>	0,38	0,64	0,015	0,025	
Dimensions not indicated in this Table are to be found in Table 2. NOTE 1 Mechanical and electrical reference plane. Surface roughness 0,8 µm (32 µin). NOTE 2 Diameter of outer and centre contact chosen to achieve a ratio $\frac{a}{d} = 2,302 \ 9$ to provide characteristic impedance of 50,00 ± 0,15 Ω. NOTE 3 Chamfer. NOTE 4 Minimum distance to insulating bead. NOTE 5 Four slots 0,38 mm to 0,43 mm (0,015 in to 0,017 in) wide; 90° ± 50'. NOTE 6 Diameter <i>v</i> shall be within the indicated limits when pin gauge of datum diameter 1,651 mm (0,065 in) is inserted in slotted portion only.					

6 Overall dimensions

Under consideration.

7 Quality assessment procedures

7.1 General

The following subclauses provide recommended ratings, performance and test conditions to be considered when writing a Detail Specification (DS). They also provide an appropriate schedule of tests with minimum levels of conformance inspection. See Table 6.

7.2 Ratings and characteristics

7.2.1 General

The R.F. connectors defined in this specification are designed for use with a variety of coaxial braided and semi-rigid cables and rigid lines.

The values indicated below are recommended for series N connectors and are given for the guidance of the writer of detail specifications.

Certain tests are listed without recommended values being given. These tests will not usually be required. When these tests are required, appropriate values shall be entered in the DS at the discretion of the specification writer.

7.2.2 Grade 2 – General purpose connectors

This grade is preferably used with 7 mm braided coaxial cable 60096 IEC 50-7, but varieties are available for both larger and smaller cables and for semi-rigid cables. Connectors shall not introduce a reflection factor greater than 0,13 at frequencies up to 11 GHz, or approximately 80 % of the upper cutoff frequency of the cable, whichever is lower. The reflection factor shall be not more than 0,03 at 1 GHz.

7.2.3 Grade 1 – High performance connectors

Grade 1 connectors are intended particularly for use with semi-rigid cables and rigid lines, but may also be used with braided cables and microwave components. They will exhibit reflection factors less than the reflection factor of grade 2 connectors of the same configuration (pattern). The reflection factor and frequency range, which may be up to 18 GHz, shall be agreed between purchaser and manufacturer. The best achievable limit for the reflection factor is deemed to be defined by the equation $r_{\max} = 0,005 + 0,003 \times f$, where f is the frequency in gigahertz.

7.2.4 Grade 0 – Standard test connector

This grade is preferably used with 7 mm rigid lines such as are recommended in the IEC 60457 series. It may also be possible, on rigid lines and other test equipment, to exchange connectors of this grade for connectors recommended in IEC 60457-2.

The maximum reflection factor of a connector at frequencies up to 18 GHz shall be not greater than $0,0015 + 0,001 \times f$, where f , is the frequency in gigahertz.

7.2.5 Climatic categories (see IEC 60068-1)

Under consideration.

Table 6 – Ratings and characteristics

Ratings and characteristics	IEC 61169-1 Subclause	Value	Remarks including any deviations from standard test methods
<i>Electrical</i>			
Nominal impedance		50 Ω	
Frequency range			
– Grade 1 connectors		Up to 18 GHz	
– Grade 2 connectors		Up to 11 GHz	
Reflection factor	9.2.1		
Grade 2 connectors			
– straight styles		$\leq 0,13$	
– right angle styles			
– below 9 GHz		$\leq 0,15$	
– 9 GHz to 11 GHz		$\leq 0,20$	
– component mounting styles		–	
– solder bucket and PCB mounting styles		–	
Grade 1 connectors			
– straight and right-angle styles		$\leq 0,005 + 0,003 f$	
Centre contact resistance	9.2.3		
– initial		$\leq 1,5 \text{ m}\Omega$	
– after conditioning		$\leq 2,5 \text{ m}\Omega$	
Outer conductor continuity ¹⁾	9.2.3		
– initial		$\leq 1 \text{ m}\Omega$	

Ratings and characteristics	IEC 61169-1 Subclause	Value	Remarks including any deviations from standard test methods
– after conditioning Insulation resistance ¹⁾ – initial – after conditioning Proof voltage at sea level ^{2) 3)} – cables 60096 IEC 50-7 – cables 60096 IEC 50-3 Proof voltage at 4,4 kPa ^{2) 3)} – cables 60096 IEC 50-7 – cables 60096 IEC 50-3 Screening effectiveness (straight cabled connectors only) Discharge test (Corona) – at 4,4 kPa (cable 60096 IEC 50-7)	9.2.5 9.2.6 9.2.6 9.2.8 9.2.9	$\leq 1,5 \text{ m}\Omega$ $\geq 5 \text{ G}\Omega$ $\geq 200 \text{ M}\Omega$ 2 500 V 1000 V 450 V 180 V 90 dB to 1 GHz $\geq 500 \text{ V}$	 4,4 kPa approximately equivalent to 20 km $Z_t \leq 3,2 \text{ m}\Omega$ Extinction voltage
<i>Mechanical</i> Centre contact captivation axial force – torque grade 1 connectors grade 1 connectors Engagement and separation force and torque – coupling nut friction Coupling torque – normal – proof Gauge retention force (resilient contacts) – centre – outer Insertion force – centre – outer Mechanical tests on cable fixing cable pulling, force minimum – cables 60096 IEC 50-7 – cables 60096 IEC 50-4 – cables 60096 IEC 50-3 Effectiveness of clamping device against torsion – cables 60096 IEC 50-7 – cables 60096 IEC 50-4 – cables 60096 IEC 50-3 Tensile strength of coupling mechanism Bending moment (and sharing force) Vibration Bump Shock	9.3.5 9.3.6 9.3.4 9.3.4 9.3.7 9.3.10 9.3.11 9.3.12 9.3.3 9.3.13 9.3.14	28 N – – 0,7 Nm to 1,1 Nm 1,7 Nm 0,56 N 2 N $\leq 9 \text{ N}$ $\leq 113 \text{ N}$ 400 N 300 N 180 N 0,5 Nm 0,4 Nm 0,3 Nm 450 N – 100 m/s ² (10 to 500) Hz – 500 m/s ² $\frac{1}{2} \sin 11 \text{ ms}$	Maximum displacement 0,25 mm each direction Shall be achievable by hand in a normal manner Slotted contacts only Slotted contacts only 10 g _n 50 g _n
<i>Environmental</i> Climatic category ⁴⁾ Sealing – non-hermetic	 9.4.5.1	55/155/21 1 cm ³ /h max. (100 to 110) kPa differential	

Ratings and characteristics	IEC 61169-1 Subclause	Value	Remarks including any deviations from standard test methods
Sealing – hermetic	9.4.5.2	1 Pa cm ³ /s (10 ⁻⁵ bar cm ³ /s) (100 to 110) kPa differential	
Salt mist	9.4.6	Duration of spraying: 48 h	
<i>Endurance</i> Mechanical High temperature ⁴⁾	9.5	500 operations 1 000 h at 155 °C	
¹⁾ These values apply to basic connectors. They depend on the cable used. Relevant values are given in the DS. ²⁾ Voltage values are r.m.s. values at (50 to 60) Hz, unless otherwise specified. ³⁾ Cables used with these connectors may have values of lower performance than those given in this Table. ⁴⁾ For certain connectors, the upper temperature limit is restricted by the cable characteristics. Reference should be made to the relevant cable specification.			

7.3 Test schedule and inspection requirements

7.3.1 Acceptance tests

NOTE For details of symbols, abbreviations and procedures, see 7.4.2.

Table 7 – Acceptance tests

	Test method IEC 61169-1 Subclause	Assessment level M (higher)				Assessment level H (lower)			
		Test required	IL	AQL %	Period	Test Required	IL	AQL %	Period
<i>Group A1</i>									
Visual examination	9.1.2	a	II	1,0		a	S3	1,5	
<i>Group B1</i>									
Outline dimensions	9.1.3.1	a	S4	0,4		a	S3	4,0	
Mechanical compatibility	9.1.3.3	a	II	1,0		a	S3	1,5	
Engagement and separation	9.3.6	a	S4	0,40	Lot	a	S3	1,5	Lot
Gauge retention (resilient contact)	9.3.4	ia	II	1,0		ia	S3	1,5	
Sealing, non-hermetic	9.4.5.1	ia	II	0,65	by	ia	S3	1,0	by
Sealing, hermetic	9.4.5.2	ia	II	0,015		ia	S3	0,025	
Voltage proof	9.2.6	a	S4	0,40	lot	a	II	4,0	lot
Solderability piece parts	9.3.2.1.1	ia	S4	0,40		ia	S3	4,0	
Insulation resistance	9.2.5	a	S4	0,40		a	S3	4,0	

7.3.2 Periodic tests

There are no group C tests for levels H and M.

NOTE For details of symbols, abbreviations and procedures, see Table 8.

Table 8 – Periodic tests

	Test method IEC 61169-1 subclause	Assessment level M (higher)				Assessment level H (lower)			
		Test required	Number of specimens	Permitted failures per group	Period	Test required	Number of specimens	Permitted failures per group	Period
<i>Group D1 (d)</i>			6	1	3 years		3	1	3 years
Solderability connector assemblies	9.3.2.1.1	ia				ia			
Resistance to soldering heat	9.3.2.1.2	ia				ia			
Mechanical tests on cable fixing									
- cable rotation (nutation)	9.3.7.2	ia				ia			
- cable pulling	9.3.8	ia				ia			
- cable bending	9.3.9	ia				ia			
- cable torsion	9.3.10	ia				ia			
<i>Group D2 (d)</i>			6	1	3 years		3	1	3 years
Contact resistance, outer conductor and screen continuity centre conductor continuity	9.2.3	a				a			
Vibration	9.3.3	a							
Damp heat, steady state	9.4.3	a				a			
<i>Group D3 (d)</i>			1*	1	3 years		1*	1	3 years
Dimensions piece-parts and materials	9.1.3.2	a				a			
<i>Group D4 (d)</i>			6	1	3 years		3	1	3 years
Mechanical endurance	9.5	a				a			
High temperature endurance	9.6	a				a			
Sulphur dioxide	9.4.8	na				na			
<i>Group D5 (d)</i>			6	1	3 years		3	1	3 years
Reflection factor	9.2.1	a				a			
Screening effectiveness	9.2.8	a				a			
Water immersion	9.2.7	ia				ia			
<i>Group D6 (d)</i>			6	1	3 years		3	1	3 years
Contact captivation	9.3.5	a				a			
Rapid change of temperature	9.4.4	na				na			
Climatic sequence	9.4.2	a				a			

	Test method IEC 61169-1 subclause	Assessment level M (higher)				Assessment level H (lower)			
		Test required	Number of specimens	Permitted failures per group	Period	Test required	Number of specimens	Permitted failures per group	Period
Group D7 (d) Resistance to solvents and contaminating fluids	9.7	ia	1§		3 years	ia	1§		3 years
Details of symbols, abbreviations and procedures: a = suggested as applicable. ia = test suggested (if technically applicable). na = not applicable. IL = Inspection Level. AQL = Acceptable Quality Level. * = one set of piece-parts each style and variant, unless using common piece parts. # = for Qualification Approval (QA) a total of two failures only permitted for level H and 1 failure only for level M from groups D1 to D7. § = Group D7 – number of pairs for each solvent. (d) = destructive tests – specimens shall not be returned to stock.									

7.4 Procedures

7.4.1 Quality conformance inspection

This shall consist of test groups A1 and B1 on a lot-by-lot basis.

7.4.2 Qualification approval and its maintenance

This shall consist of three consecutive lots passing test groups A1 and B1 followed by selection of specimens from the lots as appropriate. These specimens shall successfully pass the specified periodic D tests.

8 Instructions for preparation of detail specifications

8.1 General

Detail Specifications (DS) writers shall use the appropriate Blank Detail Specification (BDS) pro-forma. The following pages comprise the pro-forma BDS dedicated for use with type N connectors. As such, it will already have entered on it information relating to

- the basic specification number applicable to all the detail specifications covering connector styles of the type covered by the sectional specification;
- the connector series designation.

The specification writer should enter the details relating to the connector style/variant(s) to be covered as indicated. The numbers in brackets on the BDS pro-forma correspond to the following indications which shall be given.

8.2 Identification of the Detail specification

- The name of the National Standards Organization (NSO) under whose authority the DS is published and, if applicable, the organization from whom the DS is available.
- The relevant mark of conformity and the number allotted to the DS by the relevant national or international organization authorizing the DS.

- (3) The number and issue number of the IEC/IECQ generic or sectional specification as relevant; also national reference if different.
- (4) If different from the IEC/IECQ number, any national number of the DS, date of issue and any further information required by the national system, together with any amendment numbers.

8.3 Identification of the component

- (5) Enter the following details:

Style: the style designation of the connector including type of fixing and sealing, if applicable.

Attachment: by deletion of the inapplicable options of cable/wire: given for centre and outer conductors.

Special features and markings: as applicable.
- (6) Enter details of assessment level and the climatic category.
- (7) A reproduction of the outline drawing and details of the panel piercing, if applicable. It shall provide the maximum envelope dimensions, also the position of the reference plane and, in the case of a fixed connector, the position of the mounting plane(s) relative to the front face of the connector.

Any maximum panel thickness limitations for fixed connectors shall be stated.
- (8) Particulars of all variants covered by the DS. As appropriate, the information shall include:
 - cable types (or sizes) applicable to each variant;
 - alternative plated or protective finishes;
 - details of alternative mounting flanges having either tapped or plain mounting holes;
 - details of alternative solder spills or solder buckets including, when applicable, those for use with Microwave Integrated Circuit (MIC) components.

8.4 Performance

- (9) Performance data listing the most important characteristics of the connector taking into account the recommended values of 7.2 in this specification. Deviations from the minimum requirements shall be clearly indicated. Non-applicable parameters shall be marked 'na'.

8.5 Marking, ordering information and related matters

- (10) Insert marking and ordering information as appropriate, together with details of related documents and any invoked structural similarity.

8.6 Selection of tests, test conditions and severities

- (11) 'na' shall be used to indicate non-applicable tests. All tests marked 'a' by the detail specification writer shall be mandatory.

When using the normal procedure with a dedicated BDS, the letter 'a' – for applicable – shall be entered in the 'Test required' column against each of the tests indicated as being mandatory in the test schedule as in 7.3 of this specification. Any additional tests required at the discretion of the specification writer shall also be indicated by an 'a'.

The specification writer shall also indicate, when necessary, details of deviations from the standard test methods and test conditions, including any relevant deviations given in the test schedule of the sectional specification.

8.7 Blank detail specification pro-forma for type N connector

[illegible]

(9) Performance (including limiting conditions of use)

Ratings and characteristics	IEC 61169-1 (QC 220000) Subclause	Value	Remarks including any deviations from standard test methods
<i>Electrical</i>			
Nominal impedance		... Ω	
Frequency range		... GHz	Measurement frequency range
Reflection factor	9.2.1		
Variant No. Designation 01.....			
Centre contact resistance	9.2.3	$\leq$m Ω $\leq$m Ω	Initial After conditioning
Centre conductor continuity	9.2.3	m Ωm Ωm Ωm Ω	Resistance change due to conditioning
Outer contact continuity	9.2.3	$\leq$m Ω $\leq$m Ω	Initial After conditioning
Insulation resistance	9.2.5	$\geq$G Ω $\geq$G Ω	Initial After conditioning
Proof voltage at sea level ^{a)}	9.2.6	kVkVkVkV	(86 to 106) kPa
Proof voltage at 4,4 kPa ^{a)}	9.2.6	VVVV	kPa (if not 4,4 kPa)
Screening effectiveness	9.2.8	$\geq$ dB at...GHz	$Z_t \leq$ m Ω
Discharge test (corona) at sea level	9.2.9	$\geq$V $\geq$V $\geq$V $\geq$V	Extinction voltage
Additional electrical characteristics			

^{a)} Voltage values are r.m.s. values at (50 to 60) Hz, unless otherwise specified.

Ratings and characteristics	IEC 61169-1 (QC 220000) Subclause	Value	Remarks including any deviations from standard test methods
<i>Mechanical</i>			
Soldering	9.3.2.1.1		
- bit size			
Gauge retention resilient contacts	9.3.4	N	
- inner contact		N	
- outer contact			
Centre contact captivation	9.3.5	N	
- axial force		mm	
- permitted displacement each direction		Nm	
- torque			
Engagement and separation forces and torque	9.3.6		
Screw coupling			Achievable by hand
Coupling torque		 toNm	
– coupling nut friction		<Nm	
– normal		N	
– proof			
Strength of coupling mechanism	9.3.11	N	
Effectiveness of cable fixing against			
- cable rotation	01.....	9.3.7 Rotations	
- cable pulling	01.....	9.3.8N	
- cable bending	01.....	9.3.9Cycles	Length of cable mass
- cable torsion	01.....	9.3.10Nm	
Bending moment	9.3.12	Nm	Relative to reference plane
Bumps total	9.3.13	m/s ²to..... Hz	(.....g _n acceleration)
Vibration	9.3.3	m/s ²to..... Hz	(.....g _n acceleration)
Shock	9.3.14	m/s ²Shapems	(.....g _n acceleration)
Additional mechanical characteristics			

Ratings and characteristics	IEC 61169-1 (QC 220000) Subclause	Value	Remarks including any deviations from standard test methods
<i>Environmental</i>			
Climatic category		/...../.....	
Sealing non-hermetically sealed connectors	9.4.5.1	cm ³ /h	(100 to 110) kPa pressure differential
Sealing hermetically sealed connectors	9.4.5.2	10 ⁻⁵ bar/cm ³ /h	(100 to 110) kPa pressure differential
Water immersion	9.2.7		
Salt mist	9.4.6	 h	Duration of spraying
Additional environmental characteristics			
<i>Endurance</i>			
Mechanical	9.5	operations	
High temperature	9.6	h at.....°C	
Additional endurance characteristics			
<i>Chemical contamination</i>			
Resistance to solvents and contaminating fluids to be used.	9.7		
Applicable fluids.			
Sulphur dioxide	9.4.8	 days	

(10) Supplementary information

- Marking of the component: in accordance with 11.1 of IEC 61169-1 (QC 220000) in the following order of preference:

- | | |
|------------------------------|-----------------------------|
| 1) Manufacturer code: | |
| 2) Manufacturing date code: | year/week |
| 3) Component identification: | Variant No./ Identification |
| | Designation |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

- Marking and contents of package: in accordance with 11.2 of IEC 61169-1

- | | |
|---|----------------------|
| 1) Information prescribed in 11.1 of IEC 61169-1 detailed above | |
| 2) Nominal characteristic impedance | Ω |
| 3) Assessment level code letter | |
| 4) Any additional marking required | |

Ordering information

- | | |
|---|----------------------------------|
| 1) Number of the detail specification | IECQC 222XXX...../Variant code.. |
| 2) Assessment level code letter | |
| 3) Body finish (if more than one listed) | |
| 4) Any additional information or special requirements | |

- Related documents (if not included in IEC 61169-1 or sectional specification):

.....

.....

- Structural similarity in accordance with 10.2.2 of IEC 61169-1

NOTE Relevant information on a basic style should be entered as variant 01.

Annex A
(informative)

Guidance information for interface dimensions of 75 Ω characteristic impedance general purpose connectors

With the exception of the inner contacts, the interface dimensions of the 75 Ω connector have been traditionally identical to that of the 50 Ω connector. It has thus been possible unintentionally to cross-couple connectors with the following effects.

- i) 75 Ω pin – 50 Ω socket: open circuit inner contact.
- ii) 50 Ω pin – 75 Ω socket: mechanical destruction of 75 Ω inner socket contact.

Consequently, the use of the 75 Ω type N connector is very strongly deprecated; it should only be used for replacement, and never in new applications.

In view of this destructive mateability, a clear visual distinction should be made on the outside of the connector with a coloured (preferably yellow) or black band and legend "75 Ω" or "75 ohms".

The reflection factor shall be not more than 0,03 GHz at 1 GHz.

Dimensions for the connector with pin centre contact are as given in Table 1, except for the following reference and notes:

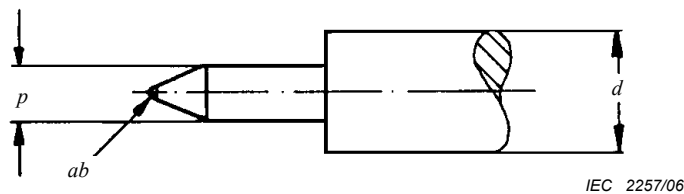


Figure A.1 – Details of pin centre contact

Table A.1 – Dimensions for the pin centre contact

Reference	mm		inches		Note	Figure
	Min.	Max.	Min.	Max.		
<i>d</i>	2,01 nom.		0,079 nom.		2	A.1
<i>p</i>	0,84	0,91	0,033	0,036	diam.	A.1
<i>ab</i>		0,25	–	0,010	7, radius	A.1
NOTE 2 Diameter of outer and centre contact to provide nominal (75 Ω) characteristic impedance to meet electrical performance requirements.						
NOTE 7 Flat 0,13 mm (0,005 in) diameter allowed.						

Dimensions for the connector with socket centre contact are as given in Table 2, except for the following reference and notes:

Table A.2 – Dimensions for the connector with socket centre contact

Reference	mm		inches		Note	Figure
	Min.	Max.	Min.	Max.		
d	2,01 nom.		0,079 nom.		2, diam.	4
p	–	–	–	–	6, diam.	4
NOTE 2 Diameter of outer and centre contact to provide nominal (75 Ω) characteristic impedance to meet electrical performance requirements. NOTE 6 Centre contact design is optional. A gauge with a pin according to Figure 6, with a diameter p of $0,93^{+0,005}_{-0}$ mm ($0,036^{+0,0002}_{-0}$ in) should be inserted into the centre contact three times; the insertion force measured at the third insertion should at maximum be 9 N. The force subsequently required to withdraw a second pin according to Figure 6 with a diameter p of $0,84^{+0}_{-0,005}$ mm ($0,033^{+0}_{-0,0002}$ in) should be 0,56 N minimum in a vertical downward position.						

BIBLIOGRAPHY

IEC 60457 (all parts), *Rigid precision coaxial and their associated precision connectors*

ISO 370:1975, *Toleranced dimensions – Conversion from inches into millimetres and vice versa*²

² This document has been withdrawn.



Standards Survey

The IEC would like to offer you the best quality standards possible. To make sure that we continue to meet your needs, your feedback is essential. Would you please take a minute to answer the questions overleaf and fax them to us at +41 22 919 03 00 or mail them to the address below. Thank you!

Customer Service Centre (CSC)

International Electrotechnical Commission

3, rue de Varembe
1211 Genève 20
Switzerland

or

Fax to: **IEC/CSC** at +41 22 919 03 00

Thank you for your contribution to the standards-making process.

A Prioritaire

Nicht frankieren
Ne pas affranchir



Non affrancare
No stamp required

RÉPONSE PAYÉE

SUISSE

Customer Service Centre (CSC)
International Electrotechnical Commission
3, rue de Varembe
1211 GENEVA 20
Switzerland



Q1 Please report on **ONE STANDARD** and **ONE STANDARD ONLY**. Enter the exact number of the standard: (e.g. 60601-1-1)

.....

Q2 Please tell us in what capacity(ies) you bought the standard (tick all that apply). I am the/a:

- purchasing agent ☐
 librarian ☐
 researcher ☐
 design engineer ☐
 safety engineer ☐
 testing engineer ☐
 marketing specialist ☐
 other.....

Q3 I work for/in/as a:
(tick all that apply)

- manufacturing ☐
 consultant ☐
 government ☐
 test/certification facility ☐
 public utility ☐
 education ☐
 military ☐
 other.....

Q4 This standard will be used for:
(tick all that apply)

- general reference ☐
 product research ☐
 product design/development ☐
 specifications ☐
 tenders ☐
 quality assessment ☐
 certification ☐
 technical documentation ☐
 thesis ☐
 manufacturing ☐
 other.....

Q5 This standard meets my needs:
(tick one)

- not at all ☐
 nearly ☐
 fairly well ☐
 exactly ☐

Q6 If you ticked NOT AT ALL in Question 5 the reason is: (tick all that apply)

- standard is out of date ☐
 standard is incomplete ☐
 standard is too academic ☐
 standard is too superficial ☐
 title is misleading ☐
 I made the wrong choice ☐
 other

Q7 Please assess the standard in the following categories, using the numbers:

- (1) unacceptable,
 (2) below average,
 (3) average,
 (4) above average,
 (5) exceptional,
 (6) not applicable

- timeliness.....
 quality of writing.....
 technical contents.....
 logic of arrangement of contents
 tables, charts, graphs, figures.....
 other

Q8 I read/use the: (tick one)

- French text only ☐
 English text only ☐
 both English and French texts ☐

Q9 Please share any comment on any aspect of the IEC that you would like us to know:

.....



ISBN 2-8318-8939-1



ICS 33.120.30
