

INTERNATIONAL STANDARD

**Printed boards and printed board assemblies – Design and use –
Part 5-4: Attachment (land/joint) considerations – Components with J leads on
two sides**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00



IEC 61188-5-4

Edition 1.0 2007-10

INTERNATIONAL STANDARD

**Printed boards and printed board assemblies – Design and use –
Part 5-4: Attachment (land/joint) considerations – Components with J leads on
two sides**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

P

ICS 31.180

ISBN 2-8318-9341-0

LICENSED TO MECON Limited, - RANCHI/BANGALORE,
FOR INTERNAL USE AT THIS LOCATION ONLY, SUPPLIED BY BOOK SUPPLY BUREAU.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 General information	6
3.1 General component description	6
3.2 Marking	7
3.3 Packaging	7
3.4 Process considerations	7
4 Small outlined J packages (SOJ).....	7
4.1 Component description.....	7
4.2 Component dimensions	8
4.3 Solder joint fillet design	9
4.4 Land pattern dimensions	11
Bibliography.....	15
Figure 1 – SOJ construction.....	8
Figure 2 – SOJ component dimensions	9
Figure 3 – Solder joint fillet design.....	11
Figure 4 – SOJ land pattern dimensions	14

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**PRINTED BOARDS AND PRINTED BOARD ASSEMBLIES –
DESIGN AND USE –****Part 5-4: Attachment (land/joint) considerations –
Components with J leads on two sides**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61188-5-4 has been prepared by IEC technical committee 91: Electronics assembly technology

The text of this standard is based on the following documents:

FDIS	Report on voting
91/703/FDIS	91/735/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61188 series, under the general title *Printed boards and printed board assemblies – Design and use*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this standard may be issued at a later date.

INTRODUCTION

This part of IEC 61188 covers land pattern for components with J leads on two sides.

The proposed land pattern dimensions in this standard are based upon the fundamental tolerance calculation combined with the given land protrusions and courtyard excesses (see IEC 61188-5-1, Generic requirements). The courtyard includes all issues of the normal manufacturing necessities.

The unaltered land pattern dimensions of this part are generally applicable for the solder paste application plus reflow soldering process. For application of the wave soldering process (though uncommon for SOJ components) the land pattern and courtyard dimensions may have to be modified. An orientation parallel to the wave direction is strongly recommended and suitably dimensioned solder thieves should be added.

This standard offers a threefold land pattern dimensioning (levels 1, 2, 3) on the basis of a threefold set of land protrusions and courtyard excesses: maximum (max.); medium (mdn); and minimum (min.). Nevertheless the user may develop deviating land pattern dimensions based upon the methodology of IEC 61188-5-1, introducing his own special material and assembling process conditions C, F, P and perhaps his own special land protrusions and courtyard excesses dimensions, as required.

If a user has good reasons to use a concept different from that of IEC 61188-5-1 or if the user prefers unusual land protrusions, this standard should be used for checking the resulting solder fillets.

It is the responsibility of the user to verify his used SMD land patterns for achieving an undisturbed mounting process including testing and an ensured reliability for the product stress conditions in use.

PRINTED BOARDS AND PRINTED BOARD ASSEMBLIES – DESIGN AND USE –

Part 5-4: Attachment (land/joint) considerations – Components with J leads on two sides

1 Scope

This part of IEC 61188 provides the component and land pattern dimensions for small outline integrated circuits with “J” leads on two sides (SOJ components) used in the reflow soldering process. Basic construction of the SOJ device is also covered. Clause 4 lists the tolerances and target solder joint dimensions used to arrive at the land pattern dimensions.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-58, *Environmental testing – Part 2-58: Tests: Test Td. Test methods for solderability, resistance to dissolution of metallization and to soldering heat of surface mounting devices (SMD)*

IEC 60286-3, *Packaging of components for automatic handling – Part 3: Packaging of surface mount components on continuous tapes*

IEC 60286-4, *Packaging of components for automatic handling – Part 4: Stick magazines for electronic components encapsulated in packages of form E and G*

IEC 60286-5, *Packaging of components for automatic handling – Part 5: Matrix trays*

IEC 61760-1, *Surface mounting technology – Part 1: Standard method for the specification of surface mounting components (SMDs)*

3 General information

3.1 General component description

The two-sided J lead family is a small outline family identified by the dimensions of the body size in inches. For example, the SOJ/300 has a body size of 0,300 in or 7,63 mm, the SOJ/350 has a body size of 0,350 in or 8,88 mm, the SOJ/400 has a body size of 0,400 in or 10,12 mm, and the SOJ/450 has a body size of 0,450 in or 11,38 mm. Package lead counts range from 14 to 28 pins. Pitch is uniformly for all sizes, i.e. 1,27 mm.

The small-outline J (SOJ) package has leads on two sides, similar to a DIP. The lead configuration, like the letter J, extends out the side of the package and bends under the package forming a J bend. The point of contact of the lead to the land pattern is at the apex of the J bend and is the basis for the span of the land pattern.

The (inner) end of the J is called the heel, and the outer side of the J is called the toe.

The leads shall be coplanar within 0,1 mm. That is, when the component is placed on a flat surface, no lead may be more than 0,1 mm off the flat surface.

The SOJ package takes advantage of chips having parallel address or data line layouts. For example, memory ICs are often used in multiples, and bus lines connect to the same pin on each chip. Memory chips in SOJ packages can be placed close to one another because of the parallel pin layout and the use of J leads. With high capacity memory systems, the space savings can be significant compared with a dual in-line.

3.2 Marking

The marking of the SOIC family of parts shall comply with the definitions in the relevant IEC product specifications.

3.3 Packaging

Components may be provided in

- tape packaging: reference IEC 60286-3,
- stick magazine: reference IEC 60286-4,
- tray packaging: reference IEC 60286-5.

Bulk packaging is not recommended because of lead coplanarity conditions required for placement and soldering.

3.4 Process considerations

Together with other components assembled on PC boards, J lead packages are normally processed using standard solder reflow processes. Parts should therefore have an adequate solderability and resistance to soldering heat. These capabilities shall be demonstrated by submitting the parts to the test conditions of IEC 60068-2-58 and by complying with the conditions defined in IEC 61760-1.


The land pattern dimensions are based on a mathematical model that establishes a platform for a solder joint attachment to the printed board. The existing models create a platform that is capable of establishing a reliable solder joint no matter what the solder alloy used to make that joint (lead-free, tin lead, etc.).

Process requirements for solder reflow are different based on the solder alloy and should be analyzed in order that the process is above the liquidus temperature of the alloy, and remains above that temperature a sufficient time to form a reliable metallurgical bond.

4 Small outlined J packages (SOJ)

4.1 Component description

Figure 1 shows a typical construction example.

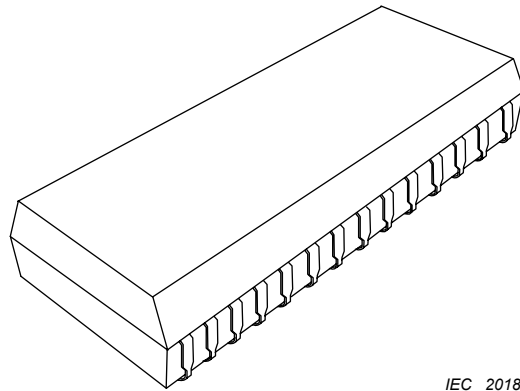


IEC 2018/07

Figure 1 – SOJ construction

4.2 Component dimensions

Figure 2 shows the component dimensions for SOJ components.

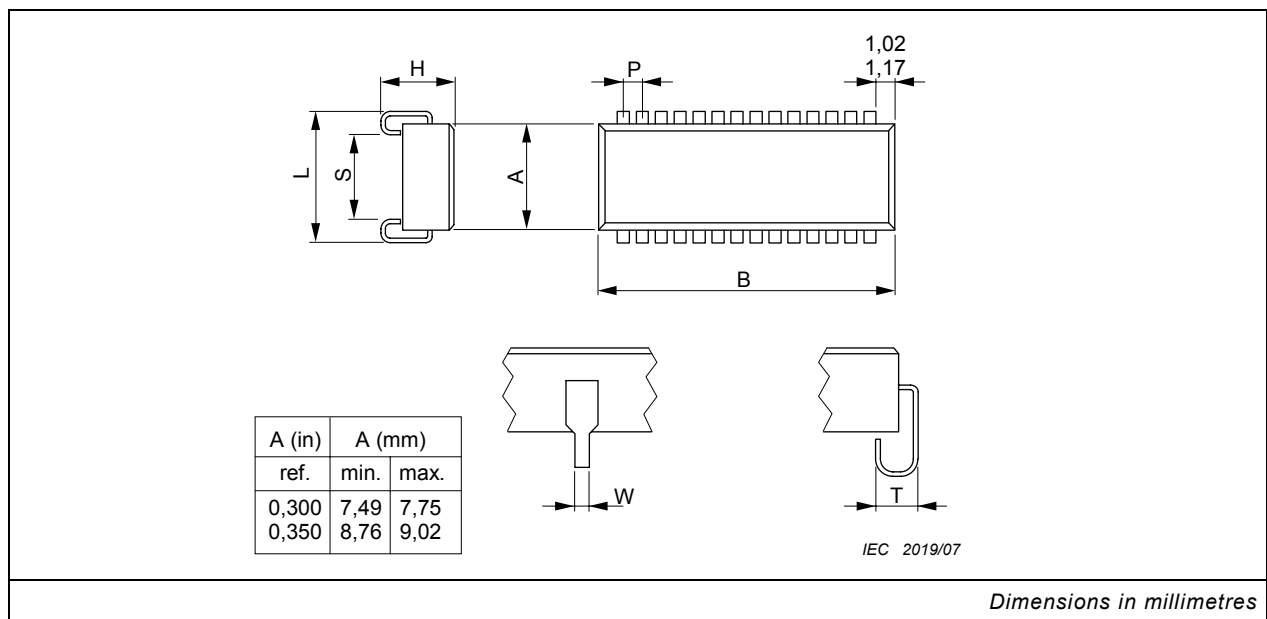

Component identification	L		S		W		T		B		H	P
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Max.	Basic
SOJ 14/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	9,65	9,96	3,75	1,27
SOJ 16/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	10,92	11,23	3,75	1,27
SOJ 18/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	12,19	12,50	3,75	1,27
SOJ 20/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	13,46	13,77	3,75	1,27
SOJ 22/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	14,73	15,04	3,75	1,27
SOJ 24/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	16,00	16,31	3,75	1,27
SOJ 26/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	17,27	17,58	3,75	1,27
SOJ 28/300	8,38	8,76	4,38	5,06	0,38	0,51	1,6	2,0	18,54	18,85	3,75	1,27
SOJ 14/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	9,65	9,96	3,75	1,27
SOJ 16/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	10,92	11,23	3,75	1,27
SOJ 18/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	12,19	12,50	3,75	1,27
SOJ 20/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	13,46	13,77	3,75	1,27
SOJ 22/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	14,73	15,04	3,75	1,27
SOJ 24/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	16,00	16,31	3,75	1,27
SOJ 26/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	17,27	17,58	3,75	1,27
SOJ 28/350	9,65	10,03	5,65	6,33	0,38	0,51	1,6	2,0	18,54	18,85	3,75	1,27
SOJ 14/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	9,65	9,96	3,75	1,27
SOJ 16/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	10,92	11,23	3,75	1,27
SOJ 18/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	12,19	12,50	3,75	1,27
SOJ 20/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	13,46	13,77	3,75	1,27
SOJ 22/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	14,73	15,04	3,75	1,27
SOJ 24/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	16,00	16,31	3,75	1,27
SOJ 26/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	17,27	17,58	3,75	1,27
SOJ 28/400	10,92	11,30	6,92	7,60	0,38	0,51	1,6	2,0	18,54	18,85	3,75	1,27
SOJ 14/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	9,65	9,96	3,75	1,27
SOJ 16/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	10,92	11,23	3,75	1,27
SOJ 18/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	12,19	12,50	3,75	1,27
SOJ 20/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	13,46	13,77	3,75	1,27
SOJ 22/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	14,73	15,04	3,75	1,27
SOJ 24/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	16,00	16,31	3,75	1,27
SOJ 26/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	17,27	17,58	3,75	1,27
SOJ 28/450	12,19	12,57	8,19	8,87	0,38	0,51	1,6	2,0	18,54	18,85	3,75	1,27

Figure 2 – SOJ component dimensions

Land pattern dimensional data may need to be adjusted if the component dimensional data does not match JEDEC and/or JEITA data sheets.

4.3 Solder joint fillet design

Figure 3 shows the shape and dimensions of the solder fillet after the soldering process. The minimum, median and maximum dimensions of each of toe, heel and side fillet are determined by taking into consideration solder joint reliability as well as quality and productivity in the mounting process of parts.

In designing land patterns, three accuracy factors need to be taken into consideration:

- parts dimensions accuracy (C);
- parts mount accuracy on PWBs (P);
- land shape accuracy of PWBs (F),

in addition to fillet dimensions. The formulae to obtain the tolerance resulting from these factors are basically as follows:

a) Design consideration when soldered without self-alignment effect (level 1)

In the flow soldering process, there is no self-alignment effect. Thus, the formulae cannot be simplified but remain the same as follows:

$$Z_{\max} = L_{\min} + 2J_H \max + T_H \quad T_H = \sqrt{F_{L1}^2 + P_{L1}^2 + C_L^2}$$

$$G_{\min} = S_{\max}(\text{rms}) - 2J_T \max - T_T \quad T_T = \sqrt{F_{L1}^2 + P_{L1}^2 + C_S^2}$$

$$X_{\max} = W_{\min} + 2J_S \max + T_S \quad T_S = \sqrt{F_{L1}^2 + P_{L1}^2 + C_W^2}$$

b) Design consideration when soldered without self-alignment effect (level 2)

$$Z_{\max} = L_{\min} + 2J_H \text{mdn} + T_H \quad T_H = \sqrt{F_{L2}^2 + P_{L2}^2 + C_L^2}$$

$$G_{\min} = S_{\max}(\text{rms}) - 2J_T \text{mdn} - T_T \quad T_T = \sqrt{F_{L2}^2 + P_{L2}^2 + C_S^2}$$

$$X_{\max} = W_{\min} + 2J_S \text{mdn} + T_S \quad T_S = \sqrt{F_{L2}^2 + P_{L2}^2 + C_W^2}$$

c) Design consideration when soldered with self-alignment effect (level 3)

$$Z_{\max} = L_{\min} + 2J_H \min + T_H \quad T_H = \sqrt{F_{L3}^2 + P_{L3}^2 + C_L^2}$$

$$G_{\min} = S_{\max}(\text{rms}) - 2J_T \min - T_T \quad T_T = \sqrt{F_{L3}^2 + P_{L3}^2 + C_S^2}$$

$$X_{\max} = W_{\min} + 2J_S \min + T_S \quad T_S = \sqrt{F_{L3}^2 + P_{L3}^2 + C_W^2}$$

In the reflow soldering process, there is a self-alignment effect. In the surface mount process of reflow soldering, parts mount displacement when soldered can be cancelled by self-alignment effect (therefore factor P can be regarded as 0). In addition, the tolerance of the land shape accuracy of PWBs is about $\pm 30 \mu\text{m}$, and this is extremely small when compared with that of the parts dimensions accuracy (therefore factor F can be regarded also as 0). Thus, the formulae can be simplified as follows:

$$T_H = C_L, Z_{\max} = L_{\min} + 2J_H \min + C_L = L_{\max} + 2J_H \min$$

$$T_L = C_S, G_{\min} = S_{\max}(\text{rms}) - 2J_T \min - C_S$$

$$T_S = C_W, X_{\max} = W_{\min} + 2J_S \min + C_W = W_{\max} + 2J_S \min$$

Any tolerance other than the above may be used depending on the soldering strength required, the capability of the production process used, and so on.

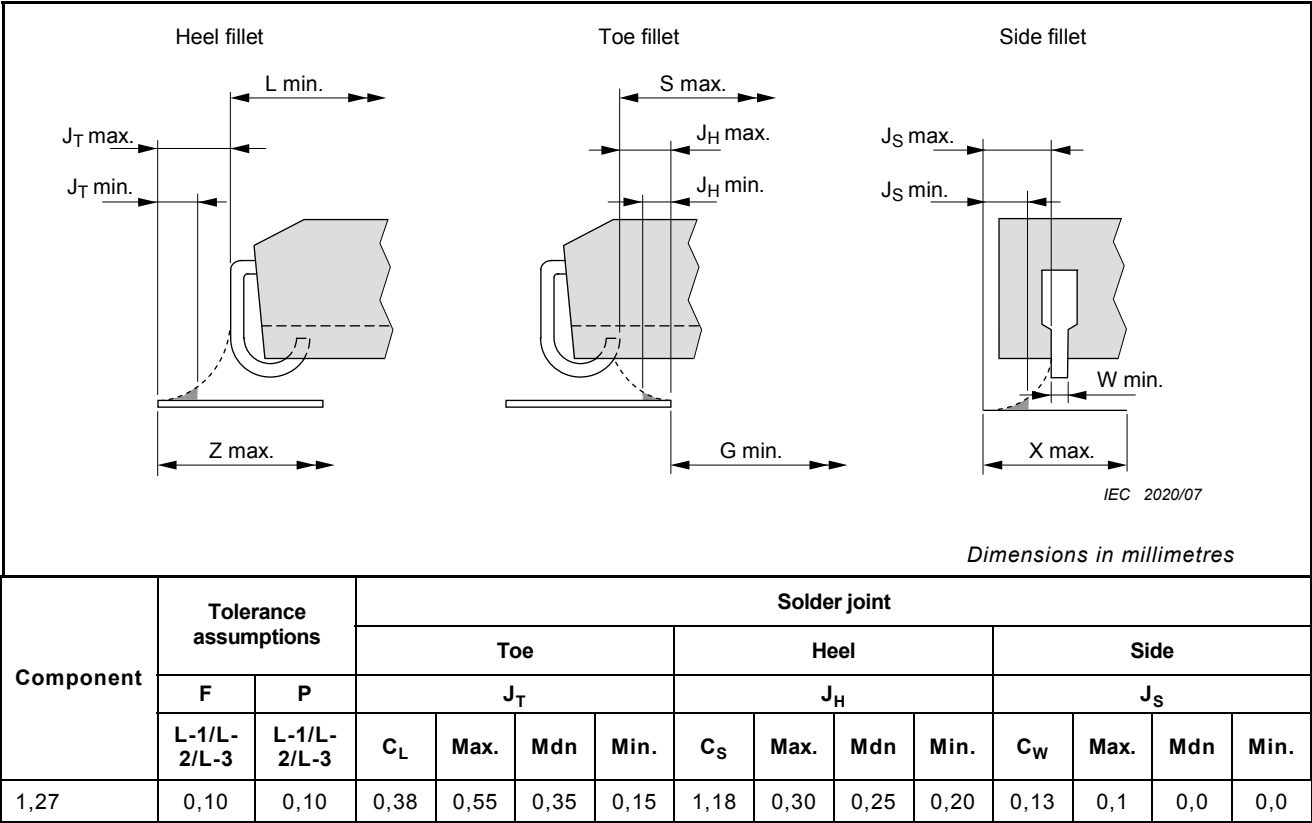


Figure 3 – Solder joint fillet design

4.4 Land pattern dimensions

Figure 4 shows the land pattern dimensions for SOJ for reflow and flow soldering. These values are calculated based on the formula for the solder joint fillet design given in 4.3.


The courtyard is calculated using the following formula and rounded up (round up factor is to the nearest 0,05 mm for minimum values and to the nearest 0,5 mm for maximum values).

$CY_1 = (A_{min} + \sqrt{F^2 + P^2 + C_A^2}) + (\text{courtyard excess} \times 2)$

$CY_2 = \{\text{whichever larger } [L_{min} + \sqrt{F^2 + P^2 + C_L^2}] \text{ or } [Z]\} + (\text{courtyard excess} \times 2)$

NOTE 1 It has to be noted that the courtyard length CY1 is determined by the component body length B (Figure 2) and not as normally by the pattern parameter D.

NOTE 2 It is not recommended (but neither is it, in principle, excluded), to use the inner area between the two rows of lands for attaching flat types of SMDs under the SOJ.

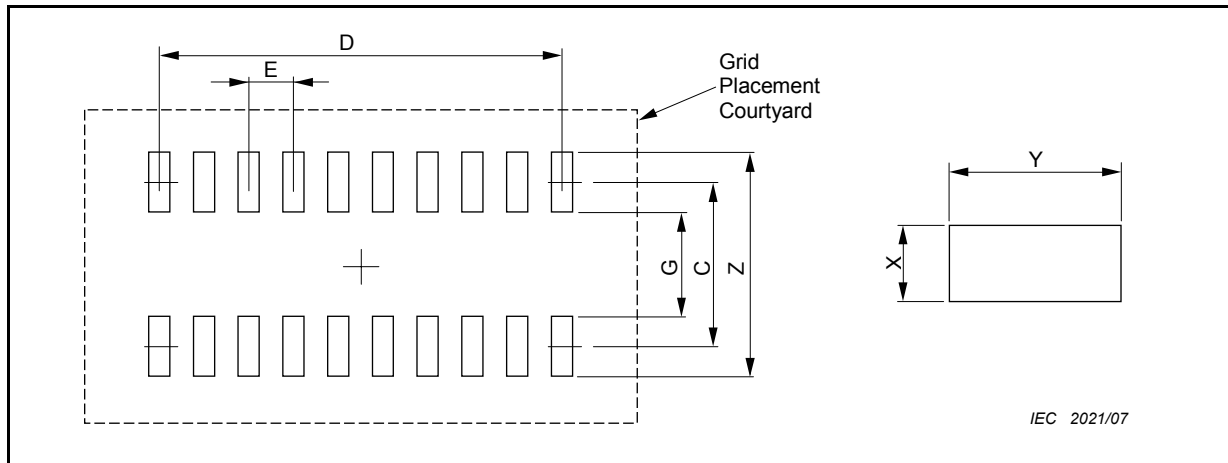

Dimensions in millimetres

Level 1

Pattern identifier	Component identifier	Z	G	X*	Y	C	D	P	CY1	CY2
4000M	SOJ 14/300	10,0	3,2	0,8	3,4	6,6	5,08	1,27	11	11
4001M	SOJ 16/300	10,0	3,2	0,8	3,4	6,6	7,62	1,27	13	11
4002M	SOJ 18/300	10,0	3,2	0,8	3,4	6,6	12,7	1,27	14	11
4004M	SOJ 20/300	10,0	3,2	0,8	3,4	6,6	15,24	1,27	15	11
4005M	SOJ 22/300	10,0	3,2	0,8	3,4	6,6	20,32	1,27	16	11
4006M	SOJ 24/300	10,0	3,2	0,8	3,4	6,6	25,4	1,27	18	11
4008M	SOJ 26/300	10,0	3,2	0,8	3,4	6,6	30,48	1,27	19	11
4009M	SOJ 28/300	10,0	3,2	0,8	3,4	6,6	38,1	1,27	20	11
4010M	SOJ 14/350	11,2	4,4	0,8	3,4	7,8	5,08	1,27	11	12
4012M	SOJ 16/350	11,2	4,4	0,8	3,4	7,8	7,62	1,27	13	12
4013M	SOJ 18/350	11,2	4,4	0,8	3,4	7,8	12,7	1,27	14	12
4014M	SOJ 20/350	11,2	4,4	0,8	3,4	7,8	15,24	1,27	15	12
4015M	SOJ 22/350	11,2	4,4	0,8	3,4	7,8	20,32	1,27	16	12
4016M	SOJ 24/350	11,2	4,4	0,8	3,4	7,8	25,4	1,27	18	12
4017M	SOJ 26/350	11,2	4,4	0,8	3,4	7,8	30,48	1,27	19	12
4018M	SOJ 28/350	11,2	4,4	0,8	3,4	7,8	38,1	1,27	20	12
4019M	SOJ 14/400	12,6	5,8	0,8	3,4	9,2	5,08	1,27	11	14
4020M	SOJ 16/400	12,6	5,8	0,8	3,4	9,2	7,62	1,27	13	14
4021M	SOJ 18/400	12,6	5,8	0,8	3,4	9,2	12,7	1,27	14	14
4022M	SOJ 20/400	12,6	5,8	0,8	3,4	9,2	15,24	1,27	15	14
4023M	SOJ 22/400	12,6	5,8	0,8	3,4	9,2	20,32	1,27	16	14
4024M	SOJ 24/400	12,6	5,8	0,8	3,4	9,2	25,4	1,27	18	14
4025M	SOJ 26/400	12,6	5,8	0,8	3,4	9,2	30,48	1,27	19	14
4026M	SOJ 28/400	12,6	5,8	0,8	3,4	9,2	38,1	1,27	20	14
4027M	SOJ 14/450	13,8	7,0	0,8	3,4	10,4	5,08	1,27	11	15
4028M	SOJ 16/450	13,8	7,0	0,8	3,4	10,4	7,62	1,27	13	15
4029M	SOJ 18/450	13,8	7,0	0,8	3,4	10,4	12,7	1,27	14	15
4030M	SOJ 20/450	13,8	7,0	0,8	3,4	10,4	15,24	1,27	15	15
4031M	SOJ 22/450	13,8	7,0	0,8	3,4	10,4	20,32	1,27	16	15

Pattern identifier	Component identifier	Z	G	X*	Y	C	D	P	CY1	CY2
4032M	SOJ 24/450	13,8	7,0	0,8	3,4	10,4	25,4	1,27	18	15
4033M	SOJ 26/450	13,8	7,0	0,8	3,4	10,4	30,48	1,27	19	15
4034M	SOJ 28/450	13,8	7,0	0,8	3,4	10,4	38,1	1,27	20	15
Level 2										
4000N	SOJ 14/300	9,5	3,3	0,6	3,1	6,4	5,08	1,27	10,5	10,0
4001N	SOJ 16/300	9,5	3,3	0,6	3,1	6,4	7,62	1,27	11,8	10,0
4002N	SOJ 18/300	9,5	3,3	0,6	3,1	6,4	12,7	1,27	13,1	10,0
4004N	SOJ 20/300	9,5	3,3	0,6	3,1	6,4	15,24	1,27	14,3	10,0
4005N	SOJ 22/300	9,5	3,3	0,6	3,1	6,4	20,32	1,27	15,6	10,0
4006N	SOJ 24/300	9,5	3,3	0,6	3,1	6,4	25,4	1,27	16,9	10,0
4008N	SOJ 26/300	9,5	3,3	0,6	3,1	6,4	30,48	1,27	18,2	10,0
4009N	SOJ 28/300	9,5	3,3	0,6	3,1	6,4	38,1	1,27	19,4	10,0
4010N	SOJ 14/350	10,8	4,6	0,6	3,1	7,7	5,08	1,27	10,5	11,3
4012N	SOJ 16/350	10,8	4,6	0,6	3,1	7,7	7,62	1,27	11,8	11,3
4013N	SOJ 18/350	10,8	4,6	0,6	3,1	7,7	12,7	1,27	13,1	11,3
4014N	SOJ 20/350	10,8	4,6	0,6	3,1	7,7	15,24	1,27	14,3	11,3
4015N	SOJ 22/350	10,8	4,6	0,6	3,1	7,7	20,32	1,27	15,6	11,3
4016N	SOJ 24/350	10,8	4,6	0,6	3,1	7,7	25,4	1,27	16,9	11,3
4017N	SOJ 26/350	10,8	4,6	0,6	3,1	7,7	30,48	1,27	18,2	11,3
4018N	SOJ 28/350	10,8	4,6	0,6	3,1	7,7	38,1	1,27	19,4	11,3
4019N	SOJ 14/400	12,1	5,9	0,6	3,1	9,0	5,08	1,27	10,5	12,6
4020N	SOJ 16/400	12,1	5,9	0,6	3,1	9,0	7,62	1,27	11,8	12,6
4021N	SOJ 18/400	12,1	5,9	0,6	3,1	9,0	12,7	1,27	13,1	12,6
4022N	SOJ 20/400	12,1	5,9	0,6	3,1	9,0	15,24	1,27	14,3	12,6
4023N	SOJ 22/400	12,1	5,9	0,6	3,1	9,0	20,32	1,27	15,6	12,6
4024N	SOJ 24/400	12,1	5,9	0,6	3,1	9,0	25,4	1,27	16,9	12,6
4025N	SOJ 26/400	12,1	5,9	0,6	3,1	9,0	30,48	1,27	18,2	12,6
4026N	SOJ 28/400	12,1	5,9	0,6	3,1	9,0	38,1	1,27	19,4	12,6
4027N	SOJ 14/450	13,3	7,1	0,6	3,1	10,2	5,08	1,27	10,5	13,8
4028N	SOJ 16/450	13,3	7,1	0,6	3,1	10,2	7,62	1,27	11,8	13,8
4029N	SOJ 18/450	13,3	7,1	0,6	3,1	10,2	12,7	1,27	13,1	13,8
4030N	SOJ 20/450	13,3	7,1	0,6	3,1	10,2	15,24	1,27	14,3	13,8
4031N	SOJ 22/450	13,3	7,1	0,6	3,1	10,2	20,32	1,27	15,6	13,8
4032N	SOJ 24/450	13,3	7,1	0,6	3,1	10,2	25,4	1,27	16,9	13,8
4033N	SOJ 26/450	13,3	7,1	0,6	3,1	10,2	30,48	1,27	18,2	13,8
4034N	SOJ 28/450	13,3	7,1	0,6	3,1	10,2	38,1	1,27	19,4	13,8

Pattern identifier	Component identifier	Z	G	X*	Y	C	D	P	CY1	CY2
Level 3										
4000L	SOJ 14/300	9,1	3,4	0,55	2,85	6,25	5,08	1,27	10,2	9,3
4001L	SOJ 16/300	9,1	3,4	0,55	2,85	6,25	7,62	1,27	11,5	9,3
4002L	SOJ 18/300	9,1	3,4	0,55	2,85	6,25	12,7	1,27	12,8	9,3
4004L	SOJ 20/300	9,1	3,4	0,55	2,85	6,25	15,24	1,27	14,0	9,3
4005L	SOJ 22/300	9,1	3,4	0,55	2,85	6,25	20,32	1,27	15,3	9,3
4006L	SOJ 24/300	9,1	3,4	0,55	2,85	6,25	25,4	1,27	16,6	9,3
4008L	SOJ 26/300	9,1	3,4	0,55	2,85	6,25	30,48	1,27	17,9	9,3
4009L	SOJ 28/300	9,1	3,4	0,55	2,85	6,25	38,1	1,27	19,1	9,3
4010L	SOJ 14/350	10,4	4,7	0,55	2,85	7,55	5,08	1,27	10,2	10,6
4012L	SOJ 16/350	10,4	4,7	0,55	2,85	7,55	7,62	1,27	11,5	10,6
4013L	SOJ 18/350	10,4	4,7	0,55	2,85	7,55	12,7	1,27	12,8	10,6
4014L	SOJ 20/350	10,4	4,7	0,55	2,85	7,55	15,24	1,27	14,0	10,6
4015L	SOJ 22/350	10,4	4,7	0,55	2,85	7,55	20,32	1,27	15,3	10,6
4016L	SOJ 24/350	10,4	4,7	0,55	2,85	7,55	25,4	1,27	16,6	10,6
4017L	SOJ 26/350	10,4	4,7	0,55	2,85	7,55	30,48	1,27	17,9	10,6
4018L	SOJ 28/350	10,4	4,7	0,55	2,85	7,55	38,1	1,27	19,1	10,6
4019L	SOJ 14/400	11,6	6,0	0,55	2,80	8,80	5,08	1,27	10,2	11,8
4020L	SOJ 16/400	11,6	6,0	0,55	2,80	8,80	7,62	1,27	11,5	11,8
4021L	SOJ 18/400	11,6	6,0	0,55	2,80	8,80	12,7	1,27	12,8	11,8
4022L	SOJ 20/400	11,6	6,0	0,55	2,80	8,80	15,24	1,27	14,0	11,8
4023L	SOJ 22/400	11,6	6,0	0,55	2,80	8,80	20,32	1,27	15,3	11,8
4024L	SOJ 24/400	11,6	6,0	0,55	2,80	8,80	25,4	1,27	16,6	11,8
4025L	SOJ 26/400	11,6	6,0	0,55	2,80	8,80	30,48	1,27	17,9	11,8
4026L	SOJ 28/400	11,6	6,0	0,55	2,80	8,80	38,1	1,27	19,1	11,8
4027L	SOJ 14/450	12,9	7,2	0,55	2,85	10,05	5,08	1,27	10,2	13,1
4028L	SOJ 16/450	12,9	7,2	0,55	2,85	10,05	7,62	1,27	11,5	13,1
4029L	SOJ 18/450	12,9	7,2	0,55	2,85	10,05	12,7	1,27	12,8	13,1
4030L	SOJ 20/450	12,9	7,2	0,55	2,85	10,05	15,24	1,27	14,0	13,1
4031L	SOJ 22/450	12,9	7,2	0,55	2,85	10,05	20,32	1,27	15,3	13,1
4032L	SOJ 24/450	12,9	7,2	0,55	2,85	10,05	25,4	1,27	16,6	13,1
4033L	SOJ 26/450	12,9	7,2	0,55	2,85	10,05	30,48	1,27	17,9	13,1
4034L	SOJ 28/450	12,9	7,2	0,55	2,85	10,05	38,1	1,27	19,1	13,1
* When the X dimension is used, it is necessary to confirm whether the space between adjacent land patterns is proper.										

Figure 4 – SOJ land pattern dimensions

Bibliography

IEC 60191-2 (all parts), *Mechanical standardization of semiconductor devices – Part 2: Dimensions*

IEC 61188-5-1, *Printed boards and printed board assemblies – Design and use – Part 5-1: Attachment (land/joint) considerations – Generic requirements*

IEC 61191-1, *Printed board assemblies – Part 1: General specification – Requirements for soldered electrical and electronic assemblies using surface mount and related assembly technologies*

IEC 61191-2, *Printed board assemblies – Part 2: Sectional specification – Requirements for surface mount soldered assemblies*

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

3, rue de Varembé
P.O. Box 131
CH-1211 Geneva 20
Switzerland

Tel: + 41 22 919 02 11
Fax: + 41 22 919 03 00
info@iec.ch
www.iec.ch