

INTERNATIONAL STANDARD

IEC
61937-5

Second edition
2006-01

**Digital audio –
Interface for non-linear PCM encoded
audio bistreams applying IEC 60958 –**

**Part 5:
Non-linear PCM bitstreams according to
the DTS (Digital Theater Systems) format(s)**



Reference number
IEC 61937-5:2006(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site (www.iec.ch)**
- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/searchpub) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.
- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/online_news/justpub) is also available by email. Please contact the Customer Service Centre (see below) for further information.
- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC
61937-5

Second edition
2006-01

**Digital audio –
Interface for non-linear PCM encoded
audio bistreams applying IEC 60958 –**

**Part 5:
Non-linear PCM bitstreams according to
the DTS (Digital Theater Systems) format(s)**

© IEC 2006 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

P

For price, see current catalogue

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms, definitions, abbreviations and presentation convention	5
3.1 Terms and definitions	5
3.2 Abbreviations	5
3.3 Presentation convention	6
4 Mapping of the audio bitstream on to IEC 61937-1	6
4.1 DTS burst-info	6
5 Format of DTS data-bursts	6
5.1 General	6
5.2 Pause data-burst	6
5.3 Audio data-bursts	7
Annex A (informative) Effect of repetition period of data burst and Fs on frame period and maximum data rate in DTS type IV	14
Bibliography.....	15
Table 1 – Fields of burst-info	6
Table 2 – Repetition period of the pause data-bursts	7
Table 3 – Data-type-dependent when DTS type I	7
Table 4 – Data-type-dependent when DTS type II	9
Table 5 – Data-type-dependent when DTS type III	10
Table 6 – Data-type-dependent when DTS type IV	12
Table A.1 – DTS type IV payload and frame repetition: some examples	14

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**DIGITAL AUDIO –
INTERFACE FOR NON-LINEAR PCM ENCODED
AUDIO BITSTREAMS APPLYING IEC 60958 –****Part 5: Non-linear PCM bitstreams according to
the DTS (Digital Theater Systems) format(s)**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61937-5 has been prepared by Technical Area 4: Digital system interfaces and protocols, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This second edition cancels and replaces the first edition published in 2002. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition.

- a) References to the company name Digital Theater Systems have been changed to DTS which is consistent with the official change of the company name.

- b) DTS type IV has been added to Table 1 and 5.3.4 describing type IV has been added.
- c) Annex A, which provides examples of the use of the repetition period parameter introduced in subclause 5.3.4, has been added.

The text of this standard is based on the following documents:

CDV	Report on voting
100/974/CDV	100/1055/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IEC 61937 consists of the following parts, under the general title *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958*:

- Part 1: General
- Part 2: Burst-info
- Part 3: Non-linear PCM bitstreams according to the AC-3 format
- Part 4: Non-linear PCM bitstreams according to the MPEG audio formats
- Part 5: Non-linear PCM bitstreams according to the DTS (Digital Theater Systems) format(s)
- Part 6: Non-linear PCM bitstreams according to the ATRAC, ATRAC2/3 and ATRAC-X formats
- Part 8: Non-linear PCM bitstreams according to the Windows Media Audio Professional¹

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

¹ To be published.

DIGITAL AUDIO – INTERFACE FOR NON-LINEAR PCM ENCODED AUDIO BITSTREAMS APPLYING IEC 60958 –

Part 5: Non-linear PCM bitstreams according to the (Digital Theater Systems) DTS format(s)

1 Scope

This part of IEC 61937 describes audio bitstreams encoded according to the Digital Theater Systems (DTS) format data-types I, II, III, and IV.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60958-1, *Digital audio interface – Part 1: General*

IEC 60958-3, *Digital audio interface – Part 3: Consumer applications*

IEC 60958-4, *Digital audio interface – Part 4: Professional applications*

IEC 61937-1, *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 – Part 1: General*

IEC 61937-2, *Digital audio – Interface for non-linear PCM encoded audio bitstreams applying IEC 60958 – Part 2: Burst Information*

3 Terms, definitions, abbreviations and presentation convention

For the purposes of this document, the following terms, definitions, abbreviations and presentation convention apply.

3.1 Definitions

3.1.1

latency

delay time of an external audio decoder to decode a DTS data-burst, defined as the sum of two values of the receiving delay time and the decoding delay time

3.2 Abbreviations

IEC International Electrotechnical Commission

ISO/IEC MPEG The Moving Pictures Expert Group, a joint committee of ISO and IEC

3.3 Presentation convention

F872h Value 'F872' in hexadecimal format

4 Mapping of the audio bitstream on to IEC 61937-1

The coding of the bitstream and data-burst is in accordance with IEC 61937-1 and 61937-2.

4.1 DTS burst-info

The 16-bit burst-info contains information about the data which will be found in the data-burst.

Table 1 – Fields of burst-info

Bits of Pc	Value	Contents	Reference point R	Repetition period of data-burst in IEC 60958 frames
0-4		Data-type		
	0-10	According to IEC 61937		
	11	DTS type I	Bit 0 of Pa	512
	12	DTS type II	Bit 0 of Pa	1 024
	13	DTS type III	Bit 0 of Pa	2 048
	14-16	According to IEC 61937		
	17	DTS type IV		Dependent on bits 8-10
	14-31	According to IEC 61937	Bit 0 of Pa	
5, 6		Reserved		
7		According to IEC 61937		
		Reserved for DTS types I, II and III		
8-10		For the repetition period for DTS type IV, see Table 6		
11, 12		Reserved		
13-15		According to IEC 61937		

5 Format of DTS data-bursts

This clause specifies the audio data-bursts DTS type I, DTS type II, DTS type III and DTS type IV. Specific properties such as reference points, repetition period, the method of filling stream gaps, and decoding latency are specified for each data-type.

5.1 General

The decoding latency (or delay), indicated for the data-types, should be used by the transmitter to schedule data-bursts as necessary to establish synchronization between picture and decoded audio.

5.2 Pause data-burst

Pause data-burst for DTS type I, DTS type II, DTS type III and DTS type IV is given in Table 2.

Table 2 – Repetition period of the pause data-bursts

Data-type of audio data-burst	Repetition period of pause data-burst	
	Mandatory	Recommended
DTS type I	-	3 IEC 60958 frames
DTS type II	-	3 IEC 60958 frames
DTS type III	-	3 IEC 60958 frames
DTS type IV	-	3 IEC 60958 frames


5.3 Audio data-bursts

5.3.1 DTS type I

The DTS bitstream consists of sequences of DTS frames. The data-type of a DTS data-burst type I is 0Bh. The data-burst is headed with a burst-preamble, followed by the burst-payload, and stuffed with stuffing bits. The burst-payload of each data-burst of DTS type I data shall contain one complete DTS-frame and represents 512 samples for each encoded channel.

NOTE 1 The length of the DTS type I data-burst depends on the encoded bit rate (which determines the DTS-frame length).

NOTE 2 The reference to the specification for the DTS bitstream, representing 512 samples of encoded audio per frame, is given in the bibliography.

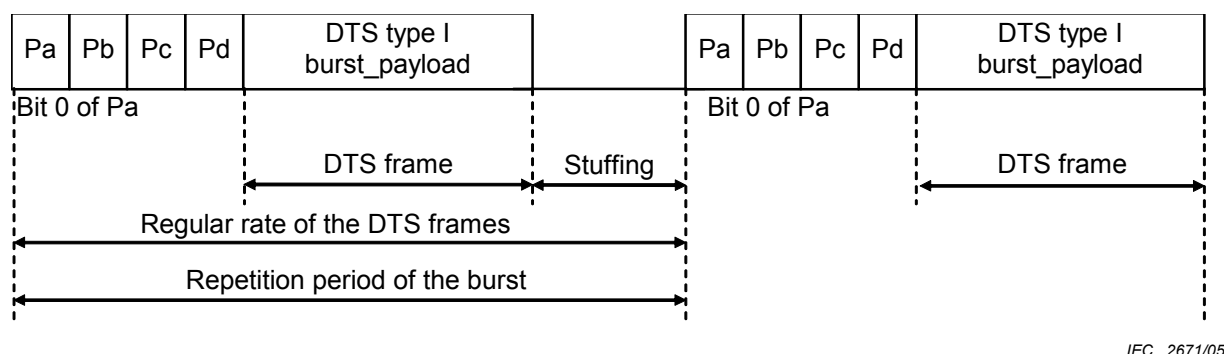

IEC 2671/05

Figure 1 – DTS type I data-burst

The data-type-dependent information for DTS type I is given in Table 3.

Table 3 – Data-type-dependent when DTS type I

Bits of Pc LSB..MSB	Value	Contents
8-12	00h	Reserved, shall be set to '0'

The reference point of a DTS type I data-burst is bit 0 of Pa and occurs exactly once every 512 sampling periods. The data-burst containing DTS type I frames occurs at a regular rate, with the reference point of each DTS type I data-burst beginning 512 IEC 60958 frames after the reference point of the preceding DTS type I data-burst (of the same bit-stream-number).

It is recommended that pause data-bursts be used to fill stream gaps in the DTS type I bitstream, as described in IEC 61937, and that pause data-bursts be transmitted with a repetition period of 3 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream gap length (which may not be a multiple of 3 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937).

When a stream gap in a DTS type I stream is filled by a sequence of pause data-bursts, the Pa of the first pause data-burst shall be located 512 sampling periods following the Pa of the previous DTS type I frame. It is recommended that the sequence(s) of pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 3 IEC 60958 frame length of the pause data-burst) the Pa of the first DTS type I data-burst which follows the stream gap.

NOTE 3 The gap-length parameter contained in the pause data-burst is intended to be interpreted by the DTS decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

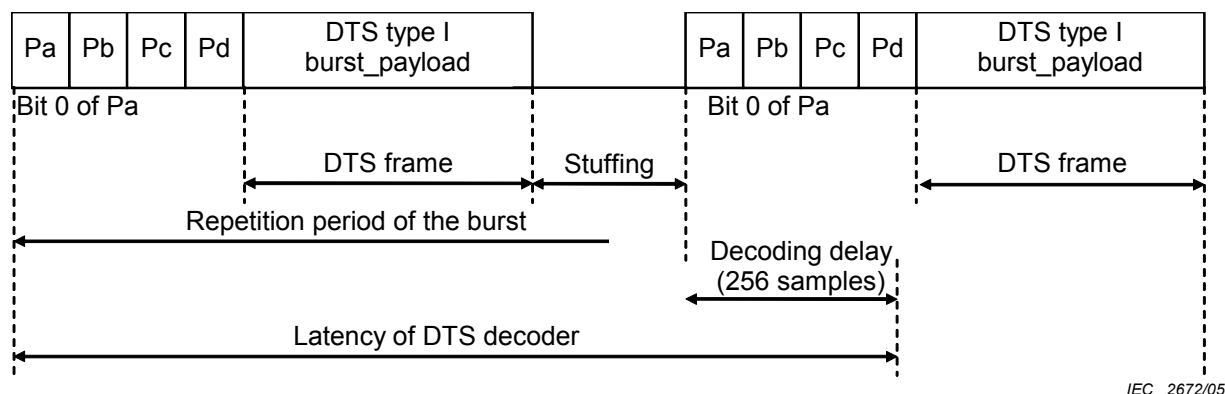


Figure 2 – Latency of DTS type II decoding

NOTE 4 The latency of a DTS decoder is defined as a delay measured from the reference point and equal to one frame (10,67 ms) plus 5,33 ms (equivalent to 256 samples). This is 768 PCM samples or 16 ms at 48 kHz sampling frequency.

5.3.2 DTS type II

The DTS bitstream consists of sequences of DTS frames. The data-type of a DTS data-burst type II is 0Ch. The data-burst is headed with a burst-preamble, followed by the burst-payload, and stuffed with stuffing bits. The burst-payload of each data-burst of DTS type II data shall contain one complete DTS-frame and represents 1 024 samples for each encoded channel.

NOTE 1 The length of the DTS type II data-burst depends on the encoded bit rate (which determines the DTS-frame length).

NOTE 2 The reference to the specification for the DTS bitstream, representing 1 024 samples of encoded audio per frame, is given in the bibliography.

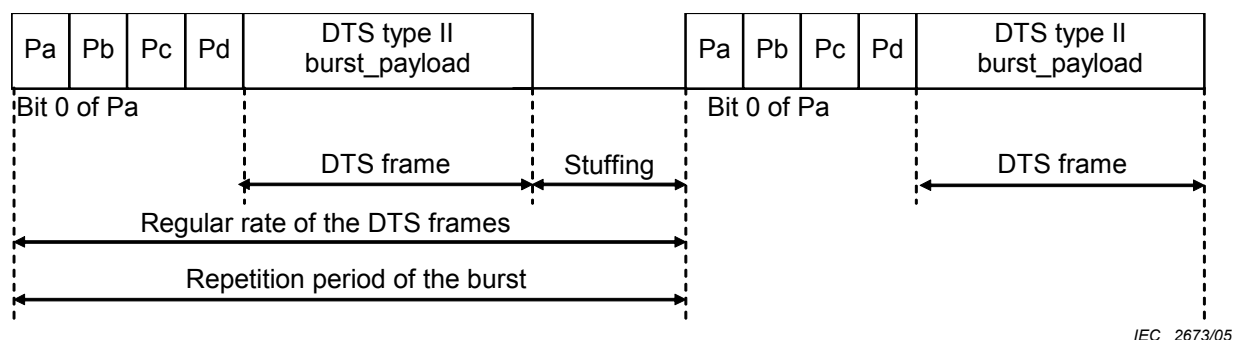


Figure 3 – DTS type II data-burst

The data-type-dependent information for DTS type II is given in Table 4.

Table 4 – Data-type-dependent when DTS type II


Bits of Pc LSB..MSB	Value	Contents
8-12	00h	Reserved, shall be set to '0'

The reference point of a DTS type II data-burst is bit 0 of Pa and occurs exactly once every 1 024 sampling periods. The data-burst containing DTS type II frames shall occur at a regular rate, with the reference point of each DTS type II data-burst beginning 1 024 IEC 60958 frames after the reference point of the preceding DTS type II data-burst (of the same bit-stream-number).

It is recommended that pause data-bursts be used to fill stream gaps in the DTS type II bitstream, as described in IEC 61937, and that pause data-bursts be transmitted with a repetition period of 3 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream gap length (which may not be a multiple of 3 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937).

When a stream gap in a DTS type II stream is filled by a sequence of pause data-bursts, the Pa of the first pause data-burst shall be located 1 024 sampling periods following the Pa of the previous DTS type II frame. It is recommended that the sequence(s) of pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 3 IEC 60958 frame length of the pause data-burst) the Pa of the first DTS type II data-burst which follows the stream gap.

NOTE 3 The gap-length parameter contained in the pause data-burst is intended to be interpreted by the DTS decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

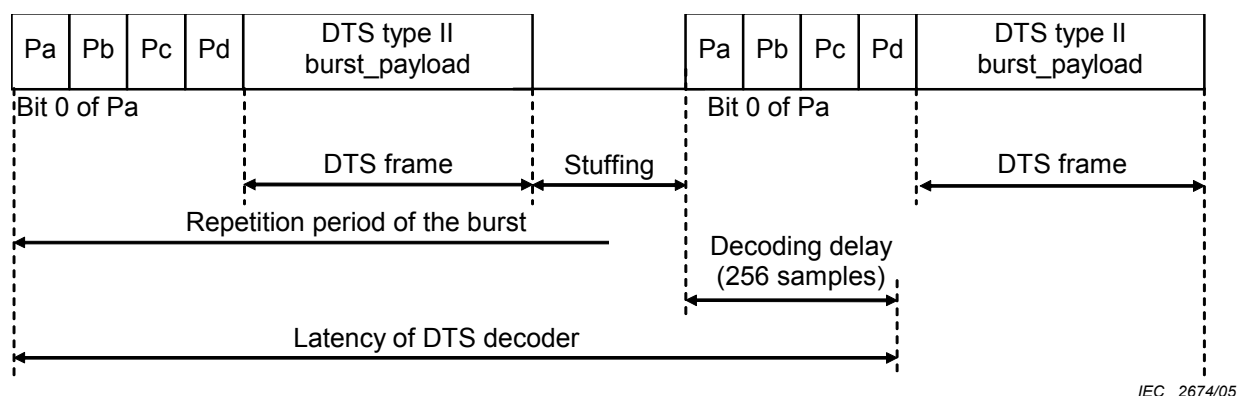**Figure 4 – Latency of DTS type II decoding**

NOTE 4 The latency of a DTS decoder is defined as a delay measured from the reference point and equal to one frame (21,34 ms) plus 5,33 ms (equivalent to 256 samples). This is 1 280 PCM samples or 26,67 ms at 48 kHz sampling frequency.

5.3.3 DTS type III

The DTS bitstream consists of sequences of DTS frames. The data-type of a DTS data-burst type III is 0Dh. The data-burst is headed with a burst-preamble, followed by the burst-payload and stuffed with stuffing bits. The burst-payload of each data-burst of DTS type III data shall contain one complete DTS-frame and represents 2 048 samples for each encoded channel.

NOTE 1 The length of the DTS type III data-burst depends on the encoded bit rate (which determines the DTS-frame length).

NOTE 2 The reference to the specification for the DTS bitstream, representing 2 048 samples of encoded audio per frame, is given in the bibliography.

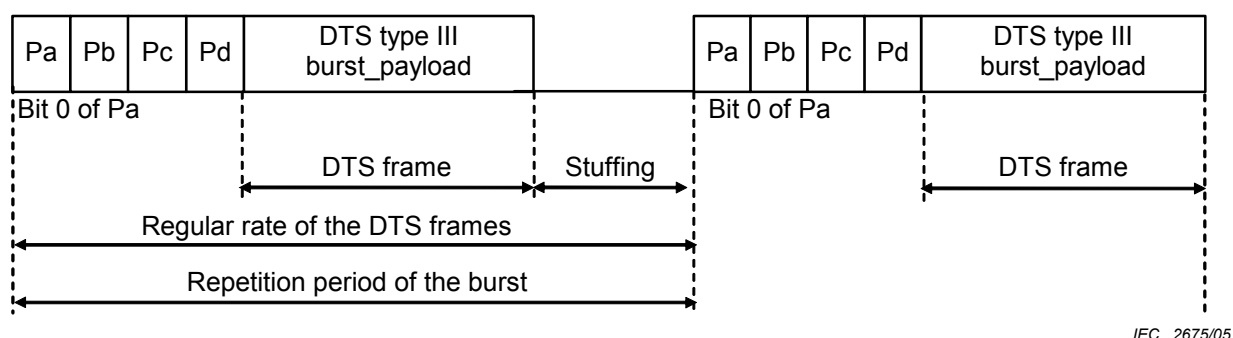


Figure 5 – DTS type III data-burst

The data-type-dependent information for DTS type III is given in Table 5.

Table 5 – Data-type-dependent when DTS type III

Bits of Pc LSB..MSB	Value	Contents
8-12	00h	Reserved, shall be set to '0'

The reference point of a DTS type III data-burst is bit 0 of Pa and occurs exactly once every 2 048 sampling periods. The data-burst containing DTS type III frames shall occur at a regular rate, with the reference point of each DTS type III data-burst beginning 2 048 IEC 60958 frames after the reference point of the preceding DTS type III data-burst (of the same bit-stream-number).

It is recommended that pause data-bursts be used to fill stream gaps in the DTS type III bitstream as described in IEC 61937, and that pause data-bursts be transmitted with a repetition period of 3 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream gap length (which may not be a multiple of 3 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937).

When a stream gap in a DTS type III stream is filled by a sequence of pause data-bursts, the Pa of the first pause data-burst shall be located 2 048 sampling periods following the Pa of the previous DTS type III frame. It is recommended that the sequence(s) of pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 3 IEC 60958 frame length of the pause data-burst) the Pa of the first DTS type III data-burst which follows the stream gap.

NOTE 3 The gap-length parameter contained in the pause data-burst is intended to be interpreted by the DTS decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

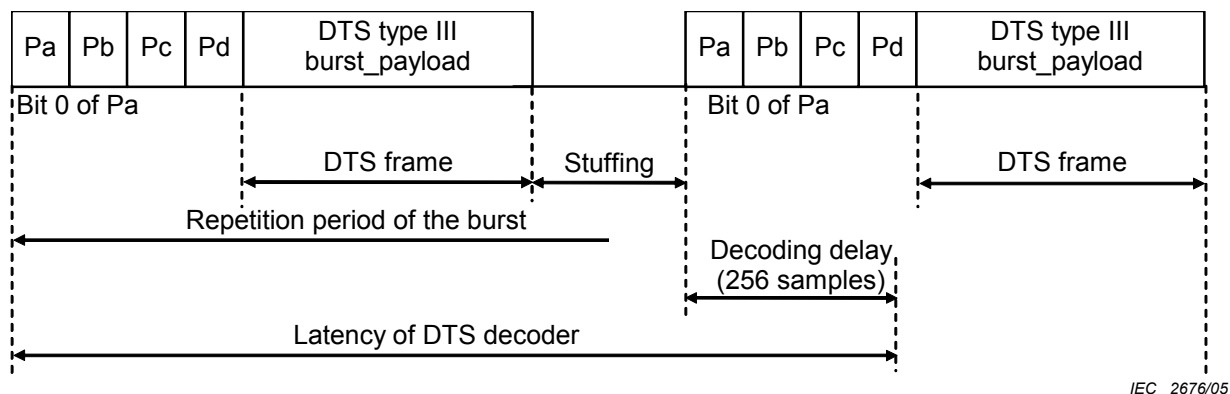


Figure 6 – Latency of DTS type III decoding

NOTE 4 The latency of a DTS decoder is defined as a delay measured from the reference point and equal to one frame (42,67 ms) plus 5,33 ms (equivalent to 256 samples). This is 2 304 PCM samples or 48 ms at 48 kHz sampling frequency.

5.3.4 DTS type IV

The DTS bitstream consists of sequences of DTS frames. The data-type of a DTS data-burst type IV is 11h. The data-burst is headed with a burst-preamble, followed by the burst-payload, and stuffed with stuffing bits.

The frame duration is the period of each complete audio frame and is relative to the base sample rate. In theory, any supported base sample rate may be applied. The nominal base sample rate for DTS Type IV is 48 kHz.

NOTE 1 The length of the DTS type IV data-burst depends on the encoded bit rate and the duration of the burst.

NOTE 2 The reference to the specification for the DTS-HD bitstream is given in the bibliography.

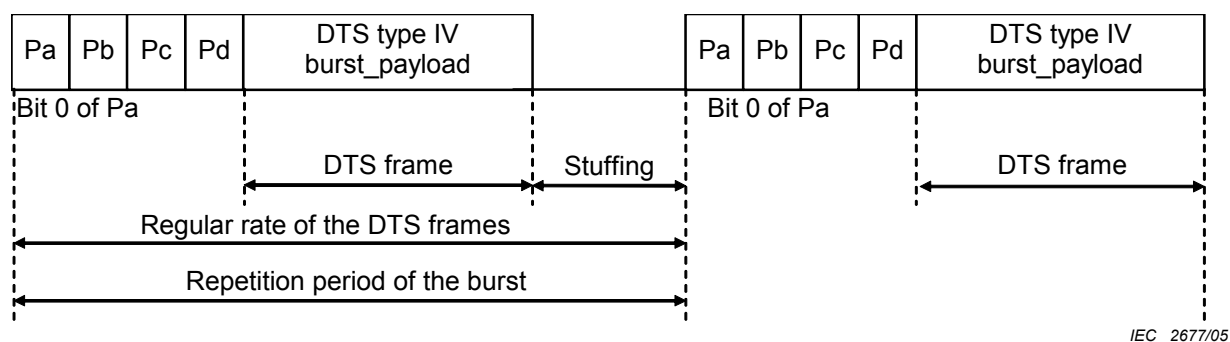


Figure 7 – DTS type IV data-burst

The units of **burst_length** shall be in bytes. This means the maximum size of a burst is 65 535 bytes.

The data-type-dependent information for DTS Type IV is given in Table 6.

Table 6 – Data-type-dependent when DTS type IV

Bits of Pc	Value	Meaning	
0-4	17	DTS Type IV	
5, 6		Reserved	
7		According to IEC 61937	
8-10	0	Repetition period of data-burst in IEC 60958 frames	512
	1		1 024
	2		2 048
	3		4096
	4		8 192
	5		16 384
	6		Reserved
	7		Reserved
11-12		Reserved	
13-15		According to IEC 61937	

The reference point of a DTS type IV data-burst is bit 0 of Pa. The data-burst containing DTS type IV frames shall occur at a regular rate, with the reference point of each DTS type IV data-burst beginning 1 audio frame period after the reference point of the preceding DTS type IV data-burst.

It is recommended that pause data-bursts be used to fill stream gaps in the DTS type IV bitstream as described in IEC 61937, and that pause data-bursts be transmitted with a repetition period of 3 IEC 60958 frames, except when other repetition periods are necessary to fill the precise stream gap length (which may not be a multiple of 3 IEC 60958 frames), or to meet the requirement on burst spacing (see IEC 61937).

When a stream gap in a DTS type IV stream is filled by a sequence of pause data-bursts, the Pa of the first pause data-burst shall be located one audio frame period following the Pa of the previous DTS type IV frame. It is recommended that the sequence(s) of pause data-bursts which fill the stream gap should continue from this point up to (as close as possible considering the 3 IEC 60958 frame length of the pause data-burst) the Pa of the first DTS type IV data-burst which follows the stream gap.

NOTE 3 The gap-length parameter contained in the pause data-burst is intended to be interpreted by the DTS decoder as an indication of the number of decoded PCM samples which are missing (due to the resulting audio gap).

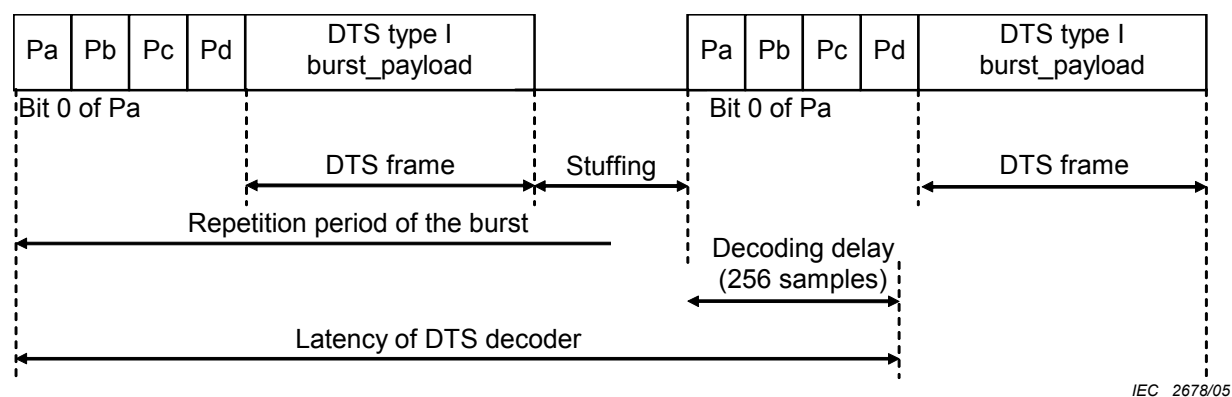


Figure 8 – Latency of DTS type IV decoding

NOTE 4 The latency of a DTS decoder is defined as a delay measured from the reference point and equal to one frame (10,67 ms) plus one subframe (256 samples at 48 kHz or 5,33 ms), equivalent to 16 ms.

Annex A (informative)

Effect of repetition period of data burst and F_s on frame period and maximum data rate in DTS type IV

A.1 Selection of DTS type IV mode

The DTS type IV mode selected will depend on the data rate required by the payload. Table A.1 shows IEC 60958 frame rates and repetition period and payload capacity in Mbps for the symbol rates shown.

Table A.1 – DTS type IV payload and frame repetition: some examples

Frame repetition period	IEC 60958 frame rate F_s	Frame period ms	Maximum data rate
512	48 kHz	10,67	1,524 Mbps
1 024	96 kHz	10,67	3,060 Mbps
2 048	192 kHz	10,67	6,132 Mbps
4 096	384 kHz	10,67	12,276 Mbps
8 192	768 kHz	10,67	24,564 Mbps
16 384	1 536 kHz	10,67	49,140 Mbps
16 384	768 kHz	21,33	24,570 Mbps
16 384	384 kHz	42,67	12,285 Mbps
16 384	192 kHz	85,33	6,1425 Mbps

The maximum data rates in Table A.1 assume a provision for two 60 958 frames for pad between bursts. Specific implementations may have additional restrictions.

Bibliography

The following documents have served as references for the specification of the related data-type.

DTS DTS-HD *Please contact DTS consumer licensing for the latest specifications for DTS and DTS-HD* ²

² DTS, Inc. 5171 Clareton Drive, Agoura Hills, CA 91301 email: consumerlicensing@ds.com



Standards Survey

The IEC would like to offer you the best quality standards possible. To make sure that we continue to meet your needs, your feedback is essential. Would you please take a minute to answer the questions overleaf and fax them to us at +41 22 919 03 00 or mail them to the address below. Thank you!

Customer Service Centre (CSC)

International Electrotechnical Commission

3, rue de Varembé

1211 Genève 20

Switzerland

or

Fax to: **IEC/CSC** at +41 22 919 03 00

Thank you for your contribution to the standards-making process.

A Prioritaire

Nicht frankieren
Ne pas affranchir



Non affrancare
No stamp required

RÉPONSE PAYÉE

SUISSE

Customer Service Centre (CSC)

International Electrotechnical Commission

3, rue de Varembé

1211 GENEVA 20

Switzerland



Q1 Please report on **ONE STANDARD** and **ONE STANDARD ONLY**. Enter the exact number of the standard: (e.g. 60601-1-1)

.....

Q2 Please tell us in what capacity(ies) you bought the standard (tick all that apply). I am the/a:

- purchasing agent ☐
librarian ☐
researcher ☐
design engineer ☐
safety engineer ☐
testing engineer ☐
marketing specialist ☐
other.....

Q3 I work for/in/as a:
(tick all that apply)

- manufacturing ☐
consultant ☐
government ☐
test/certification facility ☐
public utility ☐
education ☐
military ☐
other.....

Q4 This standard will be used for:
(tick all that apply)

- general reference ☐
product research ☐
product design/development ☐
specifications ☐
tenders ☐
quality assessment ☐
certification ☐
technical documentation ☐
thesis ☐
manufacturing ☐
other.....

Q5 This standard meets my needs:
(tick one)

- not at all ☐
nearly ☐
fairly well ☐
exactly ☐

Q6 If you ticked NOT AT ALL in Question 5 the reason is: (tick all that apply)

- standard is out of date ☐
standard is incomplete ☐
standard is too academic ☐
standard is too superficial ☐
title is misleading ☐
I made the wrong choice ☐
other

Q7 Please assess the standard in the following categories, using the numbers:

- (1) unacceptable,
(2) below average,
(3) average,
(4) above average,
(5) exceptional,
(6) not applicable

- timeliness.....
quality of writing.....
technical contents.....
logic of arrangement of contents
tables, charts, graphs, figures.....
other

Q8 I read/use the: (tick one)

- French text only ☐
English text only ☐
both English and French texts ☐

Q9 Please share any comment on any aspect of the IEC that you would like us to know:

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....



ISBN 2-8318-8427-6



9 782831 884271

ICS 33.160.60

Typeset and printed by the IEC Central Office
GENEVA, SWITZERLAND