TECHNICAL SPECIFICATION

ISO/TS 16878

First edition 2010-12-01

Direct reduced iron and hot briquetted iron — Determination of metallic iron — Iron(III) chloride titrimetric method

Minerais de fer préréduits et fer briqueté à chaud — Dosage du fer métallique — Méthode titrimétrique au chlorure de fer(III)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents Page

Forev	word	iv
Intro	duction	v
1	Scope	1
2	Normative references	1
3	Principle	1
4	Terms and definitions	2
5	Reagents	2
6	Apparatus	2
7	Sampling and sample preparation	3
8 8.1 8.2 8.3	Procedure	3 3 3
8.4 9	Determination Expression of results	
10	Number of tests and permissible tolerances	
11	Test report	4
12	Verification	5
Anne	ex A (informative) Schematic representation of the procedure	6
Anne	ex B (normative) Flowsheet for the procedure for the acceptance of test results	7
	ex C (informative) Results of inter-laboratory test programme	
	ography	

ISO/TS 16878:2010(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of normative document:

- an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50 % of the members of the parent committee casting a vote;
- an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

An ISO/PAS or ISO/TS is reviewed after three years in order to decide whether it will be confirmed for a further three years, revised to become an International Standard, or withdrawn. If the ISO/PAS or ISO/TS is confirmed, it is reviewed again after a further three years, at which time it must either be transformed into an International Standard or be withdrawn.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TS 16878 was prepared by Technical Committee ISO/TC 102, *Iron ore and direct reduced iron*, Subcommittee SC 2, *Chemical analysis*.

This document is issued as a Technical Specification (according to the ISO/IEC Directives, Part 1, 3.1.1.1) as a "prospective standard for provisional application" in the field of direct reduced iron and hot briquetted iron because there is an urgent need for guidance on how standards in this field should be used to meet an identified need.

This document is not to be regarded as an "International Standard". It is proposed for provisional application so that information and experience of its use in practice may be gathered. Comments on the content of this document should be sent to Technical Committee ISO/TC 102, Subcommittee SC 2.

A review of this Technical Specification will be carried out not later than 3 years after its publication with the options of: extension for another 3 years; conversion into an International Standard; or withdrawal.

Introduction

The determination of metallic iron has in the past been carried out by a method using bromine-methanol (ISO 5416). Due to the undesirability of using bromine, a method using iron(III) chloride has been developed. This method is also more likely than ISO 5416 to determine all relevant metallic iron.

As insufficient participants took part in the inter-laboratory test programme conducted to derive precision values for this method, the method cannot be used for referee purposes.

- The second sec

Direct reduced iron and hot briquetted iron — Determination of metallic iron — Iron(III) chloride titrimetric method

WARNING — This Technical Specification may involve hazardous materials, operations and equipment. This Technical Specification does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this Technical Specification to establish appropriate safety and health practices and to determine the applicability of regulatory limitations prior to use.

1 Scope

This Technical Specification specifies an iron(III) chloride titrimetric method for the determination of the mass fraction of metallic iron in hot briquetted iron (HBI) and direct reduced iron (DRI).

This method cannot be used for referee purposes.

NOTE The term 'metallic iron' means those forms of iron not bonded to oxygen and not present as pyrite; it includes iron present as cementite (Fe₃C).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 385-1, Laboratory glassware — Burettes — Part 1: General requirements

ISO 648, Laboratory glassware — Single-volume pipettes

ISO 1042, Laboratory glassware — One-mark volumetric flasks

ISO 3696, Water for analytical laboratory use — Specification and test methods

ISO 11323, Iron ore and direct reduced iron — Vocabulary

ISO 10835, Direct reduced iron and hot briquetted iron — Sampling and sample preparation

3 Principle

Iron present in the oxidation state Fe⁰ in the sample is oxidized to Fe⁺² by the action of FeCl₃ according to the reaction:

$$Fe^0 + 2Fe^{+3} \longrightarrow 3Fe^{+2}$$

The Fe⁺² is titrated with a solution of potassium dichromate using sodium diphenylamine sulfonate as an indicator.

4 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11323 apply.

5 Reagents

All reagents used in this procedure are to be prepared using analytical reagent-grade chemicals, unless otherwise specified. The water used for preparing solutions shall comply with grade 2 of ISO 3696.

5.1 Iron(III) chloride hexahydrate

To a 2 000 ml container holding 600 ml of water, add 250 g of iron(III) chloride hexahydrate and agitate until it is completely dissolved. Dilute with water to a volume of 1 l.

- **5.2** Sulfuric acid (1,84 g/ml).
- **5.3** Phosphoric acid (1,7 g/ml).
- 5.4 Sulfuric acid (15 %)/phosphoric acid (15 %) mixture.

To a 3 000 ml beaker add 1 000 ml of water. Place the beaker in a cool place and add slowly, while stirring, 300 ml of phosphoric acid (5.3). Allow to cool. Add slowly, while stirring, 300 ml of sulfuric acid (5.2) and allow to cool. Dilute this mixture to 2 000 ml while stirring. Store the solution in a 2 000 ml high-density polyethylene bottle or equivalent container.

5.5 Sodium diphenylamine sulfonate

Dissolve 0,2 g of sodium diphenylamine sulfonate in 100 ml of water.

5.6 Standard potassium dichromate solution (0,1 N)

Dry potassium dichromate at $150\,^{\circ}\text{C}$ for 3 h. Remove potassium dichromate from the oven and cool to room temperature in a desiccator or over silica gel. Weigh 9,806 3 g of potassium dichromate [with a minimum purity of 99,9 % (mass fraction)] into a weighing scoop and transfer qualitatively to a 2 000 ml volumetric flask. Add 1 500 ml of water and dissolve potassium dichromate. When dissolution is complete, dilute to volume and mix thoroughly.

5.7 Inert gas, carbon dioxide (CO_2) , argon (Ar) or nitrogen (N_2) .

6 Apparatus

Use one-mark A-grade volumetric flasks complying with the specifications of ISO 648 and ISO 1042 respectively, and the following.

- **6.1** Analytical balance, capable of weighing to the nearest 0,1 mg.
- **6.2** Erlenmeyer flask, wide mouth (500 ml).
- **6.3 Stopper**, to fit the Erlenmeyer flask, modified to allow nitrogen to pass through the beaker.
- **6.4** Hotplate, with a magnetic stirrer.
- 6.5 Magnetic stirrer bar.
- **6.6 Measuring cylinder**, of an appropriate volume.

- **6.7 A-grade burette,** Mark A, complying with the specifications of ISO 385-1.
- 6.8 Non-magnetic spatula.
- 6.9 Graduated measuring cylinder.

7 Sampling and sample preparation

For analysis, use a laboratory sample of minus 160 µm particle size which has been taken and prepared in accordance with ISO 10835. Metallized fines should be dried in an inert atmosphere and stored where possible in an airtight container flushed with a dry inert gas to prevent re-oxidation of the sample.

Thoroughly mix the laboratory sample using non-magnetic materials. Taking multiple increments with a non-magnetic spatula, extract a test sample of not less than 25 g in such a manner that it is representative of the whole of the contents of the container. When taking the test portion for the purpose of analysis, expose the sample to air for as short a time as practical. After weighing, immediately replace the remaining material in its container, flush with an inert gas and store.

8 Procedure

8.1 General

A schematic representation of the procedure is given in Annex A.

8.2 Number of determinations

All determinations should be carried out in duplicate. If necessary, make further determinations in accordance with the flowsheet given in Annex B.

8.3 Preparation of test portions

Accurately weigh 0,200 0 g \pm 0,005 0 g of the test sample. Record the sample mass (m).

8.4 Determination

Transfer the sample to a 500 ml Erlenmeyer flask and add sufficient water to the sample to cover the stirring bar (at least 15 ml).

Dispense 35 ml of ferric chloride solution (5.1) into the flask after first eliminating air from the flask by slushing with a controlled flow of inert gas. Control the temperature of the solution to below 80 °C.

Adjust the nitrogen flow to a gentle stream and fit the stopper to the flask.

WARNING — Adjust the nitrogen flow while the stopper is not fitted to the flask. Adjusting the nitrogen flow while the stopper is fitted to the beaker may cause the solution to be forced out of the beaker.

Heat the solution, while stirring, for 20 min.

Remove from the hotplate and cool in an ice bath or cold water, maintaining the nitrogen flow, until the solution is at room temperature.

Remove the stopper and add 30 ml of sulfuric acid/phosphoric acid solution (5.4), 200 ml of water and 1 ml of sodium diphenylamine sulfonate indication (5.5).

ISO/TS 16878:2010(E)

Titrate the solution with 0,1 N potassium dichromate (5.6) to the first permanent end-point (purple colour).

Perform a blank by following the procedure without the sample. Record the blank titration volume as V_0 .

NOTE A blank needs to be performed every time a new batch of ferric chloride solution is prepared.

9 Expression of results

Determine the mass fraction of metallic iron, w_{Fe} , expressed as a percentage, in the sample using Equation (1):

$$w_{\text{Fe}} = \frac{\left(V - V_0\right) \times N \times 5,585}{m \times 3} \tag{1}$$

where

V is the volume, in millilitres, of potassium dichromate consumed during the titration of the sample;

 V_0 is the volume, in millilitres, of potassium dichromate consumed during the titration of the blank;

N is the normality of potassium dichromate solution;

m is the sample mass, in grams.

10 Number of tests and permissible tolerances

The test shall be carried out in duplicate. If the difference between the paired results is within the permissible range (R_d), the mean value of the results shall be reported as the final result to one decimal place. If the difference between the paired results exceeds R_d , further test(s) shall be carried out in accordance with the flowsheet given in Annex B.

The permissible range (R_d) for this method is 0,46.

NOTE The results obtained in a limited inter-laboratory test programme are contained in Annex C.

11 Test report

The test report shall include the following information:

- a) a reference to this International Standard, i.e. ISO/TS 16878:2010;
- b) the name and address of the testing laboratory;
- c) the date of the test report;
- d) details necessary for the identification of the sample;
- e) the results of the test, to one decimal place;
- f) any characteristics noticed during the test and any operations which may have had an influence on the results, e.g. drying time, titration end-point;
- g) all operations not specified by this International Standard or regarded as optional;

- h) a reference to verification activities;
- i) the names of the supervisor and person who performed the test.

12 Verification

Checks shall be carried out at regular intervals. The frequency of checking is a matter for each laboratory to determine. The following items shall be checked.

- a) Solutions should be standardized on a weekly basis.
- b) Regularly check nitrogen-pressure measurement devices.
- c) Regularly calibrate weighing devices.
- d) Appropriate records of all verification activities must be maintained.

Annex A

(informative)

Schematic representation of the procedure

Weigh 0,2 g and record exact mass m Add to flask and stirring rod Make sure balance is level and clean, use dry, clean flask and rod

Add 15 ml of water Add 35 ml of FeCl₃



Place on hotplate under nitrogen Solution temperature 80 °C, check nitrogen-pressure gauge



Cool in ice bath under nitrogen to room temperature



Add 30 ml of sulfuric/phosphoric acid 200 ml of demineralized water 1 ml of indicator



Titrate with 0,1 N potassium dichromate with a correctly standardized solution




Calculate the test results to one decimal place, according to Clause 8

Annex B

(normative)

Flowsheet for the procedure for the acceptance of test results

Start with independent duplicate results

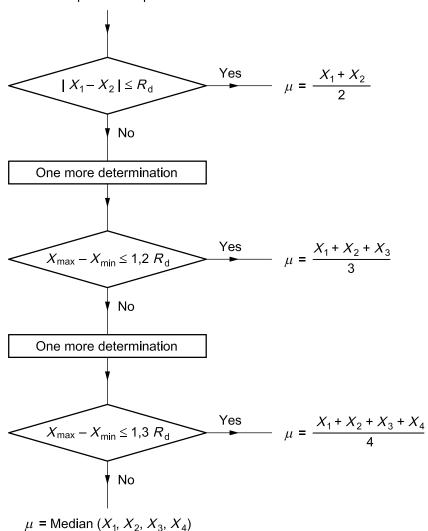

Annex C (informative)

Results of inter-laboratory test programme

Four samples of DRI and one certified reference material, covering the range 11 % to 85 % mass fraction of metallic iron, were circulated to 19 laboratories for an international round robin test. Samples were ground to $-150 \, \mu m$ and sealed in vials before distribution, to remove any variation due to different sample preparation techniques at the various laboratories.

Results were provided from five laboratories and communication was received from another three.

The results were plotted in Figures C.1 to C.5. In general, the laboratories agree closely, with results falling within a range of mass fractions of metallic iron of less than 1 %.

The results were statistically analysed using ISO 5725-2. The independent duplicate limit, $R_{\rm d}$, which is the maximum difference expected between two independent duplicate measurements at a 95 % probability level, was found to be 0,46 for metallic iron (average result as there is no reliable trend in $R_{\rm d}$ with increasing metallic iron level).

The permissible tolerance between laboratories, P, which is the maximum difference expected between mean results from two different laboratories at a 95 % probability level, was found to be 0,47 for metallic iron.

These results compare favourably with the numbers published in ISO 5416 (metallic iron determination by bromine-methanol titrimetric method) of $R_d = 0.52$ and P = 1.7 (for a mass fraction of metallic iron of 85 %).

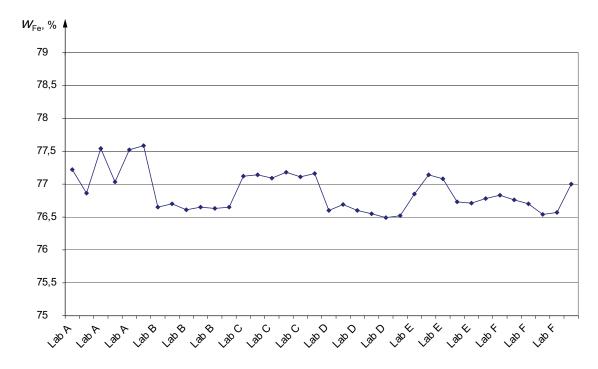


Figure C.1 — Metallic iron analyses for sample No. HB 1831 (DRI sample with 0,6 % carbon)

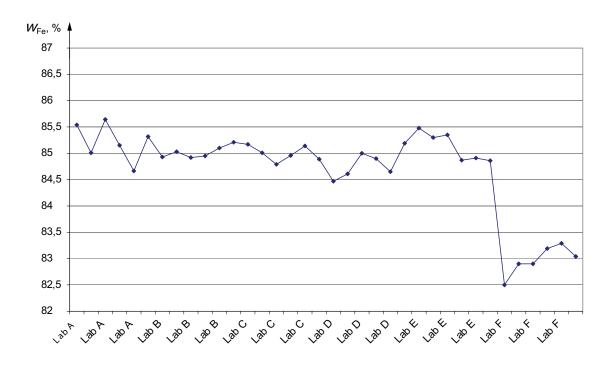


Figure C.2 — Metallic iron analyses for sample No. HB1854 (DRI sample with 3,9 % carbon)

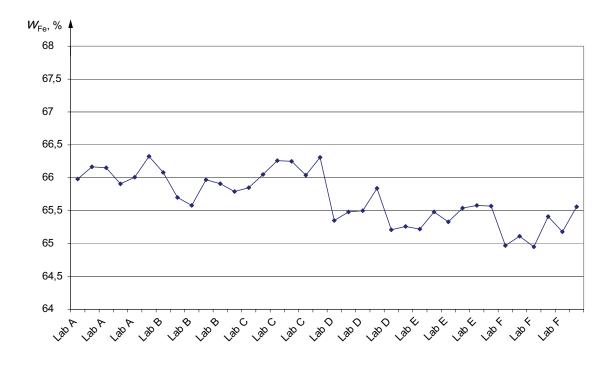


Figure C.3 — Metallic iron analyses for sample No. HB1904 (DRI sample with 0,3 % carbon)

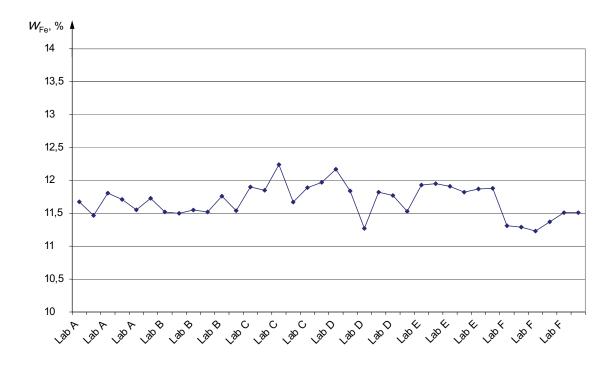


Figure C.4 — Metallic iron analyses for sample No. HB1938 (DRI sample with 0,3 % carbon)

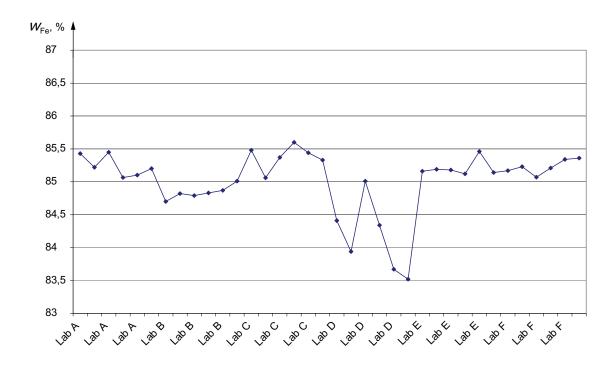


Figure C.5 — Metallic iron analyses for sample No. HB2840 (CRM NBS691, certified at 84,6 $\%\pm0.6$ % metallic iron using the bromine-methanol method, 0,1 % carbon)

Table C.1 gives the mass fractions of metallic iron obtained from analyses.

Table C.1 — Summary of metallic iron analyses

Mass fractions of metallic iron in percent

	Sample							T		
	1831	1831	1854	1854	1904	1904	1938	1938	2840	2840
	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)
Laboratory A	77,22 ^a	77,03 ^a	85,54	85,15	65,98	65,91	11,67	11,71	85,43	85,06
	76,86 ^a	77,52 ^a	85,01	84,66	66,17	66,01	11,47	11,55	85,22	85,10
	77,54 ^a	77,58 ^a	85,64	85,32	66,15	66,33	11,81	11,73	85,45	85,20
Mean	77,29 ^a		85,22		66,09		11,66		85,24	
Error	0,30		0,36		0,15		0,13		0,16	
Laboratory B	76,65	76,65	84,93	84,95	66,08	65,97	11,52	11,52	84,70	84,83
	76,70	76,63	85,03	85,10	65,70	65,91	11,50	11,76	84,82	84,87
	76,61	76,65	84,92	85,21	65,58	65,79	11,55	11,54	84,79	85,01
Mean	76,65		85,02		65,84		11,57		84,84 ^b	
Error	0,	03	0,	11	0,18		0,10		0,10	
Laboratory C	77,12	77,18	85,17	84,96	65,85	66,25	11,90	11,67	85,48	85,60
	77,14	77,11	85,01	85,14	66,05	66,04	11,85	11,89	85,06	85,44
	77,09	77,16	84,79	84,89	66,26	66,31	12,24	11,97	85,37	85,33
Mean	77,13		84,99		66,13		11,92		85,38 ^b	
Error	0,03		0,15		0,18		0,19		0,18	
Laboratory D	76,60	76,55	84,47	84,90	65,35	65,84	12,17 ^a	11,82 ^a	84,41 ^a	84,34 ^a
	76,69	76,49	84,61	84,65	65,48	65,21	11,84 ^a	11,77 ^a	83,94 ^a	83,67 ^a
	76,60	76,52	85,00	85,19	65,50	65,26	11,27 ^a	11,53 ^a	85,01 ^a	83,52 ^a
Mean	76	,57	84	,80	65	,44	11,	,73 ^a	84,	,15 ^a
Error	0,07		0,27		0,23		0,31		0,55	
Laboratory E	76,85	76,73	85,48	84,87	65,22	65,54	11,93	11,82	85,16	85,12
	77,14	76,71	85,30	84,91	65,48	65,58	11,95	11,87	85,19	85,46
	77,08	76,78	85,35	84,86	65,33	65,57	11,91	11,88	85,18	85,14
Mean	76	76,88 85,13 65,45 11,89		85	,21					
Error	0,18		0,28		0,15		0,05		0,13	
Laboratory F	76,83	76,54	82,50	83,19	64,97	65,41	11,31	11,37	85,17	85,21
	76,76	76,57	82,90	83,29	65,11	65,18	11,29	11,51	85,23	85,34
	76,70	77,00	82,90	83,04	64,95	65,56	11,23	11,51	85,07	85,36
Mean	76,73 82,97 ^b		97 ^b	65,20		11,37		85,23		
Error	0,	17	0,28		0,24		0,12		0,11	
1	•		•		•		•			

One replicate or entire sample excluded from statistical analysis, as the within-laboratory error was too high.

b Sample mean excluded from statistical analysis, as the between-laboratory error was too high.

Table C.2 — Statistical analysis

	Sample								
	1831	1854	1904	1938	2840				
All samples:									
Mean metallic iron, %	76,88	84,69	65,69	11,69	85,01				
SD (B)	0,28	0,85	0,38	0,21	0,46				
Number of laboratories	6	6	6	6	6				
Selected samples only:									
Mean	76,79	85,03	65,69	11,68	85,23				
Number of laboratories	5	5	6	5	3				
SR	0,118 6	0,251 5	0,192 2	0,123 1	0,140 2				
SL	0,215 8	0,117 0	0,375 5	0,225 2	0,000 0				
Within-laboratoriy error	0,157 6		At 0 % = 0,1576						
Between-laboratories error	0,204 9		At 0 % = 0,2049						
NOTE Cochran and Grubbs' statistical outliers were deleted at the 5 % level.									

Bibliography

- [1] ISO 2597, Iron ores Determination of total iron content Titrimetric methods
- [2] ISO 5416:2006, Direct reduced iron Determination of metallic iron Bromine-methanol titrimetric method
- [3] ISO 5725-2:1994, Accuracy (trueness and precision) of measurement methods and results Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method

ISO/TS 16878:2010(E)

ICS 73.060.10

Price based on 13 pages

Copyright International Organization for Standardization Ved Provided by IHS under license with ISO No reproduction or networking permitted without license from IHS