U.S. Sporting Goods, Inc.

MODEL Z5



Bolt Action Rifle

WARNINGS AND INSTRUCTION MANUAL

U.S. Sporting Goods, Inc. 411 Hawk Street Rockledge, Florida 32955 (321) 639-4842 www.ussginc.com

E-mail: ussg@eaacorp.com

U.S.SPORTING GOODS, INC. MODEL Z5 BOLT ACTION RIFLE

WARNINGS AND INSTRUCTION MANUAL PLEASE READ THESE INSTRUCTIONS

MODEL #	BARREL LENGTH	CALIBERS	FINISH	WEIGHT	OVERALL LENGTH
Z5	22"	22 LR, 22 WMR 17HMR	BLUE	6.75lbs	40.75"
Z5 YTH	16.5"	22LR	BLUE	5.5lbs	35.25"

FOR YOUR SAFETY AND THE SAFETY OF OTHERS, this owner's manual contains important warnings and safety procedures which must be understood BEFORE using this firearm. Read the ENTIRE MANUAL and if you do not understand any part of it or the operation of your Bolt Action Rifle, stop and seek professional firearms instructions. You can get a copy of this manual from US SPORTING GOODS, Inc. on request.

#	#					
and	a description of it:					

Record the serial number of your firearm.

Make a copy of this manual, proof of purchase/sales record for safekeeping in a secure safe or fireproof container. Such proof is necessary if the firearm is stolen or for warranty repair. Before handling any firearm, make sure you know the safety procedures and most importantly, keep the firearm pointed in a safe direction.

⚠ WARNING

YOU RISK INJURY OR DEATH BY HANDLING THIS FIREARM
Before handling this firearm, read, understand and follow the instructions in this manual. Always keep this manual with the firearm. If you lend, give or sell this firearm, be sure the manual goes with it. If there is anything you do not understand, seek advice from someone qualified in safe handling of firearms.



^{*}This firearm should always be transported and stored unloaded in its case.*

Type Of Ammunition To Be Used:

It is suggested that high quality commercially manufactured ammunition be used in this firearm. Some factory ammunition works better than others and you should stick with the brand you find works well in your Bolt Action Rifle. Avoid military surplus or hot loaded ammo. The use of reloaded, high pressure or hand loaded ammunition will void the warranty.

NOTICE

BOLT ACTION RIFLES ARE CLASSIFIED AS FIREARMS OR DANGEROUS WEAPONS and are sold by US SPORTING GOODS, Inc. with the specific understanding that we are not responsible in any manner what-so-ever for their safe handling or resale under local laws and regulations.

US SPORTING GOODS, Inc. shall not be responsible in any manner whatsoever for malfunctioning of the firearm, for physical injury or for property damage resulting in whole or in part from (1) intentional or negligent discharge, (2) improper or careless handling, (3) unauthorized modifications and/or alteration to the internal/safety mechanisms, (4) defective, improper, high pressure, hand loaded, or reloaded ammunition, (5) corrosion and/or lack of proper maintenance (6) neglect, or (7) other influences beyond our direct and immediate control. This limitation applies regardless of whether liability is asserted on the basis of contract, negligence or strict liability (including any failure to warn). Under no circumstance shall US SPORTING GOODS, Inc. be liable for incidental or consequential damages, such as loss of use of property, commercial loss and loss of earnings or profits.

Safety Procedures:

- We recommend that you get competent firearms instruction in safe handling before using this firearm. Please ask your dealer. All guns are extremely dangerous if carelessly handled or used. Remember that the <u>firearm user</u> is the primary "safety" and to depend on any mechanical devices is to be only half safe.
- 2. This firearm will fire if a cartridge is in the chamber and the trigger is pulled and the safety is disengaged.
- DO NOT LOAD THIS BOLT ACTION RIFLE UNTIL YOU UNDERSTAND HOW THIS BOLT ACTION RIFLE OPERATES. KEEP this Bolt Action Rifle unloaded at all times except when ready to fire and you are sure of your target.
- 4. ALWAYS carry this Bolt Action Rifle in a case or original box unloaded.
- 5. NEVER point this Bolt Action Rifle at anything that is not your intended target even if this Bolt Action Rifle is unloaded. When loading, cleaning, unloading or handling, always be sure the muzzle is pointed in a safe direction and always keep your finger off the trigger.

- 6. NEVER assume any gun is unloaded. Before handling, check to make sure the chamber is empty. See unloading Instructions and then unload any ammunition. Make sure you know that this or any firearm is fully unloaded before displaying or handling it. When handling any firearm, keep your fingers away from the trigger at all times until you intend to fire.
- 7. WARNING: The actual firearm does not contain any lead; however, it does fire ammunition containing lead or lead compounds known to the State of California to cause cancer, birth defects, reproductive toxicity, and other serious physical injury. Those who discharge a firearm, stand near someone who discharges a firearm or cleans firearms are hereby warned of the dangers presented by lead and lead compounds and should take protective health measures. Avoid exposure to lead while handling and wash your hands after contact. Proper air ventilation is absolutely necessary when shooting indoors.

AMMUNITION WARNING

Old, Hot-loaded and/or re-loaded ammunition may be dangerous. Because of the poor or nonexistent quality control standards among some companies or people who make reloaded ammunition and the dangers of overloads and under loads (squib loads) which may occur, we recommend that only good quality new factory ammunition be fired in our firearms. [If you prepare your own hand loads, do NOT exceed recommended pressures in line with those generated by standard factory loads as manufactured by Remington, Winchester, Federal, PMC or other reputable companies.] Old ammunition may not fire with sufficient force to expel the projectile from the barrel.

READING THESE SAFETY RULES WILL SAVE YOUR LIFE OR THE LIFE OF SOMEONE ELSE

Get instructions from a competent firearms instructor before using this or any firearm. Learn from a professional how to handle, load, unload, operate, fire and care for your gun.

NEVER PLAY with your firearm. It is not a toy and can be a very dangerous weapon that can cause serious personal injury or death.

Always keep the gun pointed in a safe direction. Treat every gun as if it is loaded...all the time. NEVER point any firearm (loaded or unloaded) at any person or anything you do not intend to shoot. Always keep your gun unloaded until ready to use and make sure that it is unloaded before cleaning.

Keep your finger OFF the trigger until you are actually aiming at the target and ready to shoot. Learn to rest your finger outside of the trigger guard.

Never rely on a gun's "safety " to protect you from unsafe gun handling. A safety is only a mechanical device, not a substitute for common sense and gun safety procedures.

Never leave a gun unattended or where it could fall and fire.

READING THESE SAFETY RULES WILL SAVE YOUR LIFE OR THE LIFE OF SOMEONE ELSE

Store guns and ammunition separately **beyond the reach of children**. Make sure that they are properly secured so untrained individuals and children will be denied access to your guns and ammo.

Test your gun's operation and safeties only at a shooting range while the firearm is pointed in a safe direction.

Know your target and what is beyond. Ask yourself what your bullet will hit if it misses the target or passes through the intended target. Remember, a fired projectile can travel over a mile (including a ricochet) and is capable of going through walls.

Guns and alcohol or drugs do not mix. Don't take any alcoholic beverages and/ or drugs before or during shooting activities.

Never pull a gun toward you by the muzzle. Don't climb a tree, cross a ditch or fence with a loaded gun.

Always empty guns before entering a house, car, truck, boat, RV, camp or any building.

When receiving a gun, always open the action and check to make sure the chamber is unloaded.

NEVER accept anyone's word that a gun is "unloaded" or "empty". You should immediately open the action and check to make sure it is unloaded.

Be careful with <u>ALL</u> ammunition. Even "blank" cartridges are deadly at close range due to the muzzle blast. Make sure your ammunition is in new and in good clean condition. Do NOT oil or grease ammo as this may damage the cartridge primer. Do NOT tamper with or alter the standard factory ammunition.

Keep firearms unloaded when not actually in use. Load the gun only when on the range preparing to fire and unload it before leaving the range.

Never put your hand over the muzzle of a gun.

ALWAYS WEAR protective shooting glasses and hearing protection when using firearms.

Spectators should be at least 10 feet behind and away from the shooter while the shooter is loading, shooting and unloading. Spectators should wear protection for hearing and sight loss and they should avoid distracting those shooting their firearms.

Never drop your gun. If you do drop it, unload it and check it for proper function before using it again.

Do NOT alter or modify your gun. Don't try to change your gun's trigger pull, because it may affect sear engagement and thereby cause accidental firing.

READING THESE SAFETY RULES WILL SAVE YOUR LIFE OR THE LIFE OF SOMEONE ELSE

Do NOT remove any internal safety or safety device on the firearm. Safety mechanisms are designed to protect you from injury or death.

Do maintain and keep your gun clean. Keep in a dry place away from other metals and water. If your gun shows sign of corrosion or improper operation, have it serviced by a competent gunsmith.

Keep the muzzle pointed in a safe direction when loading and unloading your gun. Never point the muzzle at anyone.

Never shoot at hard flat surfaces or water....bullets ricochet.

If a gun fails to fire when the trigger is pulled, keep it pointed down range at the target for 60 seconds. Sometimes slow primer ignition will cause a "hang fire" and the cartridge will go off after a short pause. If it still fails to fire, keep muzzle pointed in safe direction and avoid exposure to the breech, as you attempt to unload your firearm.

Never let water, snow, mud or other material enter the barrel. Always be sure the barrel is free of any obstruction.

Since many ammunition identifications sound similar, be sure that you use only the correct ammunition for your gun. Do NOT use the wrong size or wrong strength ammunition in your firearm.

Repeated and prolonged exposure to gunfire may cause toxic levels of lead in your body. High levels of lead in the blood may result in cancer, impotency, birth defects and other serious physical injury. When shooting indoors, make sure there is proper fresh air ventilation.

Teach children: 1. NOT to touch guns, bullets, cartridges, shells, flares or any explosive device and 2. If they discovery such a dangerous item or weapon, they must immediately report its location to their parents, school teacher or police.

Remember a firearm has the capability of taking your life or the life of someone else. Be careful with your firearm — an accident is almost always the result of not following basic safety rules.

HOME SAFETY IS PROBABLY YOUR BIGGEST CONCERN. We suggest a gun lock such as Master Gun Locks. They work on most firearms and are available in gun shops and sporting goods departments. For more information write: Master Gun Locks; Master Lock Company, P.O. Box 10367, Milwaukee. WI 53210. You have invested this much in your new firearm, now invest a little more in your family's safety.

USED FIREARMS If you got your US Sporting Goods, Inc. firearm as a used gun, BEFORE USING IT you should unload it and check all its functions to be sure it works correctly. Firearms are sometimes altered to work incorrectly, or parts may be removed, lost or replaced with incorrect parts. First, unload it and check it yourself and then take it to a good gunsmith who knows US Sporting Goods, Inc. firearms, and have him examine it.

WRITE US concerning any items or circumstances which you don't understand and which might relate to your safety and the operation of your firearm.

⚠WARNING

BEFORE LOADING or firing a Bolt Action Rifle, examine the bore and the firing chamber to be certain they are clean and free of any obstruction. Even a heavy coat of oil, grease, snow or water may result in damage to the firearm and injury to the shooter and/or persons near the firearm. A misfire or unusual sound upon firing is a signal to cease firing and to examine the chamber and bore. If there is any obstruction, clear the obstruction and clean the bore and chamber before firing.

♠ FIRING WARNING

When shooting, full eye and ear protection is mandatory at all times. Shooters and spectators must wear shooting glasses and sound suppressor to prevent eye injury and hearing loss. *Vision loss and hearing impairment can occur with only one moment of non-protection.*

^WARNING

Any bore obstruction, even if it is only partly blocked, may cause the gun to blow up if it is fired, or may cause damage to the gun such as a bulged barrel. To avoid injury or death to the shooter or bystanders, check the barrel before shooting or if a shot does not sound normal.

WARNING

Always keep the muzzle pointed in a safe direction! Never attempt to load or unload any firearm inside a vehicle, building or other confined space (except a properly constructed shooting range). Enclosed areas frequently offer no completely safe direction in which to point the firearm. If an accidental discharge occurs, there is great risk of injury or property damage. Before loading, always clean all, grease and oil from the bore and chamber, and check to be certain that no obstruction is in the barrel. Any foreign matter in the barrel could result in a bulged or burst barrel or other damage to the firearm and could cause serious injury to the shooter or to others.



If there is any reason to suspect that a bullet or projectile is obstructing the barrel, immediately unload the firearm (See Unloading Instructions) and check the chamber and the bore. A bullet may be lodged some distance down the barrel where it can not easily be seen. Check the bore by using a cleaning rod to pass through the barrel. If a blockage is in the bore, DO NOT ATTEMPT TO SHOOT IT OUT WITH ANOTHER CARTRIDGE, OR BLOW IT OUT WITH A BLANK CARTRIDGE OR A CARTRIDGE FROM WHICH THE BULLET HAS BEEN REMOVED. SUCH TECHNIQUE(S) CAN GENERATE EXCESSIVE PRESSURE, DAMAGE THE FIREARM AND CAUSE SERIOUS PERSONAL INJURY. If the blockage can be removed with a cleaning rod, clean any unburned powder grains from the bore, chambers & mechanism before resuming shooting. If the blockage can not be dislodged by tapping it with a cleaning rod, take the firearm to a gunsmith.

MARNING (Mechanical Malfunctions)

STOP SHOOTING IMMEDIATELY AND UNLOAD YOUR FIREARM if your firearm develops: a mechanical malfunction; binding or stoppage; spitting powder/gas; a cartridge primer is punctured; a cartridge case is bulged or ruptured; or the sound on firing does not sound quite right. Do NOT try one more shot but unload your firearm and take it and the ammunition to a qualified gunsmith or send it back to USSG for examination. Do not assume that the Bolt Action Rifle is empty merely because you checked the chamber. You must also check the bore for any fired cartridge jammed inside the barrel.



Operating Instructions

Model Five rifles are manufactured with a 5-round detachable box magazine or single round detachable magazine. Before loading your rifle for the first time, make sure (1) you have read and understand all of the warnings and instructions in this Owner's Manual, and (2) you have removed all grease and oil from the barrel and chamber and any obstructions from the barrel.

External Control Parts:

The Safety Mechanism

The safety mechanism is located on the right sight of the receiver just behind the bolt handle. (See **Picture 1**).

Note: The safety mechanism cannot be engaged in the "safe" position unless and until the rifle is cocked. To engage the safety mechanism in the "safe" position, pull the safety to its most rearward position, covering the red indicator dot on the stock. (See **Picture 2**).

To place the safety mechanism in the "fire" position, push the safety fully forward, exposing the red indicator dot on the stock. The rifle is now ready to fire by pulling the trigger. (See **Picture 3**).



The firearm will fire when the trigger is pulled and the safety mechanism is in the "FIRE" position if the bolt is installed in the receiver.

THE TRIGGER: The trigger mechanism has been preset at the factory. Never alter or modify the trigger or firing mechanism.

THE BARREL: Some of the metal parts of your rifle have had a rust preventative compound applied at the factory to protect the metal during shipment. Before shooting your rifle for the first time, you must clean the anti-rust compound from the barrel, receiver, breech bolt mechanism, and the action/chamber areas. To clean the barrel, refer to the Cleaning Instructions in this Owner's Manual.

Bolt

The bolt has been packaged separately in the shipping carton. The bolt should be cleaned and lightly oiled before its initial use. You must become familiar with installing and removing the bolt properly. NEVER attempt to install or remove the bolt on a loaded firearm. Completely unload the firearm (empty chamber and magazine) before installing or removing the bolt.

Bolt Installation

- After inspecting your firearm to insure it is not loaded, move the Safety Mechanism to the "FIRE" position.
- Holding the bolt handle with your right hand, orient the bolt to the receiver with the bolt handle raised. (See **Picture 4**).









- Grasping the pistol grip of the stock with your left hand, pull the trigger and hold it to the rear. (See **Picture 5**).
- 4. Slide the bolt forward until it is fully in the receiver. (See **Picture 6**).
- 5. Lower the bolt handle to the fully down position. (See **Picture 7**).
- 6. Release the trigger. (See **Picture 8**). The bolt is now installed in the receiver.
- Raise the bolt handle and move the bolt to the rear of the receiver.
- 8. Return the Safety Mechanism to the "SAFE" position.













Bolt Removal



Before installing or removing the bolt, visually inspect the chamber and receiver to make sure the chamber and magazine are completely empty. Never attempt to install or remove the bolt with a loaded firearm.

- After inspecting your firearm to insure it is not loaded, move the Safety Mechanism to the "FIRE" position.
- 2. Raise the bolt handle with your right hand.
- 3. With the bolt handle fully raised, use your left hand to pull the trigger and hold it to the rear. (See **Picture 9**).
- Keeping the trigger pulled fully to the rear, pull the bolt to the rear and out the receiver. (See Picture 10).

WARNING

The bolt has been fitted at the factory to assure proper head space when used with this particular rifle. Never interchange bolts from one rifle to another as this may affect head space leading to a potentially hazardous situation. If your bolt is damaged or lost, return your rifle to the factory for replacement with a properly fitted bolt.



WARNING: Some of the metal parts of your rifle have had a rust preventative compound applied at the factory to protect the metal during shipment. Before shooting your rifle for the first time, you must clean the anti-rust compound from the barrel, receiver, breech bolt mechanism, and the action/chamber areas. To clean the barrel, refer to the Cleaning Instructions in this Owner's Manual.

Z5 rifles are manufactured with either a hinged floor plate magazine or a detachable box magazine.

Before loading your rifle for the first time, make sure (1) you have read and understand all of the warnings and instructions in this Owner's Manual, and (2) you have removed all grease and oil from the barrel and chamber and any obstructions from the barrel.

Loading the Rifle

- 1. Keep the rifle pointed in a safe direction throughout the loading process.
- 2. Make sure the safety mechanism is engaged in the "safe" position.
- 3. Lift the bolt handle and pull the bolt all the way to the rear.
- Depress the magazine latch in front of the trigger guard, allowing the magazine to be pulled out of the bottom of the receiver. (See Picture 11).









- 5. Place a cartridge on top of the follower of the magazine and press down on the cartridge until it is retained in the magazine. Carefully position the cartridge so that its base is flush with the rear of the magazine. (See **Picture 12**).
- 6. Place each successive cartridge in the magazine as described in Step 4, until the magazine is full.
- 7. With the bolt still open and to the rear, insert one round directly into the chamber. (See **Picture 13**).
- 8. Close and lower the bolt. (See **Picture 14**). The rifle now has a live round in the chamber.

- Insert the magazine back into the magazine well of the receiver until it is retained by the magazine latch. (See Picture 15).
- Your rifle is now in the ready-to-fire condition, loaded with a round in the chamber and a full magazine.



Note:

SINGLE LOADING: Your rifle may be loaded with a single round in the chamber and no cartridges in the detachable box magazine. To single-load the rifle, simply skip Steps 5, 6, and 9 above.

LOADING THE MAGAZINE ONLY: Your rifle may be loaded with no round in the chamber and a full magazine. To accomplish this type of loading, follow Steps 1 through 6 above. Then close the bolt on an empty chamber before inserting the loaded magazine into the receiver. The bolt will now be closed over an empty chamber. A round may subsequently be loaded into the chamber for firing by opening and fully retracting the bolt and then closing the bolt, stripping off the top cartridge from the magazine into the chamber.

WARNING

Your rifle may fire a chambered round even if the magazine has been removed from the rifle. Never assume the rifle is unloaded merely because you have removed the magazine.

Once a cartridge has been loaded into the chamber, the rifle is ready to be fired.

WARNING

Your rifle may fire a chambered round even if the detachable box magazine has been removed from the rifle. Never assume the rifle is unloaded merely because you have removed the magazine.

FIRING THE RIFLE:

- 1. Aim the rifle at your intended target, with the butt of the rifle planted firmly against your shoulder.
- 2. Keeping your fingers away from the trigger, push the manual safety forward to the "fire" position.
- 3. Put your trigger finger on the trigger and slowly squeeze or pull the trigger to fire the rifle.

Note: Unless you intend to fire another shot right away, leave the bolt closed over the fired cartridge.

4. To extract and eject the fired cartridge case, lift the bolt handle and pull the bolt all the way to the rear.

Closing the bolt will then chamber the next cartridge from the magazine. Unless you intend to fire an immediate next shot, pull the safety fully to the rear to the "safe" position.

Your rifle is now loaded with another round in the chamber.

WARNING: Never keep or store your rifle loaded.......... There is no excuse for not being careful.....

WARNING: Never load a shell or cartridge into the chamber until you are ready to fire the Bolt Action Rifle...

MARNING

- Do not disengage the safety until the Bolt Action Rifle is pointed in a safe direction and you are ready to fire.
- If a cartridge does not fire and the trigger has been pulled and the safety is disengaged...Stop! and do the following: a) Make sure the gun is pointed in a safe direction b) Engage the safety c) Wait 60 seconds d) Follow the instruction below for unloading the Bolt Action Rifle.
- If during firing the sound of any cartridge is noticeably softer or louder than
 the previous cartridge fired, Stop! Do not load another cartridge or fire another cartridge and do the following: a) Make sure the gun is pointed in a
 safe direction b) Engage the safety c) Follow the instruction below for unloading the Bolt Action Rifle d) With the Bolt Action Rifle unloaded visually
 inspect the Bolt Action Rifle for barrel blockage or damage and inspect the
 mechanical portion and receiver of the Bolt Action Rifle for damage before
 continuing.

Unloading Your Rifle

- 1. Keep the muzzle pointed in a safe direction and your fingers away from the trigger throughout the unloading process.
- 2. Make sure the safety is engaged in the "safe" position.



3. Depress the magazine latch in front of the trigger guard, allowing the magazine to be pulled out of the bottom of the receiver. (See **Picture 16**).

WARNING

At this stage in the unloading process, your rifle still has a live round in the chamber which may be fired even though the magazine has been removed. Never assume your rifle cannot fire simply because the magazine has been removed.

- 4. Lift the bolt handle and pull the bolt fully to the rear to remove the cartridge from the chamber (See **Picture 17**).
- With the bolt open (fully to the rear), look into the chamber and magazine well to make sure all cartridges have been removed from the rifle.



- 6. Empty the cartridges from the box magazine in a reverse manner from the loading instructions. You may store the empty magazine separately or reinsert it into the rifle.
- 7. With the bolt still open, visually recheck the chamber and magazine well to make sure the rifle is completely unloaded.

CLEANING INSTRUCTIONS

WARNING: NEVER attempt to clean a loaded firearm. Make sure the rifle is completely unloaded (chamber and magazine empty) before cleaning.

Cleaning the Barrel

- Make sure the safety is engaged in the "safe" position and your rifle is unloaded.
- Remove the bolt from the rifle.
- 3. Select a cleaning rod and brush of the appropriate caliber for your rifle.
- 4. Soak the cleaning brush with a quality gun cleaning solvent or Bore Cleaner.
- Push the cleaning rod and brush through the entire length of the barrel several times.
- 6. Remove the brush from the cleaning rod and attach a dry cleaning patch to the patch attachment.
- 7. Push the rod and dry patch through the entire length of the barrel several times. Repeat with another dry patch until the patch is no longer dirty.
- 8. Put a patch saturated with a quality gun oil on the rod tip.
- 9. Push the oiled patch through the barrel several times.
- 10. Remove the oiled patch from the rod tip, and insert another dry patch.
- 11. Push the dry patch through the barrel several times to remove any excess oil from the barrel.
- 12. When you have finished cleaning the interior of the barrel, visually check the bore to make sure no patches or other obstructions remain in the barrel.
- 13. Apply a thin coat of gun oil to the outside of the barrel with a soft clean cloth.

Cleaning the Action

 Use a patch or soft clean cloth to clean powder residues and any other foreign materials from the bolt and receiver surfaces.
 To clean congealed lubricants or other hard to remove deposits, use a quality action cleaner. (See **Picture 18**).



2. Apply a light film of quality gun oil along the bolt and receiver surfaces. Avoid applying too much lubricant - only a light film is necessary.

WARNING: Never attempt to take your rifle apart further than as set forth in the Owner's Manual. If further cleaning, service or repairs are needed, take your rifle to a competent gunsmith or return to US SPORTING GOODS, Inc. for service.

WARNING: Lead or lead compounds are known to the State of California to cause cancer, birth defects, reproductive toxicity, and other serious physical injury. Those who clean firearms should take protective measures to avoid contact or exposure to such chemicals.

⚠ MANUFACTURER'S WARNING

This firearm was manufactured to properly perform with the original parts as designed. It is your duty to make sure any parts you buy are correctly installed and that neither replacements nor originals are altered or changed. Your gun is a complex tool with many parts that must relate correctly to other parts for safe and accurate operation. Putting a gun together wrong or with modified parts can result in a damaged gun, injury or death to you or others through malfunction. Always let a qualified gunsmith work on your gun or at least, check any work not performed by a gunsmith. Firearms safety is your primary concern. THE GUN OWNER MUST ACCEPT FULL RESPONSIBILITY FOR THE CORRECT REASSEMBLY AND FUNCTIONING OF THE FIREARM AFTER ANY DISASSEMBLY OR REPLACEMENT OF PARTS.

↑ DANGER — AMMUNITION WARNING

Firearms may be damaged and serious injury or death to the shooter or bystander may result from any condition which contributes to the generation of excessive pressure or uncontrolled release of gas within the firearm. Such adverse conditions can be caused by bore or chamber obstruction, propellant powder overloads or by defective, incorrect or improperly loaded and assembled cartridge components. Even the strongest firearm can be blown up as a result of excessive pressure. It is extremely dangerous to use a cartridge whose pressure is greater than that developed by cartridges loaded to industry standards.

AMMUNITION (CARTRIDGES) NOTICE

We specifically disclaim responsibility for any damage, injury or death occurring in connection with or as the result of the use of the Z5 Bolt Action Rifle of faulty, non-standard, remanufactured, hand loaded or reloaded ammunition, used cartridges or cartridges other than factory cartridges for which the firearm was originally chambered.



Firing a Bolt Action Rifle with oil, grease or any other material even partially obstructing the bore may result in damage to the Bolt Action Rifle and injury to the shooter and those nearby. Do not spray or apply lubricants directly on ammunition. If the powder charge of a cartridge is affected by the lubricant, it may not be ignited, but the energy from the primer may be sufficient to push the bullet into the bore where it may become lodged. Firing a subsequent bullet into the obstructed bore will damage the Bolt Action Rifle and may cause injury to the shooter and those nearby. Use lubricants properly. You are responsible for the proper care and maintenance of your firearm and ammunition.

ONE YEAR LIMITED WARRANTY

This US Sporting Goods, Inc. firearms is warranted to the original retail customer for One Year from date of purchase against defects in material and workmanship. All parts and labor or replacement **at our option** are covered. Wood Stock and Wood Forend are not covered by the One Year Warranty. The warranty on the wood stock and forend is 60 days from purchase and only covers manufactured and material defects.

Transportation to and from our repair facilities, government fees, damage caused by failure to perform normal maintenance, sales outside the United States, damage due to use of high velocity, high pressure, reloaded or other nonstandard ammunition, or any unauthorized repair, modification, misuse, abuse, or alteration of the product is not covered by this Limited Warranty.

Any implied warranties, including the implied warranties of merchantability and fitness for a particular purpose, are limited to one year from date of original retail purchase. Consequential or incidental damages and/or expenses, or any other expenses are not covered by this warranty.

To obtain warranty performance send your firearm with proof of retail purchase, freight prepaid to:

US SPORTING GOODS, Inc.


411 Hawk St.

Rockledge, Florida 32955



Altering or modifying parts and/or internal safeties is dangerous and will void the warranty. This Bolt Action Rifle was manufactured to perform properly with the original parts as designed. It is your duty to make sure any parts you buy are made for this firearm and are installed correctly and that neither the replacements nor originals are altered or changed. Your gun is a complex precision tool with many parts that must relate correctly to other parts in order for proper and safe operation. Putting a gun together wrong or with incorrect or modified parts can result in a damaged gun, danger, and injury or death to you and others through malfunction. Always have a qualified gunsmith work on your gun or at least check any work not performed by a gunsmith.

PARTS EXPLOSION Model 5 Rimfire Bolt-Action Exploded View

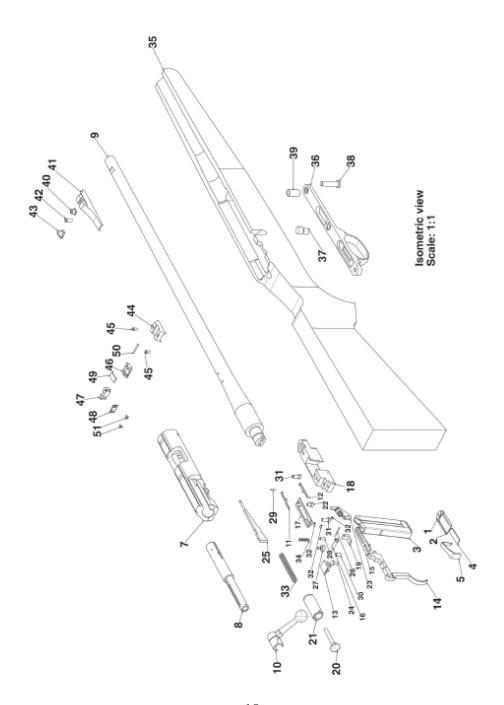

PARTS LIST **Model 5 Rimfire Bolt-Action**

1. Magazine bottom plate	27. Abutment screw
2. Magazine bottom plate	28. Regulating screw
3. Magazine box	29. Extractor axle
4. Magazine bottom lock piece	30. Trigger spring screw
5. Follower	31. Magazine holder spring
7. Receiver	32. Screw
8. Bolt body	33. Firing pin spring
9. Barrel	34. Magazine holder spring
10. Bolt handle	35. Stock
11. Extractor, left	36. Trigger guard
12. Extractor, right	37. Magazine holder button
13. Trigger holder	38. Screw
14. Trigger	39. Distance bushing
15. Safety	40. Carrier
16. Trigger screw	41. Front sight base
17. Ejector	42. Screw
18. Magazine carrier	43. Front sight
19. Magazine holder	44. Rear sight base
20. Spring holder	45. Base screw
21. Cover	46. Rear sight carrier
22. Ejector securing pin	47. Plate carrier
23. Safety lever	48. Rear sight plate
24. Plug	49. Rear sight spring
25. Firing pin	50. Rear sight axle
26. Magazine holder axle	51. Plate screw

YOUR OWNERS' MANUAL

Always keep this manual with your firearm. Make sure you understand all the warnings, operation instructions and safety procedures. When you lend, give or sell the firearm, be sure this manual goes with it. You can get a copy of this manual from European American Armory on request.

ALL PARTS ORDERS ARE SUBJECT TO A \$10.00 CHARGE FOR SHIPPING AND HANDLING. Please state Model, Caliber, Serial Number, and Finish Color when ordering. For parts, information and service contact: US SPORTING GOODS, Inc., 411 Hawk St., Rockledge, Florida 32955 Phone: (321) 639-4842.

!WARNING

Children are attracted to and can operate firearms that can cause severe injuries or death.

Prevent child access by always keeping guns locked away and unloaded when not in use. If you keep a loaded firearm where a child obtains and improperly uses it, you may be fined or sent to prison.

ADVERTENCIA

A los ninos los atroen las armaside de fuego y los pueden hacer funcionar. Ellos pueden causarses lesiones graves y la muerte.

Evite que los ninos tengon acceso a los armas de fuego guardandolas siempre con llave y descargadas cuando no las este utilizando. Si usted tiene un arma de fuego cargado en un lugar en que un nono tiene acceso a ella y la usa indebidamente. Le pueden dar una multa a enviarlo a la carcel.

Importer:

U.S. Sporting Goods, Inc. 411 Hawk Street Rockledge, FL 32955

Manufacturer:

Zastava Oruzje D.P. 4 Trg topolivaca 34000 Kragujevac Serbia & Montenegro