


START

- (✓) 10 K Ω (brown-black-orange).
- (✓) .02 μ fd disc capacitor.
- (✓) 22 K Ω (red-red-orange).
- (✓) 47 K Ω (yellow-violet-orange).
- (✓) .1 μ fd disc capacitor.
- (✓) .005 μ fd disc capacitor.
- (✓) 100 K Ω (brown-black-yellow).
- (✓) .02 μ fd disc capacitor.
- (✓) 2" jumper. Use sleeving.
- (✓) 1000 Ω (brown-black-red).
- (✓) 2-7/8" jumper. Use sleeving.
- (✓) 1 megohm (brown-black-green).
- (✓) 1000 Ω (brown-black-red).
- (✓) 47 K Ω (yellow-violet-orange).
- (✓) .005 μ fd disc capacitor.

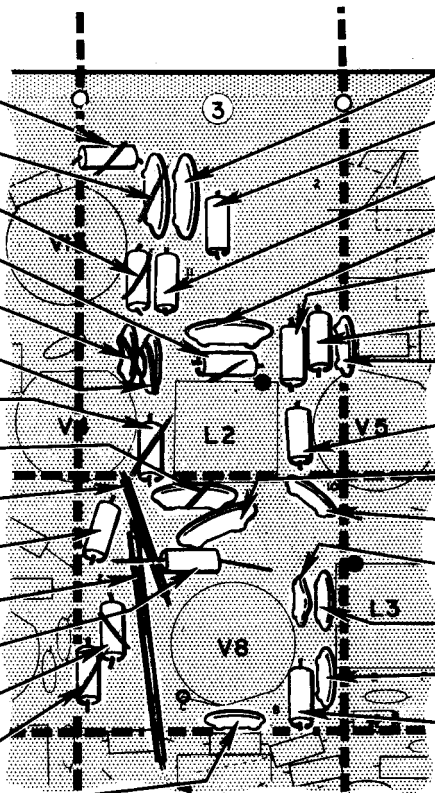

BOARD SECTIONS 3A and B
PICTORIAL 5

CONTINUE


- (✓) .02 μ fd disc capacitor.
- (✓) 1000 Ω (brown-black-red).
- (✓) 220 K Ω (red-red-yellow).
- (✓) .02 μ fd disc capacitor.
- (✓) 6800 Ω (blue-gray-red).
- (✓) 150 Ω (brown-green-brown).
- (✓) .1 μ fd disc capacitor.
- (✓) 47 Ω (yellow-violet-black).
- (✓) .02 μ fd disc capacitor.
- (✓) 47 μ fd disc capacitor.
- (✓) 47 μ fd disc capacitor.
- (✓) .005 μ fd disc capacitor.
- (✓) .02 μ fd disc capacitor.
- (✓) 47 K Ω (yellow-violet-orange).
- (✓) Check to see that all connections are soldered, and cut off excess leads.

FINISH

NOW PERFORM THE STEPS ON PICTORIAL 6.

START

- (✓) 220 Ω (red-red-brown).
- (✓) 47 K Ω (yellow-violet-orange).
- (✓) 1 megohm (brown-black-green). Use sleeving.
- (✓) 10 K Ω (brown-black-orange).
- (✓) 500 μ fd disc capacitor.
- (✓) 47 K Ω (yellow-violet-orange).
- (✓) .02 μ fd disc capacitor.
- (✓) 22 K Ω (red-red-orange).
- (✓) 47 μ fd disc capacitor.
- (✓) 47 μ fd disc capacitor.

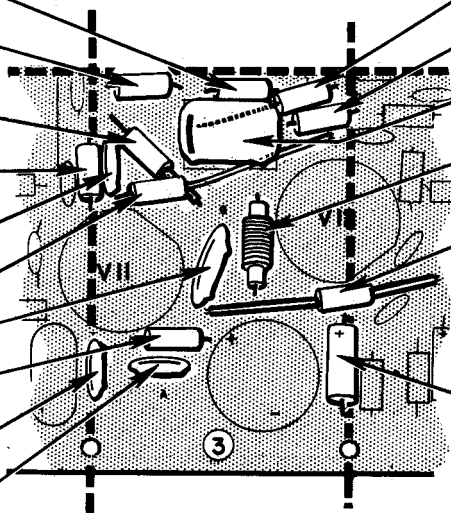

BOARD SECTION 3C

PICTORIAL 6

CONTINUE

- (✓) 1 megohm (brown-black-green).
- (✓) 100 K Ω (brown-black-yellow).
- (✓) .4 μ fd Mylar capacitor. Use 3/8" sleeving on each lead.
- (✓) 2 mh (#45-47) choke. See Detail 2A.
- (✓) 1 megohm (brown-black-green). Use sleeving.
- NOTE: When installing electrolytic capacitors, position the positive (+) end as shown.
- (✓) 10 μ fd 10 V electrolytic capacitor.
- (✓) Check to see that all connections are soldered, and cut off excess leads.

FINISH

NOW PERFORM THE STEPS ON PICTORIAL 7