


HEATHKIT TUBE CHECKER

MODEL TC-2

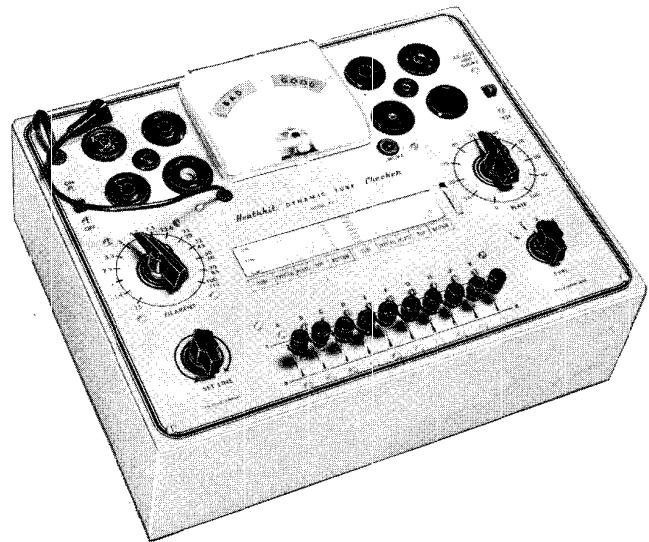

SPECIFICATIONS

Simplified set-up procedure.
Rapid switch selection of individual tube elements.

Any combination of base pin connections.

Check for quality, emission, shorted elements, open elements, and filament continuity.
Checks 4, 5, 6, and 7 pin large, regular and miniature, octal, loctal, Hytron, 9 pin miniature
and pilot lamps.

Individual tests on multiple element tubes.

Blank panel socket for obsolescence protection.

Compensation for line voltage variation.

New smooth rolling illuminated roll chart.


Easy to read GOOD-BAD meter scale.

Fourteen Filament voltages - .75 to 117 volts

Element Test Voltages 0-250 volts

Dimensions 14" wide x 11" deep x 4 1/4" high

Power Requirements 105-125 volts 50/60 cycles AC

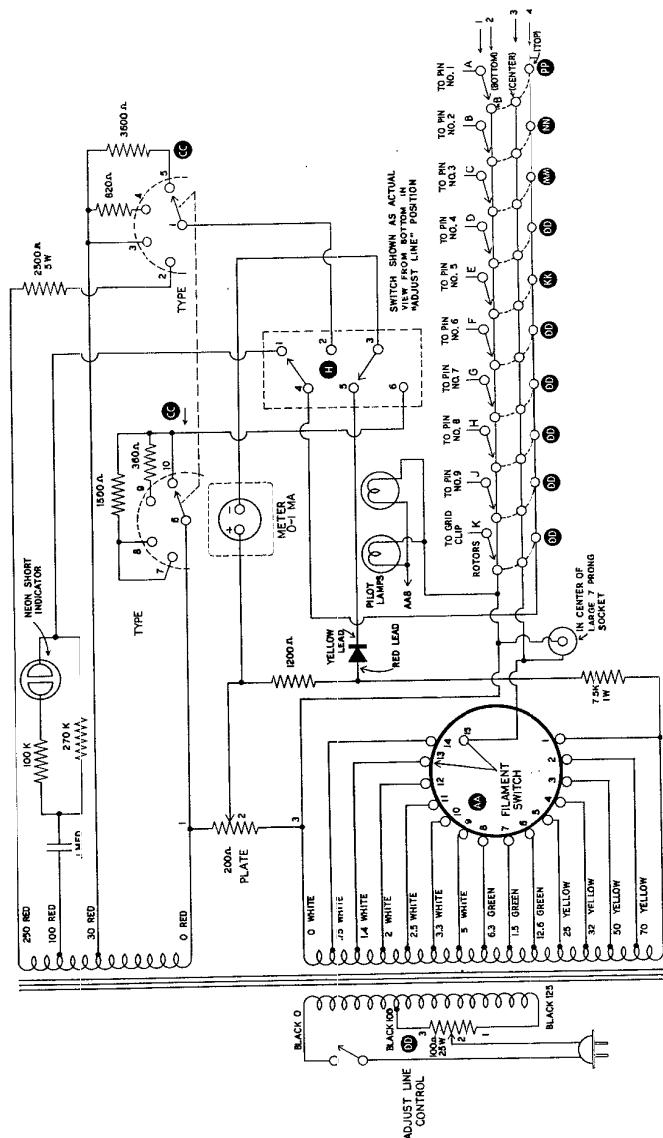

SCHEMATIC
HEATHKIT TUBE CHECKER
Model TC-2