

THE NATIONAL GEOGRAPHIC MAGAZINE

AUGUST, 1912

CONTENTS

Notes About Ants and Their Resemblance to Man

WITH 35 ILLUSTRATIONS.

WILLIAM MORTON WHEELER

The Grandest and Most Mighty Terrestrial Phenomenon:

The Gulf Stream

JOHN BLLIOTT PILLSBURY, U. S. NAVE

ILLUSTRATED WITH MASS AND DISCHARS

Elephant Hunting in Equatorial Africa with Rifle and

WITH 50 ILLUSTRATIONS

ELEANOR STUART CHILDS

CARL II. AKELEY

WITH II DAUSTRATIONS

Zanzibar

PUBLISHED BY THE
NATIONAL GEOGRAPHIC SOCIETY
HUBBARD MEMORIAL HALL

WASHINGTON, D.C.

\$2.50 A YEAR

25 CTS A COPY

NATIONAL GEOGRAPHIC SOCIETY

HUBBARD MEMORIAL HALL

SIXTEENTH AND M STREETS, WASHINGTON, D. C.

O. H. TITTMANN PRESIDENT HENRY GANNETT VICE-PRESIDENT JOHN JOY EDSON O. P. AUSTIN SECHETARY . TREASURER GILBERT H. GROSVENOR, DIRECTOR AND EDITOR F. B. EICHELBERGER ASST, TREASURER JOHN OLIVER LA GORCE, ASSISTANT EDITOR

BOARD OF MANAGERS

1910-1912

HENRY F. BLOUNT

Vice-President Am. Security and Trust Co.

C. M. CHESTER

Rear Admiral U. S. N., For-merly Supt. U. S. Naval Observatory

FREDERICK V. COVILLE

President of the Washington Academy of Sciences

JOHN E. PILLSBURY

Rest Admiral U. S. N., Formerly Chief Bureau of Navi-

RUDOLPH KAUFFMANN

Managing Editor The Evening Star

FRANKLIN K. LANE

Member of the luterstate Commerce Commission

T. L. MACDONALD, M. D.

S. N. D. NORTH

Formerly Director U. S. Burend of Census

1911-1913

ALEXANDER GRAHAM BELL Inventor of the telephone

HENRY GANNETT

Chairman of U.S. Geographic

J. HOWARD GORE

Prof. Emerinas Mathematics. The Geo, Washington Univ.

A. W. GREELY

Arctic Explorer, Major Gen'l U. S. Army

GILBERT H. GROSVENOR

Editor of National Geographic Magnetinii

GEORGE OTIS SMITH

Director of U. S. Geological Survey

O. H. TITTMANN

Superintendent of U. S. Coast and Gendetic Survey

JOHN M. WILSON

Brigadiar General U. S. Army. Formerly Chief of Engineers

1912-1914

O. P. AUSTIN

Chief U. S. Bureau of Statistica

CHARLES L BELL

President American Security and Trust Co.

JOHN JOY EDSON

President Washington Loan & Trust Co.

DAVID FAIRCHILD

In Charge of Agricultural Ex-plorations, Dept. of Agric.

C. HART MERRIAM

Chief U.S. Biological Survey

GEORGE R. PUTNAM

Commissioner U.S. Bureau of Lighthouses.

GEORGE SHIRAS, 3D

Former Member of U. S. Congriess, Finanni Naturalist, and Wild-Game Photographer

GRANT SQUIRES

New York

To carry out the purpose for which it was founded twenty-three years ago, namely, "the increase and diffusion of geographic knowledge." the National Geographic Society publishes this Magazine. All receipts from the publication are invested in the Magazine itself or expended directly to promote geographic knowledge and the study of geography. Articles or photographs from members of the Society, or other friends, are desired. Contributions should be accompanied by an addressed return envelope and postage, and be addressed:

GILBERT H. GROSVENOR, EDITOR

ASSOCIATE EDITORS

A. W. GREELY C. HART MERRIAM O. H. TITTMANN ROBERT HOLLISTER CHAPMAN N. H. DARTON WALTER T. SWINGLE ELIZA R. SCIDMORE

ALEXANDER GRAHAM BELL DAVID FAIRCHILD HUGH M. SMITH FRANK M. CHAPMAN FRANK EDWARD JOHNSON



Che Postal Life Insurance Company Safeguards at Lowest Cost the Wife, the Children, the Home

Postal-Life Child's-Welfare Policy

The welfare of the child as ever on the minds of most men and women—the thoughtful, unselfish ones.

This means not alone food and clothing, but nowcation, for in these progressive days the young man or woman without a good education is handicapped, to say the least.

But education isn't always so easy; Grammar school and high school, yes; for a boy or girl lives at home and the cost doesn't seem to count.

It is another matter when high-school days are over and the next step—the necessary step—must be seminary or college.

Just at this critical point, the lack of a few hundred dollars in each has prematurely sent many a boy and



girl into the store, office or factory to struggle along for years at scanty wages because they lacked the educational equipment to get on quickly.

The Right Way to Start the Young Folks

What a life-sacrifice—this lack of means to even start the young folks right!

Parents may think that by the time the child grows up the money will come nonthous, but it will hardly "come" unless provided for in advance—the near way.

What a fine situation if when the young man or woman reaches twenty there is available, let us say, an endowment of \$1,000, payable in four yearly payments, being the proceeds of a matured Child's-Welfare Policy I

The way is opened to fulfill every parental obligation to assist the child into a professional or business career; and the Policy also includes certain specified insurance protection in the early years.





Let us tell you about this special Child's-Welfare Policy—its options, advantages, benefits and moderate cost.

At the same time, let us give you particulars about insurance for pourself; the POSTALLIFE issues all the standard forms of protection for men, women and young people.

In any case simply write and say:

"Mail insurance particulars as mentioned in National Geographic for August."

No agent will be sent to visit you: the Company dispenses with agents.

If you want figures for a child be sure to give age : if you simply wish personal particulars give

1. Your accupation, 2. The exact date of your hirth.

Postal Life Insurance Company

The Only Nun-Agency Converge in America
WM R. MALONE, President

35 Nassau St., New York

STRONG POSTAL POINTS

AND DESCRIPTION OF THE OWNER, WHEN THE OWNER,

First 1 Old-line legal reserve instrumer but fraternal or assessment.

Second: Standard policyreserves, now more than \$10,000,000. Incurance to force more than \$50,000,000.

Third: Standard solicy-Armeisians, approved by the State Insurance Depertment.

Fearth: Operates under street State requires ments and subject to the United Status postal authorities.

Fifth: High medical standards the miscrion of rinks.

Sixth: FulleyArtders'
Mealth Harristy accounts
to each year, it desired.



SCI

THE HOUR OF PRAYER IS THE SAHARA BESTET

SPECIAL ARRANGEMENT FOR FRAMED PICTURES

Responding to many requests for copies of "The Hour of Prayer" and "The Palms," artistically framed and ready for hauging, we are glad to announce that arrangements have been completed to supply a limited number framed and finished in perfect harmony with the subjects, a careful selection of the moulding having been made and the best French glass used. Price \$3.00 each, express collect.



THEPALMS

Copies of this wonderfully realistic picture of the Great Sahara can be had printed in a soft sepin, on heavy artist-proof board, unfolded, size 7 x 18 inches, 30 cents each, postpaid.

PANORAMA OF THE CANADIAN ROCKIES

It is impossible to show this wanderful picture in miniature, being nine feet long.

This splendid panorama of snow-covered peaks, pronounced to be the most marvelous mountain photograph ever taken, makes a beautiful framed picture or frieze, 9 feet long by 9 inches high. A limited edition on heavy artist-proof board, unfolded and ready for framing, 50 cents each, post-paid.

THE PALMS

A special edition of this beautiful scene, so typical of the Orient, produced on heavy artist-proof cardboard, unfolded, size 10½ x 24 inches, price 50 cents, postpaid.

UP-TO-DATE MAP OF MEXICO

The Society's map of Mexico, published late in 1911, giving the transportation routes and elevations, is the most complete and up-to-date reference map of that country to be had. Executed in five colors, size 17 x 24 1/2 inches. Postpaid, 50 cts.

WARHINGTO	M, D, C.:
Please send me	copies of
The Hour of Prayer	Framed
The Palms	Unframed
Panorama of the Canal	lian Rockies.
Map of Mexico	
For which I anclose herewi	thdollars
NAME	
STREET ADDRESS	



THE HOME OF THE NATIONAL GEOGRAPHIC SOCIETY, WASHINGTON, D. C. An Association Organized for "The Increase and Diffusion of Geographic Encycledge."

RECOMMENDATION FOR MEMBERSHIP

in the

National Geographic Society

The Membership Fee Includes Subscription to the National Geographic Magazine

DUES: Annual membership in U. S., \$2.00; annual membership abroad, \$3.00; Canada, \$2.50; life membership, \$50. Please make remittances payable to National Geographic Society, and if at a distance remit by N. Y. draft, postal or express order.

Please detach and fill in blank below and send to the Secretary.

191

To the Secretary, National Geographic Society, Sixteenth and M Streets Northwest, W ashington, D. C.:

l' nominate

for membership in the Society.

N 22

Address

(Write poor olidyses)



"That's the Cloth"

AN unfinished worsted, made right, is one of the finest fabrics ever put in a man's suit. Always appropriate for business or semi-dress, it is dignified, rich, tailors splendidly and wears well.

Your guide to the best unfinished worsted is this name stamped on the back of the cloth—

WASHED WORSTED

REG. U. S. PAT. OFF.

WASHINGTON 1789 is a highest-grade style fabric for men who appreciate thoroughbred clothes. It is pure wool, has a beautiful surface and does not wear shiny. London shrunk, 56 to 58 inches wide

OSWEGO SERGE for Fall and Winter wear is a distinctive blue serge of superb quality. Tailors splendidly and retains its smart appearance through long wear.

Ask your tailor or clothier to show you WASHINGTON 1789 and Oswego Serge. They are featured by good custom tailors and used by manufacturers of high-grade ready-to-wear suits. If you cannot find them, send us chack or money-order for quantity required (3% yards for man's suit), at \$1.25 per yard for Washington 1780, and \$1.00 for Owngo Serge, and we shall see that you are supplied through regular channels, as we do not sell at retail.

American Woolen Company

Wm M Wood President.

Selling Agency : American Woolen Company of New York,
American Woolen Bidg.

18th to such Street on 4th Avenue, New York

American Bank Note Definition of Service is This:

From Art to Shipping Room—designing, engraving, printing, binding—every process connected with the manufacture of booklets, folders, maps, posters, with *undivided* responsibility under *one* roof. The experience and advice of men who *know*.

You will never enjoy the help and value of this service until you try it.

Try it now.

AMERICAN BANK NOTE COMPANY

70 Broad Street, New York.



GERHARD MENNEN CO.

Newark, N. J.

"Security of Principal and Income"

We can offer to investors who are seeking security as well as a good yield the Preferred and Common Stock of the

E. T. BURROWES CO. Portland, Me.

Manufacturers of Browse Wire Rustleye Screens

The Preferred pays 6% The Common pays 10%

These stocks have maintained the above rate of dividends for the last four years.

Send for Circular No. 90

BAYNE, RING & COMPANY

BANKERS

Nat'l City Bank Bldg. 55 Wall St., New York

Chicago

Philadelphia

Boston

Our Claim to Your Confidence

is based on long experience, ample facilities and a clean record. The fact that we have built up a clientele for sound bonds reaching into every State and several foreign countries, and which includes many of the largest banks, insurance companies and estates, indicates the reliability of our recommendations.

Your confidence and patronage are invited regardless of the amount of your funds. Our service is extended alike to the large and frequent buyer and the small buyer who may only be able to purchase a single bond at infrequent intervals.

Write for booklet A. N.-72, "Service to Bond Buyers," which explains in some detail the investment service we render

N. W. Halsey & Co.

NEW YORK 49 Wall 5t. PHILADELPHIA 1421 Chestnut St. CHICAGO La Salle and Adams Sta. SAN FRANCISCO 424 California St.

Government, Municipal, Railroad and Public Utility Bonds bought, sold and appraised



Burton Holmes

The Well-Known Lecturer and Writer on Travel Topics

USES

AMERICAN BANKERS ASSOCIATION TRAVELERS CHEQUES

Mr. Holmes has traveled nearly a million miles. This is what he says of "A. H. A." Cheques:

"My 'A. B. A.' Cheques were just as good as gold and twice as handy—negotiable at any time and anywhere."

—(Signal) E. Rurion Hilmes

"A.B.A." Cheques simplify foreign money matters. You pay travel bills with them, instead of using cash. Each cheque is engraved with its exact value in foreign moneys. Your signature identifies you.

Write for information as to where "A.B.A." Chequis may be obtained in year sicinity, and booklet, "The Chequis that homelies,"

BUY THEM FROM YOUR OWN BANKER OR IF HE CANHOT SUPPLY THEM APPLY TO BANKERS TRUST COMPANY, NEW YORK CITY.

40 Years of Age

This is the age at which the average man begins to weigh carefully his experience, his capabilities and his financial resources. All these factors from up before him as of large importance. They affect not only himself, but more particularly the future welfare of those dependent upon him. If he is a normal man, he understands that the age of forty is the age of opportunity, and that by an orderly application of his experience and knowledge, and by systematic saving and prudent investment, he has every reasonable chance to provide for the future.

Write for Circular No. 585

Spencer Trask & Co.

ALBANY-BOSTON-CHICAGO
Members New York Black Bankers

Бининовинининининининининининининини

"Mention the Geographic-It identifies you."

CHICK THE PROPERTY OF THE PROP

The WALTHAM Riverside

The Waltham Riverside—named for the picturesque location of the great Waltham Plant on the banks of the beautiful Charles River—renowned for its absolute reliability in every civilized country—preferred for its happy combination of exquisite beauty and unfailing accuracy.


The Waltham Riverside is made in various sizes for ladies and gentlemen, it comes in 17 and 19 jewel grades and is carefully timed and adjusted. Priced at \$40 and up, according to grade of movement and quality of case. We have prepared an interesting historical booklet on Riverside movements, which you should read before boying a watch.

Write for the Riverside Booklet-use the coupon.


"It's Time You Owned a Waltham Riverside."

WALTHAM WATCH COMPANY,

Waltham, Mass.

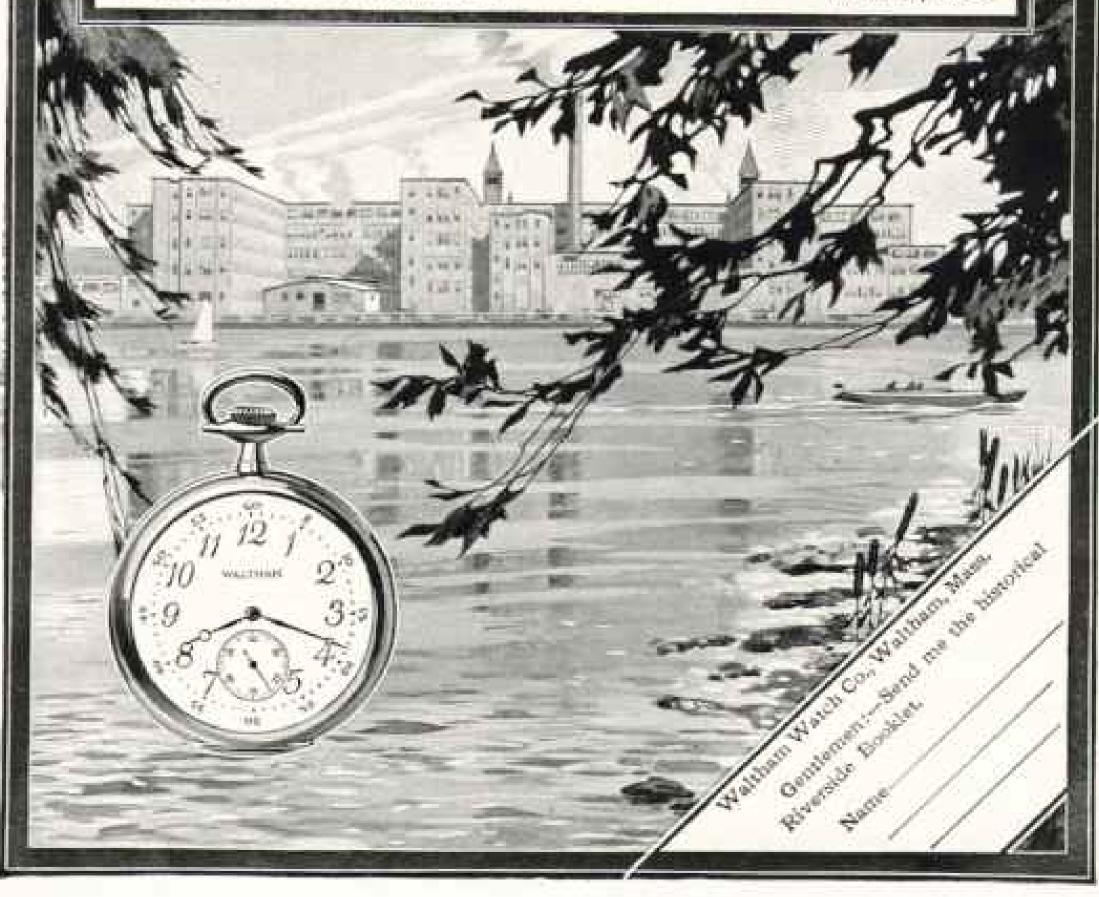

"Geographic readers may depend upon the character of our advertisers."

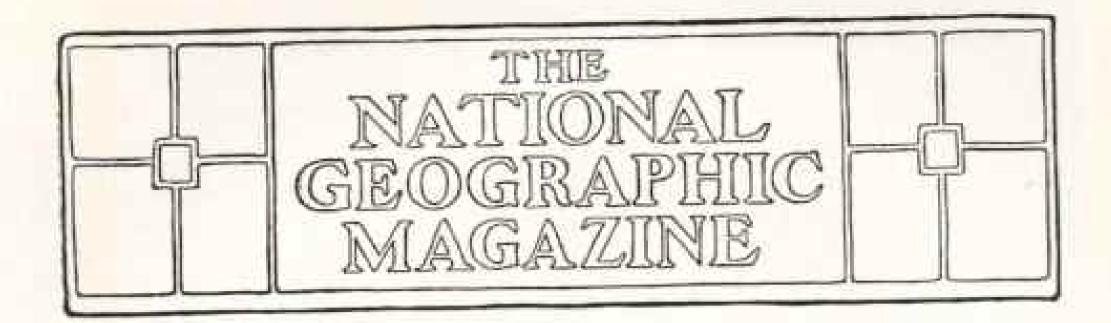

NOTES ABOUT ANTS AND THEIR RESEMBLANCE TO MAN

BY WILLIAM MORTON WHEELER, PH. D.

PROFESSOR OF ECONOMIC ENTOMOLOGY IN HARVARD UNIVERSITY

Dr. Wheeler is the author of an unusually entertaining book, "Ants, Their Structure, Development, and Behavior," published by the Columbia University Press. The volume contains 650 pages and several hundred illustrations, and is probably the most scholarly and suggestive work on the subject that has been published. The pictures illustrating this article are from the above book.

It is sometimes profitable to turn away from the consideration of the social and economic problems, which so constantly beset us, to a study of the social insects and their methods of solving the problems which they, too, have had to face during their long and strenuous evolution.

Though in most respects man and the insect differ enormously, both nevertheless display some remarkable convergent similarities. They are the only two successful and dominant animal types of the present age, and, so far as they are social, not only have had to encounter the same obstacles, but have learned to overcome many of them in the same manner.


The social insects, however, have been more successful than man in organizing stable communities, because they have frankly trusted and followed their instincts and have therefore carried their social organization to its logical, or perhaps we had better say instinctive, conclusion, whereas man's intellectual processes and the ideals and dissentions to which they give birth forever prevent a definitive solution of economic problems

and keep him in a state of active and ceaseless evolution.

We naturally find, therefore, that the stable and well-regulated insect societies, which have 'neither guide, overseer, nor ruler.' have always aroused the admiration of those who long for a rigid communistic control of human society, while the individualist turns away from them with a feeling akin to horror.

THREE GREAT PROBLEMS OF EXISTENCE

It is well known that three great problems must be solved by every organism that would survive in the struggle for existence; first, how to obtain a sufficient quantity of the right kind of food; second, how to reproduce its kind and bring up its offspring, and, third, how to protect itself and its offspring from the injurious effects of both the lifeless and the living environment. And although all animals are constantly impelled to the solution of these problems by the primal instincts of hunger, love, and fear, the solution is often extremely difficult. And it is especially difficult in the social and colonial animals, because these must en-

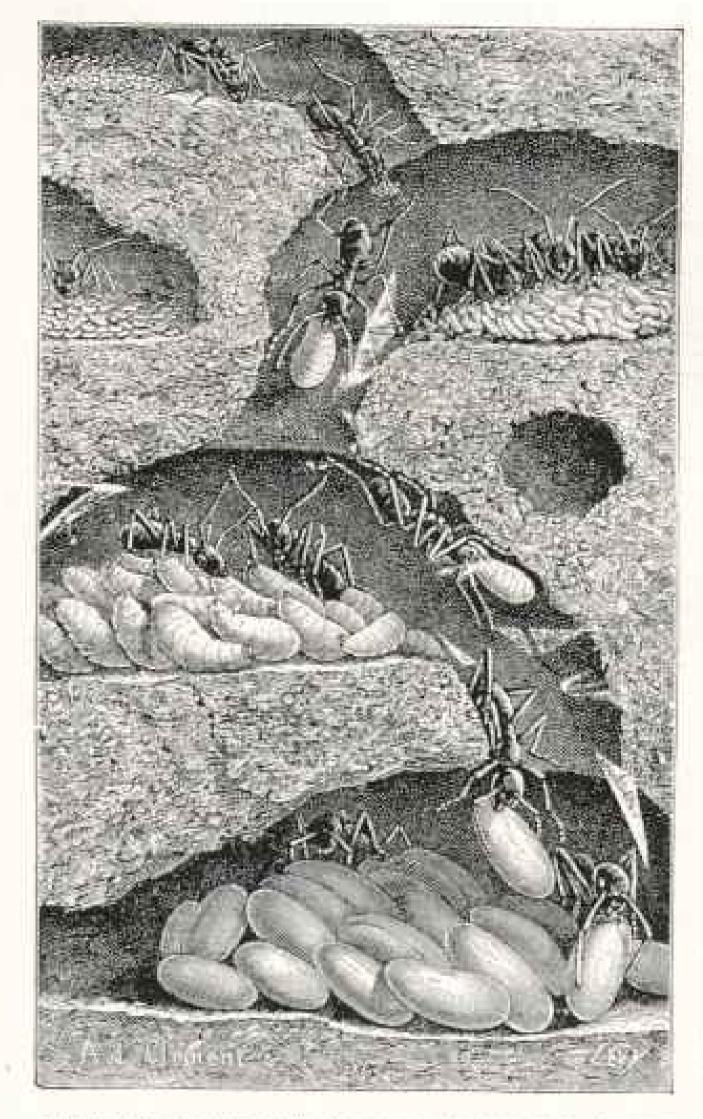

INTERIOR OF AN ANT NEST OR FORMICARY (AFTER ERNEST ANDRE)

Showing the arrangement of the chambers and galleries and the ants' method of classifying the brood according to stages. The lowermost chamber contains only cocoons (pupue), the next above mature larvæ, while the young larvæ and eggs are in the superficial chambers.

ter into severe competition not only with other organisms, but also with the members of their own species, to whom they are, moreover, bound by indissoluble ties.

There are two main groups of social insects, the termites and the social Hymenoptera, the latter embracing three minor groups, the social wasps, the social bees, and the ants. It is more than probable that social habits were developed in-

dependently in all four of these groups, and that such resemblances as they exhibit are due more to what biologists call convergence than to blood relationship.

Auts are to be found everywhere, from the arctic regions to the tropics, from timberline on the loftiest mountains to the shifting sands of the dunes and seashores, and from the dampest forests to the driest deserts. Not only do they outnumber in individuals all other terrestrial animals, but their colonies even in very circumscribed localities often defy enumeration. Their colonies are, moreover, remarkably stable, sometimes outlasting a generation of men. Such stability is, of course, due to the longevity of the individual ants, since worker ants are known to live from four to seven and quiens from 13 to 15 years. In all these respects the other social insects are decidedly inferior.

A GREAT PRODUCER OF SPECIES

Not only are the colonies of the wasps and bumblebees of rather rare occurrence, but they are merely annual growths. The honey-bees, too, are very short-lived, the workers living only a few weeks or months, the queens but a few years. The termites, though perhaps longer-lived than the bees and wasps, are practically confined to very definite localities in the tropics. Only a few of the species have been able to extend their range into

temperate regions.

Thus unquestionably the most successful and dominant of all these groups is the ants, for these have produced the greatest number of species, have occupied all parts of the earth, except the very tops of the high mountains and the cold arctic and antarctic regions, with untold multitudes of individuals, and have developed the most intimate and complicated rela-

tionships to other insects and the vegetation of the planet. It is therefore particularly instructive to study the methods whereby the ants as social insects have solved the problems of nutrition, repro-

duction, and protection.

The ant colony or society may be regarded as an organism which, like the individual insects of which it consists, grows and develops to a fixed adult size, and the size to which it grows is characteristic of the species, just as is the size of any individual. Some ants always form diminutive colonies of only a few dozen individuals, whereas the colonies of other species, when mature, may comprise thousands or hundreds of thousands. The growth of these colonies obviously depends on the quantity and quality of the available food supply and on its distribution for immediate consumption, or its storage for the future use of the colony.

THE INTRICATE PROCESS OF FOOD CONSERVATION

Ants feed on a great variety of substances, but in all cases only the liquid portions of the food are taken into the alimentary tract. If the food is solid, minute particles of it are rasped off by means of the tongue and pressed into a small pocket in the floor of the mouth. The juices expressed from the mass are then sucked back through the guilet into a dilated portion of the alimentary tract, the crop, and the useless pellet is spit out.

The crop is very distensible, but thinwalled and lined with a layer of chitin, which is impenetrable to the liquid contents, so that none of the food, so long as it is stored in this receptacle, can be absorbed or digested. The crop is closed behind by a complicated valve, which separates it from a short, bag-like stomach, the walls of which have a permeable lining, so that it and the succeeding portions of the alimentary tract, the intestine, are able to digest and absorb any food which may be permitted to enter them through the valve.

The crop and true stomach have been called respectively the "social" and "individual" stomachs, because the liquid food stored in the former is in great part distributed by regurgitation to other ants.



Photo by Mr. J. G. Habbard and Dr. O. S. Strong

QUEENS OF A COMMON ANT (Camponotus americanus)

One of the queens is feaundated and has lost her wings and is thus prepared to start a colony. Ant societies are societies of females. The males really take no part in the colonial activities, and, in most species, are present in the nest only for the brief period requisite to insure the impregnation of the young queens. The males take no part in building, provisioning, or guarding the nest, or in feeding the workers or the brood. They are in every sense the arrus arguior. Hence the ants resemble certain mythical human societies like the Amazons, but, unlike these, all their activities center in the multiplication and care of the coming generations.

whenever they signify their hunger by protruding their tongues and making supplicatory gestures with their feelers, and because none of the food in this receptacle can be used by the individual unless it passes back through the valve into the true stomach.

The crop is thus a storage reservoir from which both the individual and the colony can be supplied with nutriment. Other older and cruder methods of the distribution and storage of food coexist among ants with this more modern and more efficient method.

Thus solid foods may be carried into the nest entire and then dismembered and the pieces distributed to different parts of the nest to be still further comminuted and sucked dry by groups of ants, or the solid food may be carefully stored in special chambers.



Photo by Mr. J. C. Hobbard and Dr. O. S. Strong

PORTION OF A Camponotus americanus COLONY WITH WORKERS AND VIRGIN QUEENS

Five pairs of workers are seen in the act of feeding one another by regurgitating liquid food from the social stomach or crop. Many observers, especially McCook, have dwelt on the exquisite care bestowed by ants on their own bodies and those of their comrades. Much of the time spent by these insects in the dark recesses of their nests is devoted to cleansing the surfaces of their bodies with their tongues and strigils. This process is not only necessary for removing all particles of the earth in which the ants work so much of their lives, but it also invests their bodies with a coating of slightly oleaginous saliva, which probably protects them from moisture and may be sufficiently antiseptic to prevent the growth of lethal moulds and bacteria,

A DETERMINED ATTEMPT AT SELF CEVILIZATION

As ants were primitively carnivorous or predacious insects, it is rather difficult to understand how they could have developed societies at all, for as a general rule we find that predacious animals, which have to hunt their prey or to lie in wait for it, like the spiders, hawks, and tigers, live solitary lives, and that only vegetarians like the caterpillars, sparrows, rodents, and ruminants, which have easy access to a large amount of food, develop gregarious or social habits. There can be no doubt that the ants

have found it difficult to reconcile their carnivorous appetites with their social proclivities, for we find that they have attempted this reconciliation in diverse ways.

Most of the species of the oldest, most primitive, and most conservative subfamily, the Ponerinae, have not been able to relinquish their carnivorous habits, and have therefore been prevented from forming large colonies. Most of the species of this subfamily, in fact, form colonies of only a few dozen individuals, and these colonies are, moreover, rare and depauperate in appearance.

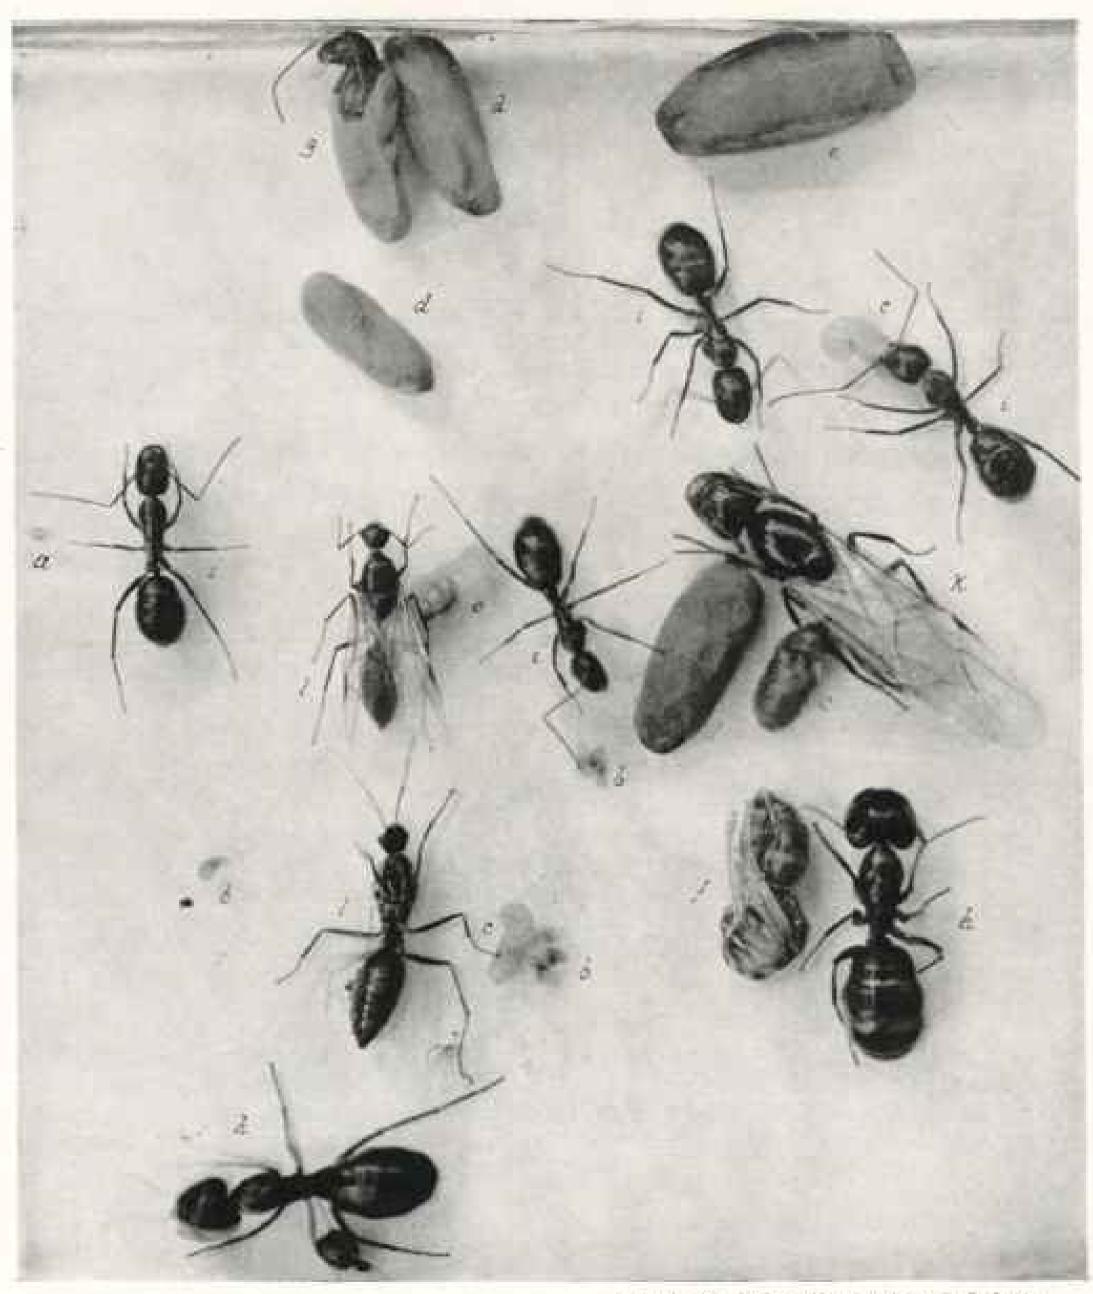


Photo by Mr. J. G. Hubbard and Dr. O. S. Strong

PORTION OF A COLONY OF Campanotus americanus AT THE HEIGHT OF THE BREEDING SEASON

a, egg; b, young larvæ; c, older larvæ; d, worker cocoons; c, queen cocoon; f, worker major pupa removed from cocoon; g, worker media, in the act of hatching; h, major workers; i, minor workers; k, virgin female, or queen; l, males. Magnification about two diameters.

Another subfamily, the Dorylina, embracing the wonderful driver ants of Africa and the legionary ants of the American tropics, are also highly carnivorous, but nevertheless succeed in forming immense colonies, often of hundreds of thousands of individuals. This they accomplish by relinquishing the sedentary habits so characteristic of the great majority of ants. They keep moving in long files through the jungles, capturing or killing all the insects they encounter, and even overrunning dwellings, and, in their search for cockroaches and other vermin, driving out the human inhabitants. From time to time these strange ants bivouse for the night or for a few days in some hole in the ground, or under a tree, but soon continue their predatory march. Evidently they are able to remain carnivorous, and at the same time to develop large colonies, only because they are nomadic and can thus draw their food supply from a large area.

The Ponerina and Dorylina ants have thus adopted the only modes of life which will permit a union of predatism

and sociability.

Their colonies must either remain small and rare, or, if populous, must keep moving from place to place. As each of these conditions has serious disadvantages, we find that the majority of ants have preferred to become more and more vegetarian, though, like man, usually without completely abandoning their carnivorous appetites.

A FAVORITE FOOD

One of the earliest departures from an exclusively animal diet is seen among the ants which attend plant-lice, scale insects, and leaf-hoppers and feed on their saccharine excrement. This excrement is, of course, merely plant sap slightly altered in its chemical constitution by passing through the digestive tract of the insects, and containing much water, some sugar, and a little nitrogenous matter.

Many ants are so inordinately fond of this food that they not only acquire an intimate acquaintance with the babits of the adult plant-lice and scale insects, but actually collect and store their eggs in the nests during winter in order that they may during the ensuing spring distribute the hatching young over the roots or foliage of the plants. This is a well-developed habit among the species of Lasins throughout temperate North America and Eurasia (see pictures, pages 743, 744).

Other plant juices, such as the nectar of flowers and the similar liquid secreted by the glands on the petioles of leaves and by green galls, are also assiduously collected by ants. There is, moreover, a singular tendency for some ants which are engaged in this collection of nectar and plant-lice excrement to become "honey-ants" through an extraordinary exaggeration of the instinct to store liquid food in the crop or social stomach.

LIVING STOREHOUSES FOR FOOD

Certain individuals, the "repletes," of the colony refrain from leaving the nest and foraging for food and become converted into flagons by distending the crop to such enormous dimensions that the abdomen looks like a transparent bead (see pictures, pages 747, 748). In this condition they hang by their claws from the roof of the nest chamber and thenceforth spend all their lives receiving liquid food from the tongues of the foras ig ants, storing it in their crops, and regurgitating it to hungry individuals when the liquid food supply outside the nest becomes inadequate. This is, of course, apt to be the case periodically in dry regions, so that we find the true honey-ants only in deserts like those of the southwestern states, northern Mexico. South Africa, and central Australia.

In such localities also a further adaptation to vegetarianism may be frequently observed in many species of ants which take to harvesting and eating the seeds of the small herbaceous plants. This harvesting habit is evidently a last resort in regions where insect food is very scarce or confined to a brief season.

There are several dozen species of harvesting ants in North America alone, the most conspicuous being those of the genus Paganomyrmex, the species of which range all the way from Montana to the Argentine through the dry western portions of two continents. It was for-

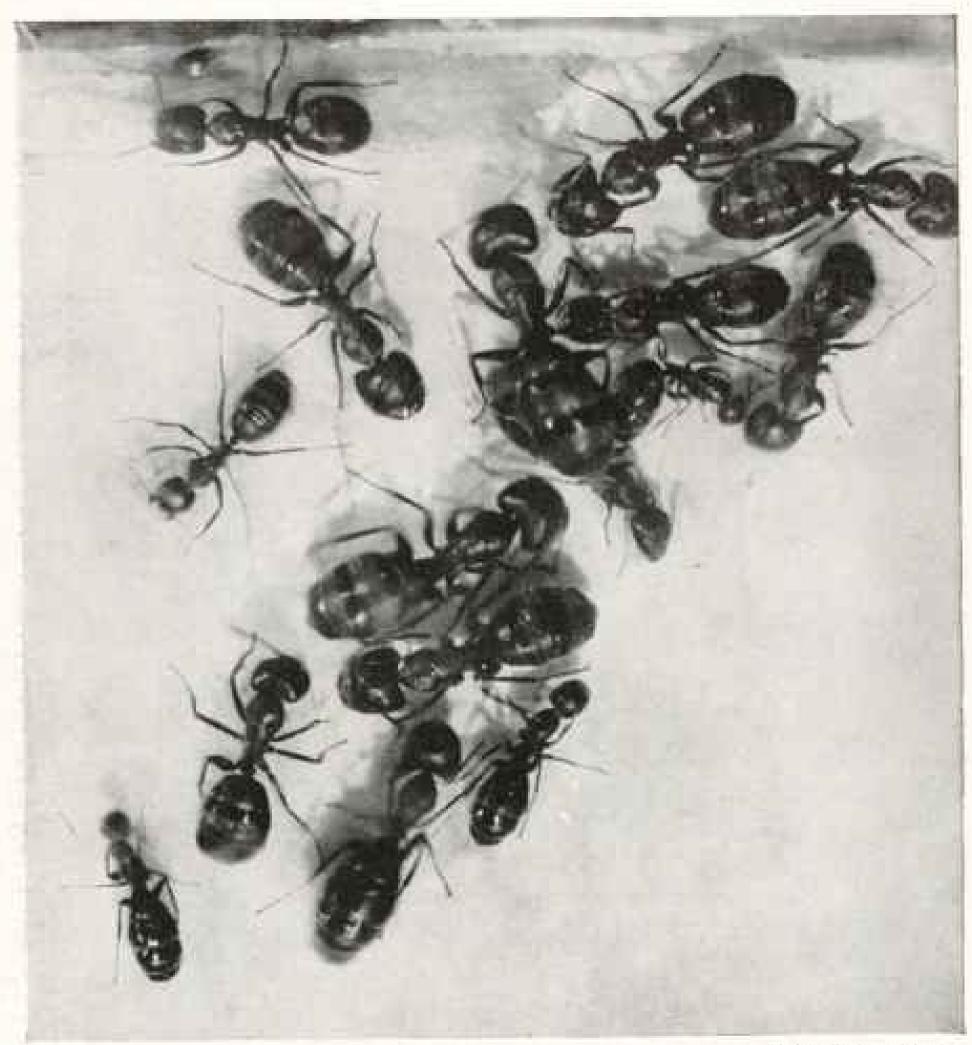


Photo by the Author

MAJOR AND MINOR WORKERS OF Camponotus americanus
The worker is produced by inadequate nourishment; is "a hunger form." Magnification
about two diameters (see text, page 742)

merly supposed that these ants intentionally sowed seeds in the ground in order that they might later harvest the crop, but this supposition has been shown to be erroneous. The ants merely visit the plants, which are often at some distance from the nest, and carry the seeds home over well-beaten paths.

TARMER ASTS

That ants can carry on agricultural or horticultural pursuits has, however, been proved by a study of the peculiar Attii, a tribe comprising more than a hundred species, all confined to America and nearly all to the tropics. These ants live on fungi which they cultivate on beds of triturated leaves, or insect excrement in specially excavated chambers.

The large species of the genus Atta cut pieces of leaves from trees, carry them into the nest in great numbers, cut them into smaller fragments, and build them up on the floors of the chambers into sponge-like masses, over the surface of which a delicate white fungus rapidly proliferates. This fungus, which is constantly weeded by the smallest ants in the colony, is prevented from fruiting and constrained to produce peculiar clus-

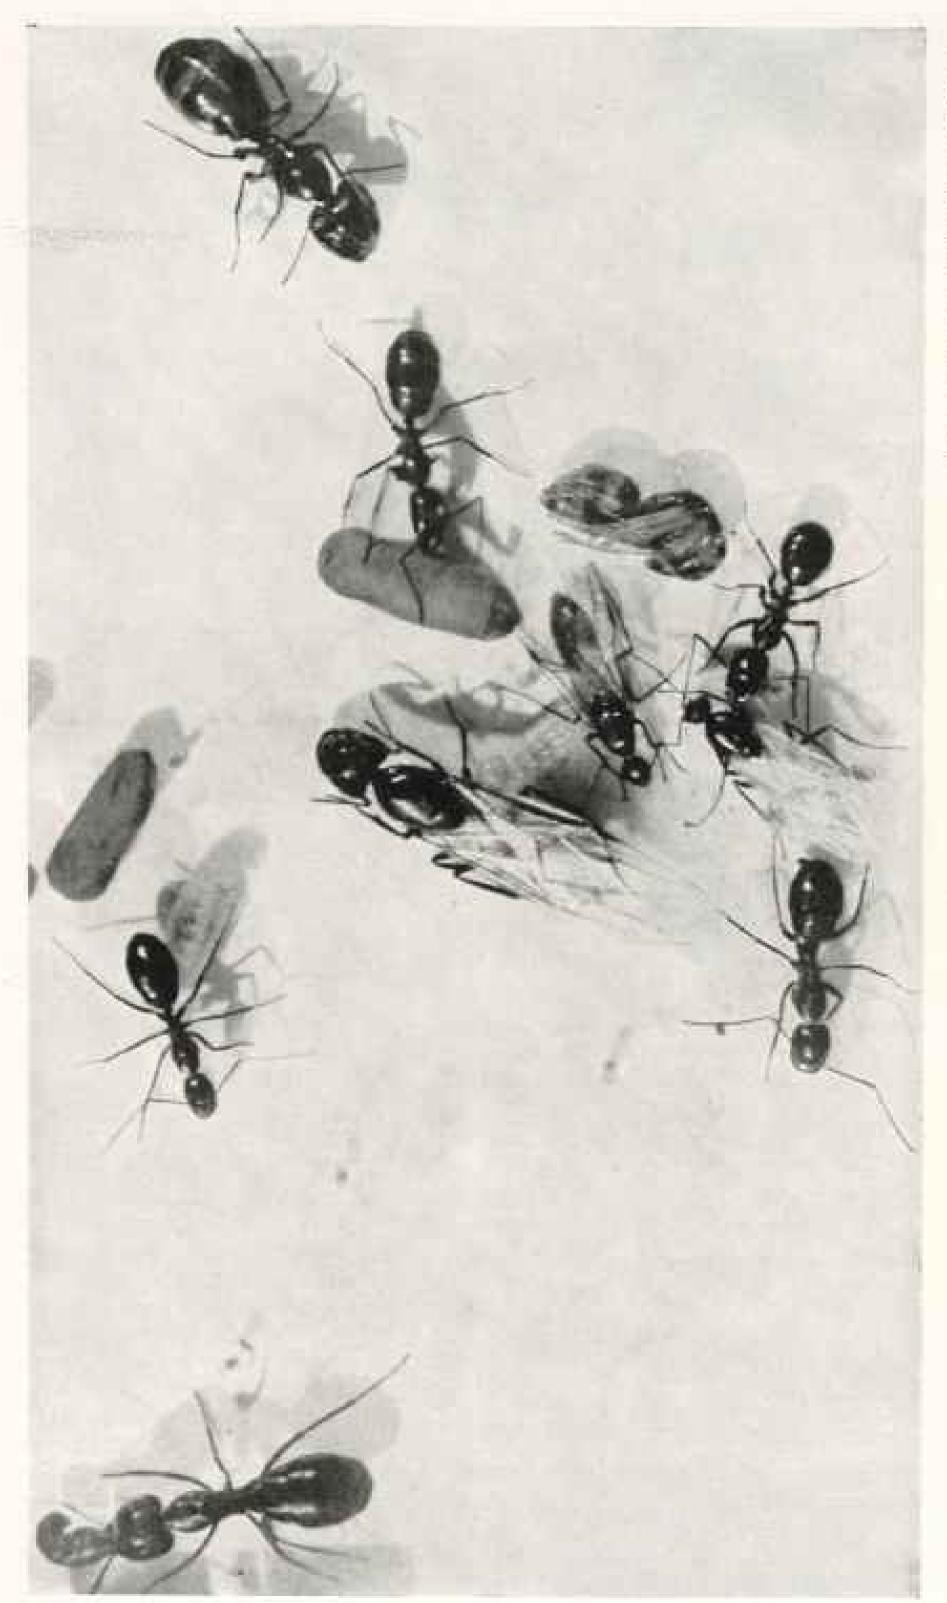


Photo by Arr. J. C. ettablespid and Liv. C. 5. Serveng

PORTION OF COLONY OF Camponotus americumus

The large, winged individual is a virgin queen; the two smaller ones are males; the large-headed wingless individuals are major, the small beaded ones minor workers. A major worker, in the left-hand upper corner, is carrying a half-grown larva in its mandibles. Eggs, very young larva, coccours, and one pupa removed from its gooden are also shown. Magnification about two diameters.


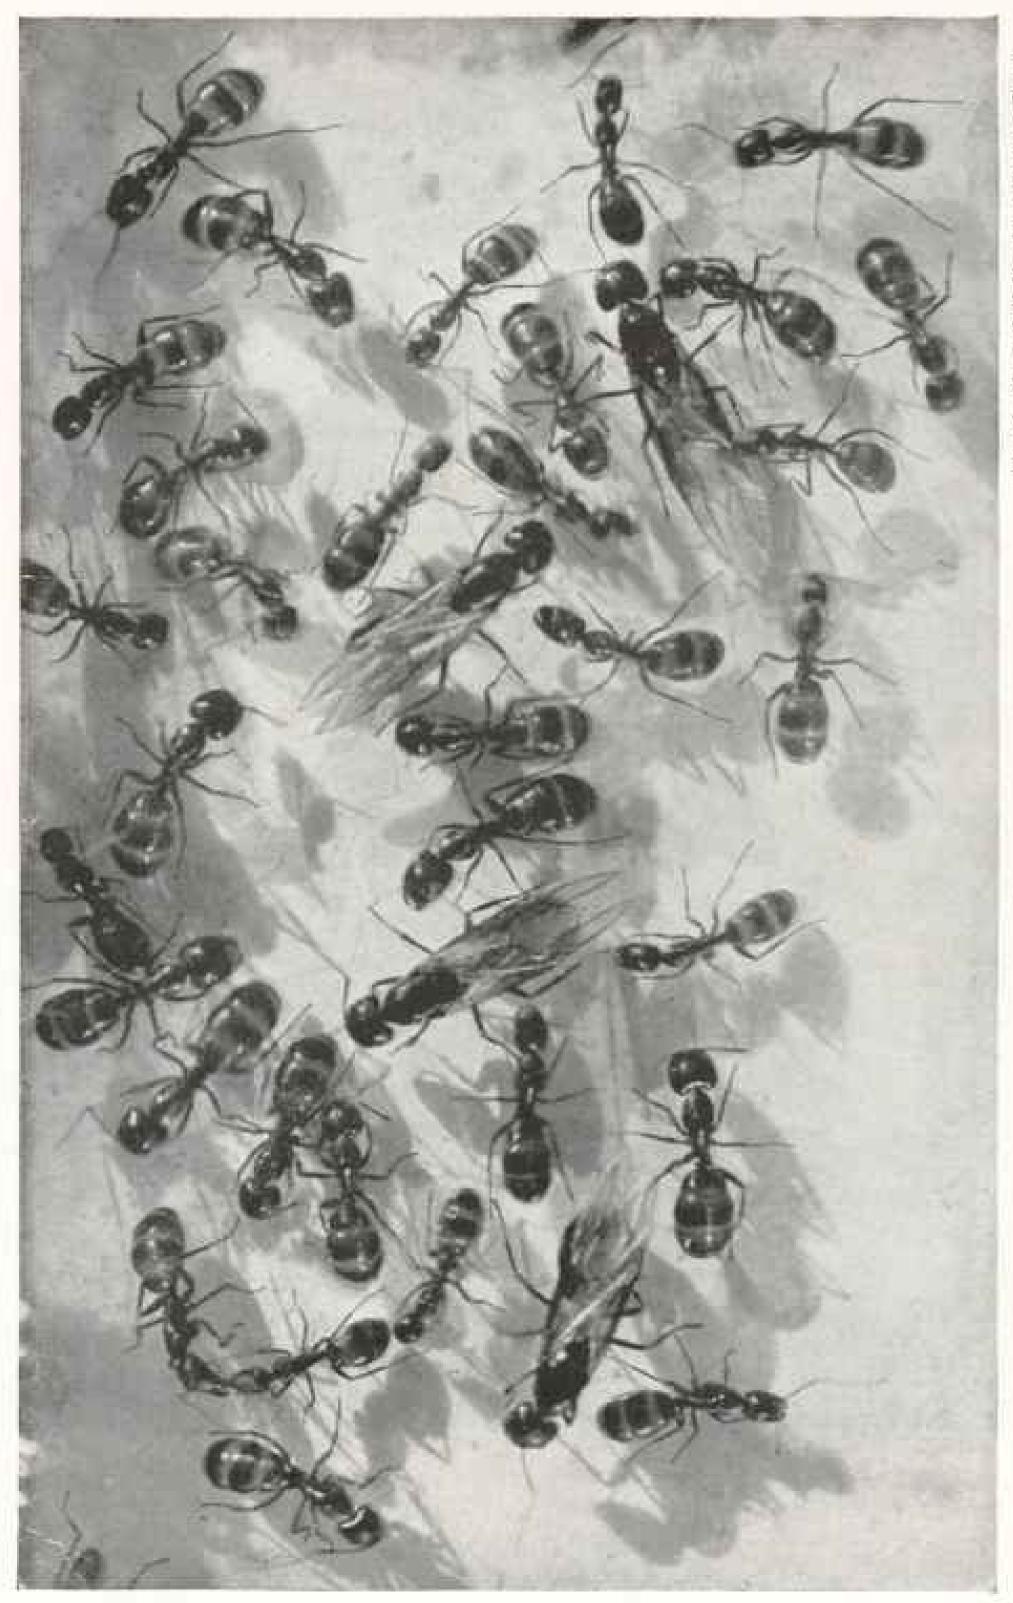


Photo by Mr. J. G. Hubbard and Dr. O. S. Strong

говатом от солому от Самронотия апетисания

for upper left-hand corner one of the workers is seen in the act of receiving food from another regargitation. Magnification about two diameters Four virgin queens and numerous workers.

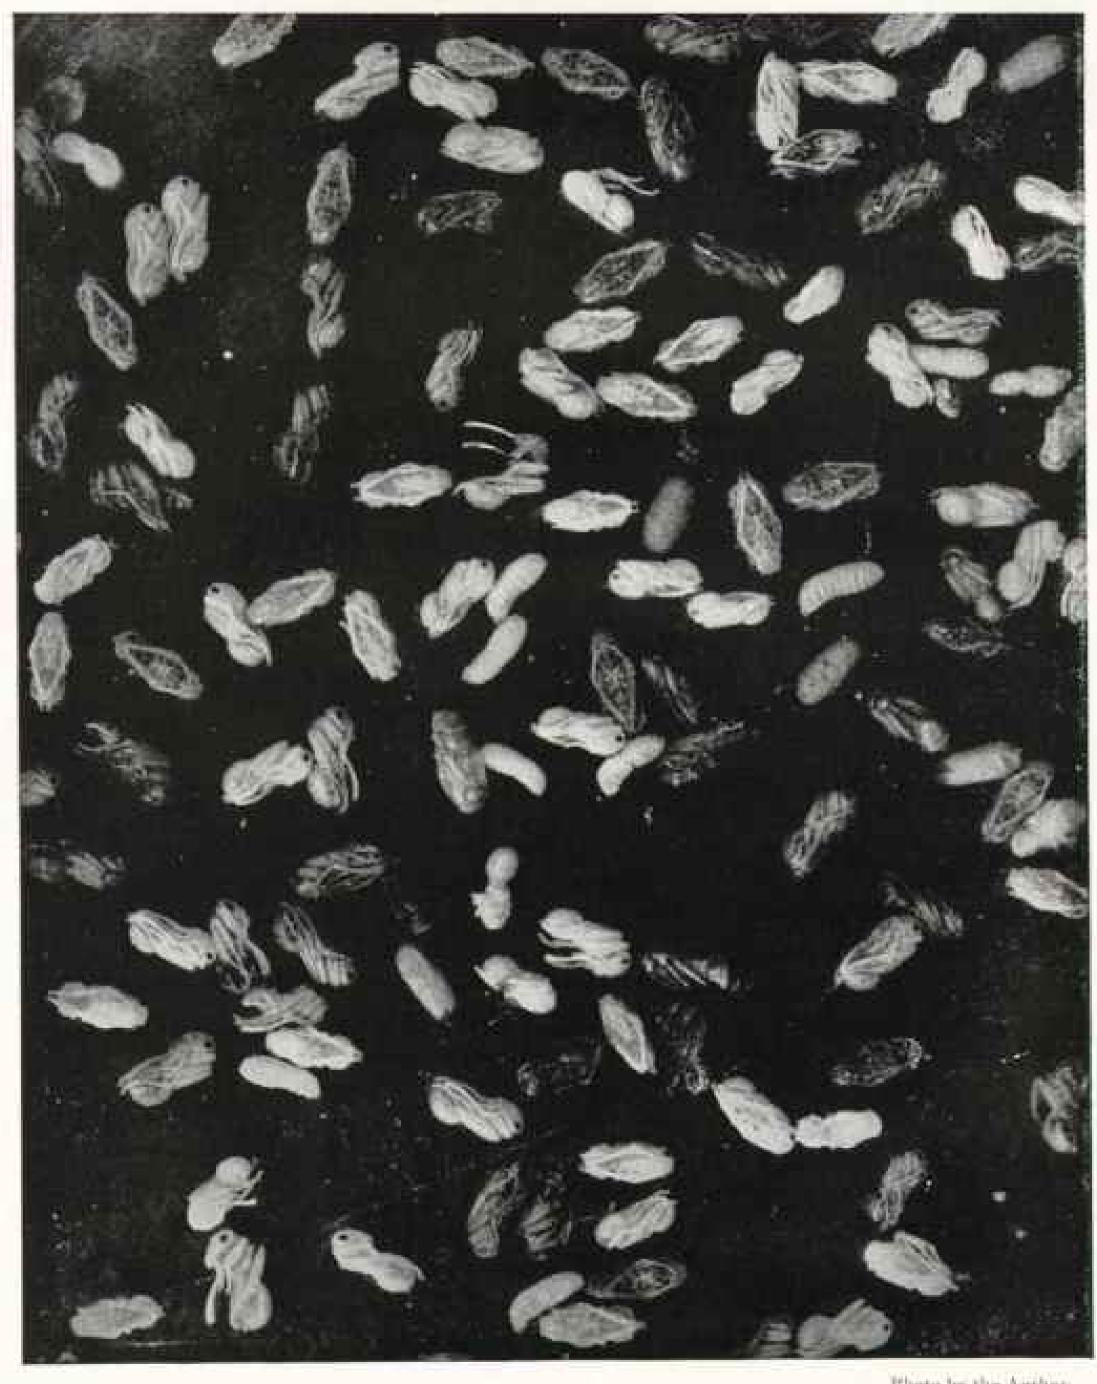

ADULT WORKER LARVE, SEMI-PUPE, AND NUDE AND COVERED PUPE IN VARIOUS STAGES OF PIGMENTATION OF Formica subscrices

Magnification two diameters

ters of small, glistening food-bodies called "ambrosia" (see pictures, pages 750-754).

Some of the small Attii, instead of building their fungus-gardens on the floors, suspend them from the ceiling of the chambers, so that the masses of substratum clothed with fungus filaments hang down like white velvet curtains. This habit is beautifully developed in several species of Trachymyrmer and Mycetosoritis. One of these, Trachymyrme.r. septentrionalis, ranges as far north as the

pine-barrens of New Jersey. None of the Attii or their larvæ, so far as known, can eat anything except the particular kind of fungus which they cultivate. To appreciate the advantages to which these completely vegetarian ants have attained in thus substituting an easily controllable and abundant foodsupply for the scarce and precarious insect diet of their predatory ancestors, one must observe these wonderful ants in Brazil or Central America, moving over their long trails in interminable processions, defoliating whole trees and carrying their leafy burdens like banners to

The foregoing remarks show that the ethnic history of ants parallels that of man to the extent that these insects were originally flesh-eating hunters, then shepherds of food-producing herds, and finally agriculturists, and that they have been compelled to pass through these stages or forfeit the advantages of living in populous and stationary communities. It is evident, furthermore, that the social needs of ants, like those of man, have been even more exigent than hunger.

their huge nest craters, which often

spread over a quarter of an acre or more.

SOCIAL DIETITIANS


The skill and success with which the higher ants have thus adapted their diet to the requirements of sociability contrasts markedly with the conditions in the other social insects. The social wasps are carnivorous, to be sure, but their colonies are small and rare like those of the Ponerinae, and in temperate regions merely annual growths. The social bees have retained the exclusively vegetarian diet of their solitary ancestors, but, as they have greatly specialized by restricting this diet to nectar and pollen, they have become dangerously dependent on the evanescent flowers. And though they have learned to construct a wonderful system of cells for food storage, they are quite unable to control the food supply. Finally, the termites, though completely vegetarian, have also become too specialized by restricting their diet to wood, or cellulose, a hard and unutritious substance, which, though abundant, can be assimilated only with great difficuity.

It is significant, therefore, that the termites of Africa and the Indomalayan region, which form the largest and most aggressive colonies, have become fungusgrowers. But even these have not yet learned, like the Attime ants, to grow "ambrosia" for all the members of the colony. The working population of the nests still has to live on wood in order to produce the excrement which is used in the construction of the gardens. The fungus itself is fed only to the young and to the sexual individuals.

It is a biological axiom that all organisms tend to propagate so rapidly that they are continually in danger of outrunning their food supply. This danger is even greater in the social or colonial than in the solitary organism, because the former is necessarily much hampered in its movements, and if every individual of which the colony consists be permitted to reproduce the food supply would very soon become so inadequate as seriously to impair the functions of the community as a whole. Hence it is not surprising that all social or colonial organisms are bound to restrict the reproductive function of their component individuals. This is true even of the individual organism itself regarded as a colony of cells.

REGULATING THE GROWTH OF FAMILIES

The four groups of social insects have, therefore, had to face a very difficult problem, and it is interesting to note that they have solved it in essentially the same manner as other social aggregates. the cell-aggregate, or individual organism included, namely, by restricting the reproductive function to a very few of the component individuals and by reducing

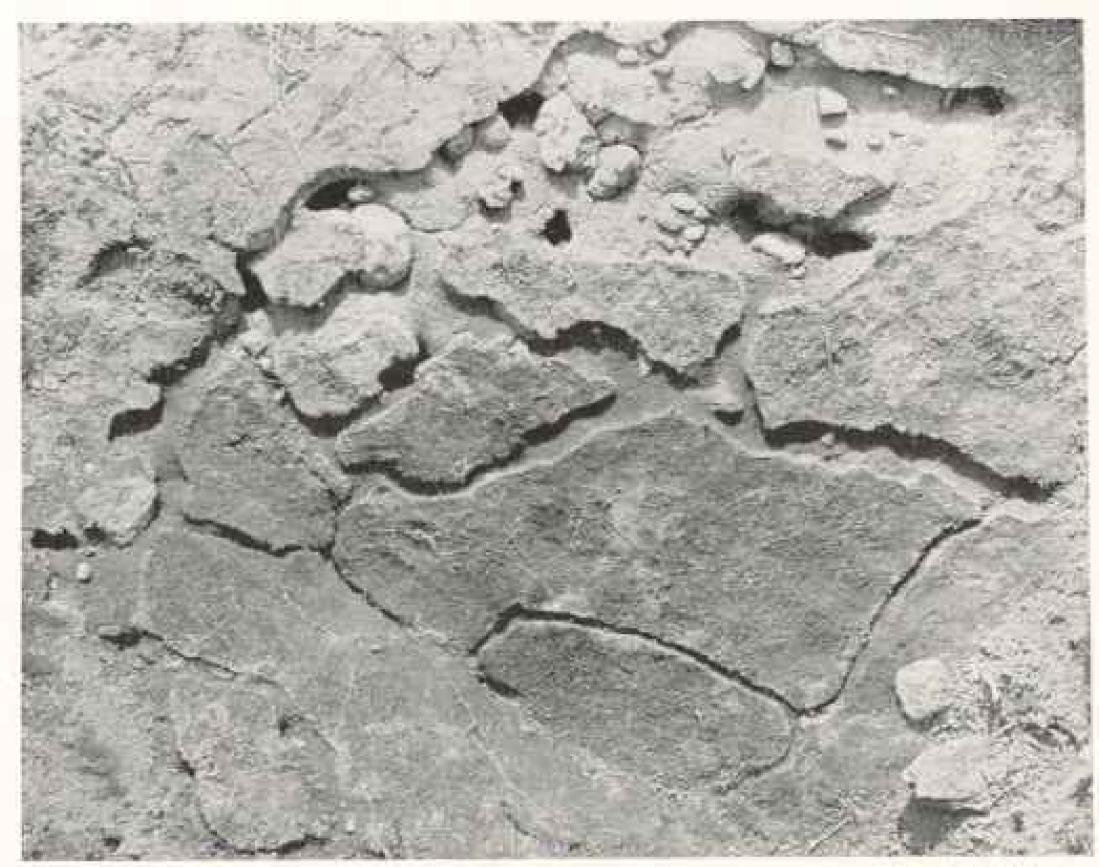

Plants by the Author

NEST OF A VERY COMMON ANT: Lasius (Acanthomyops) latiges

Only the irregular superficial galleries and chambers are shown as they appear when the stone covering the nest is removed. The care of the nest is an important matter with all ants, for convenience, no less than sanitation, requires that the galleries and chambers be kept scrupulously clean. All species, therefore, remove any refuse food, empty cocoons, pupal extivitie, meconial pellets, dead members of the colony, etc., to a proper distance from the living apartments. Veritable kitchen middens are established for this purpose, either in the open air or, if the colony is nesting under a large stone, in one of the deserted surface galleries.

the great majority to sterility and endowing them with a purely nutritive or protective function.

Nevertheless there are some interesting minor differences in the solutions of the problem of reproduction as exhibited by the termites on the one hand and the social Hymenoptera on the other. Although both of these groups bring up their brood in such a manner that the majority of individuals in the colony are sterile and only a few normally capable of reproduction, the termites make sterile or worker forms out of both male and female individuals, whereas the wasps, bees, and ants produce sterile forms only

among the females and merely reduce the number of males and permit them to develop only at certain seasons.

Hence among the social Hymenoptera we have three castes: males, fertile females, or queens and sterile females, or workers. The workers among ants and termites, however, may be still further differentiated into workers proper and soldiers, the former having a nutritive, the latter a protective, function.

This remarkable method of reducing the reproductivity of a society, whilst insuring its nutritive success, is of no little interest at the present time. It is probably not a mere coincidence that we



Photo by Mr. J. G. Hubbard and Dr. O. S. Strong

WORKERS AND COCOONS OF THE ANT WHICH PASTURES AND GUARDS PLANT-LICE: Lasius (Acanthomyops) claviger (see text, pages 735, 736)

This is a common herder of root-lice in the northern States. From the small cocoons males and workers will hatch; from the two large ones queens. The pale individuals at a are just-hatched callows. Magnification about two diameters,

should be most diligently discussing eugenics, or the restriction of reproduction to the sane in mind and body, at a time when we are also most exercised by the high cost of living. Did space permit, it could be shown that man, like other social organisms, has for ages sought and is still seeking means of regulating the reproductivity of his race to prevent its exceeding its food supply, and that the expedients on which he has relied in the past, such as monasticism, wars, and the adoption of religious, property, and caste restrictions to marriage, have been only partially successful.

In termites, both sexes, as we have seen, cooperate equally in the activities of

the colony, so that each nest contains, besides a king and queen, a host of workers and soldiers of both sexes. The
colonies of ants and the other social Hymenoptera, however, are essentially feminine, since they contain one or more
queens and a great number of workers,
which are all sterile females, and only at
certain times of the year contain any
males. These, moreover, take no part in
the colonial activities, but live only to
mate with the queens of other colonies
during the annual marriage flight.

We are therefore prepared to find that maternity is the pivotal instinct about which all the activities of the ant colony revolve. Not only the queen, the repro-



A COLONY OF THE AXT WHICH HOARDS THE EGGS OF THE CORN-ROOT LIDESE IN ITS NESTS OVER WINTER AND DISTRIBUTES THE JUST-HATCHED YOUNG IN THE SPHING ALONG THE ROOTS OF THE MAIZE



Photo by Mr. J. G. Hubbard and Dr. O. S. Strong

COLONY OF Lasius (Acanthomyops) claviger, A COMMON SUBTERNANEAN ANT IN THE WOODS OF THE EASTERN STATES, WHICH NURSES THE ROOT LICE

Two mother queens, without wings, several winged or virgin queens, and males are scattered through the throng of workers. Three queen cocoons and numerous worker cocoons are also shown. Magnification about two diameters (see pages 735, 736).



THE HONEY ANT, WHOSE STOMACH IS DEVELOPED INTO A FOOD RESERVOIR FOR THE REST OF THE ANT COLONY

The picture shows the honey ant (Myrnuccocystus hartideorum) in the act of regurgitating food to workers of the ordinary form. (After H. McCook.) (See text. page 736.)

ductive center of the colony, but all the workers act as though they were obsessed with a perfect mania of reproduction and mursing. Unless this fact is clearly appreciated, much of the behavior of ants will remain enigmatic, meaningless, or absurd.


Nothing shows more clearly the strength of the maternal instincts in ants than the development of the colony from its inception till it becomes in turn the mother of other colonies. After mating with the male high in the air, the queen descends to earth and loses her wings, either by breaking them off at the base against the stones or blades of grass or by tearing them away with her mandibles, for they are to be of no further use to her. She then seeks some small cavity under a stone or piece of bark, or digs. one in the ground, and closes it after her, so that she is completely shut off from the world (see picture, page 703).

In this little cell she passes days, weeks, or even months without food while wait-

ing for the eggs in her ovaries to mature. The now useless wing-muscles, which fill her large thorax, dissolve in the blood and go to build up the yolk of the eggs, and a similar fate overtakes the great masses of fat which she stored away in her abdomen during her larval life in the maternal nest.

THE INFANT OFFSCHING FEED THE STARV-

Eventually she lays a small batch of eggs and cares for them till they batch as helpless grub-like larvæ. These she feeds with her saliva, but as the supply of this is meager, the larvæ grow slowly, pupate prematurely, and emerge as very small and feeble workers. They nevertheless at once set to work to expand the colony by opening up a gallery to the outside world and go forth to forage. They bring in food to their starving mother and henceforth spend their days in foraging, enlarging the nest by excavating additional galleries and chambers, and in

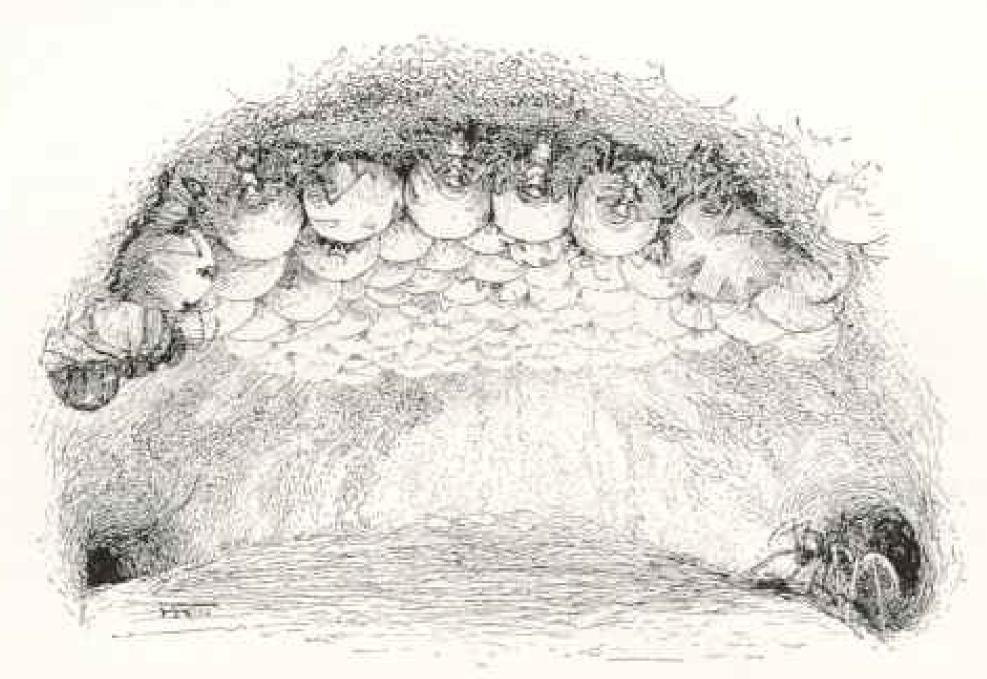

'The "replete" workers, with their social stomachs distended with the sweet exudations of oak galls, hang from the vaulted roof of the chamber in a cluster and function as so many food reservoirs. (After H. McCook.) (See text, page 736).

rearing the successive broods of larvæ from the eggs which the queen is now

able to produce in quantities.

The larvæ are fed more abundantly as the number of workers increases, and therefore develop into larger and more vigorous individuals. As time goes on and at the proper season, male larvæ appear and develop, and the female larvæ are so well fed that they can develop beyond the worker stage and become queens.

With the appearance of these sexual forms the colony has reached maturity, and although it may persist for many years, it merely repeats each year this same cycle of feeding and rearing as great a number of individuals as possible on the amount of food which the workers

can secure.

The queen may live a dozen years or more, and each worker may live three to four years, but the males usually live only a few weeks and die after the nuptial flight, being exhausted and knowing neither how to feed themselves nor how to return to the nest.


THE HIGHEST DEGREE OF SELF-SACRIFICE

Most extraordinary during the development of the ant colony is the behavior of the workers, for though sterile and, under ordinary circumstances, unable to lay eggs, they nevertheless exhibit all the other maternal instincts in an exaggerated degree. The worker, as we have seen, is a form produced by inadequate nourishment. It is a hunger form, so inured to long fasting during its larval life that even when it reaches maturity it seems to prefer to starve, for though greedy to fill its social stomach with liquid food whenever there is an opportunity, it dispenses this store most generously to the larvæ and its sister ants and permits very little of it to pass the valve into the individual stomach, only enough, in fact, to maintain healthful activity.

Ants are, therefore, the most thoroughgoing of communists, to whom individual possession as such has no meaning beyond its benefit to the community

as a whole.


But even the worker's sterility, which has given certain individualistic thinkers such had dreams, is neither fixed nor irrevocable. If the colony has a very abundant food supply, or if its queen dies, the small, undeveloped eggs, which are always present in the ovaries of the workers, may grow to full size, be de-

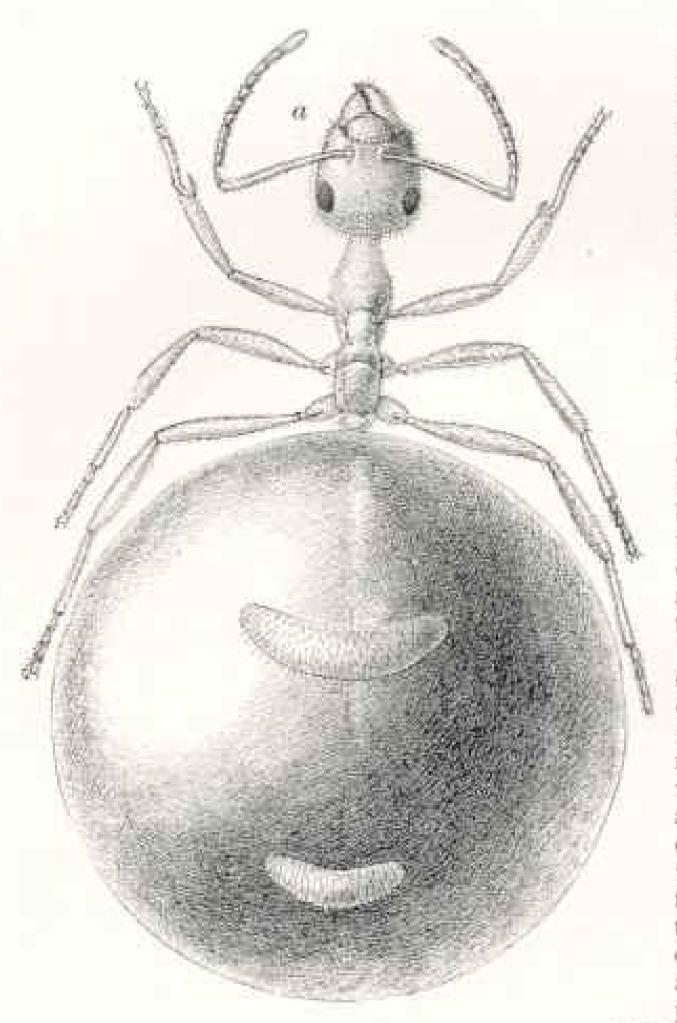

posited and develop normally, though always or nearly always into male ants, because they are not fertilized. Thus the joys of maternity may fall to the lot of the worker, though less abundantly and less frequently than to that of the queen.

The founding of the colony as described in the foregoing paragraphs is typical of the great majority of ants, but there are several other methods, which may be briefly considered, since they still further accentuate the remarkable fondiness of these insects for their brood. These methods are determined by the different endowment with which the queen ants of different species leave the maternal nest.

In most species, as already described, the recently fecundated queen possesses a large fat body and a mass of wing muscles, which can be converted into food for the eggs and a complicated instinct endowment, which enables her to found a nest and bring up a first brood of young without the aid of workers. There are queens, however, even better and some that are much more poorly endowed.

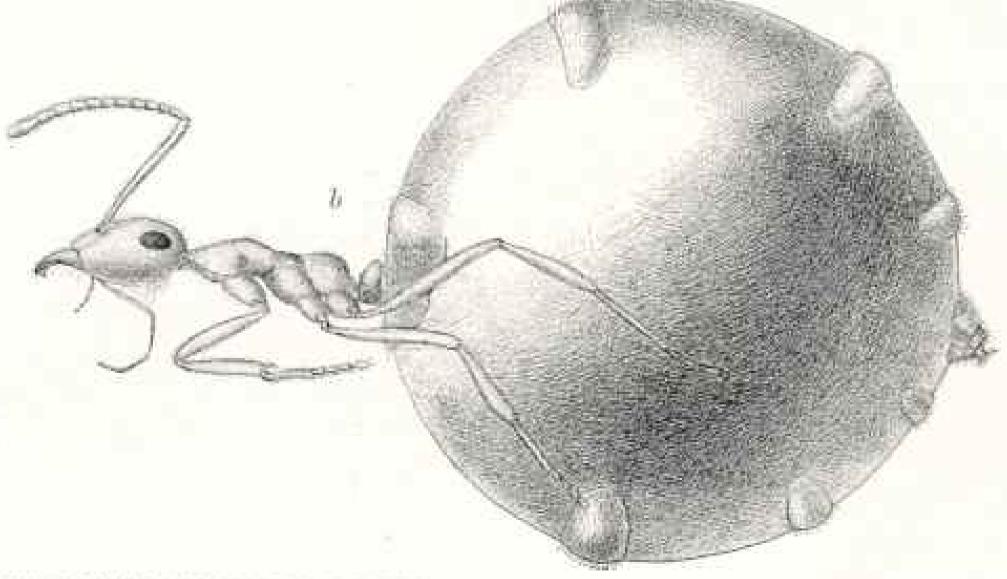

THE FAMILY STOMACH OR REPLETES OF THE HONEY ANT OF THE GARDEN OF THE GOOS (Myrmecocystus hortideorum)

a shows the insects as seen from above; b in profile. In both the segments of the abdomen are widely separated by the thin intersegmental membrane, which is great's stretched by the distended crop, or social summer. (Author's illustration.) (See text, page 736.)

BORN WITH A WELL-STOCKED LARDER

To the former class belongs the queen of the fungus-growing ants, which not only leaves the maternal nest with the mental and bodily endowment of the ordinary queen, but also inherits some property in the form of a bundle of fungus filaments from the gardens of the maternal nest, tucked away in the little pocket in the floor of her mouth. After she has excavated her chamber in the soil and closed its entrance, she is thus in a position not only to bring up a first brood without extraneous aid, but to start the gardens with the fungus pellet, which she spits out, and keeps growing by careful weeding and by manuring it from time to time with her excrement, or even with her own broken eggs, till the firstling workers hatch and begin to bring in the leaf material or caterpillar excrement, which is henceforth used as the only substratum for the gardens.

Very different is the endowment of the queens of a number of parasitic ants. These queens are either very small and feeble or lack the instincts and initiative that would enable them to found a colony independently. They are therefore compelled to seek assistance in this arduous task, and they succeed in securing it in

one of the three following ways:

The young queens of some parasitic ants enter the colonies of an allied species, the workers of which then either kill their own queen and adopt the parasite in her stead or permit the latter to kill their queen. After the reproductive center of the host colony has been thus destroyed, the intrusive queen lays her eggs and permits her young to be brought up by the alien workers. These die off in the course of a few years, but by that time they have reared at least one brood of the parasitic species and the colony, now consisting exclusively of the queen and workers of this species, is sufficiently vigorous to lead an independent existence. This method of colony formation, in which the queen is relieved from the difficult task of feeding and rearing a first brood, has been called temporary social parasitism. It is characteristic of many of the largest and most

prosperous ants of the north temperate zone—c. g., of the mound-building ant of the Alleghanies (Formica exsectoides) and the fallow ant of Europe (F. rufa).

THE KIDNAPPERS

A different method is adopted by the slave-making ant Formica songuinea and many of its subspecies (see picture, page 755). The young queen enters a nest of the common black Formica fuscu or of some one of its many varieties, kills or drives away any of the workers when, irritated by her odor, they rush forth to attack her, then hastily collects a lot of the worker pupse of the fusca and stands guard over and defends them till they batch. These workers at once affiliate themselves with the queen as intimately as if she were their own mother and bring up her brood for her as soon as it appears.

The sanguinea young inherit their mother's peculiar instinct to attack the fusca colonies in the neighborhood and to kidnap the worker pupar. They bring these pupe back to the maternal nest and eat some of them, but permit others to hatch and become "auxiliaries," or "slaves." Thus what has been called slavery among ants is merely a form of parasitism, in which the "slave" species is really the host. In old colonies the sanguinea workers often lose the slavemaking habit, and as the fusca workers then completely die out, there ensues an emancipation of the sungained colony from the host like that observed in the

temporary social parasites.

THE SLAVERS

A third method is adopted by the young queens of the permanent social parasites. These queens enter the colonies of an alien species and are adopted like the queens of the temporary social parasites, after the enforced death of the host queen, but the worker offspring of the parasite are destined always to live with the host species. There are really two methods of insuring this result. One is by slavery, as in the case of the amazon ants (Polyergus), the workers of which are unable to feed themselves, to care for


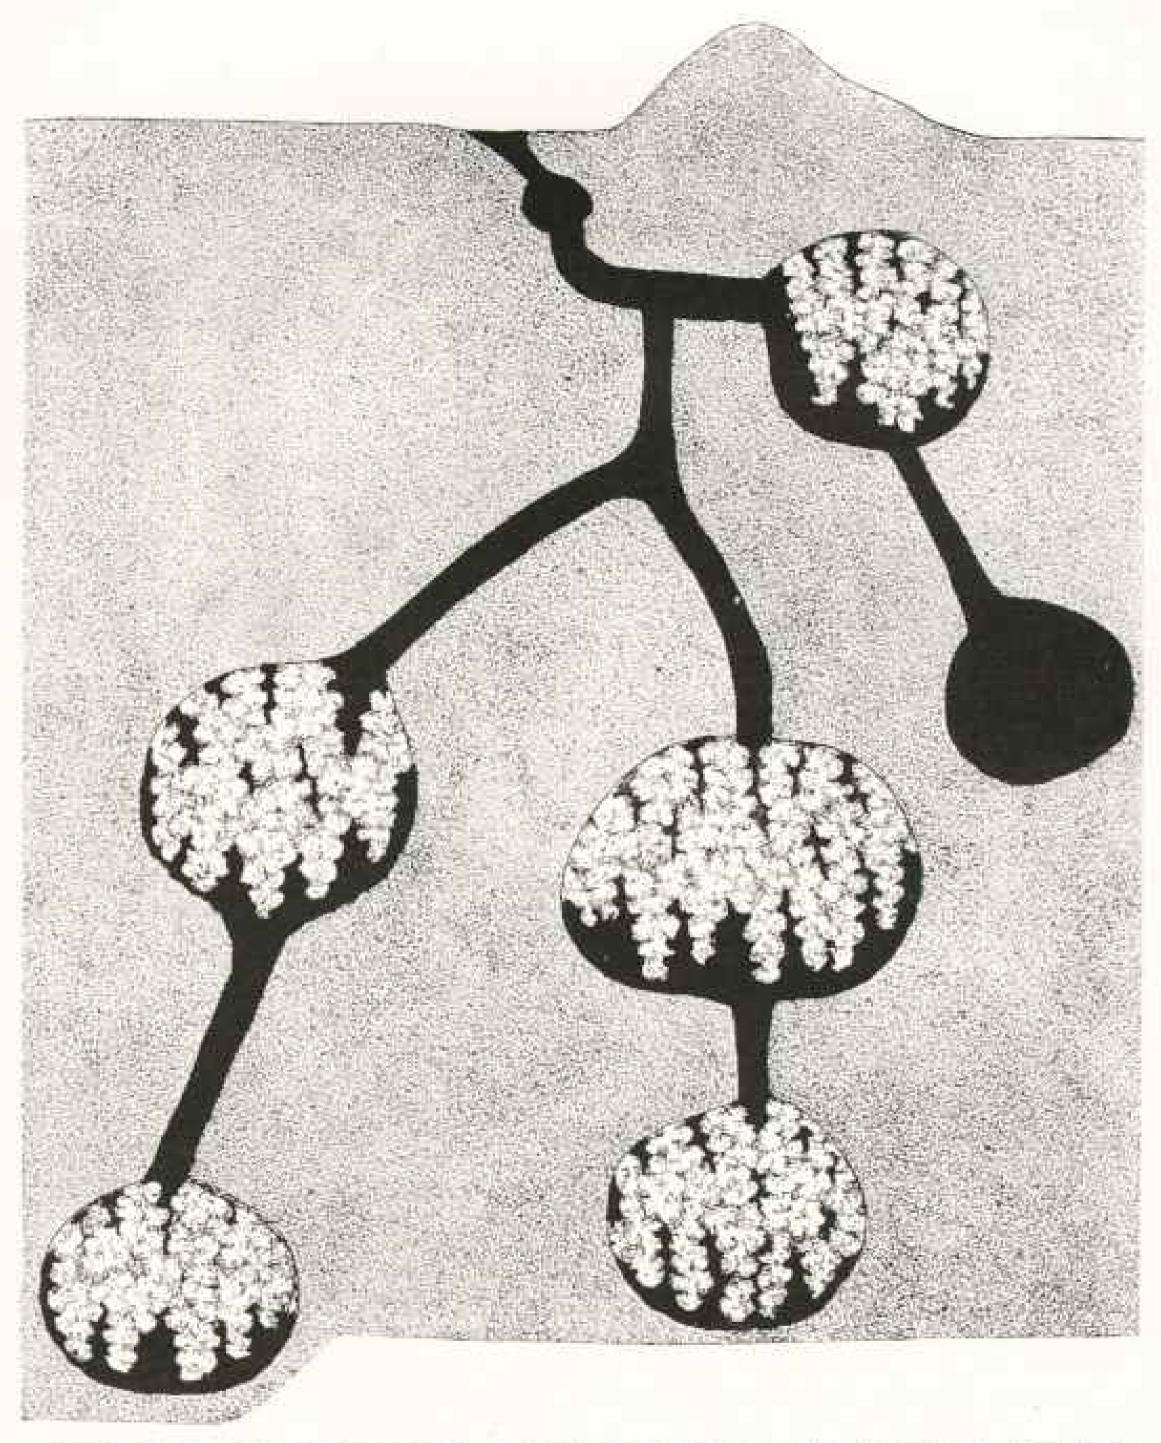


ILLUSTRATION OF THE GARDENS OF A FUNGUS-GROWING ANT (Trachymyrmex obscurior)

The figure shows near the surface the small original chamber formed by the queen, five chambers, with pendent frangus gardens, and a newly excavated chamber, in which the garden has not yet been started (see text, pages 737 and 738).

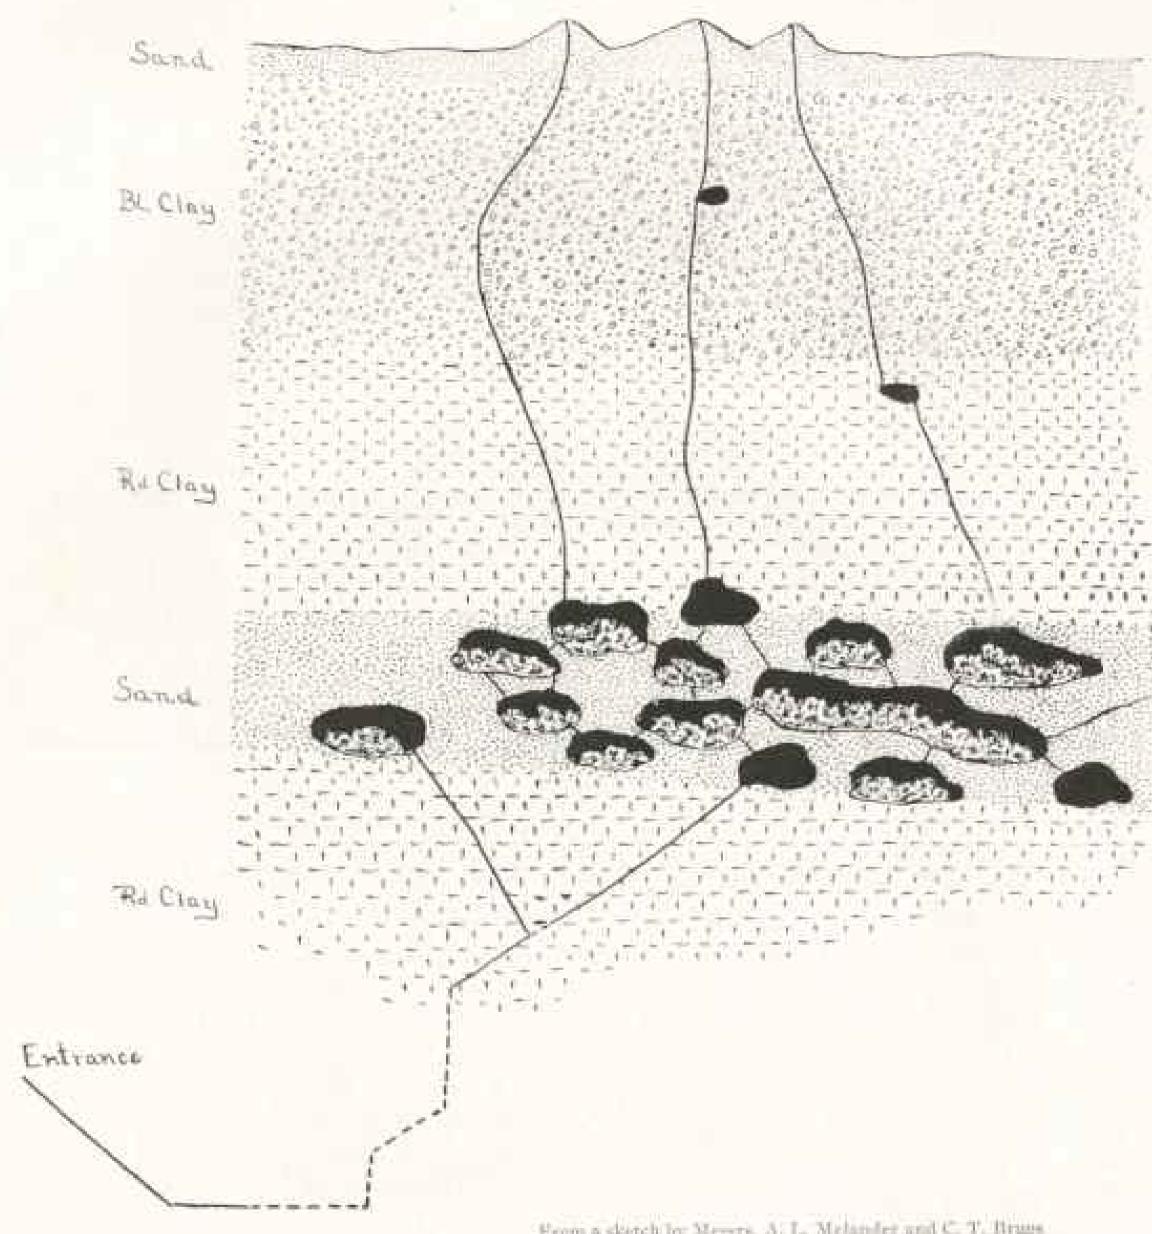

From a sketch by Messys. A. L. Mclander and C. T. Braus.

NEST DIAGRAM OF THE TEXAN LEAF-CUTTING ANT (Atta texana).

The large chambers, with sponge-like fungus gardens on their floors, are situated in a stratum of sand under layers of red and blue clay and several feet below the surface, on which the nest craters have their openings (see text, pages 737 and 738).

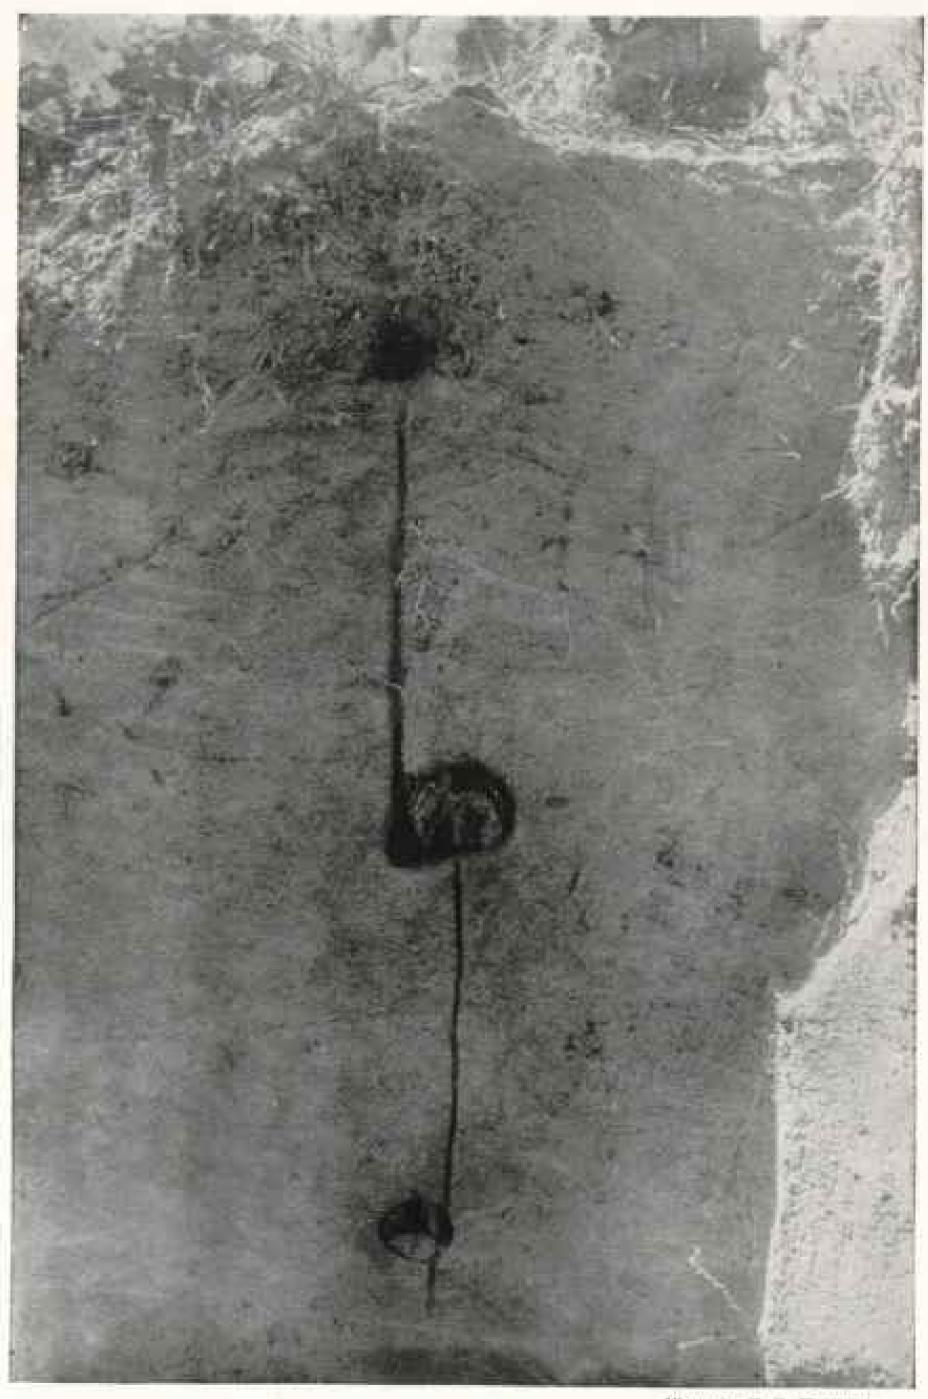


Photo by C. G. Hartman

A PHOTOGRAPH OF A SECTION OF THE NEST OF A SMALL TEXAN FUNGUS-GROWING ANT $(Mycelosoritis\ lartmani)$

Two of the three chambers of the nest, which is excavated in pure sand, contain pendent fungus-gardens. About one-fourth the natural size



Photo by C. G. Hartman

NEST CHAMBER OF A SMALL TEXAN FUNGUS-GROWING ANT (Mycetosoritis hartmani)
The middle chamber of the preceding figure one-fourth larger than natural size, showing in
the upper right-hand corner some of the rootlets to which the garden is suspended

their brood, or to excavate the nest, and are therefore compelled to keep kidnapping the young of the host species in order to secure the performance of these tasks. The other method is by completely suppressing the worker caste in the parasitic species, so that the queen after her adoption in the nest of the alien species can at once produce males and females within the host colony's lifetime, which is very short because the host queen has been eliminated.

These various methods of colony formation show that among ants the extreme adaptations of parasitism have for their sole object the securing of better opportunities of reproduction.

The restriction of reproduction to a few members of the colony brought with it, among other advantages, the usurpation of the nutritive and protective functions by a special caste, the workers, which, moreover, comprised the majority of the personnel of the colony. Later these functions were delegated to two subdivisions of this caste, the workers proper and the soldiers.

Among the special adaptations for the protection of the colony we may cite the development of the sting and of the various poisonous or malodorous secretions with which the workers spray or smear the bodies of their enemies, the enlarged mandibles of the soldiers, and above all the excavation or construction of the nest, which protects the colony both from its enemies and from excessive drought, cold, and heat.



Plooto by the Author

LARVAL OF THE TEXAN AGRICULTURAL ANT (Pogonomyrmex molefaciens)

The brilliant white color and tensity of the skin in these grub-like creatures is due to the great accumulations of fat, which will be used, in part at least, during papation in building up the body of the adult ant. Magnineation about five diameters.

ANTS THAT BUILD INCUBATORS

Ants no doubt originally nested in the earth, and the majority of species still prefer this habitat. It was while living in this plastic material that they learned to prefer irregular galleries and chambers and to become great opportunists, in marked contrast with the social wasps and bees, which have never been able to depart from their habit of rearing their young in combs made of a refractory substance like paper or of an expensive secretion like wax.

The ants early discovered the great advantages of being able to carry their brood from place to place when danger threatened.

In connection with this free method of dealing with the brood, they were also led to add to the original subterranean nest a kind of tepidarium or incubator, in which the young could be placed during the warmest hours of the day for the purpose of hastening their development (see pictures, page 750). This incubator is the mound or dome of pebbles or vegetable detritus, which surmounts the subterranean nest of many of the more conspicuous species of North America and Eurasia, especially in mountain re-

gions, where the summers are so short that the ants have to utilize every bit of mid-day heat in order to bring their young to maturity.

The mound is riddled with chambers and galleries and is not only fully exposed to the sun, so that its temperature is several degrees higher than that of the surrounding soil, but its slopes are often constructed in such a manner to eatch the heat rays perpendicularly form the most effective regions of the heavens. This orientation of the nests is indeed often so conspicuous and definite that they can be used as compasses (see pictures, pages 742, 759).

In the tropics where the soil is often saturated or flooded with water during the rainy season, and where

devices for conserving the heat are quite unnecessary, many ants have learned to construct paper nests on the trees. Such nests superficially resemble the nests of wasps. They contain no combs, however, but only a maze of irregular, intercommunicating galleries and chambers. A few tropical species belonging to three different genera (Œcophylla,Myrma, and Camponotus) inhabit nests consisting in part at least of a fine silken web.

REPAIRING THE NEST WITH SILK

It was long a mystery how ants could manufacture silk, but it has been recently shown that the ants themselves do not spin the silk, but use their larvæ for this purpose. The process can be actually observed by making a rent in the wall of the nest and then following the movements of the ants under a magnifying glass. They separate into two brigades. one of which stations itself on the outside of the nest and draws the edges of the rent as close together as possible by pulling with claws and mandibles, while the other, inside the nest, moves the spinning larvæ back and forth across the gap till it is filled out with a dense felt-work of extremely fine silken threads (see picture, page 704).

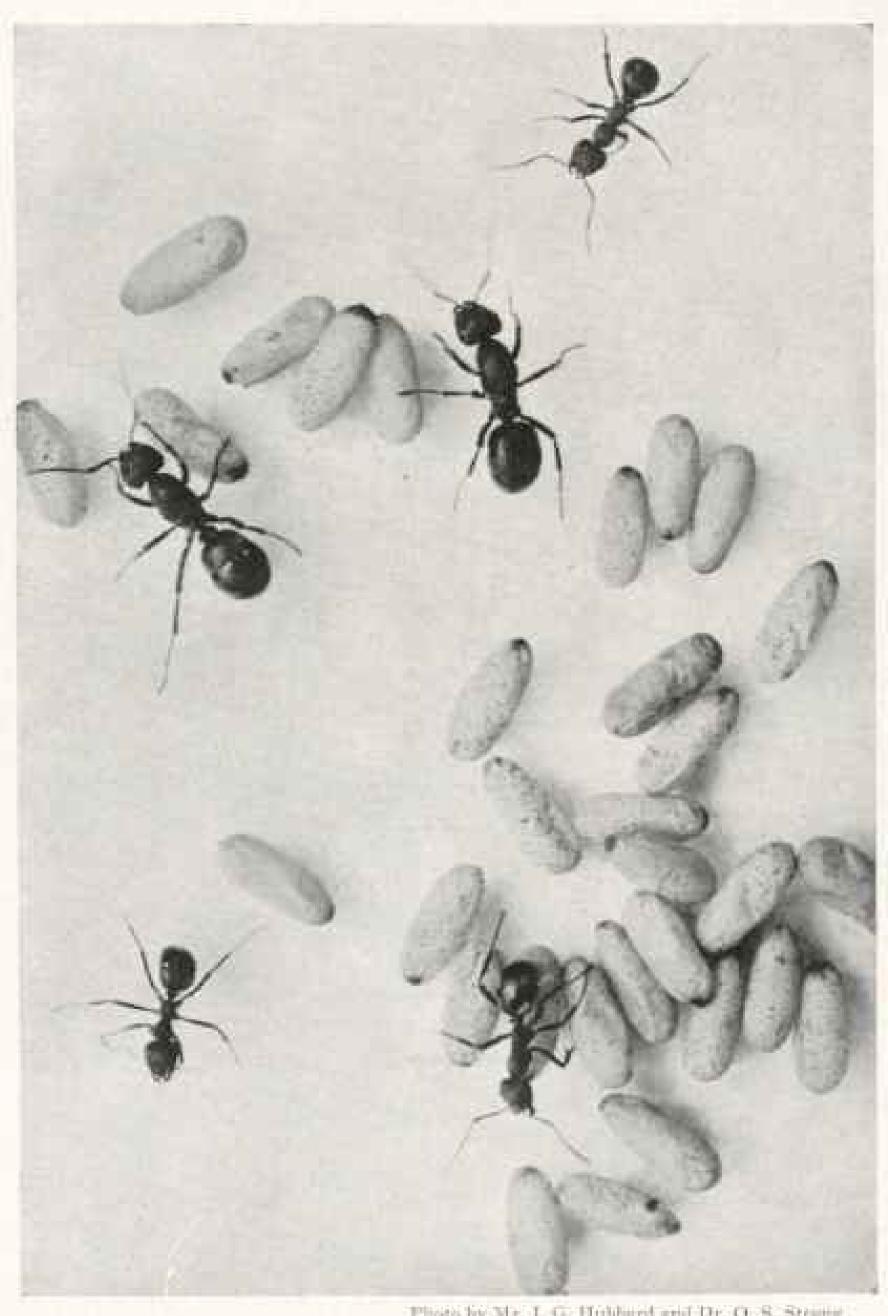


Photo by Mr. J. G. Hubbard and Dr. O. S. Strong

PORTION OF A COLONY OF AN AMERICAN SLAVE-MAKING ANT (Formica sanguinea) subintegra) (SEE TEST. PAGE 748)

Two females after the removal of the wings, three workers, and a number of worker cocoons, nearly twice the natural size



Pleate by Mr. J. G. Huhland and Dr. O. S. Strong

COLONY OF Aphanogaster picea, A COMMON ANT IN THE WOODS OF THE EXSTERN STATES


The mother queen of the colony is seen at a in the lower right-hand corner of the photo-graph, a male at b in the upper left-hand corner



Photo by Mr. J. G. Hubbard and Dr. C. S. Strong

WORKERS OF THE COLONY OF Aphenogaster picea, SHOWN IN THE PRECEDING

In this rather primitive and the workers are all of the same size and shape, not polymorphic as in Camponotus americanus (see pages 735, 737, and 738) and many other species. Magnification about twice the natural size.

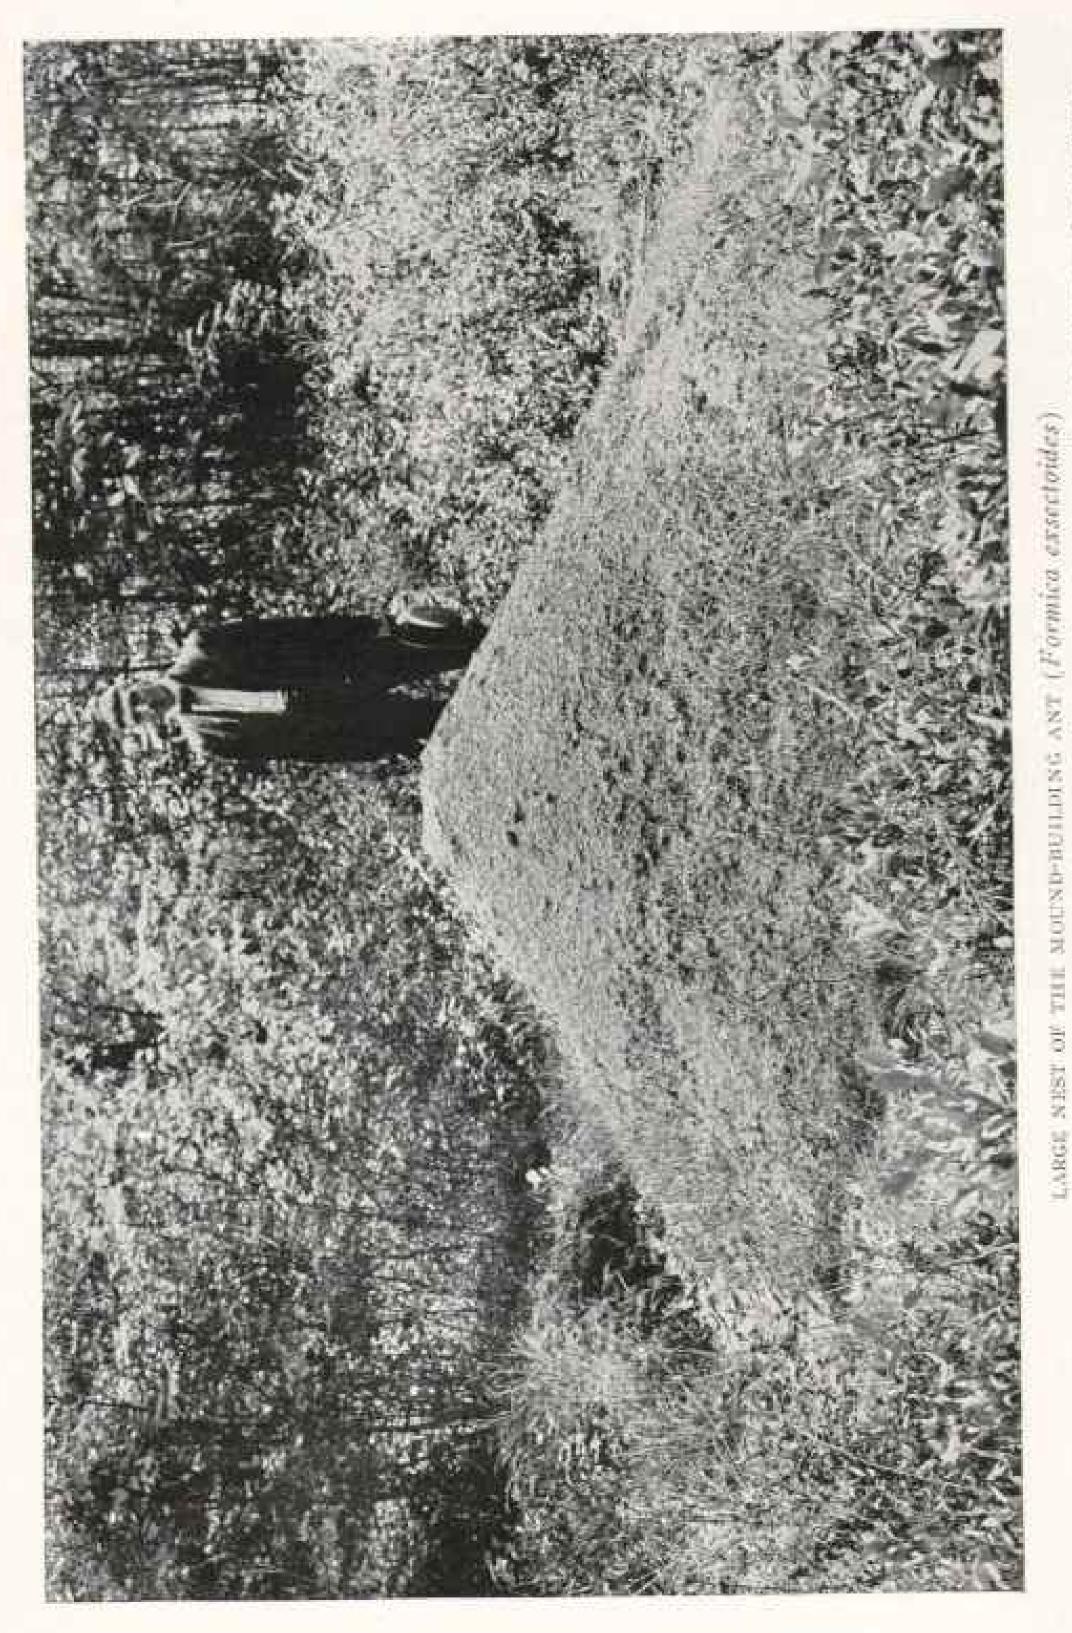


1 meter high, has a basal diameter of 3.25 meters, and a circumference of 10.21 meters This mest, liveated at Scotch Plains, N. J., is LARGE NEST



Photo by the Author

NEST OF THE OCCIDENT ANT (Pogonomyrmex occidentalis) WHICH BUILDS INCUBATORS FOR ITS YOUNG

On the Dry Plains at Las Vegas, New Mexico. The nest cone has its entrance pear the base and nearly always on the east or south side. It is closed at night by the workers, and the advantage of having it in this position is to insure its being opened earlier in the morning when the warmth of the sun awakens the workers (see text, pages 746 and 747).

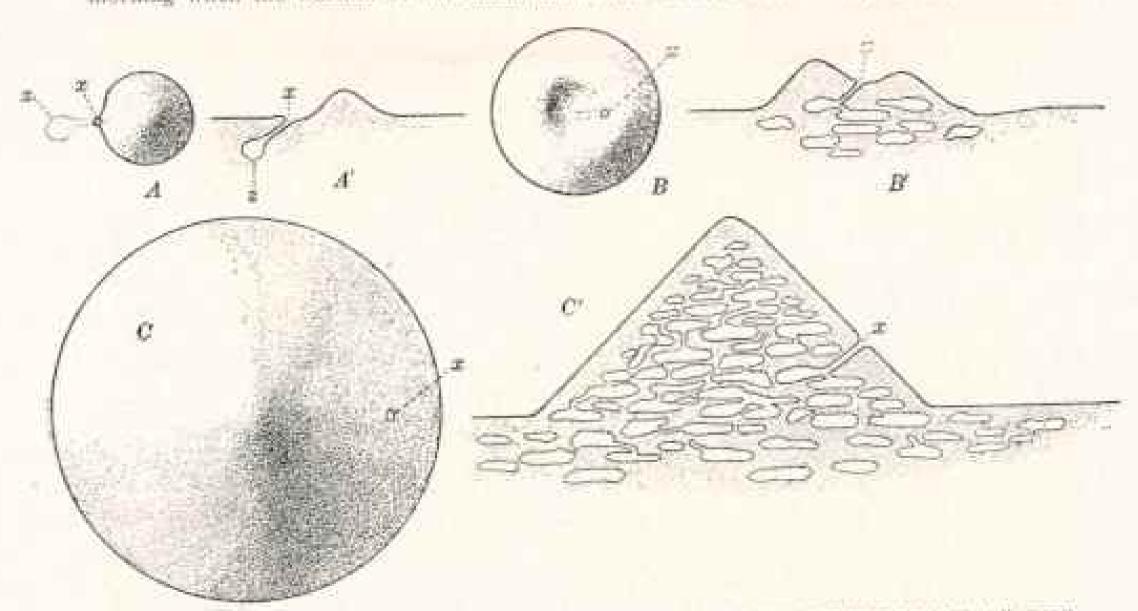


DIAGRAMS OF THREE STAGES IN THE DEVELOPMENT OF THE NEST-MOUNT OF THE OCCIDENT ANT (Pogonomyrmex occidentalis) WHICH BUILDS INCUBATORS FOR ITS YOUNG

 A_i small mound of earth thrown up by the queen when starting her formicary; x_i entrance; x_i first chamber; A'_i some nest in section; B_i crater nest (second year) formed by incipient colony; B'_i section of same; C_i dome of adult colony; C'_i section of same showing galleries and chambers used for incubation of the young (see text, pages 746 and 747).



MOUND OF THE THATCHING ANT (Formica rubiginosa) OF COLORADO

The mound, which is made of coarse twigs and grass-blades, may be two or three feet in diameter

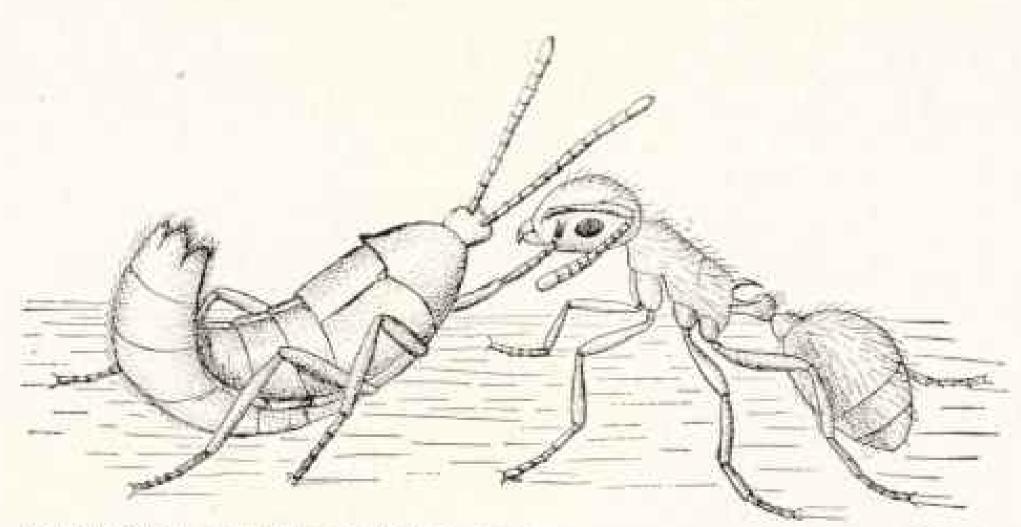

ANT GUEST OR PARASITE (Atemeles) SOLICITING FOOD FROM A WORKER Myrmica (AFTER E. WASMANN)

The beetle strokes the cheeks of the ant in order to induce her to regargitate a drop of liquid food from her social stomach. Any insect which by means of its shape, odor, or behavior can delude the ants into feeling that it may be another out or one of their larvæ can secure free board and lodging in their nests (see text, page 748).

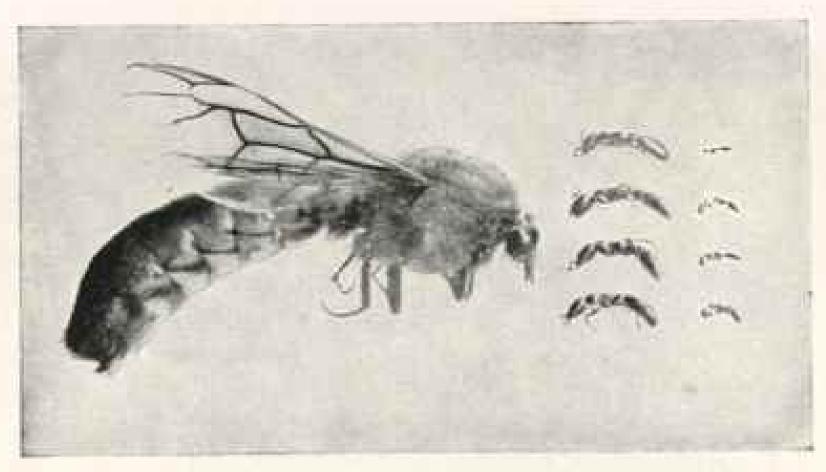


Photo by the Author.

MALE AND WORKERS OF A SOUTH AFRICAN DRIVER ANT (Dorylus fimbriatus)

The male is a very large, hairy insect with large eyes; the workers are small and blind,

but vary greatly in size.

The driver ants (Dorylii) in the tropics of the Old World and the allied legionary ants (Ecitonii) in the corresponding regions of America do not confine themselves to collecting dead or disabled insects. They move in long files over or immediately beneath the surface of the ground and capture myriads of living insects and their larvæ. So efficient are they in exterminating all kinds of vermin, including rats and mice, that they are welcomed into

the houses, even if their owners are obliged to vacate for the time being.

In some countries the ants are regarded as useful allies in destroying the insect pests of plantations. According to Magowan, quoted by McCook (1882): "In many parts of the province of Canton, where, says a Chinese writer, cereals cannot be profitably cultivated, the land is devoted to the cultivation of orange trees, which, being subject to devastation from worms, require to be protected in a peculiar manner, that is, by importing ants from the neighboring hills for the destruction of the dreaded parasite. The orangeries themselves supply ants which prey upon the enemy of the orange, but not in sufficient numbers; and resort is had to hill people, who, throughout the summer and winter, find the nests suspended from branches of hamboo and various trees. There are two varieties of ants, red and yellow, whose nests resemble cotton bags.

The orange and feeders are provided with pig or goat bladders, which are baited inside with lard. The oringes they apply to the entrance of the nests, when the auts enter the bag and become a marketable commodity at the orangeries. Orange trees are colonized by depositing the auts on their upper branches, and to enable them to pass from tree to tree, all

the trees of an orchard are connected by a bamboo rod,"

An interesting side-light is thrown on the various nutritive, reproductive, and protective devices in ants by the behavior of the insects that live as guests or parasites in their nests. Of these insects, called myrmecophiles, some 1,500 species have been described, a wonderful assemblage of creatures whose sole aim in life is to exploit the ants. They stay in the nests because these afford warmth, food, and protection. Some myrmecophiles feed on the larvæ and pupæ, or even on the adult ants, and some, known as true guests or symphiles, have developed glands that emit a redolent secretion which seems to fascinate the ants much as a catnip fascinates cats. The more highly developed of these true guests are fed and reared by the ants as if they were ant larvæ.

EVER READY HOSPITALITY

The only explanation of such extraordinary behavior towards parasites which eventually injure or destroy the colonies they infest must be sought in the inordinate fondness of the ants for their own brood and for one another. Observation and experiment have shown that any insect which, by means of its shape, odor, or behavior can delude the ants into feeling that it may be another ant or one of their larvae, can secure free board and lodging in their nests (see picture, page 760).

Having discussed some of the more



NEST OF AN ARBOREAL BRAZILIAN ANT (Astern trigona)

This nest consists of paper (carton) and is built around a branch of the trumpet tree (Cecropia adenopus). (Photograph from a specimen in the American Museum of Natural History.)



Photo by the Author

INCIPIENT COLONY OF CARPENTER ANT (Camponotus pennsylvanicus)


The queen has established her colony in the abandoned cocoon of a beetle (Rhagium lineatum) under pine bask, has reared a few small workers, and has started a second brood, represented by a small cluster of larvæ in the upper part of the chamber (see text, pages 741-742). In incipient ant colonies the queen mother takes no food often for as long a period as 8 or 9 months, and during all this time is compelled to feed her first broad of larvæ exclusively on the secretion of her salivary glands.

striking peculiarities which the ants have developed during the long course of their evolution, a word may be added in conclusion on the prospects of future developments. It must be confessed that these prospects are not very bright, for, strange as it may seem, there are no indications that these insects have made any considerable evolutionary progress since carly Tertiary times.

The exquisitely preserved ants of the Haltic amber, belonging to the Lower Oligocene formation, are in all respects like existing ants. All of them belong to existing subfamilies, most of them even to existing genera, and a few of them are


practically indistinguishable from species inhabiting Europe today. That some of them were herders of plant-lice is proved by blocks of amber containing masses of ants mingled with the plant-lice which they were attending when the liquid resin of the Oligocene pines flowed over and embedded them. Possibly the soldier caste is a recent innovation, but the differentiation of the males, queens, and workers was as extreme and precisely of the same character then as now.

This seems to force us to the conclusion that all the great features of ant-life must have been established during the Mesozoic Age, and although many spe-

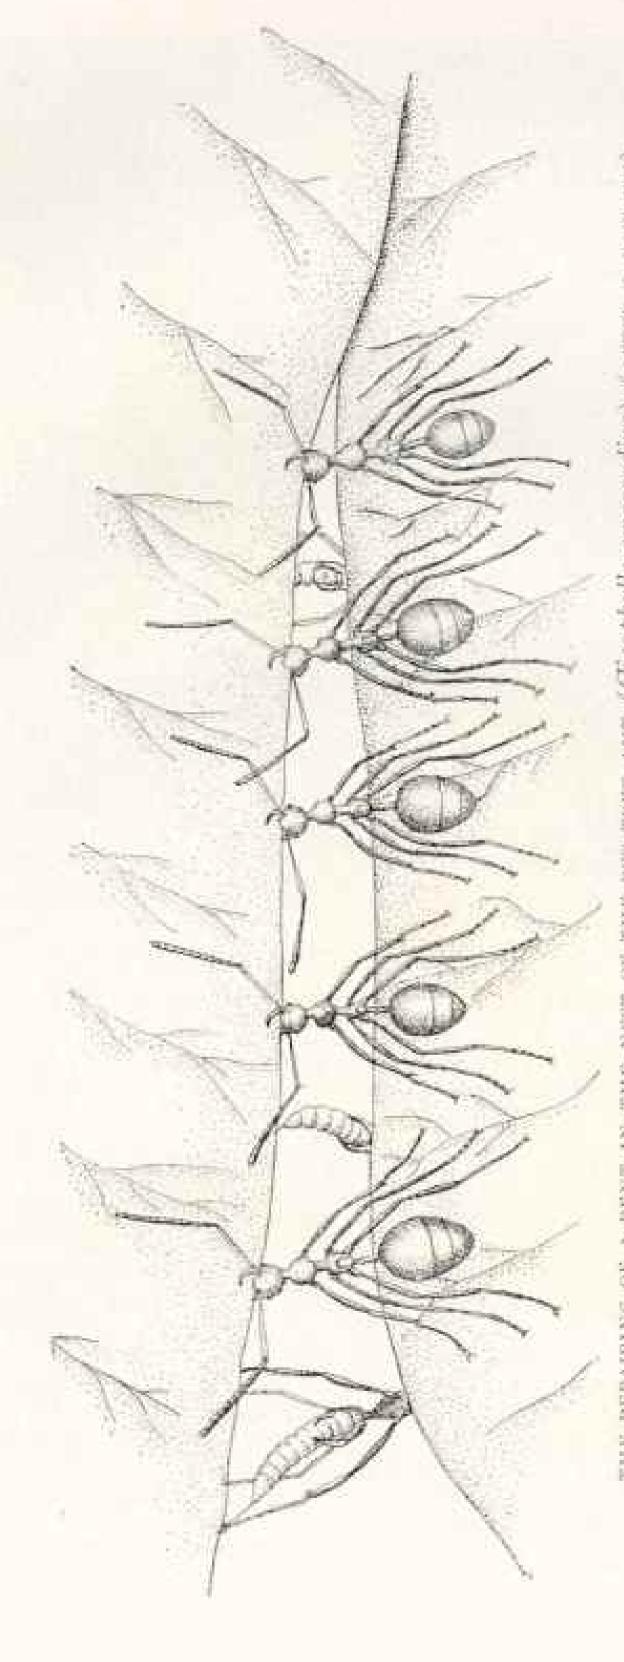

THE REPAIRING OF A RENT IN THE NEST OF THE REF TREE ANT (Cheophylle smaragdine) (After F, Bollein)

The next is made of feaves, held together with a silken web. The figure shows the workers repairing a rest, one brigade of them being ocean pired in drawing the edges of the leaves together, while the others on the inside of the next move the spinning larvae back and forth across the gap (see text, pages 247 and 748).

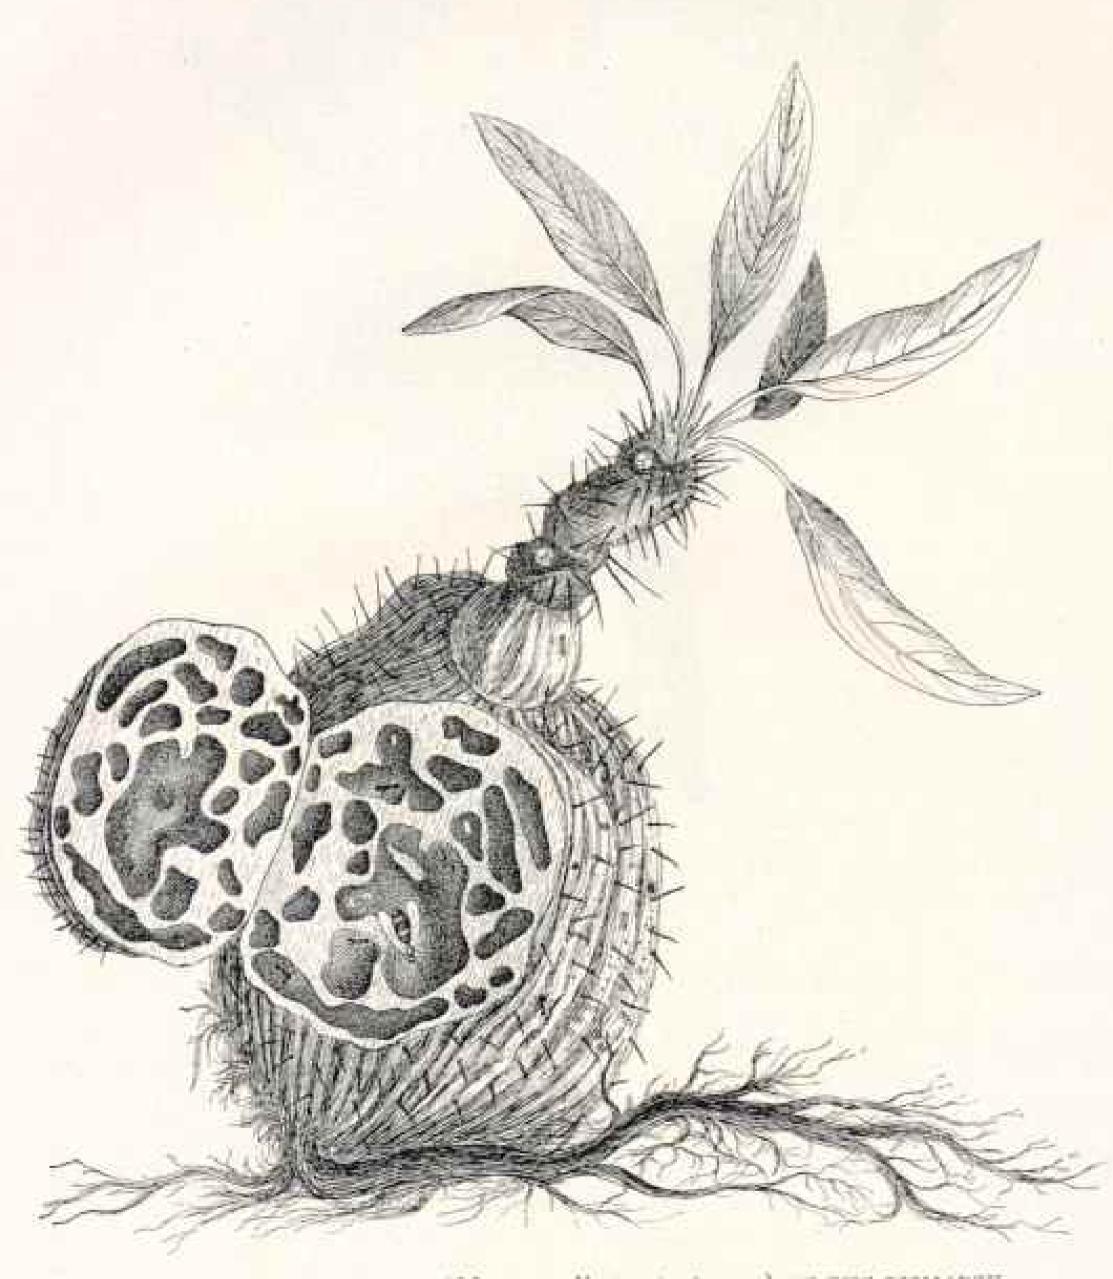

AN EPIPHYTIC ANT PLANT (Myrmecodia pentasperma) OF THE BISMARCK ARCHIPELAGO (AFTER F. DAHL)


The large pseudobulb is filled with cavities, which are nearly always tenanted by ants (Iridomyrmex cordatus)



ANT GARDENS OF THE AMAZON (AFTER E. ULE)

A a large, B a small spherical, sponge-like mass of earth which is built around the axils of the branches of trees in the tropical forests and, according to Ule, is seeded by the ants with parasitic plants.

cies, subspecies, and varieties have since arisen and may yet arise, we must nevertheless admit that the future development of the group will probably be limited very largely or exclusively to a more minute differentiation of existing forms and a greater refinement of existing modes of behavior.

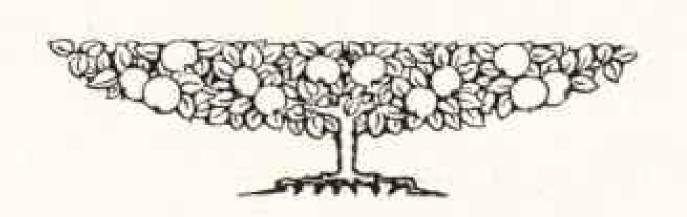

THE GRANDEST AND MOST MIGHTY TERRES-TRIAL PHENOMENON: THE GULF STREAM

By JOHN ELLIOTT PILLSBURY, U. S. NAVY

HE subject of ocean currents is one that has engaged the attention of mariners and men of science for centuries. In all oceans there are movements of the water (other than that caused by the tides) which may be said to be due primarily to the prevalent wind.

Many branches of scientific inquiry are concerned in their examination, for they bear directly upon the dissemination and evolution of species and the deposit and structure of geological formation, while in the business world they enter as a factor in the price of everything carried affoat as well as in the safety of all those who travel by sea. The currents of the ocean too are the great transporters of the sun's heat and moisture from the torrid zone, to temper the climate of more polar

regions. In the two great oceans, the Atlantic and the Pacific, there is to be found both north and south of the equator, and also in the Indian Ocean, a similar circulation, that is, a general westerly movement in the tropics, a flow toward the poles along the eastern shores of the continents, an easterly set in the temperate zones, and a current toward the equator along the western shores. It thus becomes a grand circular movement, some parts being quite slow, and other parts very swift; sometimes there may be a temporary interruption in the slower portions, or perhaps even a reversal, but taken as a whole the movement is continuous (see map, page 768).

In the North Atlantic Ocean the currents are probably more pronounced than in either the Pacific or the Indian Oceans. Without entering upon a discussion now as to the causes of ocean flow, or of any particular current, a brief description of the main streams will not be out of place, for they are all connected more or less intimately with our Gulf Stream.

The equatorial current is usually described as being a broad band of water moving across the Atlantic in the tropics.

The portion of this current situated south of the equator is divided into two parts upon meeting the eastern salient of South America, Cape St. Roque. One branch turns south toward the Antarctic, while the other is forced to the westward along the shores of Northern Brazil and the Guyanas, and is called the Guyana coast current. The equatorial current north of the equator has an almost uninterrupted progress until it reaches the Windward Islands, but a portion of it also impinges against the Guyana Coast and thus augments the volume of that current.


At the Windward Islands both are united, and a portion of the flow enters the Caribbean through the various passages, crosses it to the Yucatan and Honduras coasts, and thence into the Gulf of Mexico, from which it issues through the Straits of Florida as the Gulf Stream. Passing onward toward Europe it is augmented in volume by a part of the north equatorial current that sweeps along outside the West Indian Islands and the Bahamas, and while this current is slow in movement in comparison to the Gulf Stream itself, it doubtless carries a much greater number of heat units to help warm up northern Europe.

The Gulf Stream, or rather the combined flow mentioned above, divides as it meets the resistance of the Eastern Continent, one branch flowing south along the African coast, while the other proceeds northward into the Arctic toward Spitzbergen and Franz Joseph Land.

THE IMMENSITY OF THIS OCEAN RIVER

The Gulf Stream is probably the grandest and most mighty of any terrestrial phenomenon. Its waters are characterized by a deep indigo blue color of great clearness and high temperature. It can be penetrated by the eye to considerable depths, and generally its meeting with the less saline polar waters can be at once distinguished.

It is difficult for the mind to grasp the

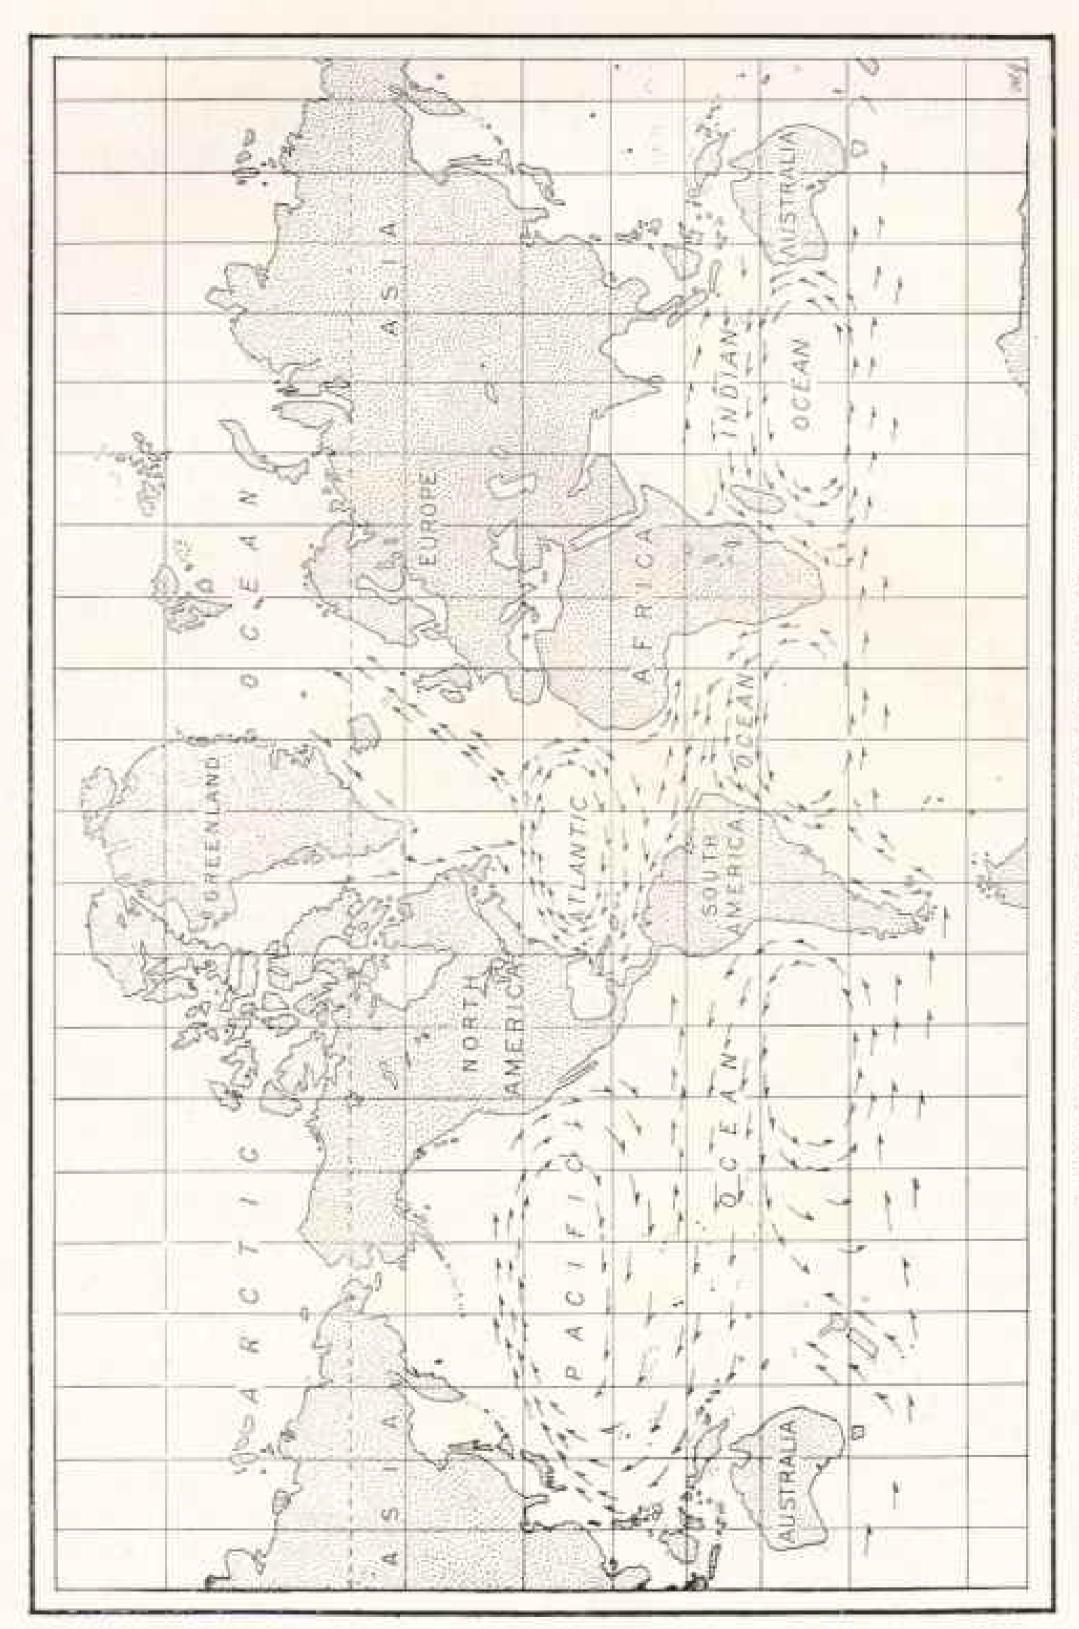

MAP OF THE WORLD, SHOWING THE PRINCIPAL OURAN CURRENTS

immensity of this great ocean river. The Straits of Florida at its narrowest point is about 40 miles wide and observations here numbered between three and four thousand, surface and subsurface. calculation of the average volume of water passing in one hour gives the enormous sum of 90 billion tons. If this one single hour's flow of water could be evaporated, the remaining salts would require many times more than all the ships in the world to carry it.

When one is on board a vessel, floating upon its waters, one is not as much impressed at the power and grandeur of this wonder of nature as he is when he stands before a towering mountain, an immense iceberg, or a fall of water such as Niagara, but when one remembers that the mighty torrent, speeding on hour by hour and day by day in a volume equal to all the largest rivers in the world combined, carrying its beneficient heat to temper the climate of continents, one begins to realize that of all the forces of the physical world none can equal this one river of the ocean.

THE INFLUENCE OF THE GULF STREAM ON THE COLONIZATION OF AMERICA WAS VERY CREAT

It is interesting to note in the history of the Gulf Stream how great its influence has been on the fortunes of the New World. Before the discovery of America, strange woods and fruits were frequently found on the shores of Europe and off-lying islands. Some of these were seen and examined by Columbus, and to his thoughtful mind they were convincing evidence of the fact that strange lands were somewhere to the westward. These woods were carried by the Gulf Stream and by the prevailing winds from the American continent, so that in part, the stream is responsible for the discovery of the New World,

Ponce de Leon, while on his famous search for the Fountain of Youth, made the discovery of this great stream. After his failure to find, on the coast of upper Florida, the means of cheating death, he turned to the southward and skirted the share for hundreds of miles, thus stemming the current.

Referring to this in his journal he describes that they found a current that. though the wind was good, they could not stem. It seemed that their vessels were going fast through the water, but they soon recognized the fact that they were being driven back in spite of the strong and favorable wind. Two of the ships near the coast were able to anchor. while a third, being in deeper water, was "soon carried away by the current and lost from sight, although it was a clear sky."

The first one to traverse the Gulf Stream from the Gulf of Mexico was Antonio de Alaminos, who had been with Columbus on his last voyage, and had been with Ponce de Leon among the Bahamas and along the coast of Florida from St. Augustine to Tortugas. Later he was in chief command of the fleet with Cortez in Mexico, and when it was desired to send dispatches and presents to Spain he was chosen as the one most able to carry out the nautical part of the mission. He sailed from Mexico, and in order to avoid foreign enemies and domestic rivals, took the route north of Cuba and through the Straits of Florida into the Atlantic.

The influence of the Gulf Stream in the colonization of America was very great. The division of the English colonies into New England and Virginia was probably in part due to the routes by which they were reached. Vessels bound from England to New England crossed the North Atlantic outside the limit of the Gulf Stream, or in a feeble adverse current. They had the advantage too, of crossing the Newfoundland Banks and of being able to surely replenish their provisions by fishing.

This voyage, however, much as the advantages might be either by the shorter distance or the gaining of food, was not thought to be practicable with a vessel bound to the Southern Colonies. They sailed south to the trade-wind region, through the Caribbean and around Cuba, thence following the Gulf Stream to

their port.

The Dutch adopted this passage to the Hudson, so that really Nantucket Island became the dividing line between the two

voyages; a difference of 100 or 200 miles in destination caused a difference in the length of the passage of about 3,000 milles.

DENJAMIN FRANKLIN PUBLISHED THE FIRST CHART OF THE GULF STREAM

The whalers of New England were the first to gain a fairly accurate knowledge of the limits of the stream between Europe and America by following the haunts of the whales, which were found north of one line and south of another, but never between the two.

Benjamin Franklin heard of their experiences, and also how the coasting vessels from Boston to Charleston, South Carolina, would take sometimes three or four weeks to make the voyage south, while the return trip would often be made in a week. Then his attention was drawn to the fact that English packets with American mails were two or three weeks longer on the voyage to America than American merchant ships.

Franklin investigated the question and published a chart in 1770 for the benefit of the mail packets, but its information was discredited by the English, and before it came to be generally known and used, the war of the Revolution was on, and Franklin, knowing the advantage of the knowledge of the limits of the stream would be to British naval officers, suppressed it all he could until hostilities

The name of "Guli Stream" was first suggested by Benjamin Franklin because it issues from the Gulf of Mexico. While it is only a part of the grand scheme of ocean circulation, and the Gulf-of Mexico is in reality only a stopping place, as it were, for its waters, this name is generally applied to the current now as it was given by Franklin-that is, the current coming from the Gulf of Mexico and spreading abroad over the North Atlantic.

In the large funnel-shaped opening between Cuba and the western extremity of the Florida reefs the current is somewhat erratic, but by the time Havana is reached it has become a regular and steady flow. As it rounds the curve of the Florida shore, the straits contract

and the current then practically fills the banks from shore to shore and reaches almost to the bottom, which at this point has a greatest depth of nearly 3,000 feet. I say almost because in its variations in velocity sometimes it does actually reach the bottom, but at other times it does not.

As it leaves the Straits of Florida its direction is about north, but it gradually changes and follows a course approximately parallel to the curve of 100 fathoms depth until it arrives off Cape Hatteras, and maintains about the same width as when it issued from the Straits of Florida. From this point it starts on its course to Europe. It has lost something in velocity as well as in temperature, and as it journeys to the eastward it gradually diminishes in both, until at

last it becomes a gentle flow.

On this part of its course it passes not tar from the Grand Banks of Newfoundland, where it is met almost at right angles by the great Labrador current, bringing down from the Arctic a stream of cold water, pack ice and icebergs, and which has recently been the cause of such an appalling disaster in the loss of the Titanic. This current, passing along the eastern shores of Newfoundland, bearing its freight of ice, sends part of its current southward and westward around Cape Race; part overflows the banks on a general southerly course and part passes to the southward along the eastern side of the banks.

When this cold current meets that of the Gulf Stream of much higher temperature, the former underruns the latter. The shallow-draft pack ice, being no longer under the influence of the polar current, is carried to the eastward by the warm Gulf Stream current and soon disappears, but the deep-draft bergs are still under the influence of the lower current running south, as well as of the surface current running east, and so they continue on until well into the Gulf Stream, sometimes reaching the thirtyninth parallel, which is nearly 200 miles south of the southernmost point of the Grand Banks.

This ice, together with the fog, which usually accompanies the meeting of currents of considerable differences in temperature, has compelled steamship companies to adopt lanes of travel and to make a detour around the region of danger. That the western-bound track was shaving dangerously near the limit of ice in the spring, when bergs are numerous, bas been shown, and it is probable that the new lanes row used which lie further south will be permanently adopted during the ice period.

THE CAUSE OF OCEAN CURRENTS

The theories as to the cause of ocean currents have been many. Columbus thought the stars, the air, and the waters of the sea all had the same motion around the earth from east to west and declared that the force of the equatorial current had washed away the land and thus formed the Windward Islands.

Toward the end of the 17th century the belief seemed to be that all ocean circulation was maintained by means of subterranean passage or abysses. A current, upon meeting land, descended into the earth and ran through a tunnel to the

other side of the obstruction.

Strange to say, the writer was called upon in recent years to examine a paper written by a gentleman whose theory was somewhat similar to the above. He believed that all mountain ranges were simply the visible evidence of a tunnel conveying water from one ocean to another, the Rocky Mountain tunnel being the conduit by means of which water was transported from the Arctic to the Gulf of Mexico to form the Gulf Stream. Another theory was that the tropical sun evaporated so much water that the African Coast current ran to fill up the hollow so formed.

In recent times the course of currents has been laid to rivers and the Gulf Stream chiefly to the Mississippi. In actual fact about 2,000 such rivers would

be required.

Some eminent men have attributed currents to the revolution of the earth, others to the differences in the density of the ocean at the equator and at the poles.

Franklin's theory, which has many advocates at the present day, was that the winds produce the current by the air moving over the surface of the water.

and he illustrated this theory by the following: "It is known that a large piece of water, to miles broad and generally only 3 feet deep, has by a strong wind had its water driven to one side and sustained so as to become 6 feet deep, while the windward side was laid dry." As will be seen later, this is a well-taken example of the force of the wind in causing the Gulf Stream, but it does not quite show the whole of the truth.

None of these theories were based upon direct evidence by observations in the Gulf Stream, but all were inferences drawn from temperature of the water, from laboratory experiments, from the drift of vessels, or from reasoning based upon opinions of what ought to be.


Much time and labor has been devoted toward attempting to define the limits of ocean currents and their velocities. Columbus on his first voyage, when nearing his final land fall, was trying to find the depth of the water one day, when he noticed that the line inclined to the southwest, from which he concluded that the surface was moving faster than the lower stratum which contained the

weight on the end of the line.

Franklin endeavored to use the thermometer to define the limits of the polar and tropical waters, and hence the current. This method is often correct, for without doubt tropical water is warmer than that coming from the poles, but it has been found that at times the warm tropical water may be blown by the wind over and onto the polar stream and then partake of its motion or, as in the Labrador current, underrunning the warm water of the Gulf Stream. Temperature is not a sure indication of how the current may be setting

Almost all governments at one time issued instructions to their naval officers and requested the cooperation of the officers of their merchant marine to keep a record of the temperature of the surface water, and by the compilation of these data the supposed limits of most ocean currents were placed upon the charts.

A method of determining the velocity of the currents has been in use since the introduction of comparatively accurate navigation. A vessel is moved at sea, by

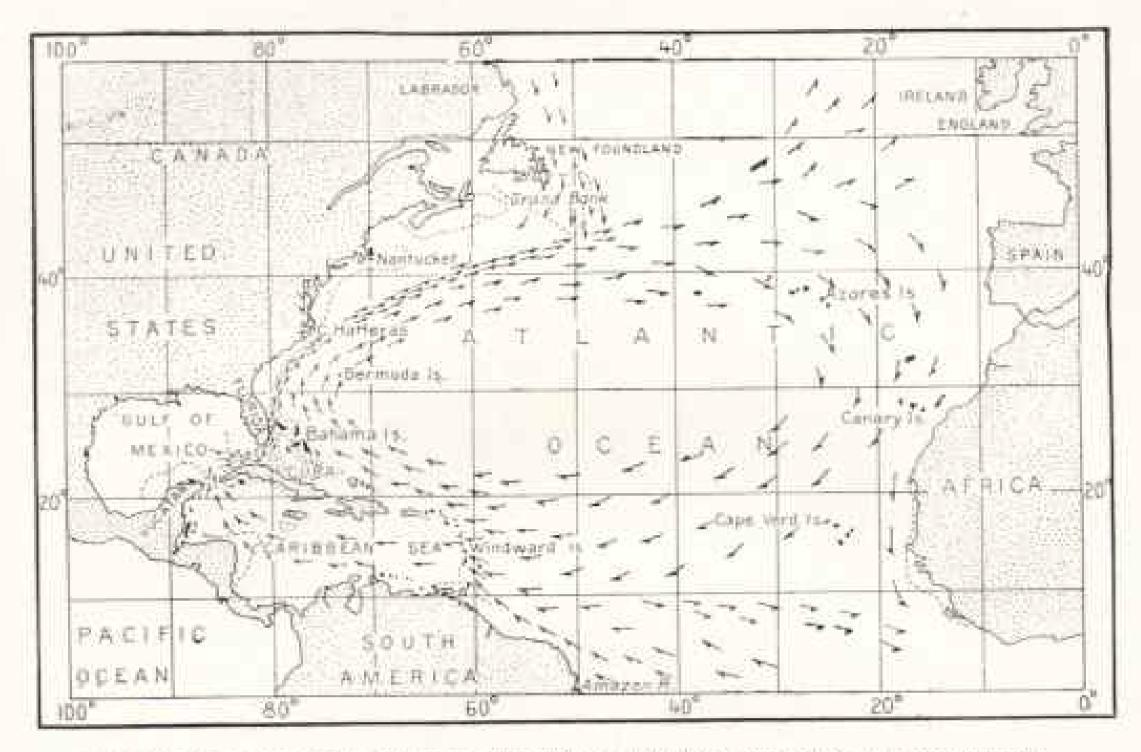

OUTLINE MAP SHOWING GENERAL DIRECTION OF THE GULF STREAM AND OTHER CURRENTS IN THE NORTH ATLANTIC OCEAN

the wind or by engines, as nearly as possible on a given compass course and for a given distance as ascertained by the log or by the engine revolutions, but she is deflected from that course and distance by winds, waves, bad steering, etc., and by currents to an unknown amount. By astronomical observation the captain ascertains the position of his ship from time to time, and the difference between this position and the supposed position is assumed to give the direction and velocity of the current affecting the ship during the interval.

Still another method has been practiced, and even now is favored by some for determining the flow of currents. Bottles or floats of various descriptions are thrown overboard from vessels at sea, each one containing a paper on which is written the date and position at which it is put affoat, and a request printed in various languages asking the finder to mark the date and locality where found and forward it to some official.

This method is of but little real value. The bottle is tossed by the waves and driven by the wind. If it is picked up on the shore, there is no means of knowing how long it has been traveling at sea and how long idle on the beach and when it is found, all that it tells is that it has journeyed from one point to another, but by what route it is impossible to tell.

Floats put adrift in the Atlantic between Newfoundland and the Azores have been found distributed, some of them years afterward, all the way from Iceland and Norway to the West Indian Islands and on the shores of the Gulf of Mexico.

The importance of a knowledge of the Gulf Stream to commercial interests was early recognized by the Congress in the passage of an act authorizing the Coast Survey to include it within the scope of its work, and later, authority was given to examine the Sargasso Sea (the body of water lying in the center of the grand circular movements of currents in the Atlantic) and also the mate to the Gulf Stream in the Pacific, called the Kuro-Shiwo, or Black Stream, of Japan, which pours its warm waters toward our western shores to temper its climate, in the

same way that the Gulf Stream does for

Europe.


The superintendent of the Coast Survey, Prof. A. D. Bache, between 1844 and 1860 caused thousands of thermometrical observations to be taken on lines extending across the stream, from Key West to well beyond Hatteras, reasoning on the line of Benjamin Franklin's studies, that temperature alone could define its limits, and that the warmest water within these limits would be the axis or the swiftest current.

He found, however, that there were bands or streaks of warm and cold water in the stream, the cause of which was attributed to irregularities in the bottom

over which it flowed, but this was based upon erroneous measurements of the depths, for in later years, with wire sounding lines instead of rope, the bottom has been found to be nearly even.

For ascertaining the relative velocity of the Gulf Stream between
the surface and subsurface on a
given line, trials were made by
floating a single can almost submerged on the surface and a pair
of cans, one on the surface and
the other suspended by a cord at proa given depth below. If both
were started together, one being
only influenced by the surface current and the others being influenced by the surface and the iro
subsurface as well, the retarding by
or accelerating effect of any difference in velocity might be determined.

In 1883 the Coast Survey Office decided to attempt to anchor a vessel in the Gulf Stream and to actually measure the amount of water flowing past. It was thought that this might be accomplished by the use of wire rope instead of a hemp cable or chain, both on account of its strength and flexibility, and also because it could be made in great lengths. The first trial at anchoring in the Gulf Stream was made by the little Coast Survey schooner Drift, but with no steam power to handle the wire rope anchoring line the difficulties were great. The result of this first attempt was the detail of a Coast Survey steam vessel, the George S. Blake, for the Gulf Stream work.

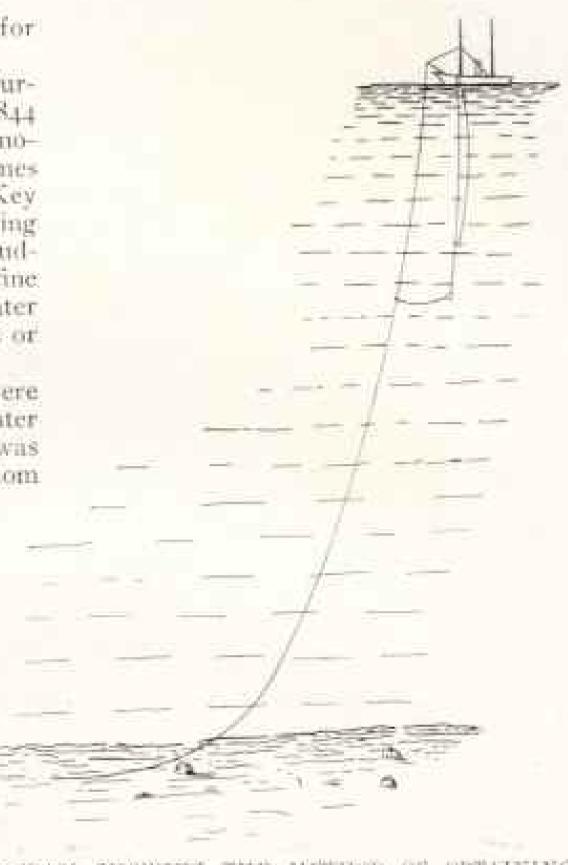


the other suspended by a cord at DIAGRAM SHOWING THE METHOD OF OBTAINING a given depth below. If both THE CURRENT OBSERVATIONS ON BOARD were started together one being THE "BLAKE"

only influenced by the surface current and the others being influenced by the surface and the
fluenced by the surface and the
from being swept astern by the force of the current
subsurface as well, the retarding by a long line secured to the anchoring rope.


A new departure was then made from the ordinary method of anchoring in very deep water. A great length of wire rope (over 41/2 miles) was carried on a large iron reel or spool. A powerful steamengine, running a winch, lowered and raised the wire rope with its anchor, while another engine revolved the spool. A special arrangement of rubber buffers was applied to the anchoring rope. whereby the sudden strain, due to violent pitching of the vessel, was reduced to a minimum. By this system the Blake was able to anchor in almost any depth of water, and did anchor in depths of more than two miles many times,

To gain a knowledge of the laws governing the flow of any current, it is neces-

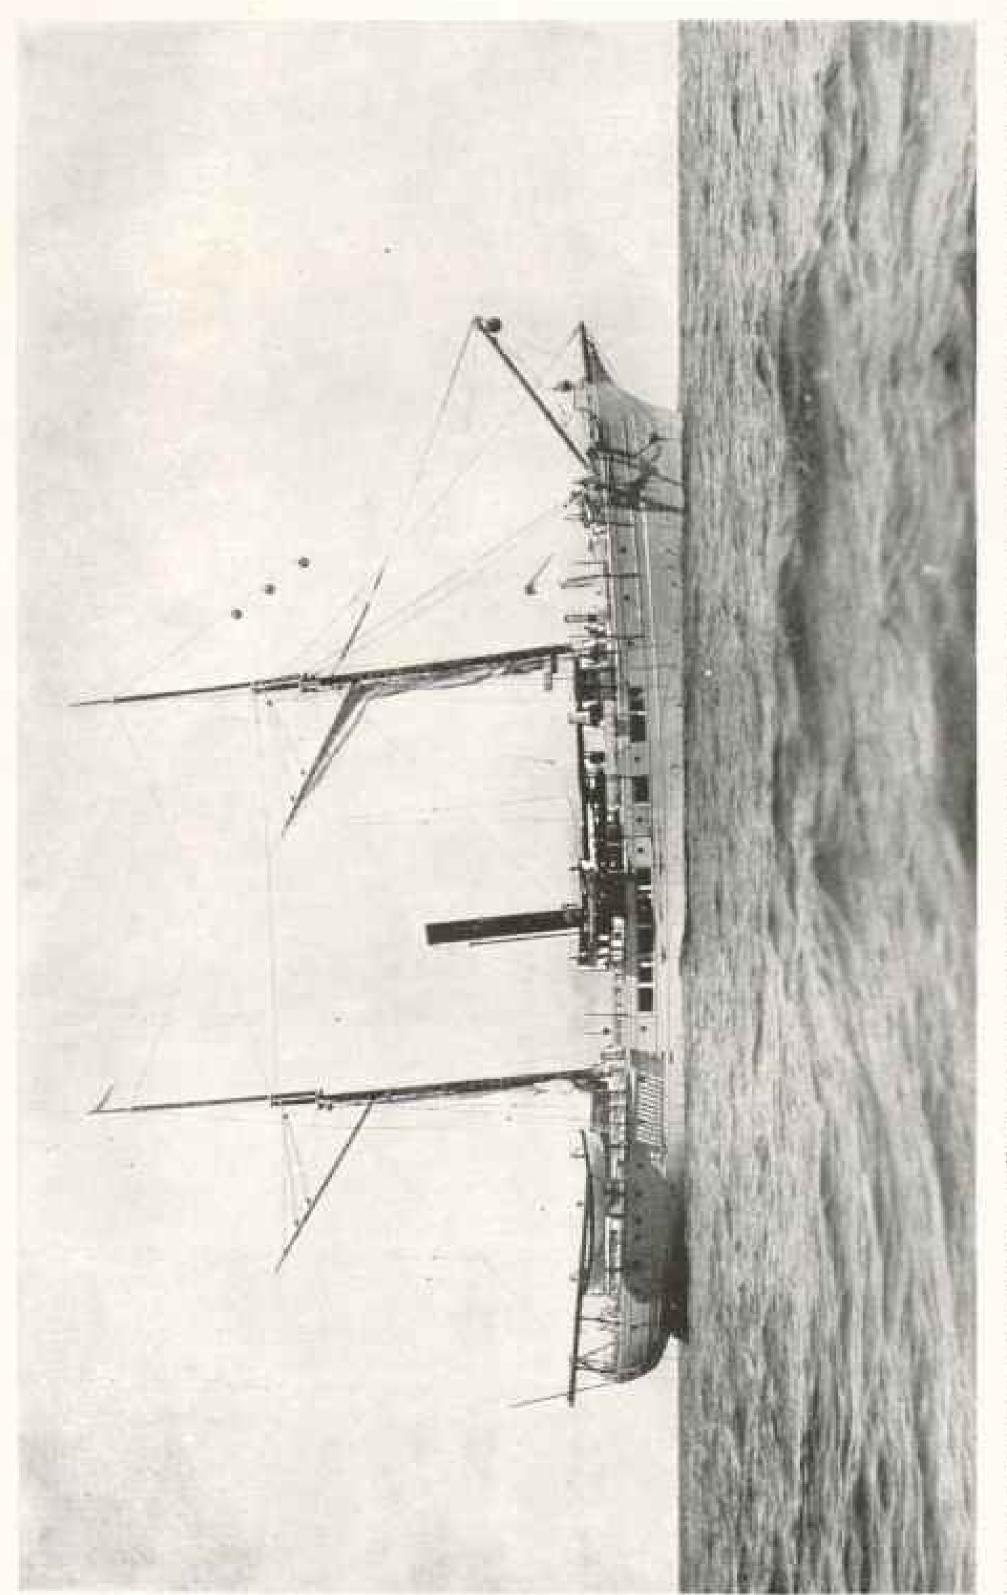

THE COAST SURVEY STEAMER "BLAKE" AT ANCHOR IN THE EQUATORIAL CURRENT, 50 MILES NORTH OF BARBADOS, IN 1100 PATHOMS OF

The ship was riding to the current coming from the east, although, as will be seen from the the west. When this photograph was taken the ship was anchored at Station 32, shown The trade winds were temporarily interrupted permant at the masthead, the wind was from on mult, page 275.

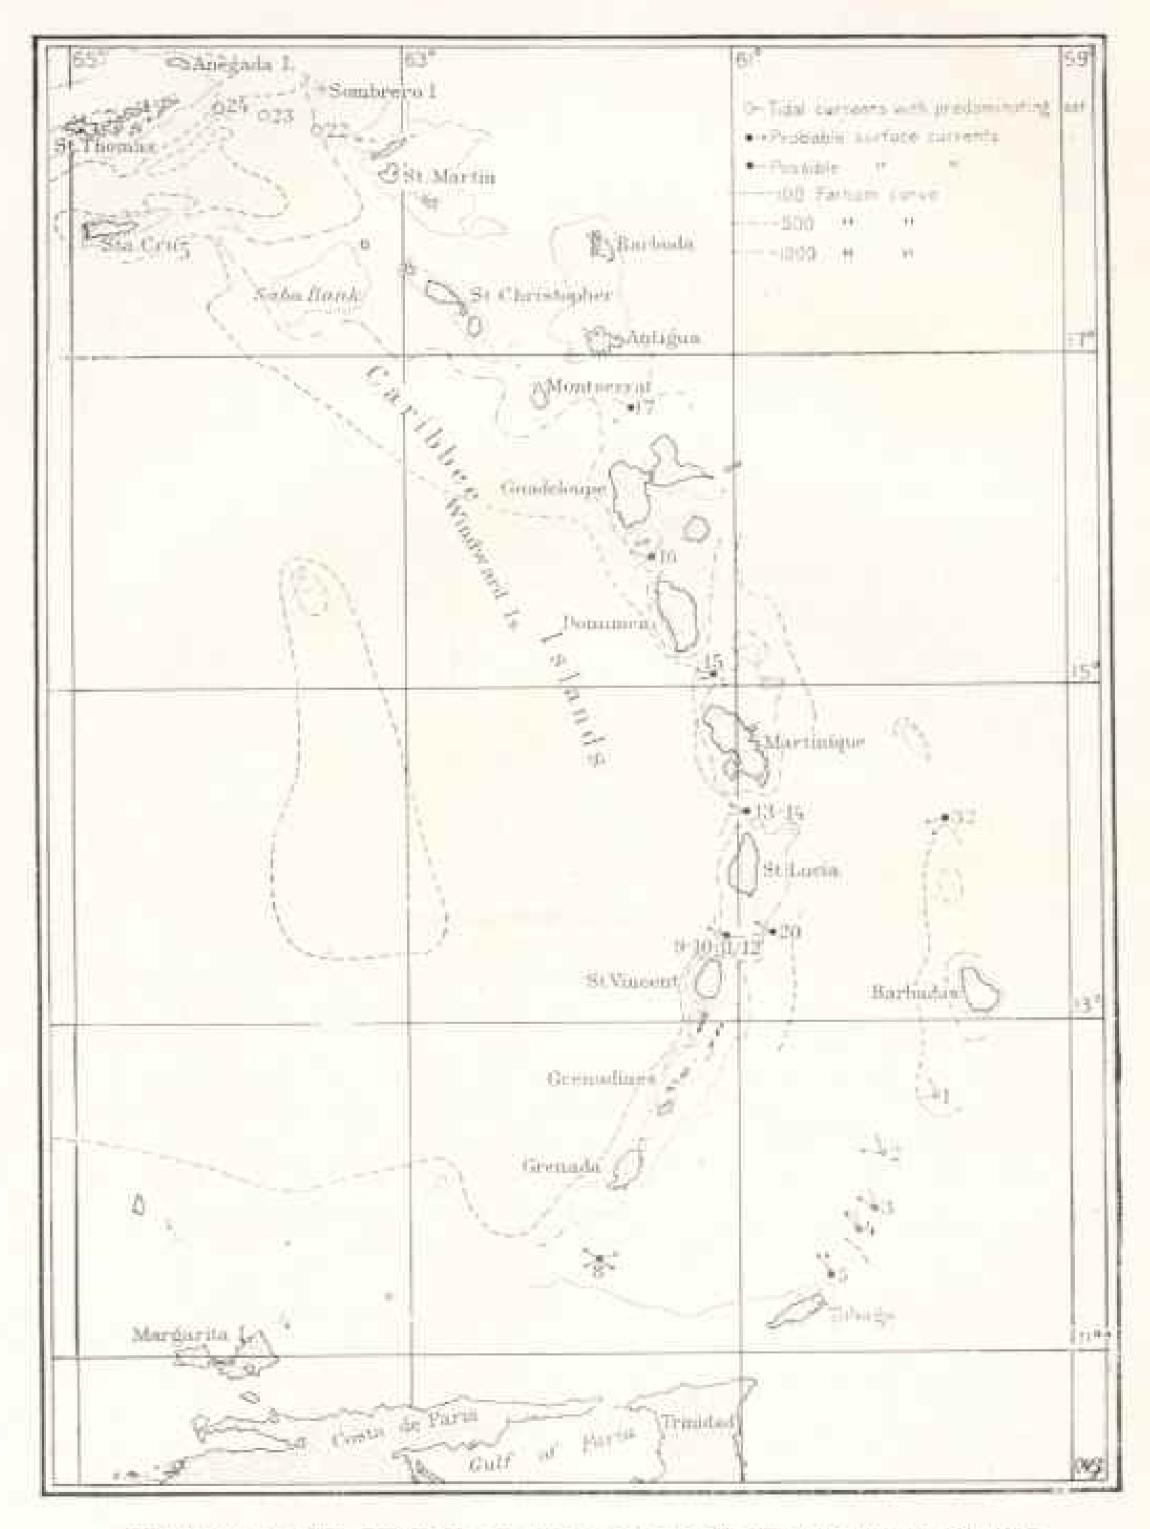

DIRECTION OF THE CURRENTS IN THE PASSAGES OF THE WINDWARD ISLANDS

The numbers indicate the record number of the anchorage whether occupied once or many times. The ship was anchored at Station 32, north of Barbados, when the photograph (shown on page 774) was taken.

sary to ascertain its direction and velocity not only on the surface, but below. The surface current is the one affecting the ship on its course, but it is also the most affected by changes in the local wind, which may be only temporary, while the vast body of flowing water maintains its direction, but feebly influenced by the

slight surface changes.

An instrument was therefore designed by which the lower currents could be measured as well as the surface. It consisted of a rudder free to take the direction of the current, a compass needle which of course pointed to the north, and an apparatus for registering the flow. Upon hoisting the instrument all of these were locked at once, and upon its reaching the surface the angle between the rudder and the compass gave the direction, and the reading of the register showed the velocity.

Observations were usually made with the current meter at depths of 3½ fathoms, 15, 30, 65, and 130 fathoms, and at times to 150 and 200 fathoms, the instrument remaining at each depth during

a period of 30 minutes.

The investigation began with these appliances in the narrowest parts of the Straits of Florida (between Fowey Rocks, which is near Miami, and the Bahamas) in order to find out the characteristics of the stream at a point where it would perhaps be least influenced by abnormal forces. After two seasons at this point the research was extended to the western part of the straits and to the passage between Yucatan and Cuba to gauge the water entering and leaving the Gulf of Mexico. Afterward, the equatorial current and the flow into the Caribbean between the islands were examined in order to compare what may be called the source of the Gulf Stream with the outlet as it leaves the Straits of Florida for the Atlantic. The stream off Cape Hatteras, the flow outside the Bahamas, and also south of Nantucket were all examined.

Some of the results of the investigation were surprising. The volume of the stream in a hour's flow has been mentioned, but the most valuable discovery was that it changes its velocity daily and monthly, and that predictions can be

As the tides change in height on the coast, so the current changes in velocity in the ocean. The equatorial current along the South American coast runs fastest about 6 hours before the moon crosses the upper meridian; between Cuba and Yucatan the maximum is 10 hours before, and in the Straits of Florida off Fowey Rocks it is 9 hours.

These variations at certain times in the month amount to more than 3 miles per hour in some parts of the stream and at other times in the month may be less

than I mile per hour.

During the month there is another change taking place following the changes in the declination of the moon north and south of the equator. Two or three days after the moon has passed the equator the maximum velocity of the stream is nearest the middle, but which it never reaches; it is always to the left of the middle, and two or three days after the moon's highest declination the maximum is well toward the left-hand edge of the stream.

Accompanying these changes the temperature of the stream fluctuates. At one time during the month, also varying with the declination of the moon, the direction of the currents, particularly the lower ones, incline slightly toward the axis of greatest velocity, while at other times they run more nearly parallel. This causes an intermingling of the warm surface with the colder water of the lower strata.

WHAT CAUSES THE GULF STREAM?

The various theories as to what causes the Gulf Stream have been given, but it seems that while Franklin's ideas are nearest correct, they are not complete. In the tropical regions there is a steady movement of the air from east to west known as the trade winds. South of a certain line situated near the equator these winds flow from a southwesterly direction, while north of the equator they come from a more northeasterly direction. The winds are not always strong, nor are they constant in direction, but they do not vary much, and then only for brief periods.

Winds blowing over the surface of the water induce a current in the latter due to friction. At first it is only the merest skim that moves, but gradually the motion is communicated from layer to layer until at last, if the wind is long continued as in the trade wind region, the movement extends to lower depths, 300 or 400

feet, or perhaps more.

These trade wind currents meet finally, the partial barrier of the islands forming the eastern part of the Caribbean, and a portion of the flow escapes through the passages between them. From here it continues its course across that sea until it reaches the obstruction of the Honduras and Yucatan coasts, from which it escapes by the easiest route, which is into the Gulf of Mexico.

It has been found, however, that the water entering the Caribbean by this means is not more than one-half of the amount which flows through the Straits of Florida from the Gulf of Mexico, and the other half is supplied from a source which does not come under the head of a measurable current. The other source is the wave caused by the wind. Every ripple carries a certain amount of water in the direction toward which it is flowing. irrespective of the current caused by its friction, and when the waves become large, tons of water are hurled from the crest into the trough every time the wave breaks

In a large area like the Caribbean, having a comparatively constant wind blowing over its whole surface, this action is practically a simultaneous movement of its surface waters to the west-ward and a continual escape of the water heaped up at the obstruction offered by the land into the Gulf of Mexico, through the Straits of Florida, and into the Atlantic.

The Gulf Stream would be little felt on the coast of Europe did it not receive a great addition to its volume of heat when en route. This is by means of a gentle flow from the northeast trade-wind current that passes outside the Caribbean Islands and the Bahamas. The surface temperature of this outside current is about the same in its passage along the West Indian Islands as the

Galf Stream in the Straits of Florida, but it is less violent in its movements and there is less intermingling of its upper and lower waters, so that it arrives off Cape Hatteras with a much higher temperature than that of the more turbulent Gulf Stream.

THE GULF STREAM HAS NOT CHANGED ITS COURSE


Newspaper items are frequent that the Gulf Stream has changed its course, and to its supposed erratic movement is laid the blame of every abnormal season on our Atlantic seaboard. Gulf weed is seen up toward Nantucket, for example, and so the Gulf Stream must have changed its course in that direction.

The fact is this gulf weed originates in the Sargasso Sea and is transported chiefly by the break of the waves. Some of it enters the Gulf Stream and may be carried by it to beyond Hatteras and further east, but the fact of meeting it in strange regions is not so much an indication of a current as it is that the wind has caused a sea which has thrown the weed to leeward. Any strong southerly gale to the eastward of Cape Hatteras will strip the little gulf weed remaining in the Gulf Stream at that point and carry it toward the Nantucket shores.

The same influence of the wind to transport the water without an accompanying current is seen at Key West. With a southerly wind the clear water of the Gulf Stream is thrown into that harbor in spite of an ebb tide, and it is often accompanied by fragments of gulf weed, but upon a change of wind from the northward (which is from the Gulf of Mexico) the harbor waters soon cloud

up.

Quite recently the overwhelming Titanic disaster, which was due to icebergs
on the border of the eastern extension of
the Gulf Stream, has led to the theory
that the stream was feeble and had not
been flowing with its usual strength and
so the bergs were farther south than
usual. Of course, there are periods of
heat and cold—one year may vary noticeably from another—and perhaps an
abnormal amount of heat transported to
the Arctic regions some years ago by the

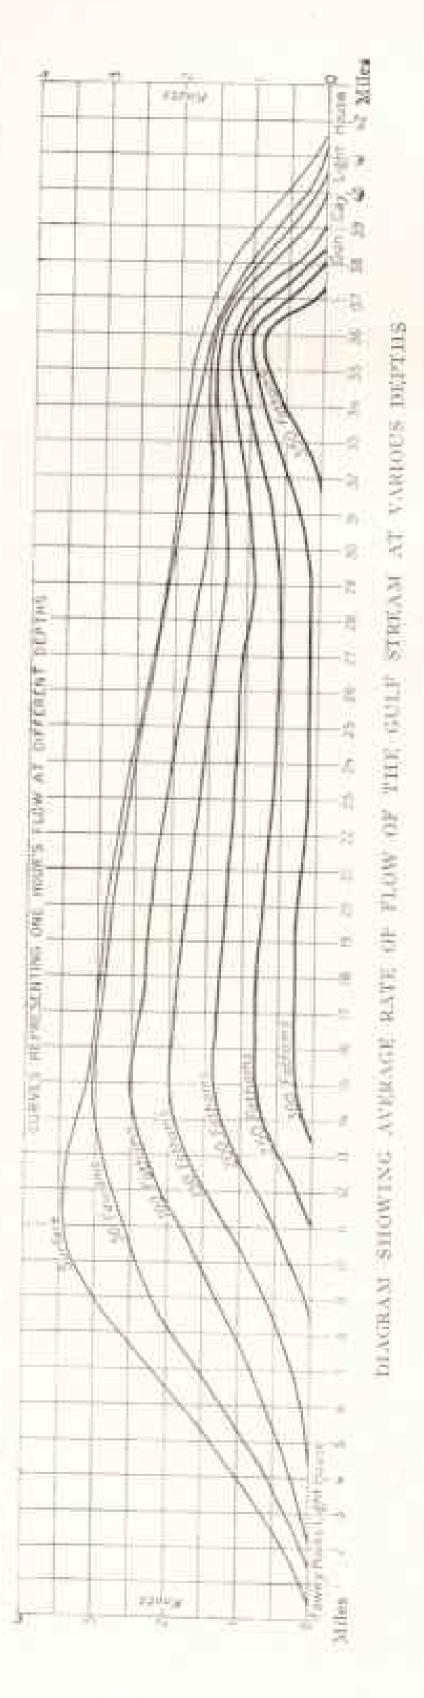

stream may have been the cause of some of the bergs in the Atlantic this year, but when it is remembered that heavy ice from the Arctic takes anywhere from one to probably two or three years to make the journey to the steamers' tracks one cannot trace the increase or decrease in quantity or size of the bergs to the Gulf Stream.

Doubtless the stream varies in velocity at different seasons of the year because the trade winds vary periodically in strength and direction. In the winter months, when the northeast trades are stronger, they blow from a more northerly direction and at the same time do not extend to as far a northern latitude as in the summer. During the latter period they have a direction more nearly toward the west, and although weaker in force probably contribute more water to the Gulf of Mexico and hence to the Gulf Stream than do the winter winds.

These changes in the winds, however, are felt in the Gulf Stream by a gradual increase or decrease in its speed some time after, the maximum yearly strength, for example, coming in October, while the maximum trade-wind influence is in July and August.

A temporary or a local increase or decrease in the force of the trade winds would have but little effect on the Gulf Stream, because the current is due to the average condition of the wind over an area of hundreds of thousands of square miles; and this average does not change materially year by year.

Sometimes a low barometer in the Gulf of Mexico, accompanied by an abnormal high on the southern Atlantic coast, will cause a reverse flow on the sides of the stream in the Straits of Florida for a short time, but the vis-a-tergo of the great mass of water quickly reestablishes the normal current.

There is every evidence that the Gulf Stream is governed absolutely by law in all its variations; its course through the ocean is without doubt fixed; its fluctuations are by days, by months, by seasons, or by years, but they do not vary materially one year from the other. So we may conclude, of all the physical forces on this earth that are subject to any variations at all, the great ocean currents are most immutable.

ELEPHANT HUNTING IN EQUATORIAL AFRICA WITH RIFLE AND CAMERA

BY CARL E. AKELEY

With Photographs by the Author and Copyrighted by Carl E. Akeley

NE evening in Uganda, when rather discouraged after a day of unsuccessful effort to locate elephants, we suddenly heard the squeal of an elephant far to the east. The squealing and trumpeting increased in frequency and distinctness until in an hour's time we realized that a large herd was drifting slowly in our direction. By eleven o'clock they had come very close, some within two hundred yards of camp, and on three sides of us. The crashing of trees and the squealing and trumpeting as the elephants fed, quarreling over choice morsels, resulted in a din such as we had never before heard from elephants:

Our men kept immmerable fires going for fear that the elephants might take a notion to raid the plantain grove in which we were camped, and at daylight I was off for the day's hunt. The herd had drifted down to the forest side, forty minutes from camp; in fact many of them had entered the forest. For a couple of miles we traveled through a scene of devastation such as a cyclone leaves in its wake: 8-foot grass trampled flat except for here and there an "island" that had been spared; half of the scattering trees twisted off and stripped of bark, and of all branches and leaves.

We approached within a few hundred vards of the forest, where the grass was undisturbed except for trails showing how the elephants at daybreak had trekked through in small bands, single file. When about to cross a little wooded gulley, we thought it wise to stop and look over the situation. From the top of a mass of rocks we discovered a cow feeding only 20 yards away and others all about in the high grass between us and the timber (see page 783).

There was clear passage to a rocky elevation too yards to the left, for which

we made, and while standing there, 75 feet above the level, I received an impression of Africa that must remain with me to the last.


There was not a breath of wind, and the forest, glistening in the morning sunlight, stretched away for miles to the east and to the west and up the slope to the north. Here and there in the high grass that intervened between our perch and the forest edge, 300 yards away, were scattered elephants singly and in groups feeding and loating along, to be swallowed by the dark shadows of the dense forest side.

SCOUTS IN ACTION

From the gulley which I had started to cross a little time before there stalked 25 or 30 of the great beasts, their bodies shining with a fresh coating of mud and water from the pool where they had drunk and bathed. As is usual with big herds, they had broken up into small bands on entering the forest, and now, as the last of them disappeared into the cover of the trees, a fuller appreciation of the surroundings suddenly dawned upon me. From a mile or more in either direction there came a reverberating roar and crash as the great hordes of monsters ploughed their way through the tangles of vegetation, smashing trees as they quarreled, played, and fed, all regardless of forestry regulations.

Where the little stream at the bottom of the gulley entered the forest, troops of black and white Colobus monkeys were racing about the trees, swearing at the elephants. From the tree tops deeper in the forest two or three troops of chimpanzees yelled and shouted at one another or everything in general, baboons barked, and great bornbills did their best to drown all other noises with their dis-

cordant rasping chatter.

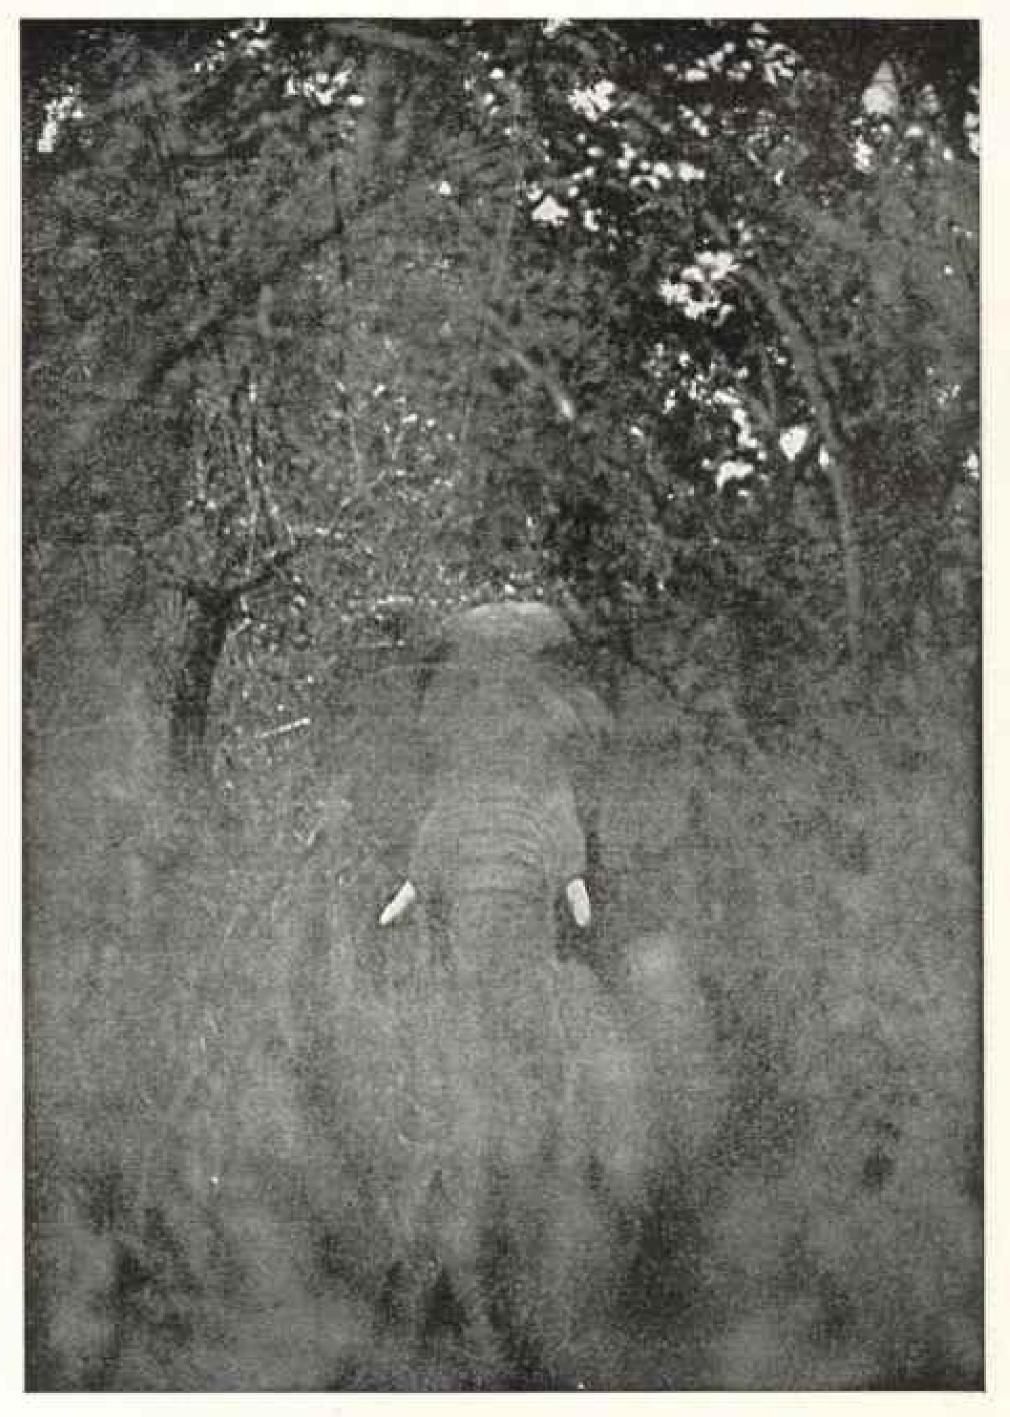


IN THE FORESTS OF UGASDA

Eleplant hunting brings much that is fascinating. Never to be forgotten was that moment when, after hearing the scuffling of great feet among leaves, we came face to face with one of the great beasts in the dim receises of the jungle. When leaving camp I had said to Mrs. Akeley, in jocular mood, that I would shoot an elephant at 11 o'clock. Remembering this as I came up with a loitering bull in the rear of a berd, I decided to take a photograph showing his small tusks, as an excuse for not shooting as promised. The photograph shows this young elephant, which was about the size of "Jumbo." Encouraged by the result, I continued photographing members of the herd for several hours.




A CHARGING COW ILLEPHANT

When approaching this cow from behind we made some slight noise, at which she wheeled and charged at once, paying the death penalty in consequence. The photograph was taken as she started and there was not time to change plates and get the second. The next cut shows the offspring of this cow, a youngster three or four years old and quite able to take care of himself.

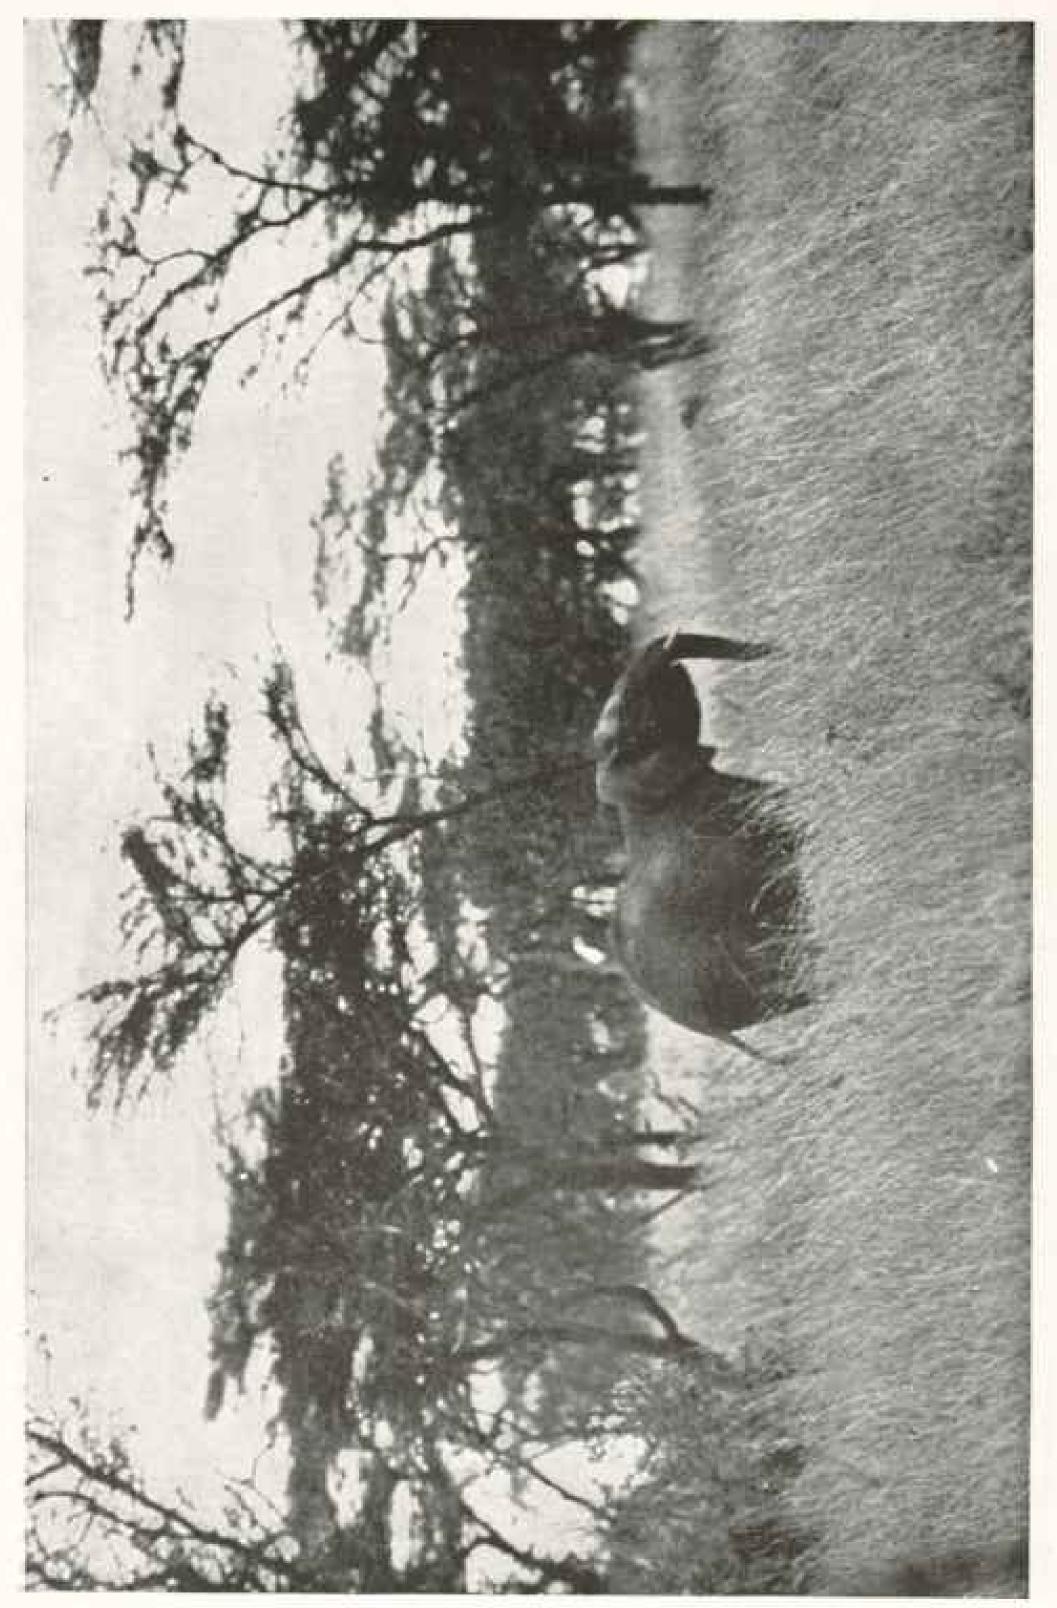

A YOUNG ELEPHANT IN TYPICAL BLEPHANT COUNTRY

and quite able to take care of himself. The youngstor test some time in deciding whether or his mether's example, thus giving an opportunity of securing good photographs Offspring of the cow that charged; 3 or 4 years old

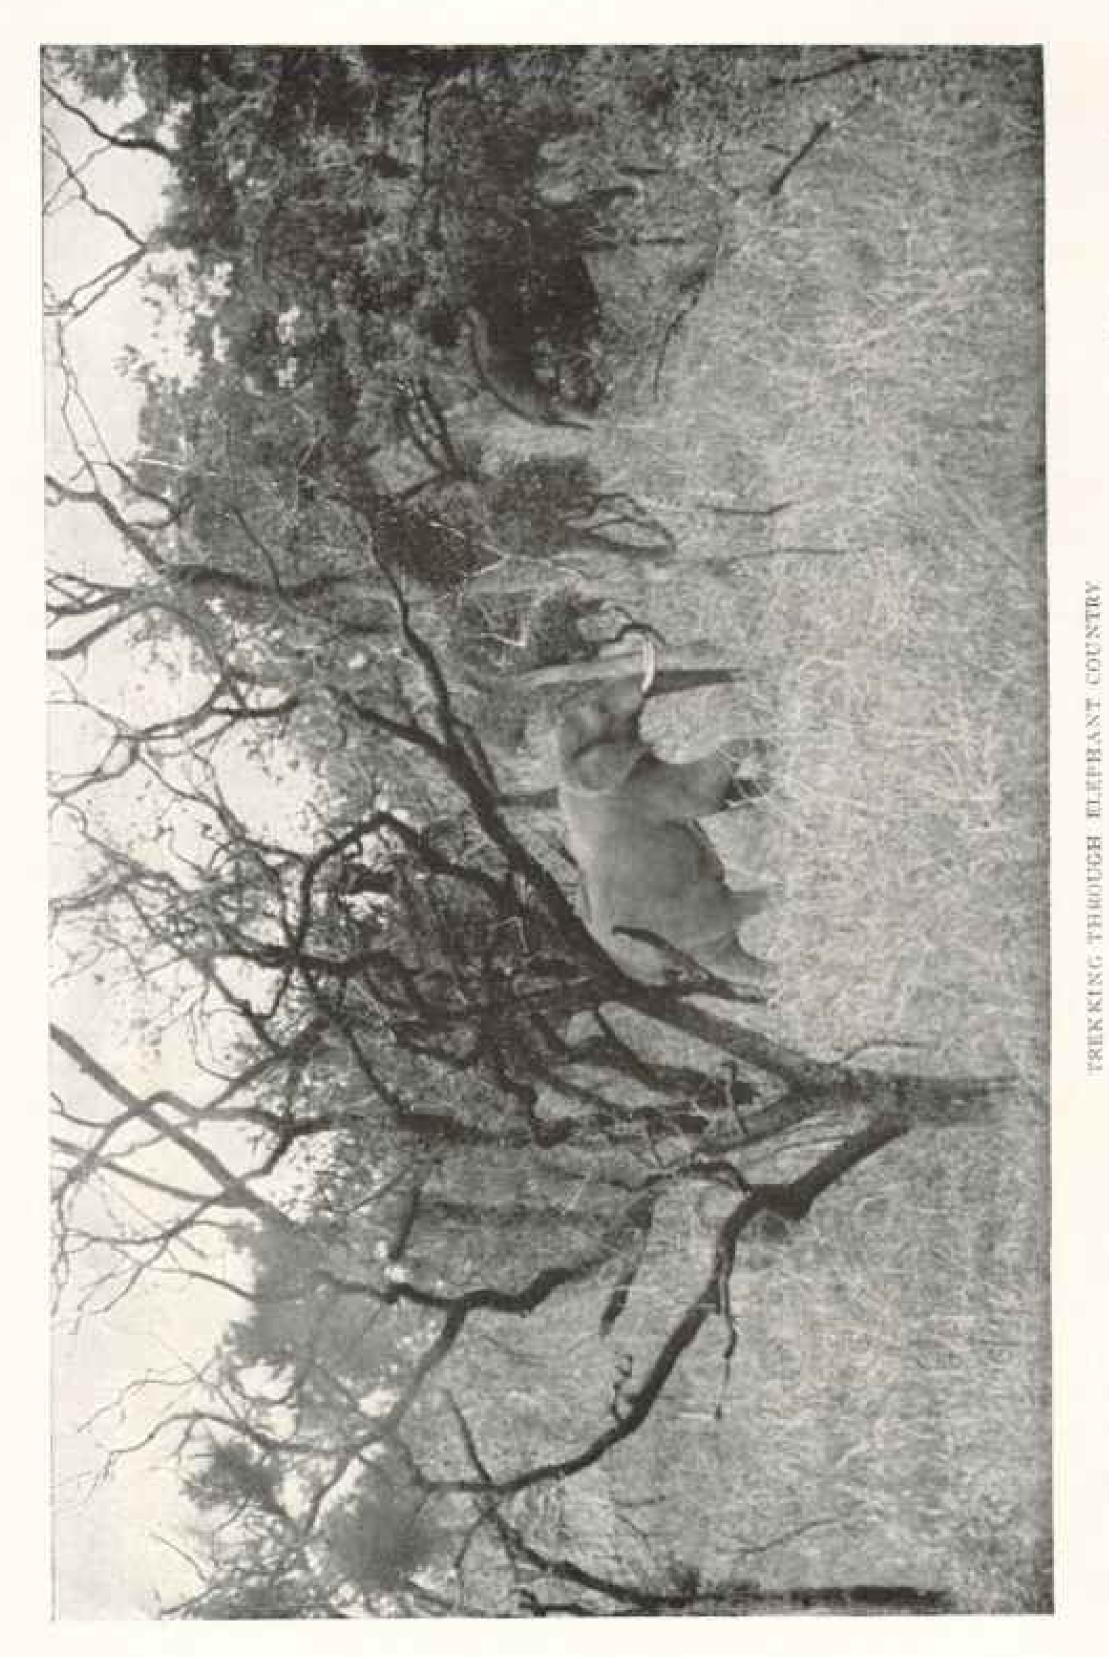

Elephant trails are cany to follow through grass, which shows plainty where the animals trokked in single file (see page 770)

Suddenly a cow elephant at the edge of the forest just in front of us uttered her peculiar shrill scream of warning. Not only the elephants, but all the other forest folk, paid heed and instantly were silent; a moment before the noise had been appalling; the silence now was even more so. Then there came a gentle rustling sound like that of leaves stirred by a breeze, increasing in volume until it sounded like a mighty windstorm in the trees,

I looked about to see whence it came. With my glasses I scoured the forest far and near, but not a visible leaf seemed to stir. Then I realized that the sound was made by elephants on the move, hastening away from danger—the scuffling of their feet among the dry leaves on the ground and the scraping of their sides against the equally dry leaves of the bushes. In a way this was even more impressive than the great din or the death-like silence preceding.

The old cow had caught a whiff of air tainted by man and all obeyed her warning. In a few moments the rustling subsided; the monkeys and birds returned to their normal state. The elephants had evidently settled down without going far; but only at rare intervals during the rest of the day did we hear the squeal of a chastised youngster or the breaking of a tree.

With my gun bearers I went down into the forest. Trails crisscrossed in all directions, so that it was impossible to follow a given trail any distance. A band of a dozen or so got our wind and passed us in confusion at close range, but the bush was so dense that I had but small glimpses of them. A mile into the forest brought us to an irregular clearing, 200 by 500 yards in extent, almost bisected by a "peninsula" of forest.

A WARLIKE MOTHER

At the base of this peninsula I nearly ran against a young bull, one of a considerable number, as I soon discovered. The whole herd began working toward the point of the peninsula and I ran along the outer edge to head them off. Just as the leader emerged from the point, they saw or winded us—shifty, uncertain breezes had sprung up—and they turned

back. I ran into the timber to try for a better view of them. I soon found myself facing a cow who, solicitous for her very young calf, had wheeled about, all attention and menacing.


Fortunately, at the moment we were partially screened behind a clump of small trees, and as we remained motion-less the cow's fears were soon allayed, and, turning, she gave the calf a boost with her trunk and followed the herd, which was moving off toward the clearing on the other side.

Hurrying out and around the point, I found the herd in the clearing, rounded up in close formation, conscious of the presence of an unseen enemy. were about 25 elephants, mostly cows, and just as I was on the point of backing off to a safer distance, thinking there were no big bulls in the lot, a fine pair of tusks appeared at the near side. A clump of bushes offered cover for a near approach and I went in quickly to within 20 yards of him, and as his front leg was thrust forward offering a good opportunity for a heart shot, I fired both barrels of the double rifle in quick succession.

RENDERING FIRST AID

All was commotion as I seized my second rifle and, seeing that there was no direct charge, retreated some 50 yards to the top of an ant hill, from which I could see what was going on. I then witnessed a scene such as I had heard described and which I had been keen to verify. A number of cows were clustered about the bull, for he had fallen 30 yards from where he was shot, and with their tusks and trunks were doing their best to get him upon his feet; the remainder of the cows were doing patrol duty, rushing about in an increasing circle, searching for the source of trouble. That meant me, so I retired to a safe distance and waited for the atmosphere to clear.

This bull stood 11 feet 4 inches high at the shoulders, and the tusks weighed 95 and 110 pounds respectively, while the circumference of the front foot around the sole was 67½ inches, the largest recorded, I believe (see photo, page 789).

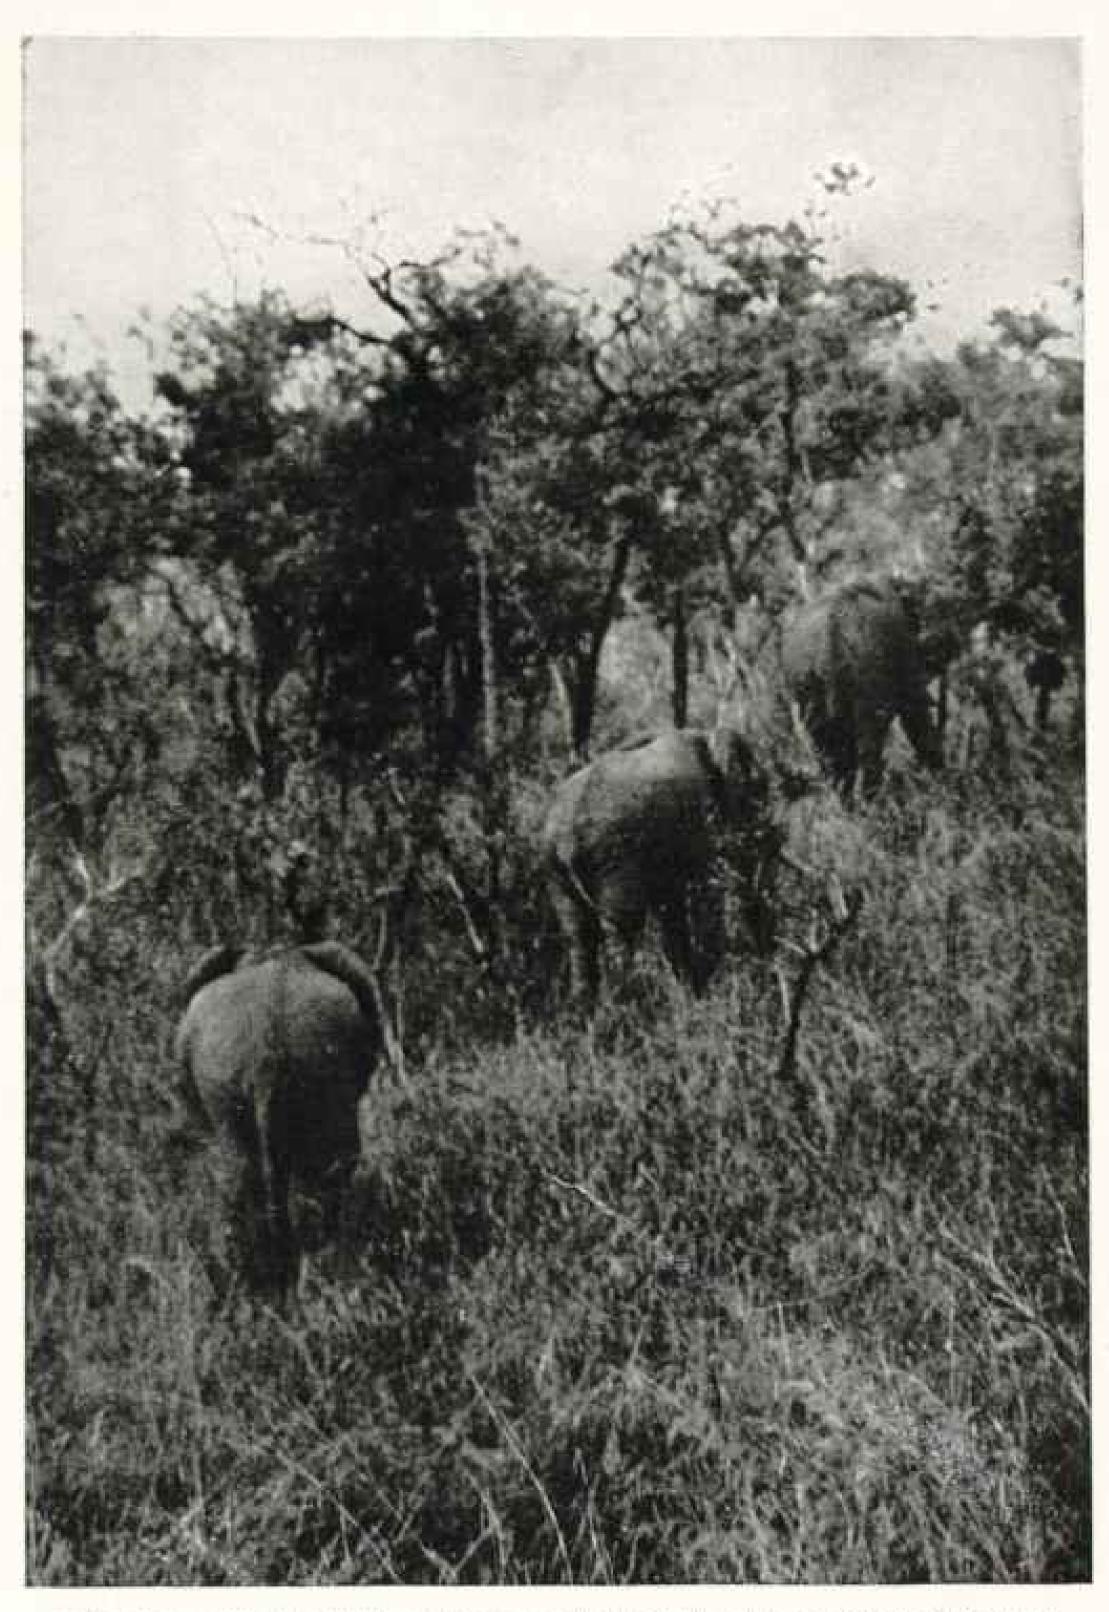

PART OF A HERD OF SEVEN BULLS THAT WE TRACKED ALL DAY ONLY TO FIND THAT THERE WERE NO LARGE-SIZED TUSKERS AMONG THEM



DEVASTATION BY ELEPHANTS


In this garden during the night previous, elephants had destroyed a large plantain grove and broken down fifty or more bark cloth trees averaging a foot in diameter. Elephants come in herds to villages described because of sleeping sickness. The damage is usually accomplished by herds containing no large ivory, and which consequently have been unnotested by lumbers until they are contemptuous of man (see page \$65).



A GREEN ACACLA TREE IS INCHES IN DIAMETER BROKEN DOWN BY A SINGLE ELEPHANT, STRIPPED OF LEAVES AND SMALL BRANCHES

I have seen a small elephant break a 6-inch tree, not by pulling with trunk or ramming it, but with a side thrust of one tusk, using the trunk only to hold the tree from slipping along the rusk.

786

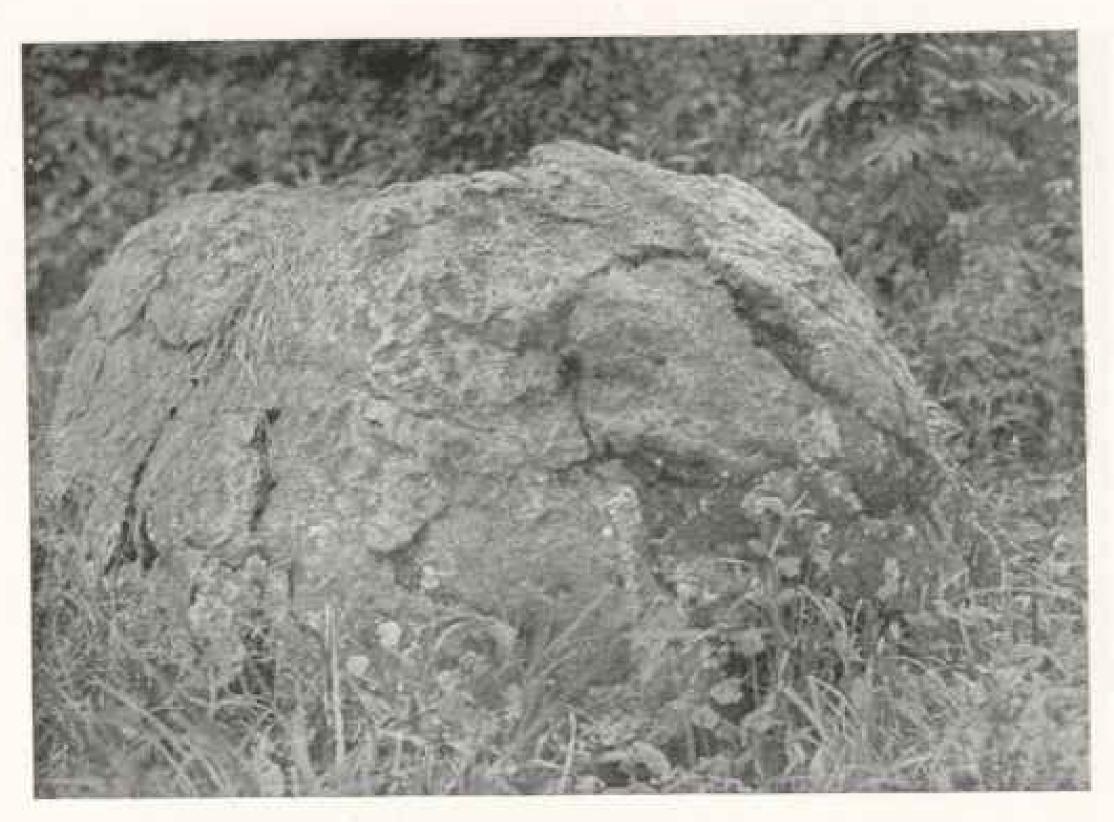

BOULDER POLISHED BY THE RUBBING OF GENERATIONS OF ELEPHANTS

The following day I went into the forest again and soon came up with a herd, but in cover so dense that an inspection could not be made. We worked with them for hours, and finally succeeded in driving them out into the open, but unfortunately the grass was high and I had not succeeded in gaining a point of vantage, when with angry grunts they doubled back to the forest.


As I turned to follow, my attention was called to a commotion in the bush at the edge of the forest some 400 yards to the left. Another herd was coming out into the grasslands, and from the top of an ant hill I saw them distinctly as they passed over a rise 50 yards away. There were 11 cows. I waited a few moments, thinking that, as often happens, a bull might follow in their wake. The cows had passed on to a distance of 300 or 400 vards, and I was about to leave the ant hill and return to camp when from the direction of the cows there came a low, ominous rumble like distant thunder. It was not very unlike the angry rumbling

sounds we had so frequently heard when with elephants, but it was plain talk and meant trouble.


A hasty glance around convinced us that there was but one thing to do, to stand and meet the charge from the elevation where we were and from which we could see. If we tried to escape to one side or to the forest we could not see them over the high grass before they were upon us.

A LIVING TORNADO

The rumbling was repeated two or three times, increasing in volume, and was then followed by the wild shrick of one angry cow and immediately taken up by 10 others as they charged toward us. They came half way and stopped for a moment. They had lost the wind, but immediately caught it again, and roaring and screaming with redoubled energy came into view over a slight rise. It was a disconcerting spectacle. Their great ears at full spread, trunks thrashing wildly, a roaring, screaming mass, 40

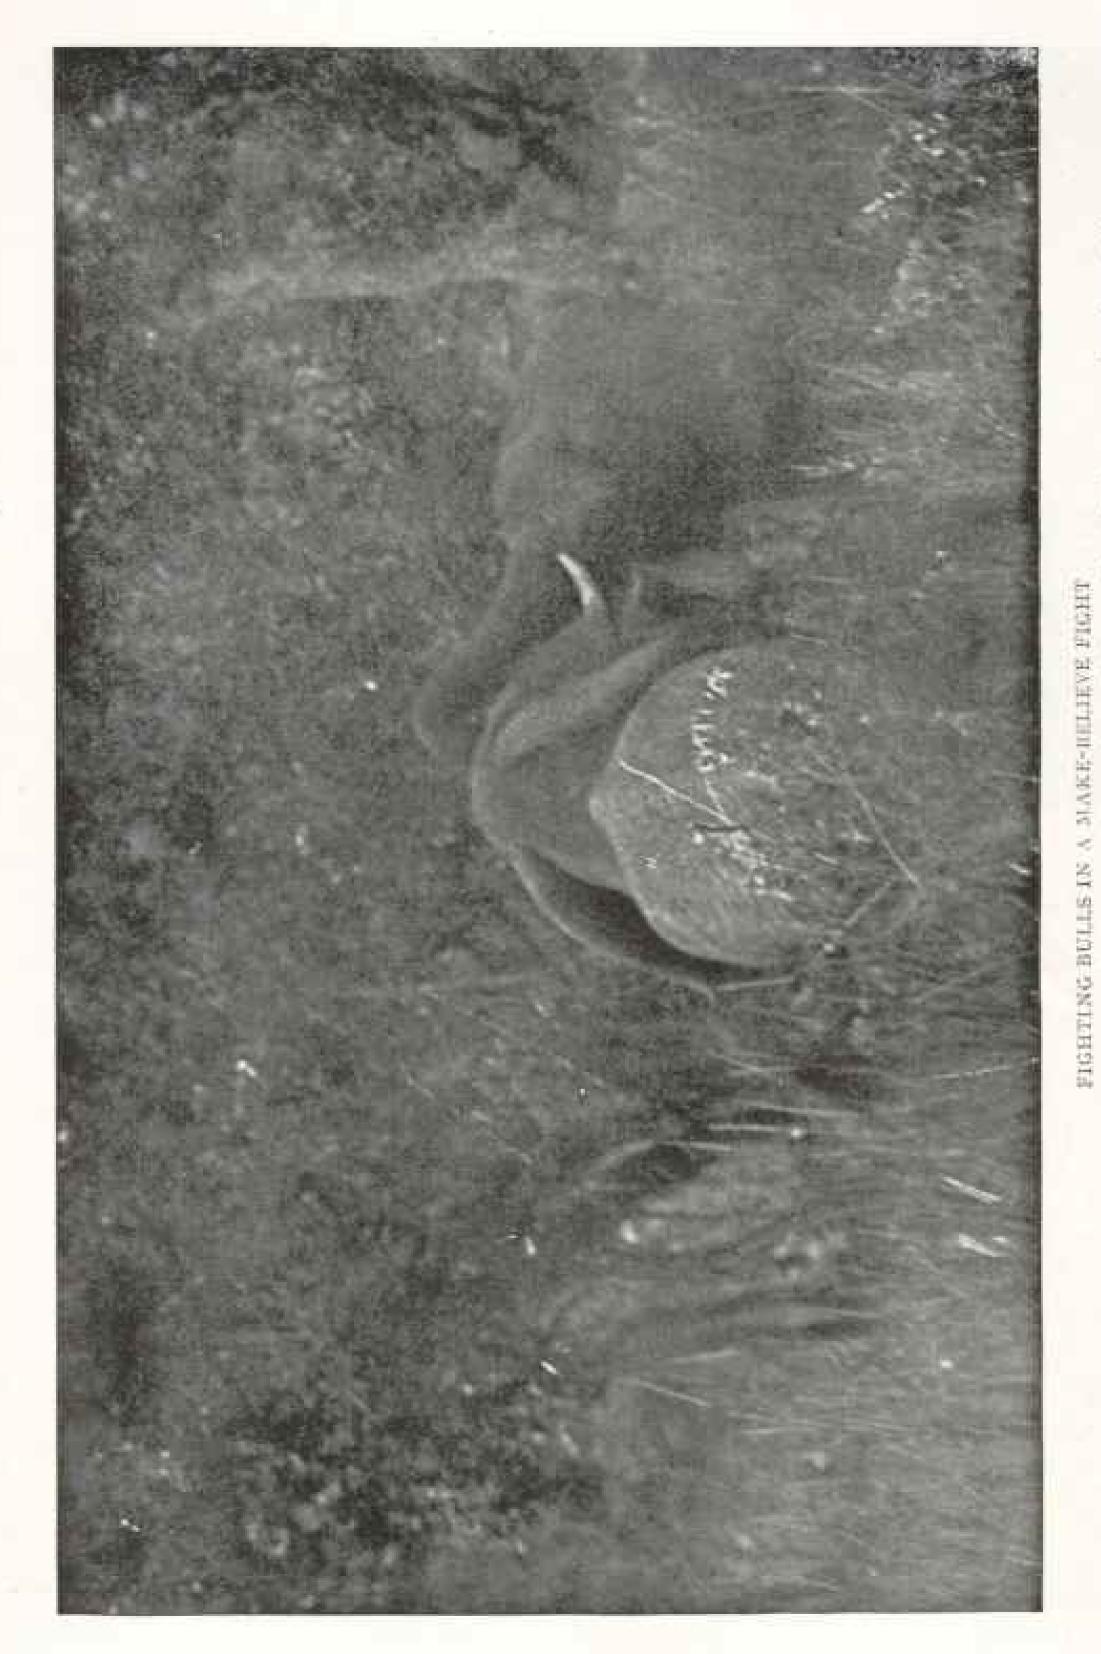


There were elephants on three sides of me when this photograph was taken, which explains the maccurate focusing of the camera

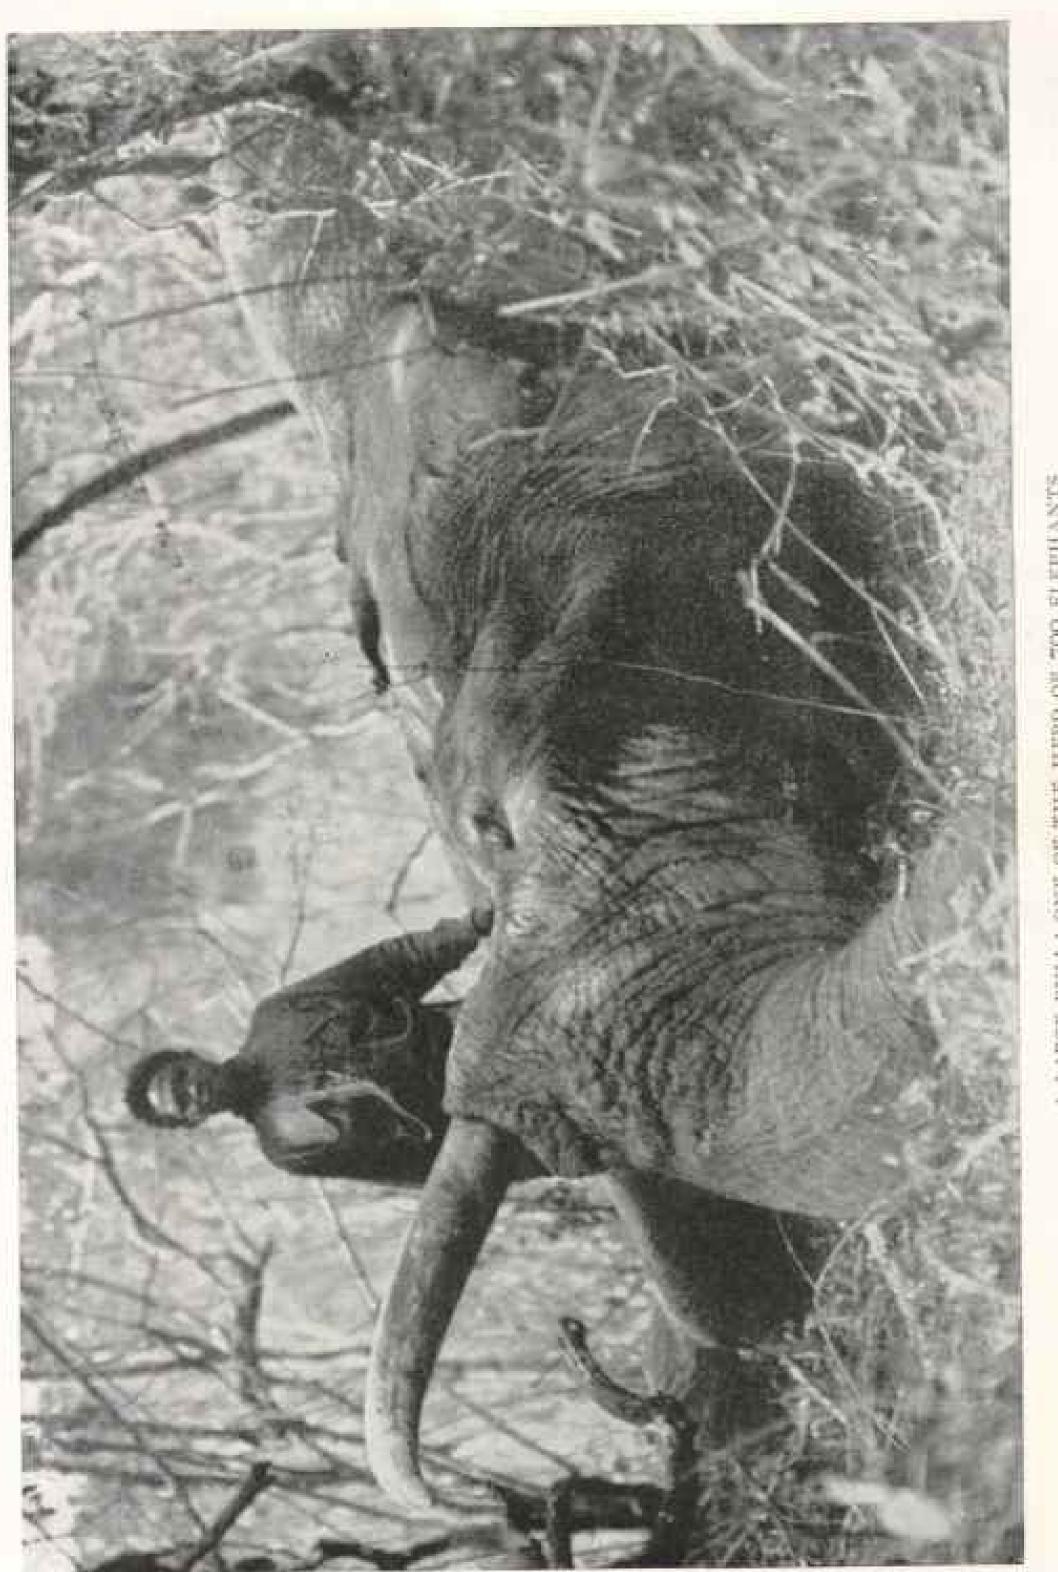


A LARGE BULL: ONE OF THE HERD OF 700 ELEPHANTS

Height at shoulders, it feet 4 inches; circumference of front feet (sole), 77 inches and 77% inches, the largest recorded. Right tusk (showing in picture) weighed 110 pounds; the left weighed 95 pounds, the lighter weight being due to slower growth because of an injury at the base of the tusk in early life, resulting also in a knotty rib along the entire length of the upper side of tusk. The oldest bulls are those which have long been protected in large herds of aggressive cows and young animals. A number of cows did their lest with tranks and make to get this fallen companion to his feet (see page 784).

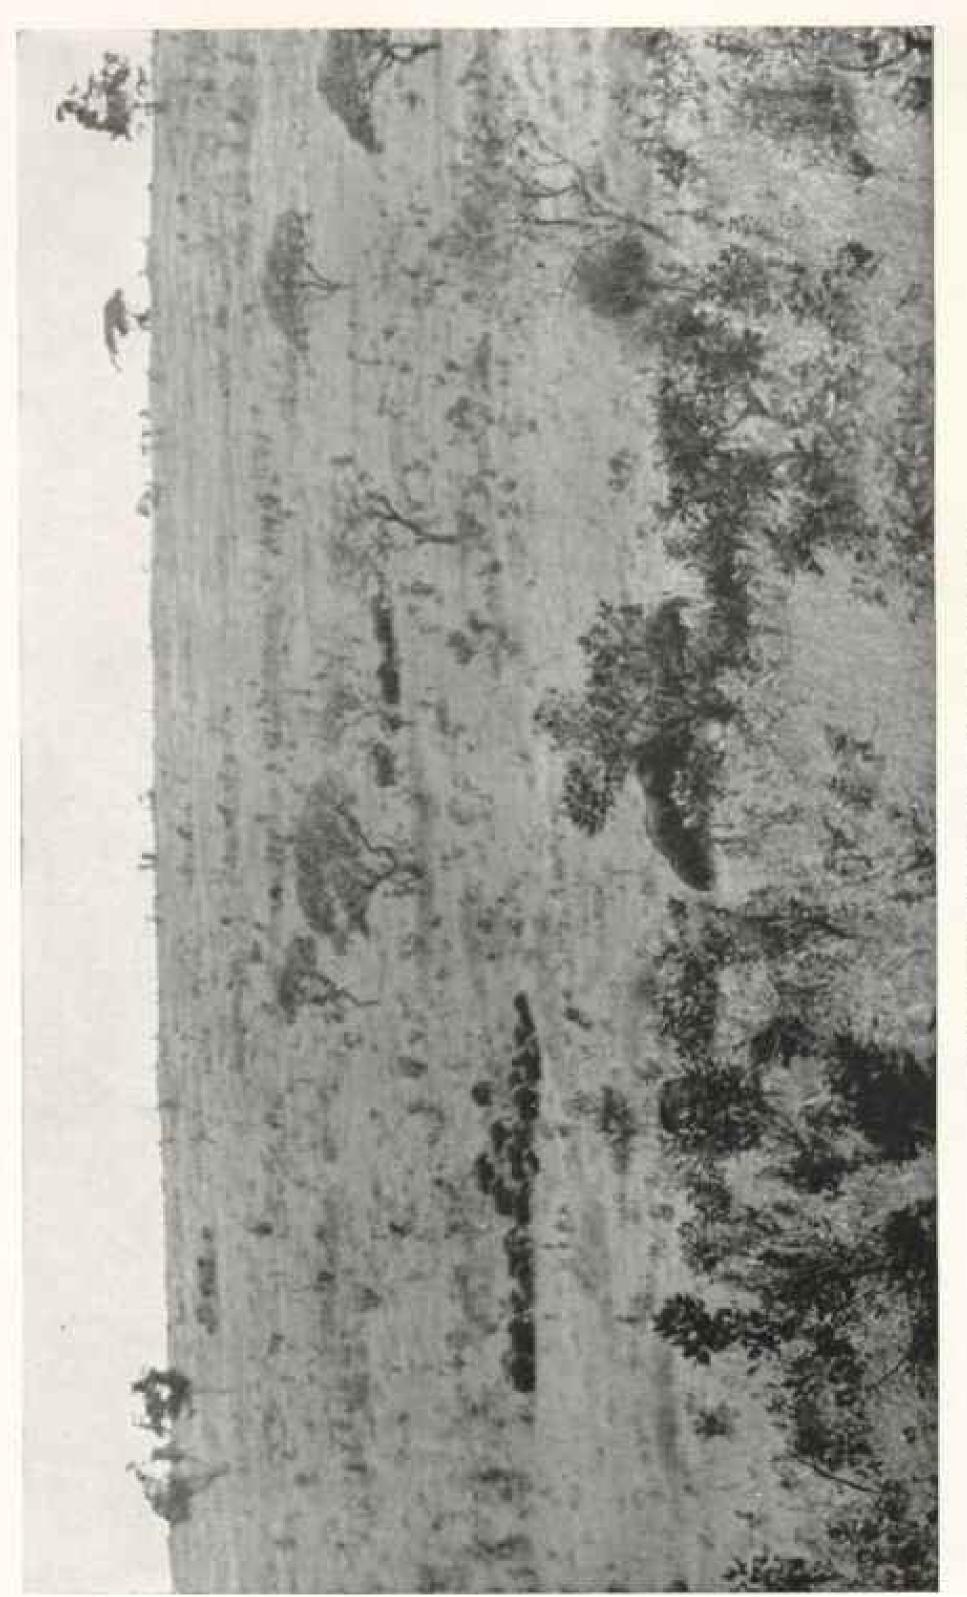


THE PLATERU TO THE EAST OF MOUNT ILLOW


Four herds of elephants are in sight, consisting of cows and young arismals of inferior grade. Mr. Akelov inspected more than one handred elephants are the Nount Elgen district without discovering a single large specimen, all the valuable elephants having been tilled off by ivory hunters; the beeds remaining, having been unmolested for same years, are amestally vicious in temper (see page 293).

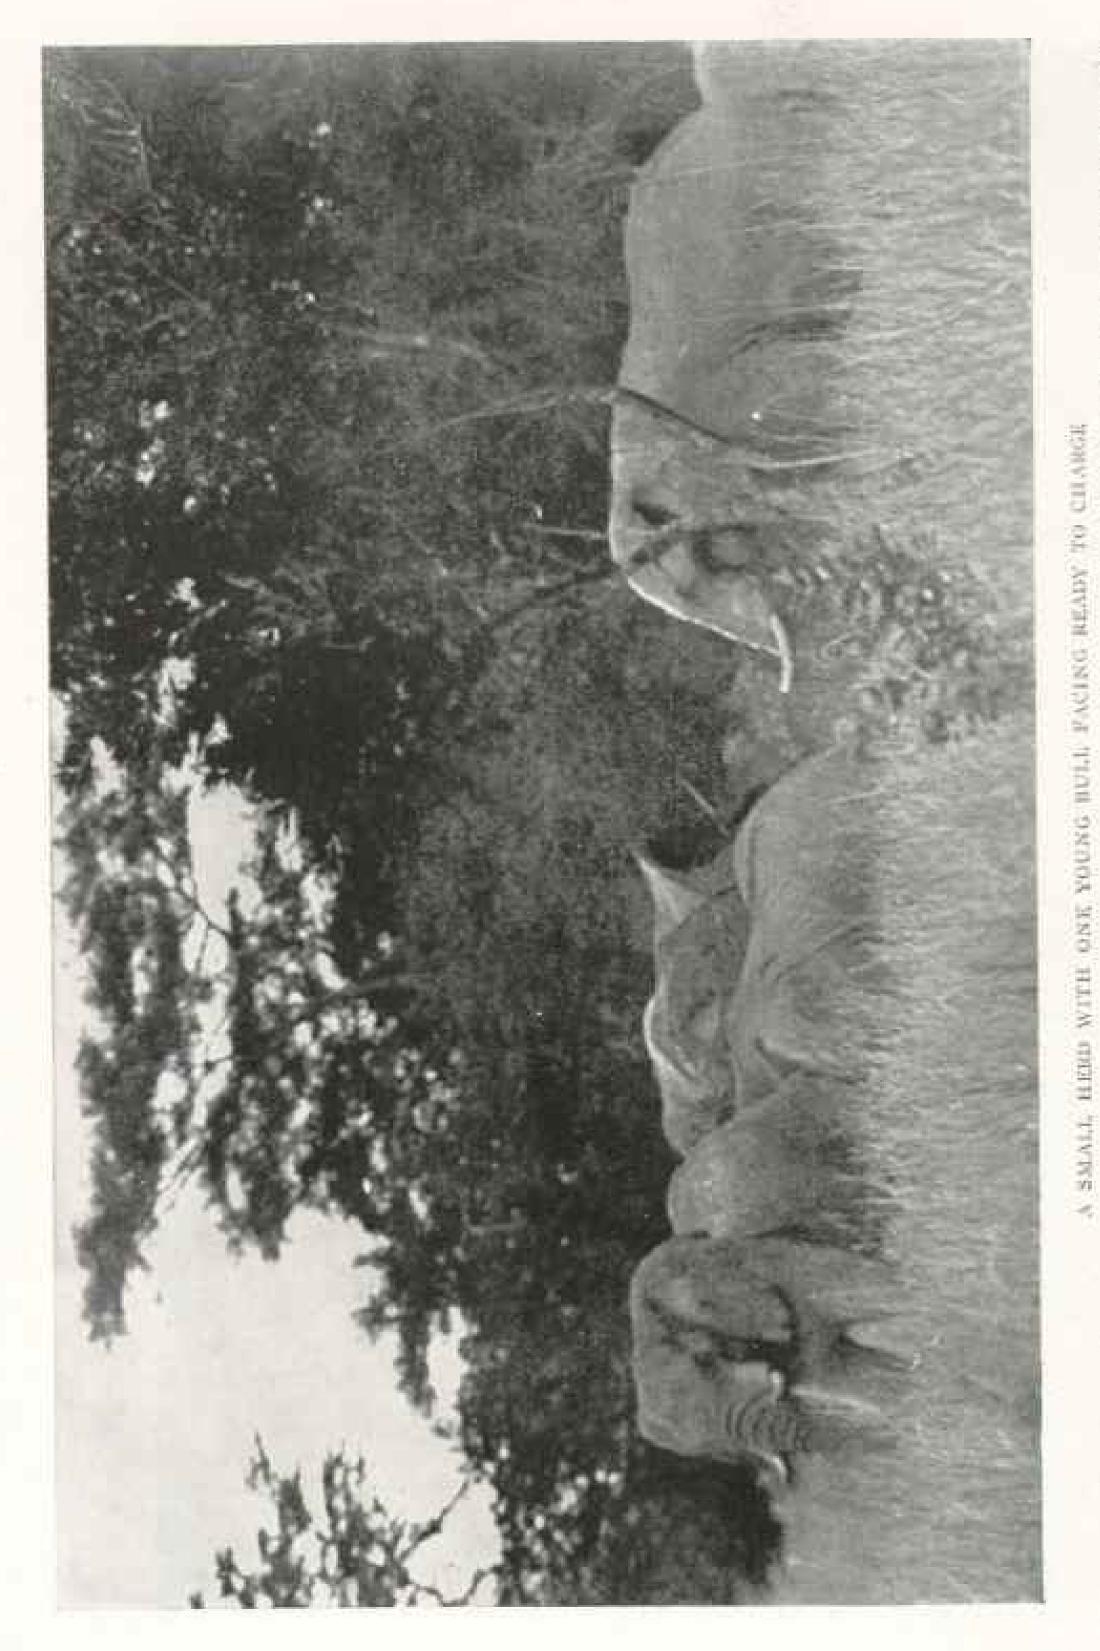

"I run arbund a clump of bush to head off this hand of young bulls, and found myself closer to them than I expected. One of them saw me and I was account picture as they turned."

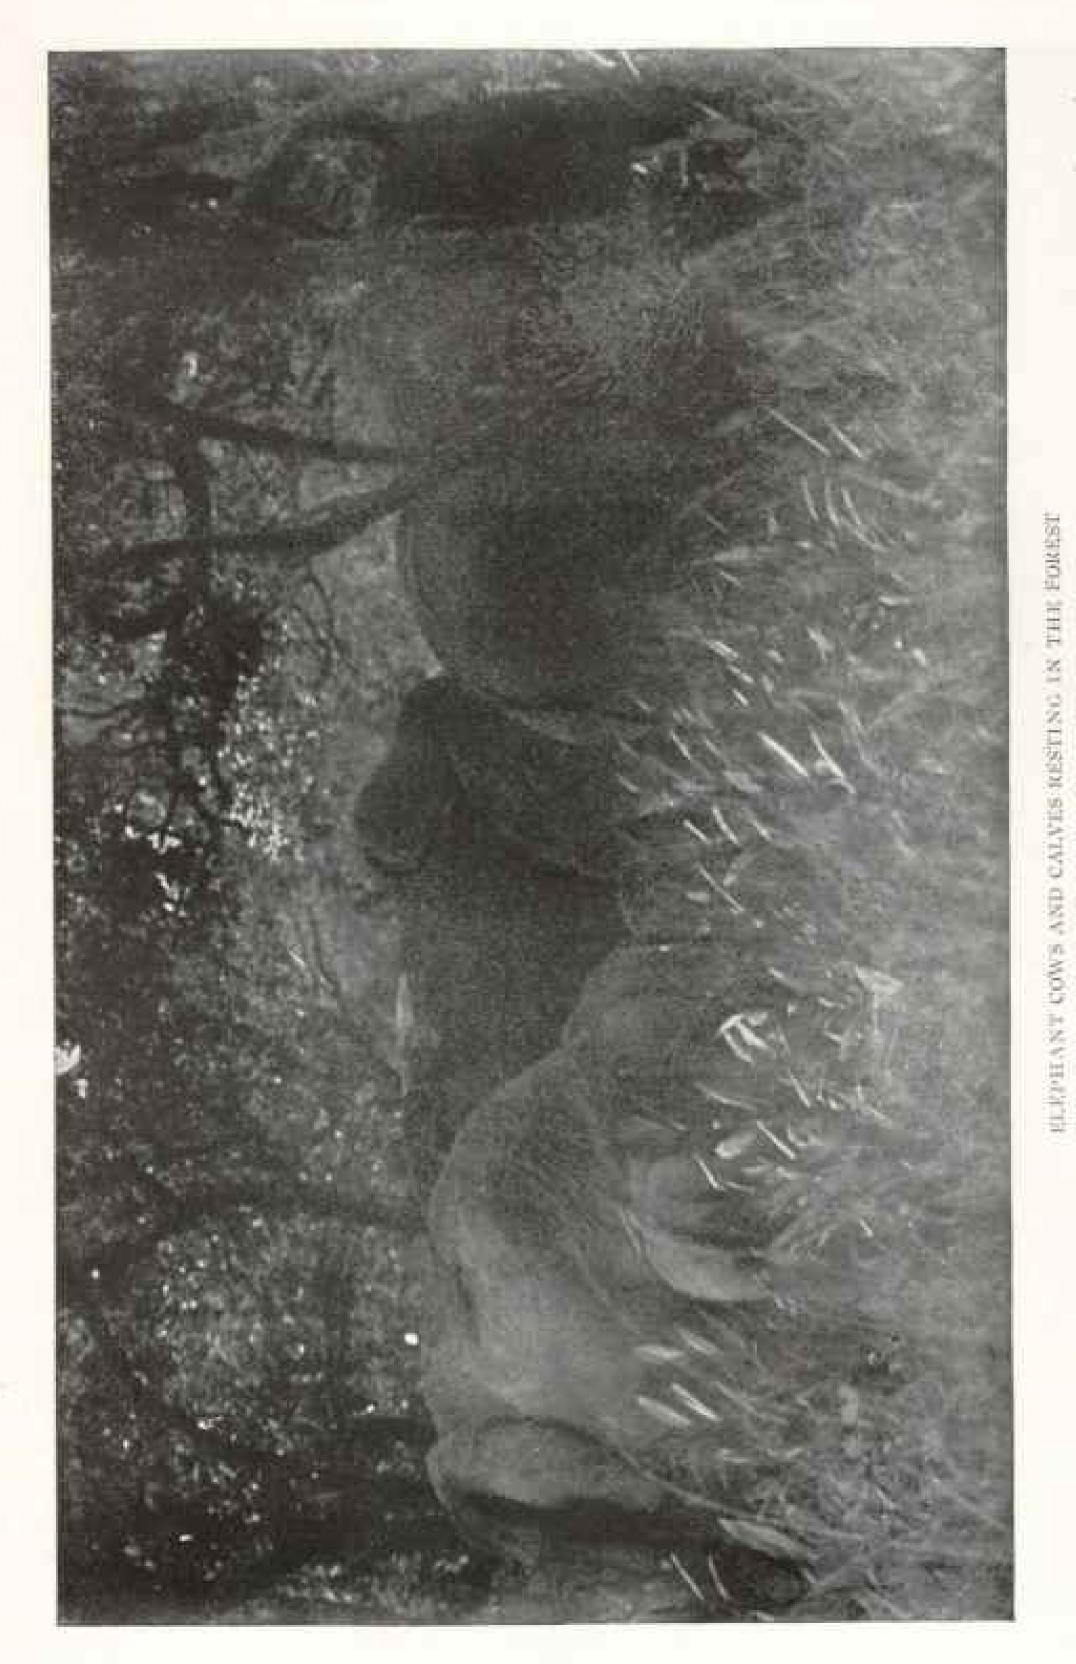

A gust of wind blowing toward them from our direction would be certain to result in a charge. Note the calves crowding their mothers They are quietly enloying the middlay steets.

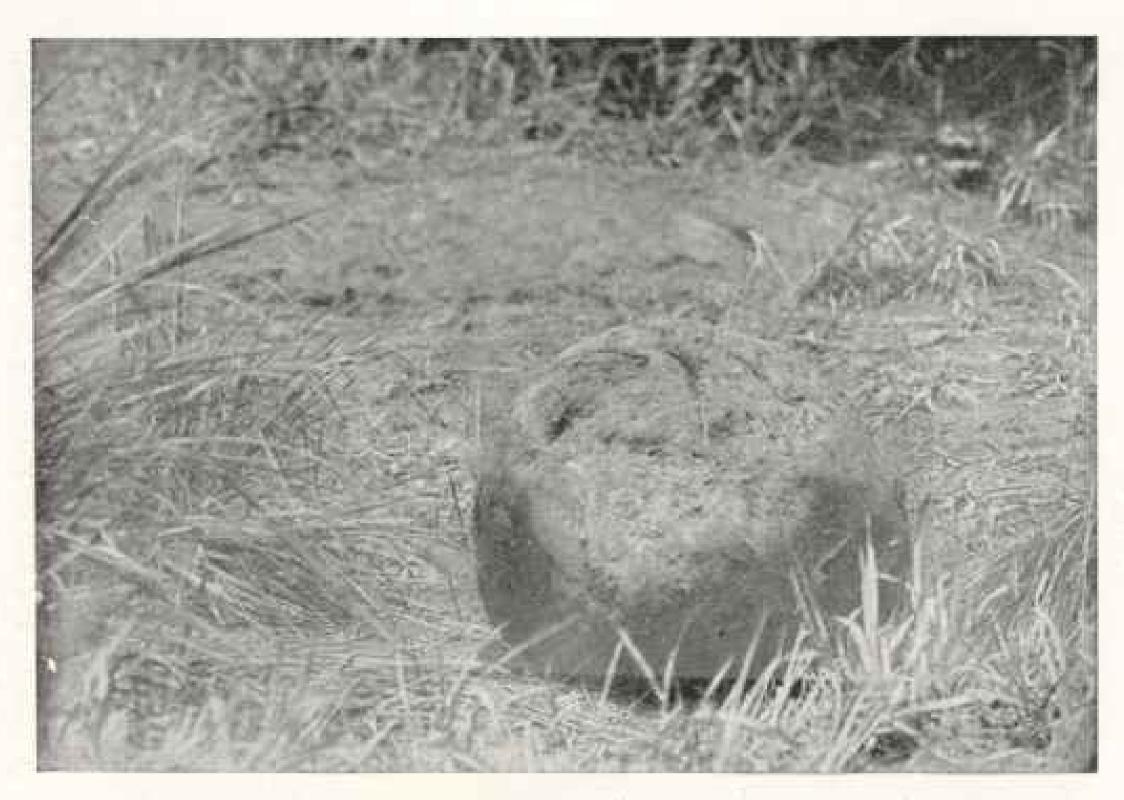

A DABY ELEPTIANT'S MARBLE

A fragment of a termite hill that the elephants had broken off and rolled about on muddy ground until it had become a nearly symmetrical sphere. They had evidently rolled it to this point from a considerable distance, as it was of black earth, while the ground where photographed was yellow. Baby elephants, like most young animals, are fond of a trolic with one another and sometimes at the expense of other animals. One day while inspecting a large hord of elephants that were feeding on the opposite side of a ravine, we met a herd of buffalo in the high grass on our side, and when we succeeded in frightening them off they stampeded across to where the elephants were. Three young elephants left the herd and gave chase, squealing and trumpeting as they charged this way and that scattering the buffalo, but not driving them away. The buffalo showed no great fear, just keeping out of reach; sometimes a cow whose calf was being hard pressed would face about and make a bluff at standing her ground, but always turned tail when the elephants got too close. As a rule elephants pay slight attention to other animals. Mr. Tarlton has seen a herd of cow elephants heat a lioness out of high grass and chase it into forest cover. This suggests the possibility of lions preying on young elephants, being recognized therefore as an enemy.


 tons of frantic female elephant vengeance. I remember that I felt homesick.

Were they to continue in a straight course they would pass at 40 yards; then a dash on our part to one side and we could lose them and be safe. When they were nearly opposite us, however, they either saw or winded us afresh and wheeled straight in, with a burst of shricks. A shot from the big cordite rifle stopped the leader, but, encouraged by the others, she came on, only to be knocked down by the second shot. The others crowded about her, sniffed and—

bolted. The old cow slowly regained her feet and staggered away, while we in deep gratitude returned to camp.

HUNTING FOR UNUSUAL SPECIMENS

It was in August, 1909, that we left New York, commissioned by the American Museum of Natural History to secure specimens for a group of African elephants. We began serious work on the Uasin Gishu Plateau, knowing that there we should be able to secure the smaller specimens, cow and young elephants, and we had reason to hope that a large bull might be found on the plateau

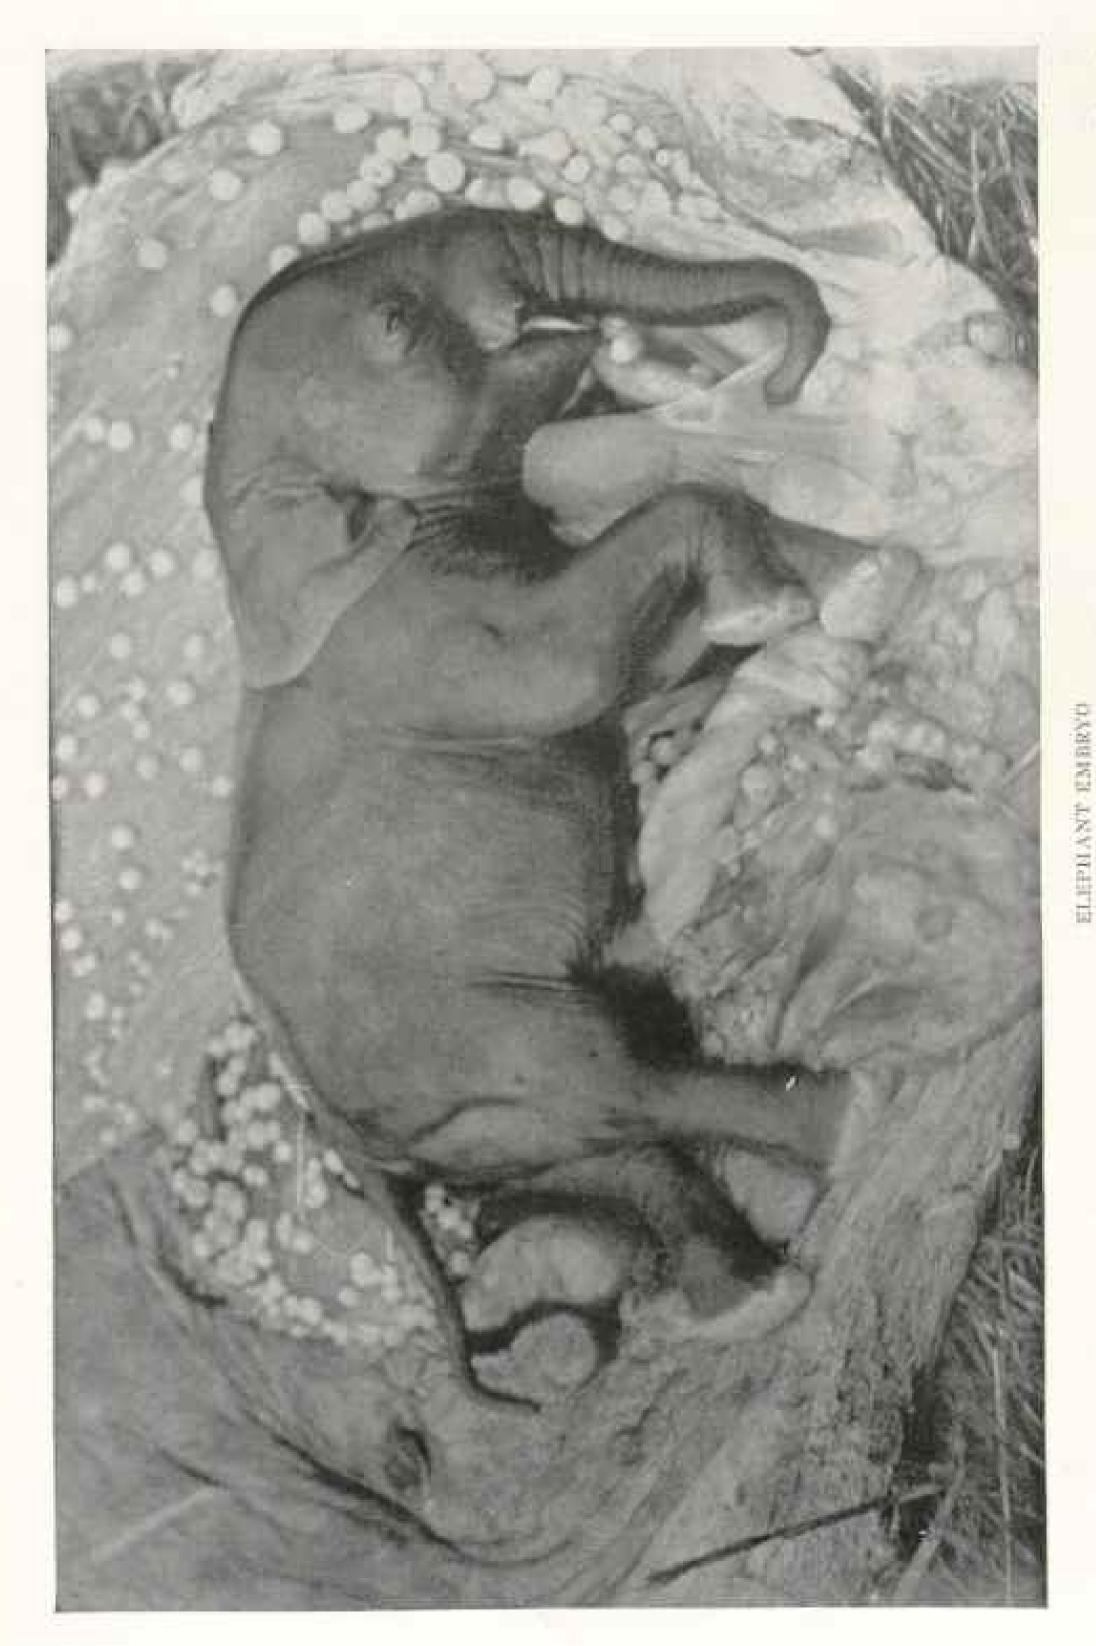

Height at shoulders, to inches; estimated age, 8 months; that is, one-third of the period of gestation. Except for the slight oversize of head, the proportions are those of an adult elephant.



A MATERNITY RED WHERE A YOUNG ELEPHANT WAS DORN AND CARED FOR DURING THE FIRST WEER OR TEN DAYS OF ITS LIFE (SEE PAGE 798)

This was found by the expedition while traveling by compass on Mount Kenia, well away from all trails

or in the forests of Mount Elgon, for in former days great numbers had inhabited the rich feeding grounds of the Elgon forest, as evidenced by the old pits (traps), scarred trees, and decaying bones. We inspected more than 100 elephants, however, without finding a trace


of a single large specimen.

We journeyed to the summit of Mount Elgon from the south and down to the east without finding the least recent trace of elephants until we had returned to the bush country of the plateau. Then we proceeded to Uganda, secured porters at Entebbe, marched along the Hoima Road to the Kafu River, down the Kafu to where the old Masinde-Kampala Road crosses it, then to Masinde, seeing no elephants during the two weeks' journey (see page 790).


We then devoted a month to hunting in the region of the Victoria Nile between Masinde and Foweira. This is a region of big elephants, where many splendid tuskers have been taken in the past, but really good ones are now very rare. On this occasion we shot two bulls, enormous in size, but with tusks weighing only from 75 to 80 pounds, each.

MOUNTAIN-CLIMBING ELEPHANTS

About the middle of April, as I was suffering from physical disabilities that made the preparation of an elephant skin impossible, we decided to return to the Unsin Gishu Plateau, where in the more healthful highlands I might hope for recovery. Though the rains were on at this time, we found no elephants on the plateau, so we devoted 20 days to lion hunting with a party of Naudi warriors for the purpose of making motion-picture records of the spectacular sport of lion spearing. About the middle of May we trekked across country to Mount Ke-

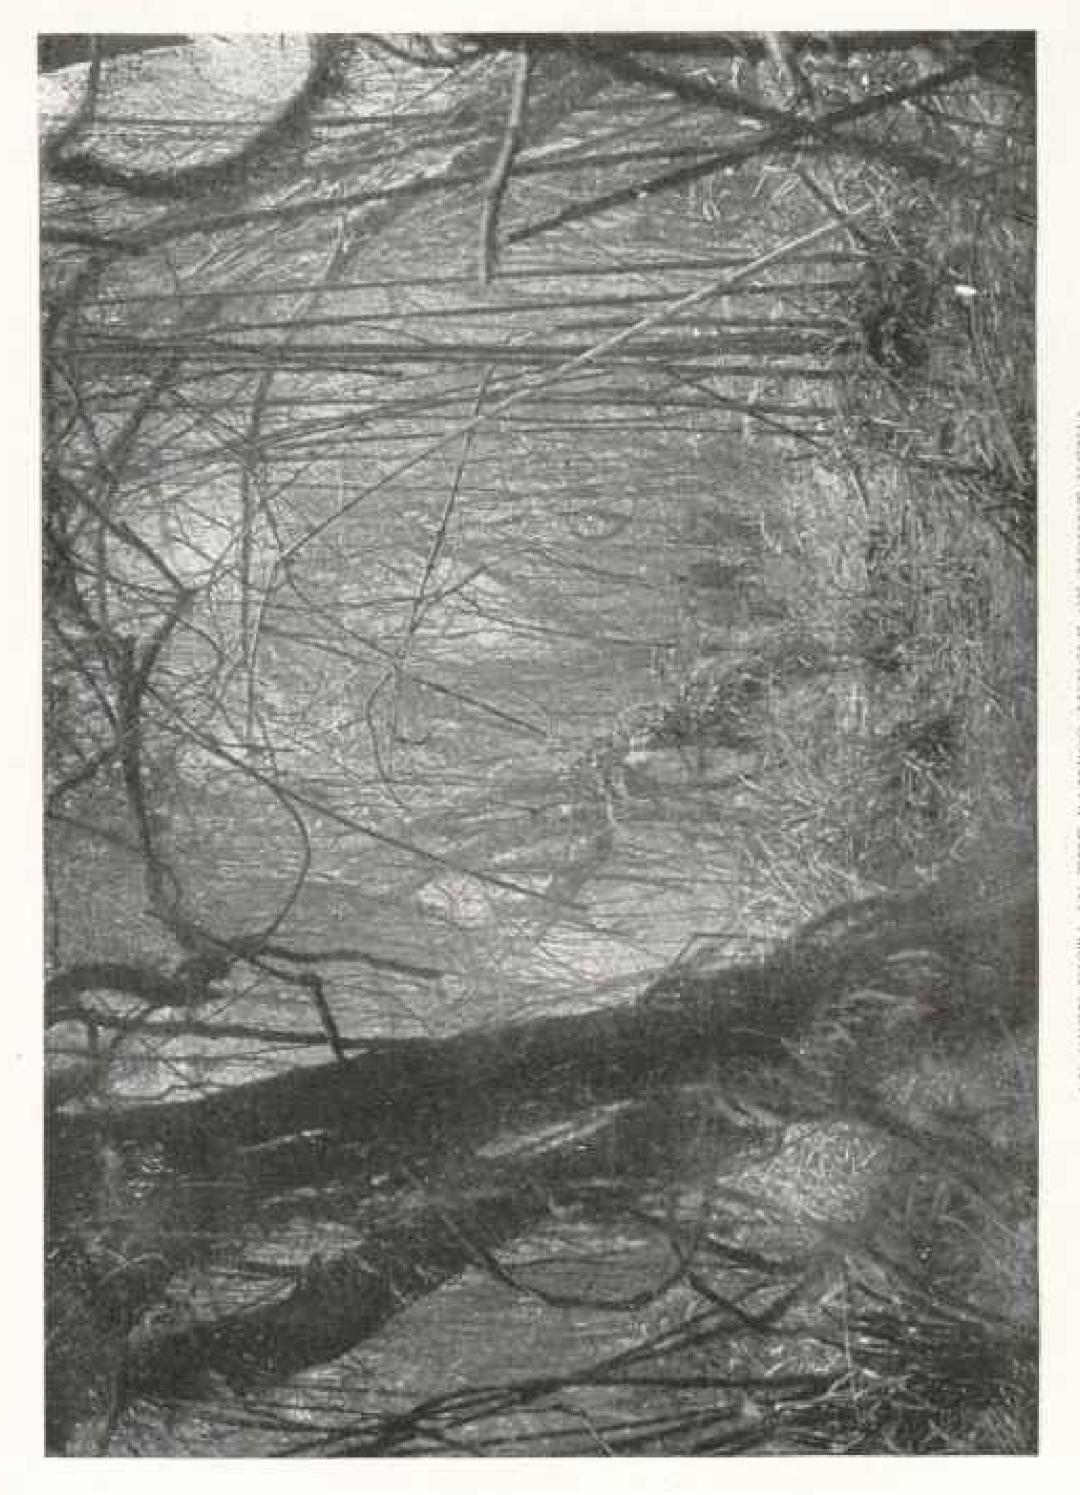


their time in the barriboos feeding on the succulent shoots of young bamboo AN OPEN VISTA IN THE RANGED JUNGLE OF MOUNT MENTA The cown and calves spend much of

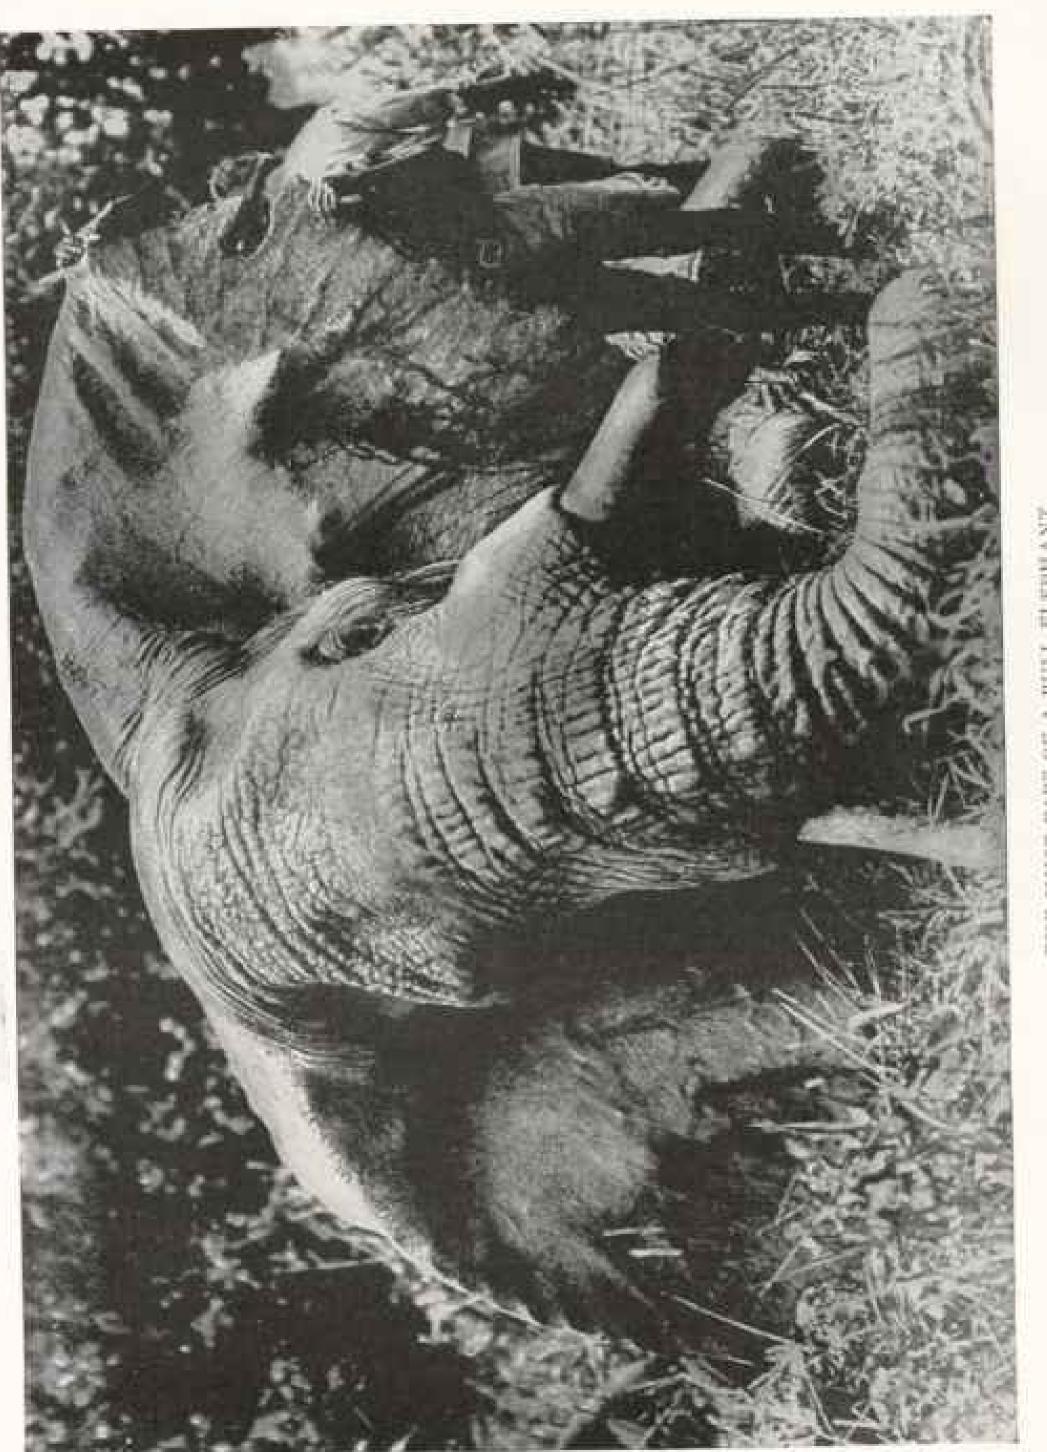

THE HUGE RARS OF A BULL ELEPHANY

So pounds each. His ears were extremely large, 6 feet 5 inches in depth. When we came up with him a half-hour later he got our wind just us he had nearly exught one of our boys. at an angle that necessitated plercing great masses of was first knocked down by a well-placed bullet from extremely heavy, thick-net bull with shot rerocionaly. e churged his feet, charged f braim

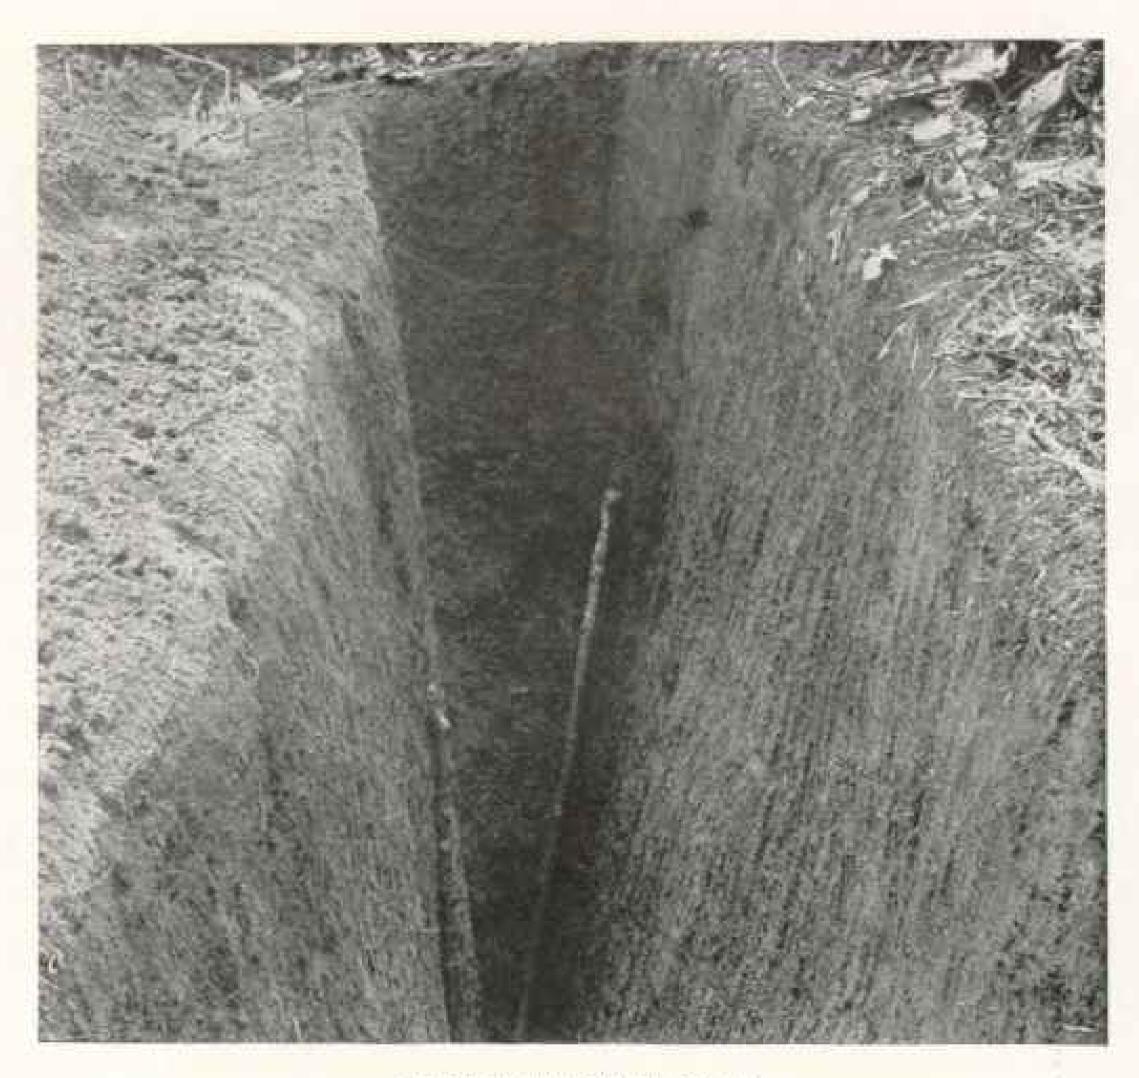

A FRESHLY DUG ELEPHANT PIT

The top will be covered with cross sticks and concealed by earth loosely thrown over the sticks. The unwary elephant crashes through this cover, its great feet are wedged in at the bottom of the pit and it suffers a lingering death. An elephant pit is usually 9 feet deep, is large at the top (3 to 4 feet wide and 10 to 12 feet long), but tapers to a width of only 6 to 12 inches at the bottom. Pits are often made in groups of three, one in the trail and one a few yards at either side.


nia for the purpose of making studies for the setting of the elephant group.

The forests of the southern slopes of Mount Kenia are inhabited by forest elephants, who seldom if ever leave them except to make short night excursions into the gardens of the Wakikuyu natives. Wishing to learn something definite in regard to the limits of their range on the mountain, we made the ascent from the south through the timber and bamboo belts onto the snow fields at the

base of the pinnacle. We found that the elephants regularly work up to timber-line (12,000 feet), and we found comparatively fresh tracks in the sphagnum marshes at 14,500 or more feet.


THE CRED OF A DAILY ELEPHANT

It was while on this excursion we found the "maternity bed" of an elephant. Under the protection of a great mass of aerial roots and the foliage of a great tree on the point of a densely for-

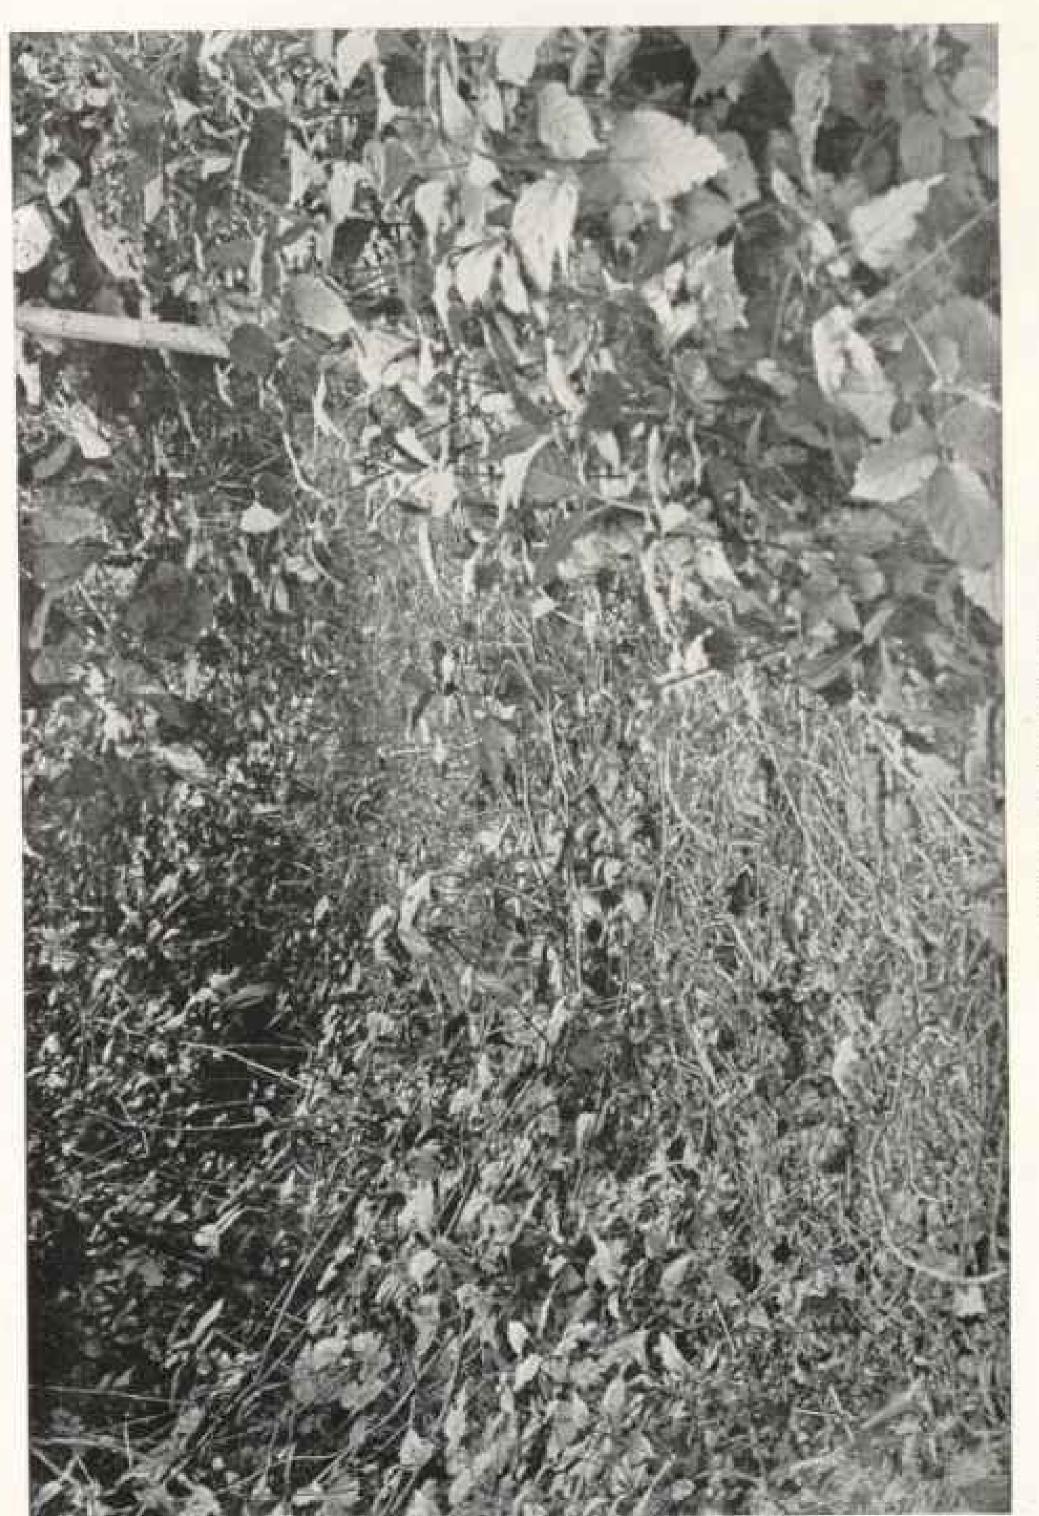

A COVERGE ELEPHANT PIT

yet is effectively concealed even to the observing eye by a new growth of vegetation, the elephants. Fortunately they are not usually staked, and a fall into one usually p. With the elephants it is different. Their great feet wedge in at the bottom of the The pit has been completed only a few week The pit is a hidden menace to the hunter as well a results in nothing more serious than a good shake pit: they become helpless and auffer a lingering d

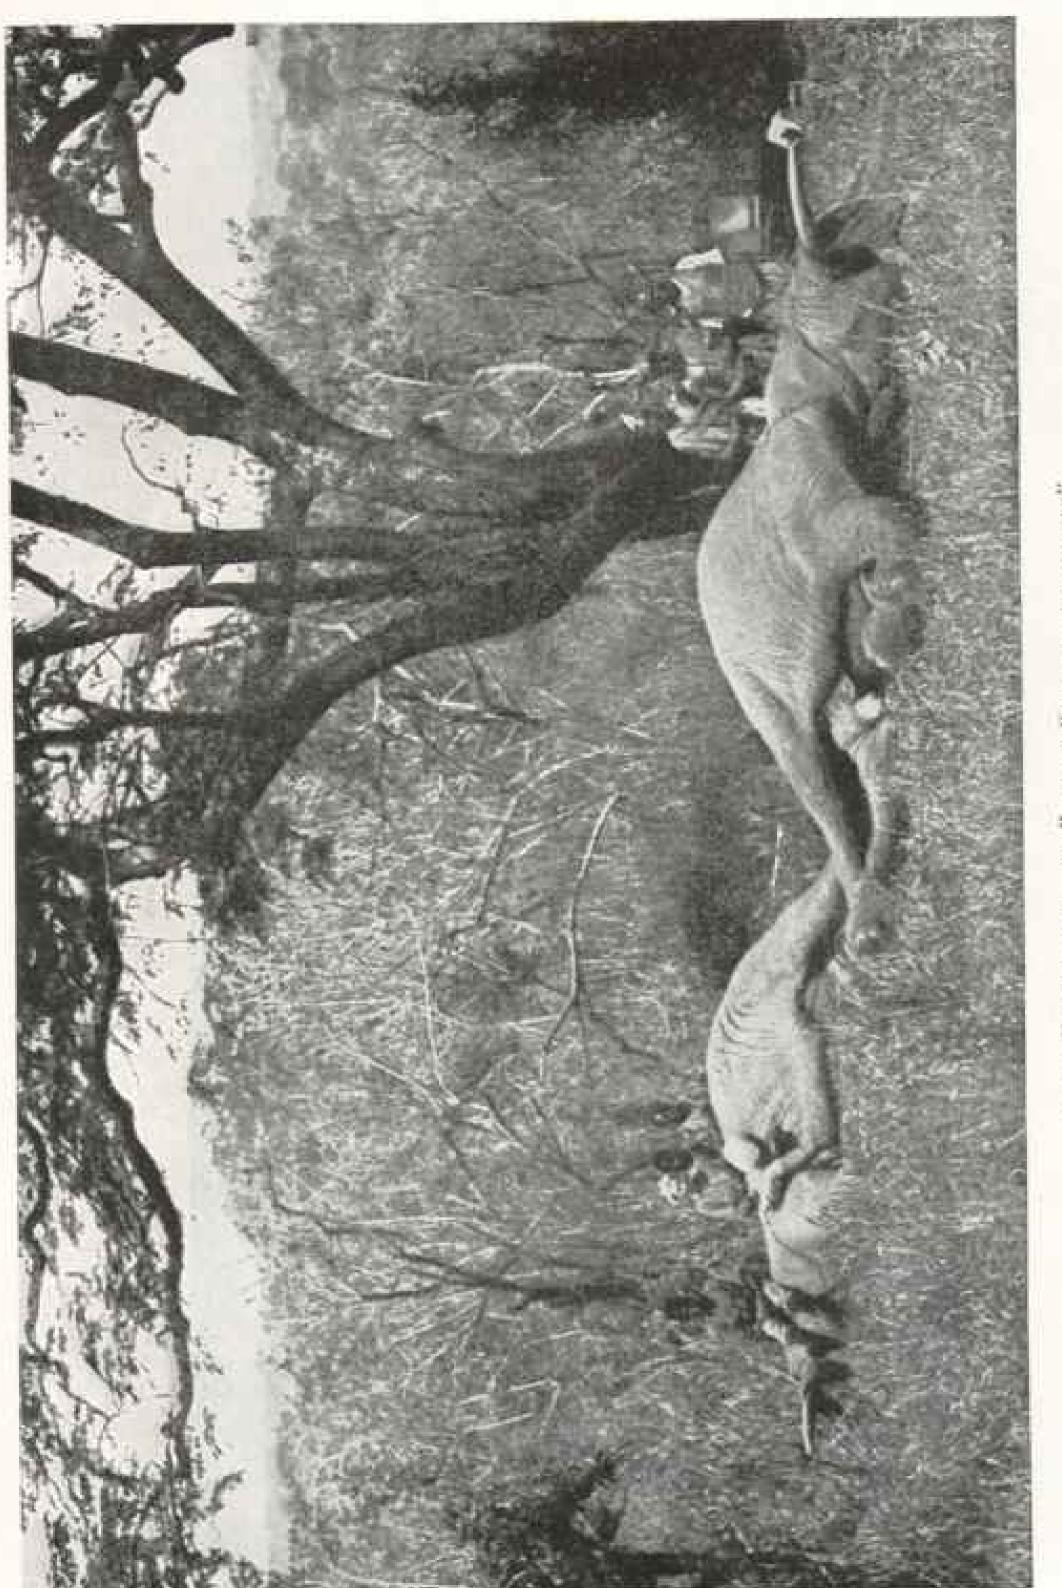

NOT A "RIGHT AND LEFT," BUT A "RIGHT AND WRONG"

um while preparing the from morning till midday, when we came up with them as they were enjoying their siesta, would meet our requirements. One was chosen and we, Mrs. Akeley and L. agreed to shoot in the shade of the tree, that we might be protected from the We had followed a bard of a dozen elephants. There were several young balls, any one of which together to make certain of dropping him where hakin; at the signal we fired and two elephants fell



A PIT-DIGGER'S SHELTER

The killing of elephants by natives is probabited; nevertheless the Wandorobo of Kenia were never more active in digging pits than when we were there. When following native guides one does not often run across new pits; it is when traveling by compass, independent of guides, that one is most likely to disturb the trappers at their work. During a three months' stay on Kenia, in 1910, two elephants were killed in pits within a few miles of our camp. A pit may be many years old before an elephant is caught in it, and we were curious to know how the few hunters could watch the hundreds of pits scattered about a large area as they are. The method is simple and entails but little fruitless labor on the part of the natives. A pitted elephant may live some days before death comes to its relief, and then a signal is soon wafted down wind to which the hyenas and leopards promptly respond, the hyenas howling as they go in search of the feast, and the Wandorobo follow the howls and tracks of the other carrion feeders. The fiesh of the elephant is thoroughly ripened by the time the natives reach it.


ested ridge, accessible from only one direction, there was a deeply trodden bed
of dry earth, where the baby elephant
had been born and had spent the first
week or ten days of its life, while the
mother watched over it or fed on the
abundant vegetation near at hand. Later
we found a second bed precisely similar
as to situation. These beds were well off
the lines of elephant travel (see picture,
page 795).

Upon returning from the summit of Kenia to the native gardens at the edge of the forest. I went back again to the bamboos to make photographic studies for the background and gather materials for accessories for the group. While thus engaged I met a bull clephant, which left me much the worse for the experience and necessitated my return to the base camp on a stretcher. This event postponed work for several months, and




THEY SMOKE-CURE THE PLESH ATIVIES CONGREGATIC IN GREAT WHEN AN ELEPHANT IS RILLED THE N

Not a bit is allowed to go to waste. Note the pieces of flesh hanging in the foreground

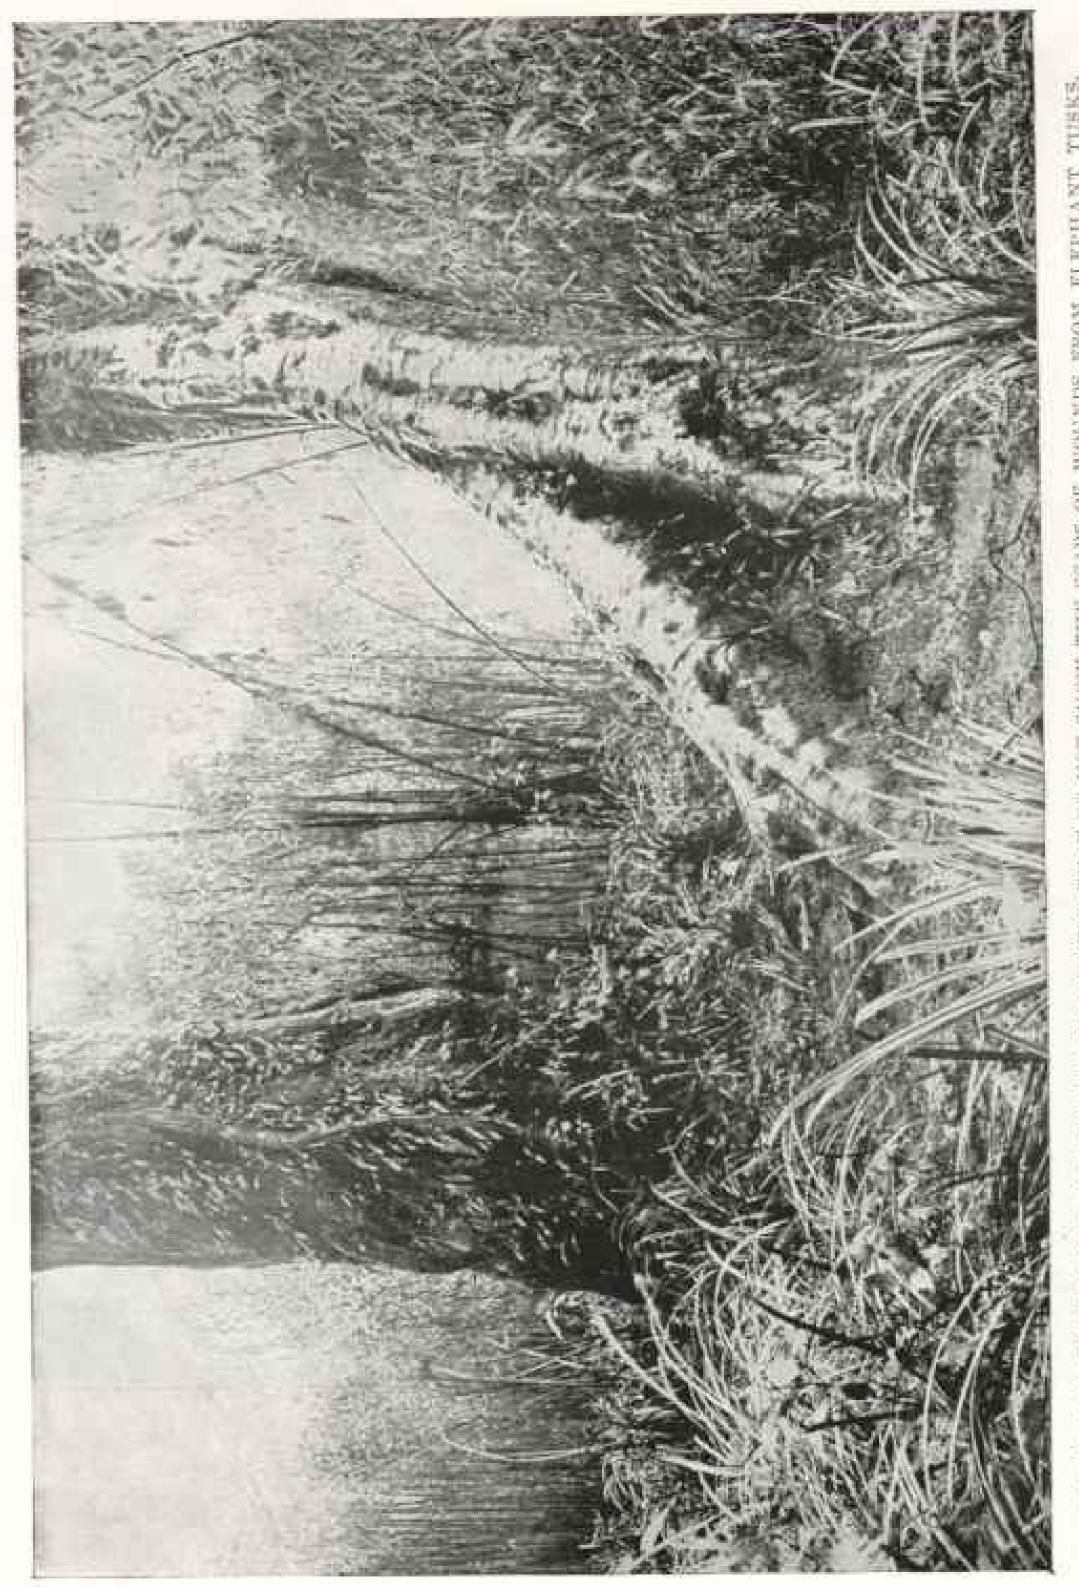

T COUNTRY THAT DO NOT SHOW THE SCARS OF WOUNDS PROM ELEPHANT TUSKS, S ARE KRIPT WILL POLISHED BY THE RUBBING OF PASSING HERDS AND THOSE BESIDE THE TRAIL THERE ARE PRIVE THEES IN THE BLEPHAN

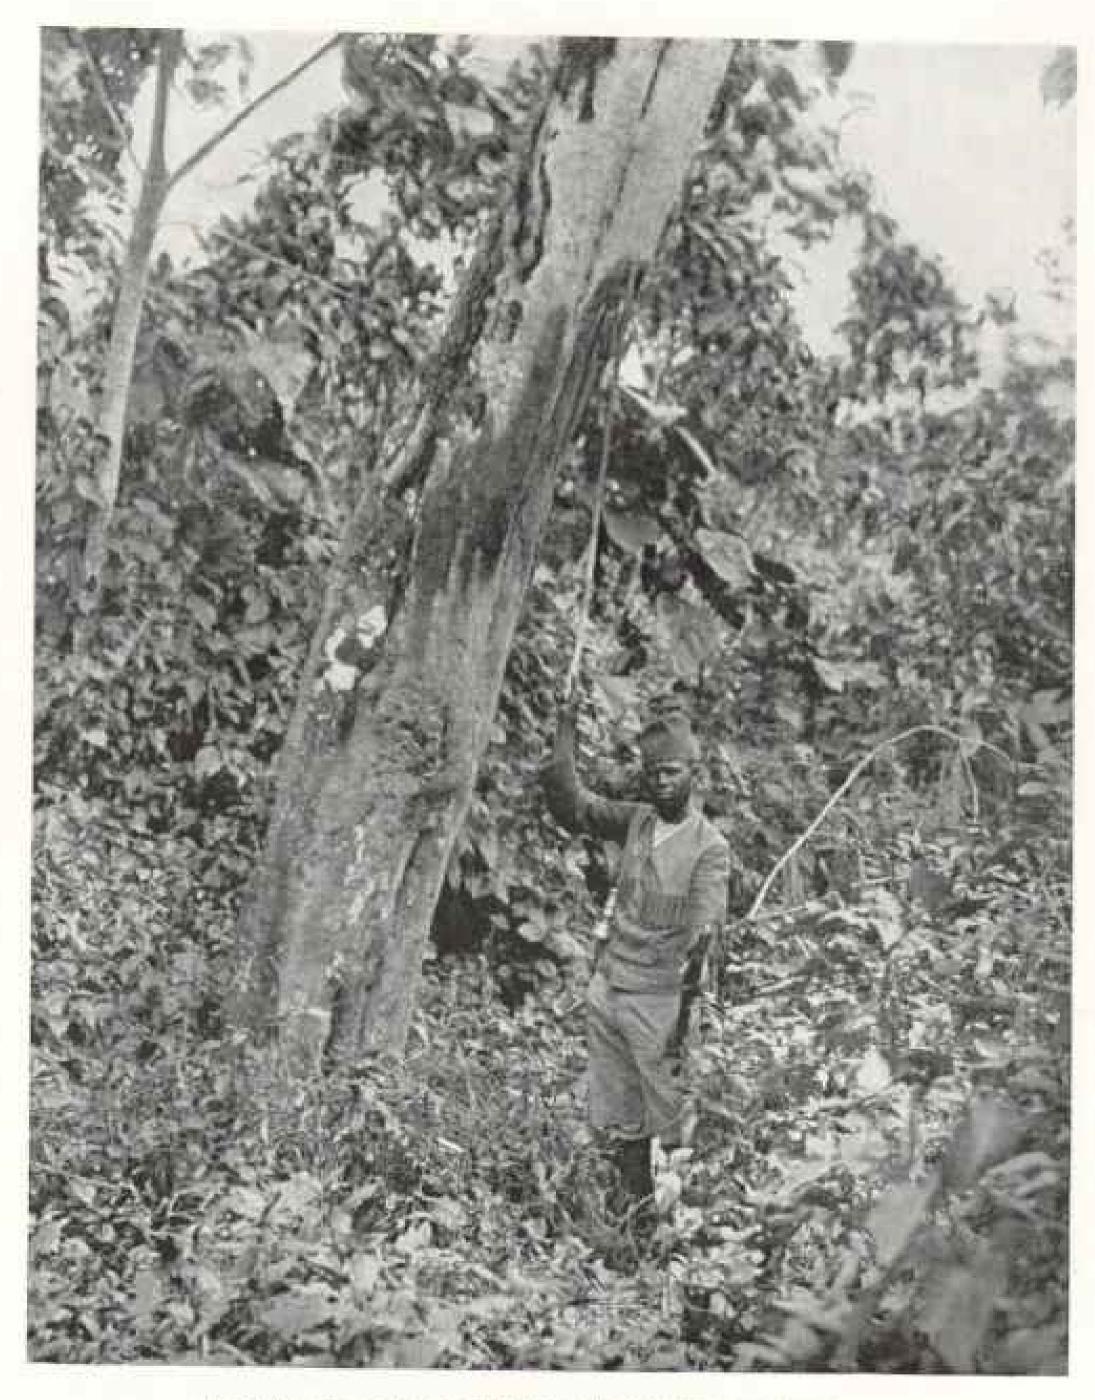

GUN-BEARER MARKING ELEPHANT RUBBING ON THE TREE

This man, a Swahili, was gun-hearer for Mr. Arthur Newman at the time he was nearly killed by a cow elephant on Kenia. One hing was punctured by the elephant's tusk, and the gun-bearer is reported to have killed the elephant, saving Mr. Newman's life. When a similar accident happened to me this gun-bearer ran to safety.



A TREE HALF DECAYED BECAUSE OF TUSE WOUNDS THAT NOW SUPPLIES THE ELE-PHANTS WITH DRY PUNKY WOOD WITH WHICH TO DUST THEMSELVES

it was not until January, 1911, that we resumed active work in the field. From then until the first of June we worked in Unyoro, from the Victoria Nile on the east and north to Lake Albert on the west northward of Masinde.

This district has now been closed because of sleeping sickness, and thus becomes an elephant reserve. During the time we were there we saw much of the results of this awful disease, whole villages in which not a living being was to be found, those who had escaped alive having abandoned all household utensils and stored food, together with the huts and gardens, to the mercy of the elephants, who had come in great herds, destroyed the plantain groves and barkcloth trees, completing the work of devastation.

The elephants do not always by any means want for the natives to go. We saw many cases where they had raided a garden at night and completely destroyed all crops, and in some instances, when angered by the natives' attempts to drive them away, had destroyed the buts also.

THE DESTRUCTIVENESS OF A HERD

The amount of damage that a herd of 500 elephants can do to forests and native cultivation is enormous. In following a herd of 250 we were led through a garden, where the night previous elephants had destroyed a large plantain grove and broken down 50 or more bark-cloth trees, averaging a foot in diameter. This was a herd from which all good bulls had been killed and the remainder, enjoying immunity from sportsmen and ivory hunters, had become contemptuous of man (see page 786).

When we approached the herd and they became aware of our presence, they surged down upon us, keeping us at a distance, and not until I climbed a tree in advance of them did I get a chance to look them over as they approached and




MOSS-COVERED ELEPHANT SKULL IN THE BAMBOOS NEAR TIMBER LINE ON MT. KENIA

passed. The average value of ivory in this herd would not have exceeded \$20 per head, not enough to cover the damage done by them in one year.


Coming south from the neighborhood of Murchison Falls, we were resting at the summit of the pass over Poduro Hills, when we detected a herd of about 100 elephants at rest some 2 miles to the south. As we watched them they began moving in our direction and ulti-

where we met them. In the meantime a second herd of more than 100 appeared, traveling rapidly to the north, passing within easy inspection range of our outlook. During the time we were engaged in watching these elephants the middle ground was occupied by two herds of buffaloes, and as we went down to look the elephants over at the foot of the hills we jumped the third herd of buffaloes in

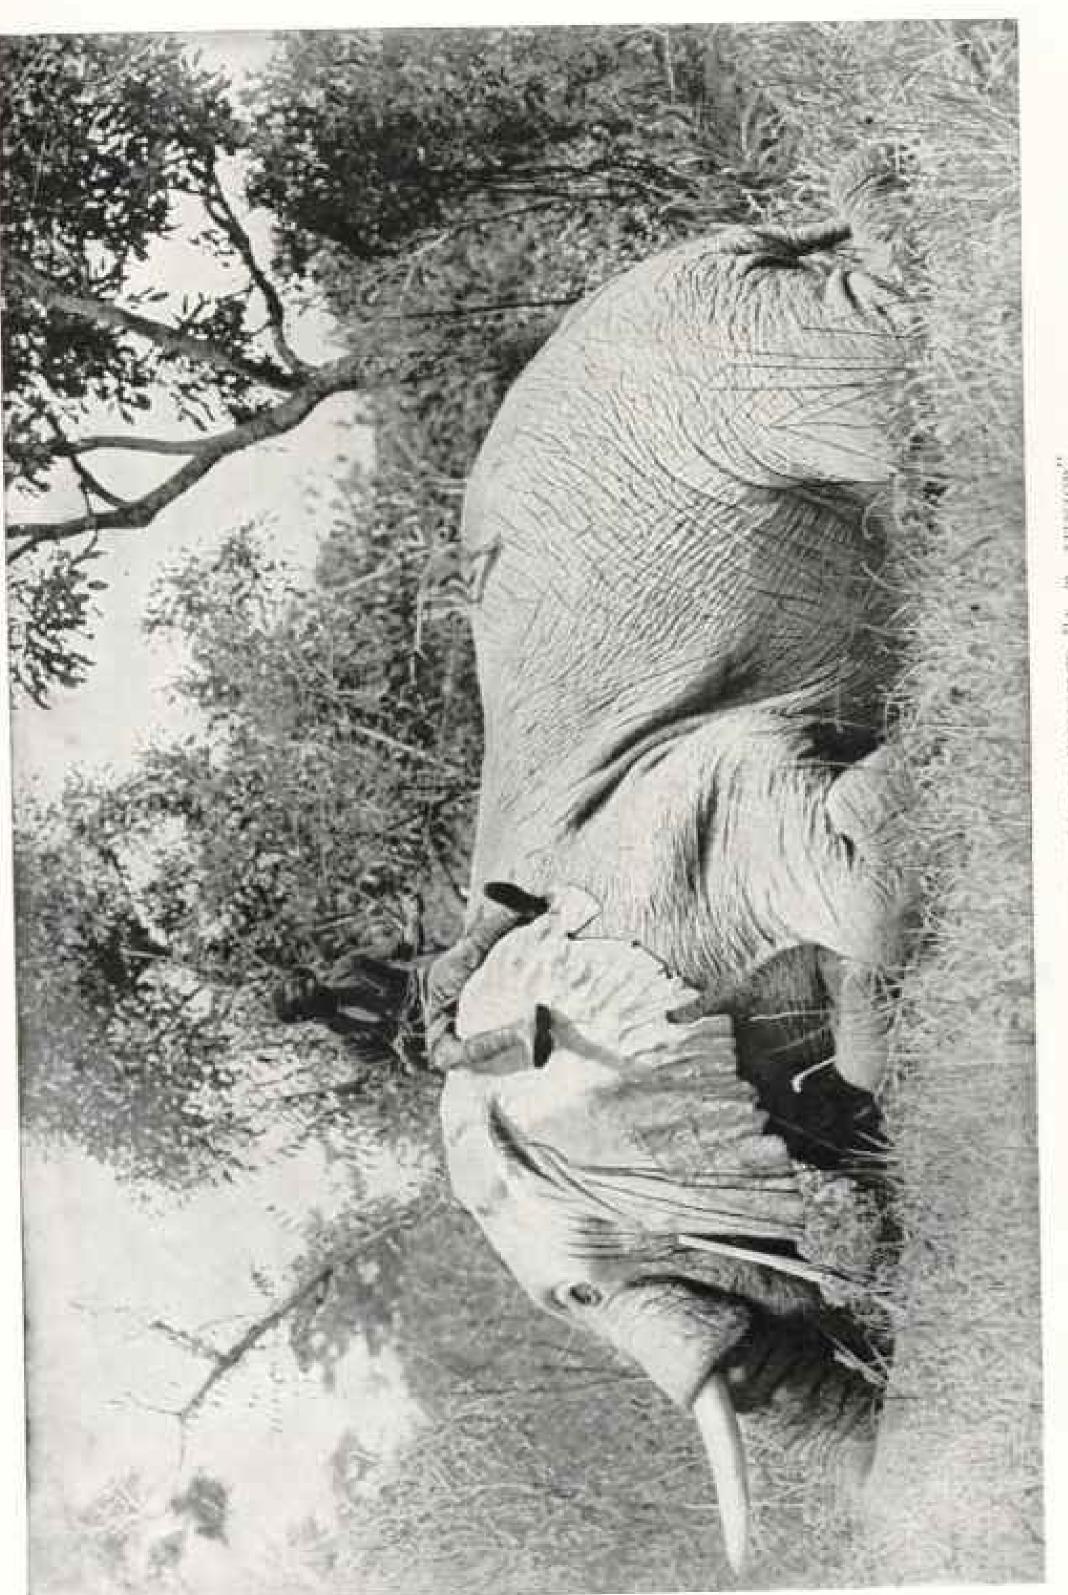


THE DIC FELLOW WHO NEARLY FINISHED "J. T. JUNIOR"

In the climb of Mount Kenia he was stricken ann River in the first month of the expedition's travels and remained a member of seast, and just as he was almost upon the tent boy, who was carrying selpful member in the good cheer he furnished. d had to be sent back. brought him down. It took some time for the m The monkey, named "J. T. Junior," was captured party throughout the two years—often the most ! with mountain nickness at 15,000 feet elevation an "At the third desperate charge of the huge

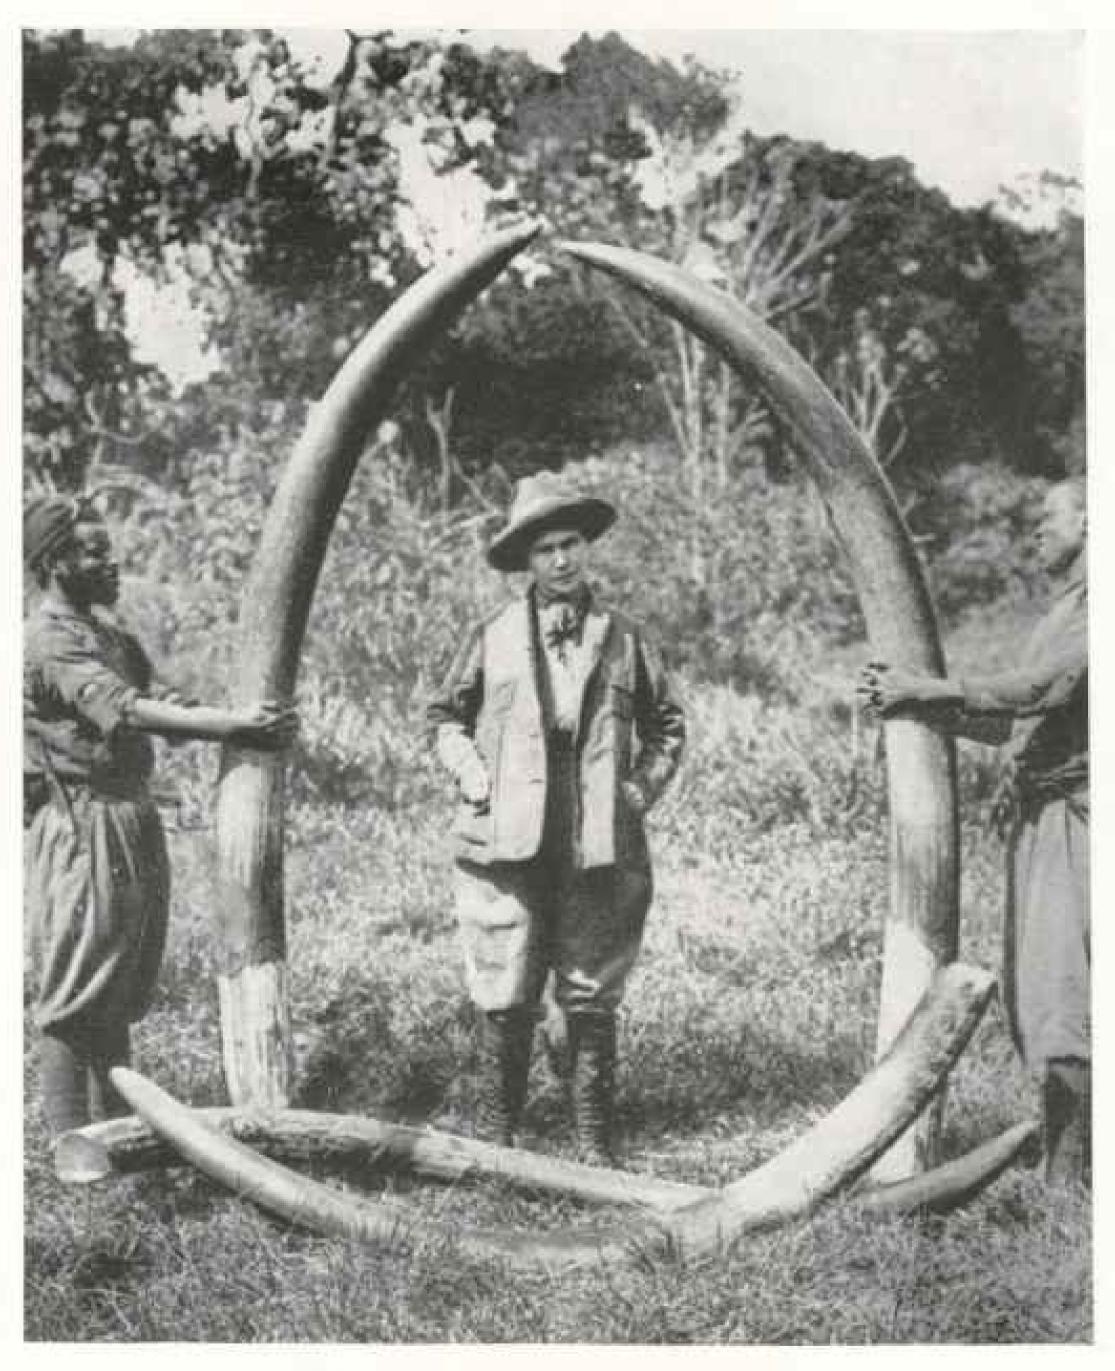

MRS. AKELEY WITH THE TUSKS OF HER TWO MOUNT KENIA ELEPHANTS.

The combined weight of the four tusks was over 400 pounds, a record

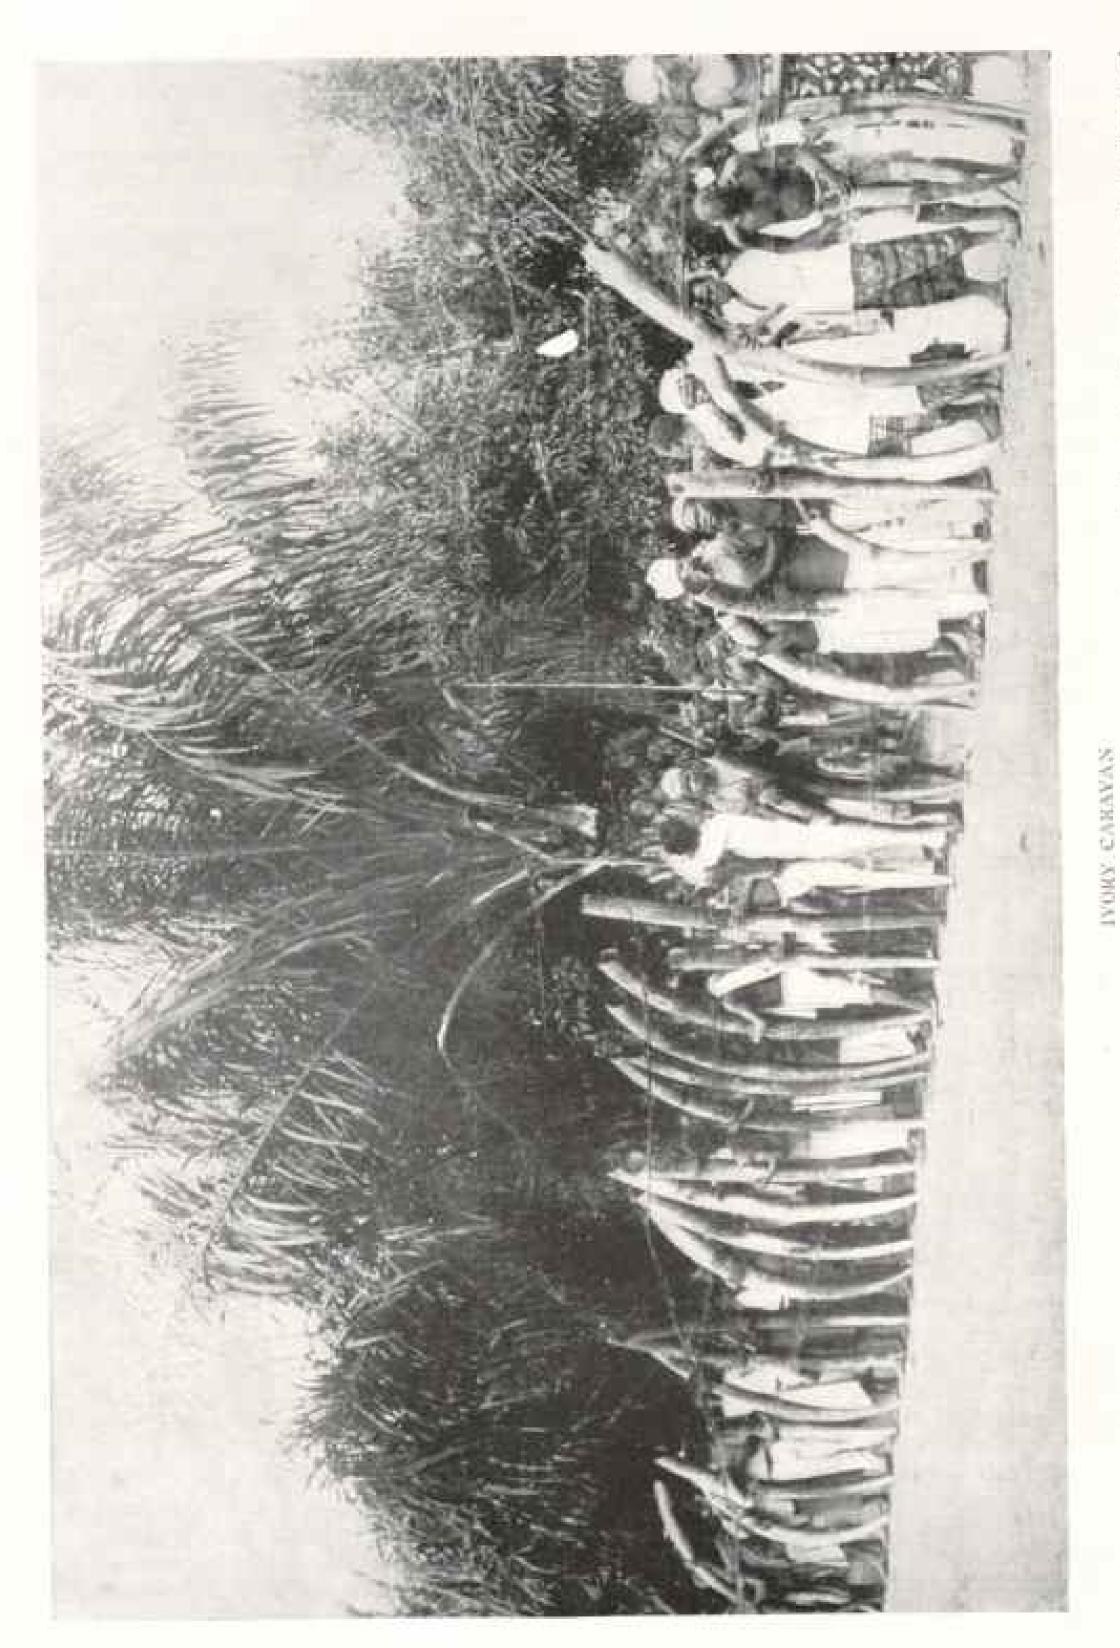

The largest weight to pounds and is a feet long. Trade in the Congo is now in the hands of several nationalities A caravan with 97 tooks from the Baut Fruri.

the bamboos. There were over three hundred in all.

It is generally understood that large bull elephants are more frequently to be found apart from the herds, but our experience does not bear this out. Three bulls that we have shot, having tusks each weighing 100 pounds or over, have been herd bulls. In Uganda we often found bulls unaccompanied by cows, singly and in small herds numbering up to 15 individuals, but it was not among these that we found the largest tusks. We have found the large old bulls enjoying the society and protection of large herds of cows and young animals (see page 789).

A GUARD OF HONOR

One splendid old bull well known in Uganda, who has been seen by many hunters, is so well protected by a large herd of most aggressive cows, who charge at the slightest intimation of danger, that he still survives. These old bulls are very rare, for when a bull has developed tusks of 50 pounds, which is at quite an early age, perhaps 25 years, he becomes the target of every hunter, native or

white, who sets eyes upon him; thus it is only the more crafty or timid individuals that, seeking the protection of large herds or clinging to the more inaccessible regions, such as dense forests, manage to survive to a ripe old age and develop a full growth of ivory.

The best bull at present in our collection for the group is a young adult stand-3 11 feet 3 inches at the shoulders with tusks of 100 and 102 pounds respectively. These are young ivory, and there can be no doubt that were this elephant to have lived 50 years longer they would have attained a weight of 200 pounds each. Such tusks are not abnormal; they are simply the tusks of a good, healthy bull who has been intelligent and lucky enough to keep his life until his ivory was full grown.

It would seem worth while that the world's permanent record of elephant life should contain a specimen that illustrates the fullest development of the African species, the finest living representative of this race of animals. Such an elephant can be secured now, but it will soon be too late, for the remaining monster specimens will be killed for their ivory.

ZANZIBAR

By Mrs. Harris R. Childs (Eleanor Stuart)

ernment employees, on the manifold errands of empire, see the town of Zanzibar without knowing much of it, or ever exploring beyond the German or English tennis clubs. But this is less remarkable than the fact that merchants, priests, secular missionaries, military and diplomatic whatnot, Indians, Arabs, Parsis, and Europeans (as inconspicuous artisans or petty traders) actually live in the town year in and year out without so much as walking half a mile beyond the terminus of the little American railway at Bu-bu-bu, a village a few miles from the town itself. The precedent for this neglect—and the social fabric of Zanzibar is dependent on precedent-is undoubtedly the indifference of the early explorers, who fitted out caravans in the old town; and, bent on dis-

I UNDREDS of tourists and government employees, on the manifold errands of empire, see the the glorious island itself.

On the first day that one leaves the road behind and finds oneself at large in the dense green of Zanzibar's titantic verdure one is conscious of a newness of interest as when one reads for the first time some book of very distinctive imaginative quality.

The woods and fields, the "shambas" (plantations), are like the contents of a Brobdignagian glass house; the colors of flowers and trees themselves are so elementary as to seem like a child's concept of beauty in nature, and when, unexpectedly, without preparation of any kind, the sight of the clove trees, shining green, red-stemmed, symmetrical, stretches before one, with the ultramarine of the Indian Ocean as a background for their

unequaled loveliness, the beauty of the whole writes itself on the memory of the most commonplace of observers as

an indelible delight.

The island, about the same size in square miles as Long Island, is of a different shape, being shorter and much broader. It is one of Great Britain's protectorates, but Sayyid Ali bin Hamoud, its present Sultan, has political instinct and a spirit of progress. Since his accession he has materially bettered his position and exalted his dominion in European as well as British eyes,

To the south of the town the landscape is less redundant and riotous in vegetable expression, but goats abound, and find all they need in the way of food to make

them marketable.

A TROPICAL PARADISE

But to the north the mango trees, palms, cloves, and every form of orange and lemon crowd thick and glorious under the most primitive of husbandmen. Just as Africa itself is netted over with aimless footpaths, so is Zanzibar veined with little tracks worn deep into the living green so long ago that no tradition follows the feet of those who made them. That black, furtive, futile being whose American enfranchisement convulsed the United States still stands there at the door of his hand-hewn hut like a creature potentially human, but lovable beyoud belief in these appropriate surroundings, knowing himself to be but 15 minutes out of the jungle, and as one once said to the writer, who was endeavoring to tell him of the civil war, "happier when he lives near to the leopard and the trail of the things that eat and are eaten than when the shadow of a master's hand is always on his shoulder."

THE OLD SLAVE TRADE

The industrial life of Zanzibar has changed three times since David Livingstone cried for mercy for the black man. who sorely needed it. Under the Arabs the town was a slave center, where the poor creatures, who were caught in the course of one of Tippoo Tib's "war walks" into the interior, were brought to the island carrying ivory, and prepared

by various heavy-handed methods for service as slaves in the Persian Gulf or in the shambas and warehouses of Zanzibar itself. The Arabs achieved the best negroes imaginable, whatever their methods may have been, and when England ruined Tippoo Tib by her slave regulations ivory took the place of slaves as a trade staple, and dealers from hither and yon brought their ivory for sale to the quaint Arab town, whose sanitation was

then a by-word of the East.

The bodies of dead slaves were frequently put out on the beach by Arabs. too inhuman to give them burial, and animals who had died were disposed of in the same fashion. Bath water was informally evicted through harem windows, and all the wanton waste of the cooking department in large Arab houses was banked up by the kitchen doors. There is a tendency to that sort of thing still, but Dr. Spurrier, Zanzibar's health officer, untrained as a sanitary engineer, but essentially scientific and resourceful, has removed Sir Richard Burton's reproachfully apt epithet of filthy in connection with Zanzibar town.

THE CLOVE INDUSTRY A SALVATION

But the third and last phase of industry in Zanzibar has been its salvation, and will keep it alive as a place of importance long after Mombasa has caught up with and passed it as the center for general trade and the entrepot for the African Hinterland. This last phase is clove cultivation, and the history of the clove in Zanzibar is a record of such pluck and foresight as may well teach a lesson to the proud Saxon who considers his race a monopolist of both qualities.

In 1860 an Arab named Telim bin Isse came up from Mauritius with a handful of cloves in his pockets and 200 plants to put into his shamba. His idea of agriculture was very unique, and he only intended to persevere in clove culture if he could depend on a crop after every neglect and affront had been offered his trees. Their beauty (cloves are a kind of myrtle and exquisite in appearance) excited the interest of Said Burgash, about to become Zanzibar's Sultan, and



A FORTICNE DN 2VORY. EACH TUSK WORTH \$50 TO \$100: ZANZIBAR



There are 907 tinks in the pitture, weighing 58,000 pounds. One of the most remarkable ivory pictures ever taken. Note the addresses stendied on the untovered tasks

he wrote at once to the Moluccas to obtain the finest plants which could be

bought for money.

Two Dutch ships brought them in an unusually short time, and the Sultan, the most remarkable man Zanzibar has ever produced or associated with its fortunes, sent out numbers of his henchmen to compel laborers from every side to get the plants into the soil immediately. He had read up the whole subject in a book of French authorship, which he had caused to be written out in Arabic, and saw that the enterprise had a great mercantile future for Zanzibar. He knew that the island's supremacy as a trade center would pass, and he hoped to make it with Pemba, the extremely fertile but rather uninteresting island to Zanzibar's north, paramount in the world of spices.

In 1872 a cyclone blew over Zanzibar, which uprooted all the clove trees and blew the cocoanuts flat to the earth without breaking them. Many clove trees were blown into the sea; many were broken off short. Within a week after the storm Said Burgash was rounding up his laborers again and sending hither and you for plants, which he presented to the poorer Arabs, who had seized on the idea of a crop which could be sold to Europeans, and had put their all into the purchase of plants and slaves for their cul-

ture.

THE WORLD'S SUPPLY

From that second planting comes ninetenths of the world's clove supply today, and when one realizes that the least output of cloves per annum has amounted (from Zanzibar alone) to 80,000 bales and the greatest output to 200,000, and when one furthermore realizes that the government claims as tax one bag out of each five, one may eatch a vista of Burgash's dream, and concede that even the Oriental has in part the greatest of mental attributes—imagination.

One might write a book on Zanzibar, and in the hurry of its beauties and the horrors of its mysterious catastrophes, like the smallpox epidemic or the bubonic plague, forget to tell the half of its wonders. It will always remain in one's mind like a soiled page of the Arabian


Nights, with what promised to be a splendid outcome ruined by some fearful visitation of cyclone or of sickness. But the intrinsic strength of the island continues in the clove crop and has attracted an enormous quantity of Indians, who are fast driving out the Arab and keeping up a desultory intercourse with India for caste reasons. The penalty for visiting Zanxibar is the lightest inflicted on any Indian who travels; he is merely required to wash in the Ganges, so that emigration to Africa's east coast is virtually encouraged.

THE MELTING POT

To realize Zanzibar's cosmopolitan quality one must reflect that with the exception of a bandful of the Wa-Hadimu. or original people (Bantu) of Zanzibar, no one lives there for any reason except greed of gain or acquiescence to coercion. The Swahili boys are a compromise between the Arab masters and their savage women. One sees Nyassa children black and glossy as lumps of coal, pointing at a distinguished old Arab as their father, or slim young Galla boys, leaning in their coffee - colored perfection over lakes crammed with blue water lilies, claiming kin with an Indian as a parent on one side of the house and a slim Somali on the other. Mohammedanism knits them together in its strong embrace, while only the Indian women secured in the Zenana system remain quite unchanged by travel and the different mode of life which a new country affords.

Much good ivory still comes to Zanzibar, but the world's supply lessens yearly, while the demand for it increases month by month. The best ivory in the world comes from Benadir coast (Italian Somaliland), and as a return American cotton and oil find their way to the Benadir ports-Mogdesho, Barawa, and Merker. For four months of each year these ports are closed, and the "dhows," or sailing ships, which take up case oil and cotton cargo from Zanzibar, together with flour, sugar, and candles, stand stacked in Zanzibar's harbor, waiting for a wind from the north again to promise safety on that sandy treacherous shore

of Benadir.

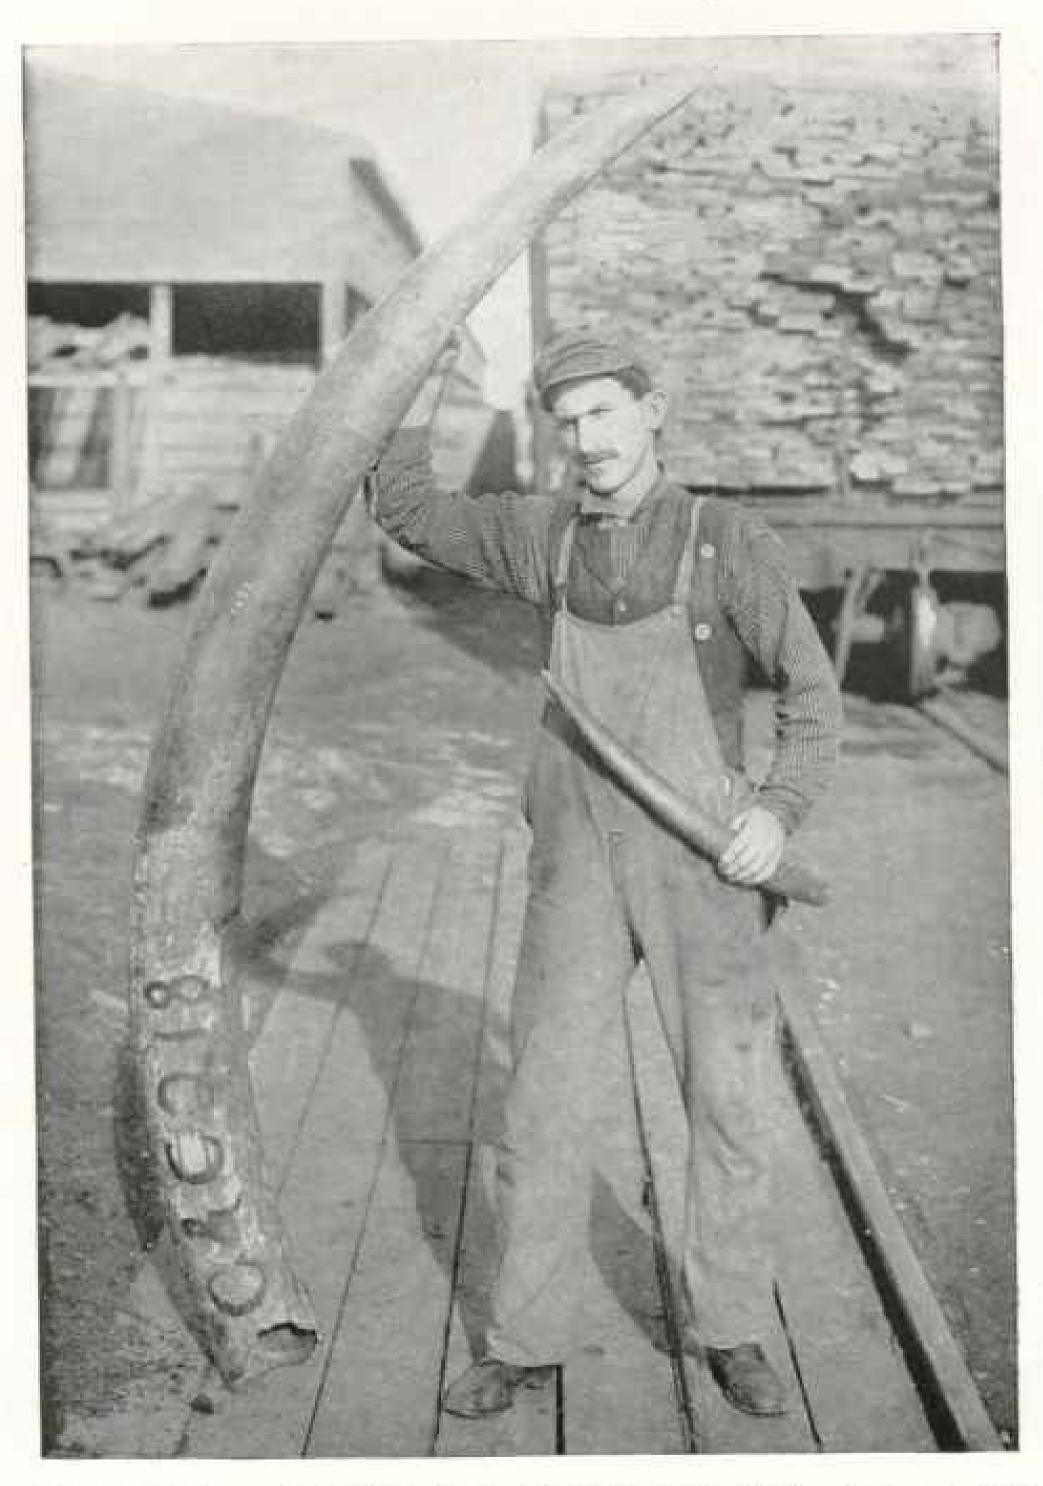

EXTREMES MEET, THIS PICTURE BLUSTRATES THE WIDE VARIETY IN TUSKS. THE LARGE ONE MEASURES 9 FEET ON THE OUTSIDE CURVE




A MESSAGE FROM PEMBA SPED IN A NATIVE CATAMARAN




ZANZIDAR'S MAIN STREET, WHERE EACH OF ITS 160,000 INHABITANTS WISHES TO PASS DAILY



(Caryophyllus aromaticus) is 26 feet. The natives speak of them with enthusiasm

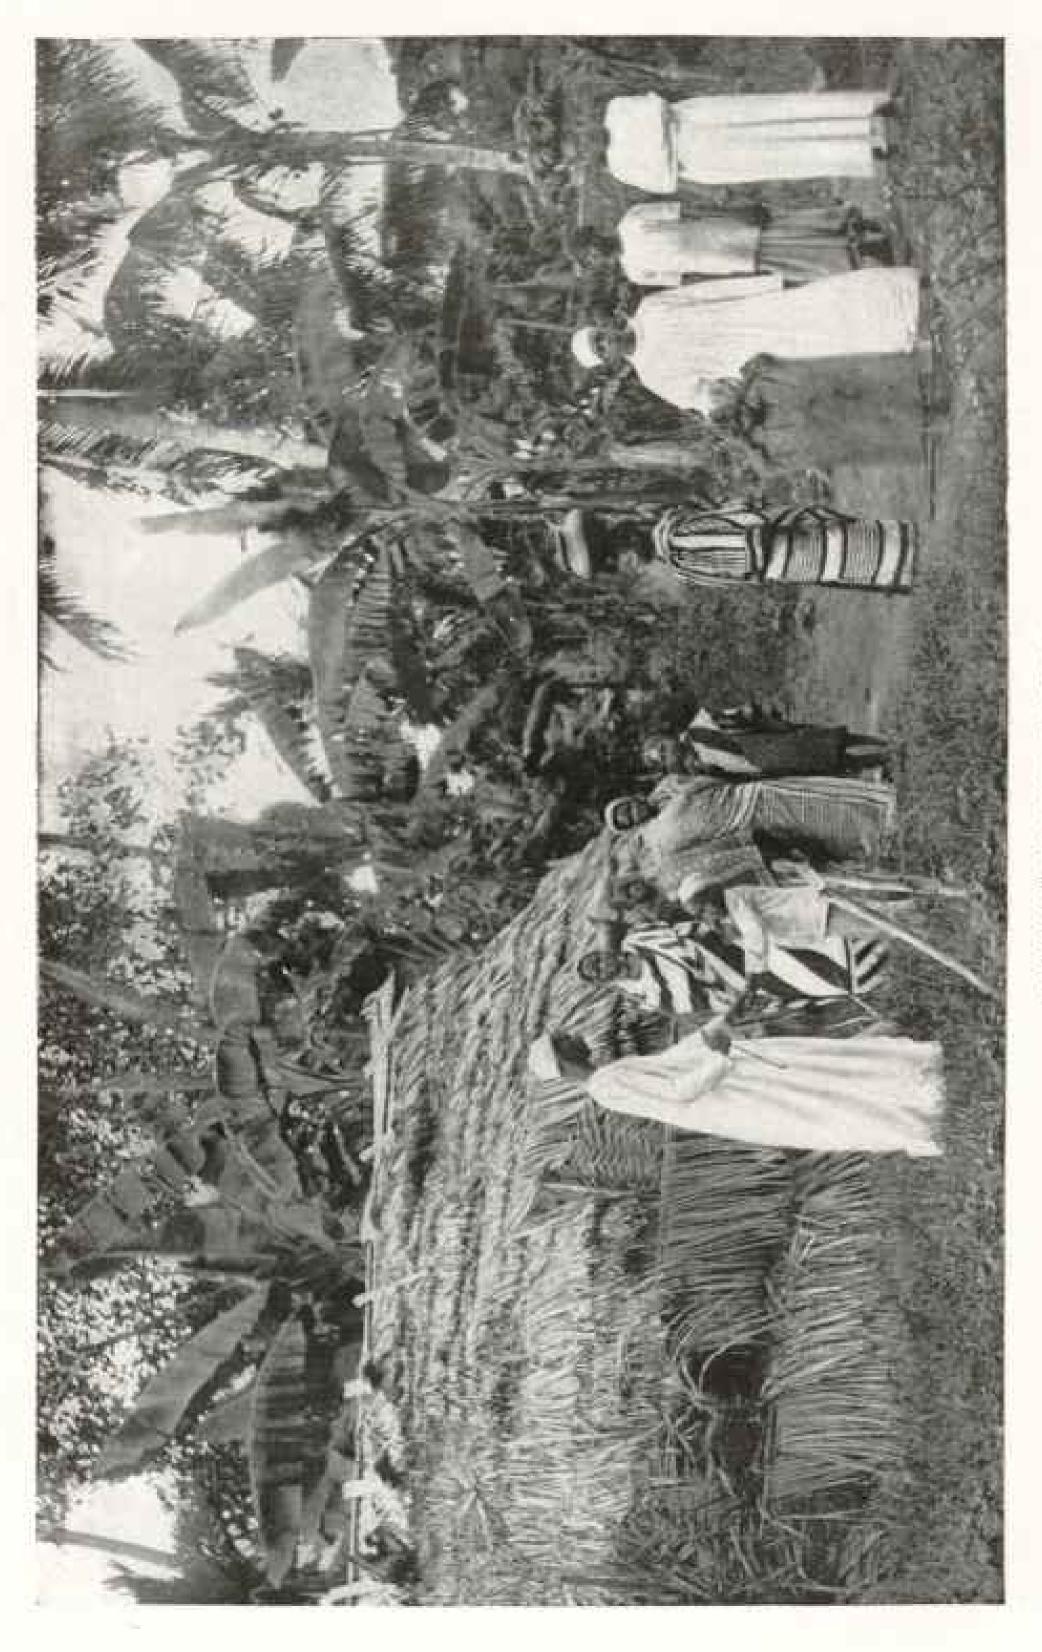

UNLOADING A BRITISH STRAMER AT ZANZHAR

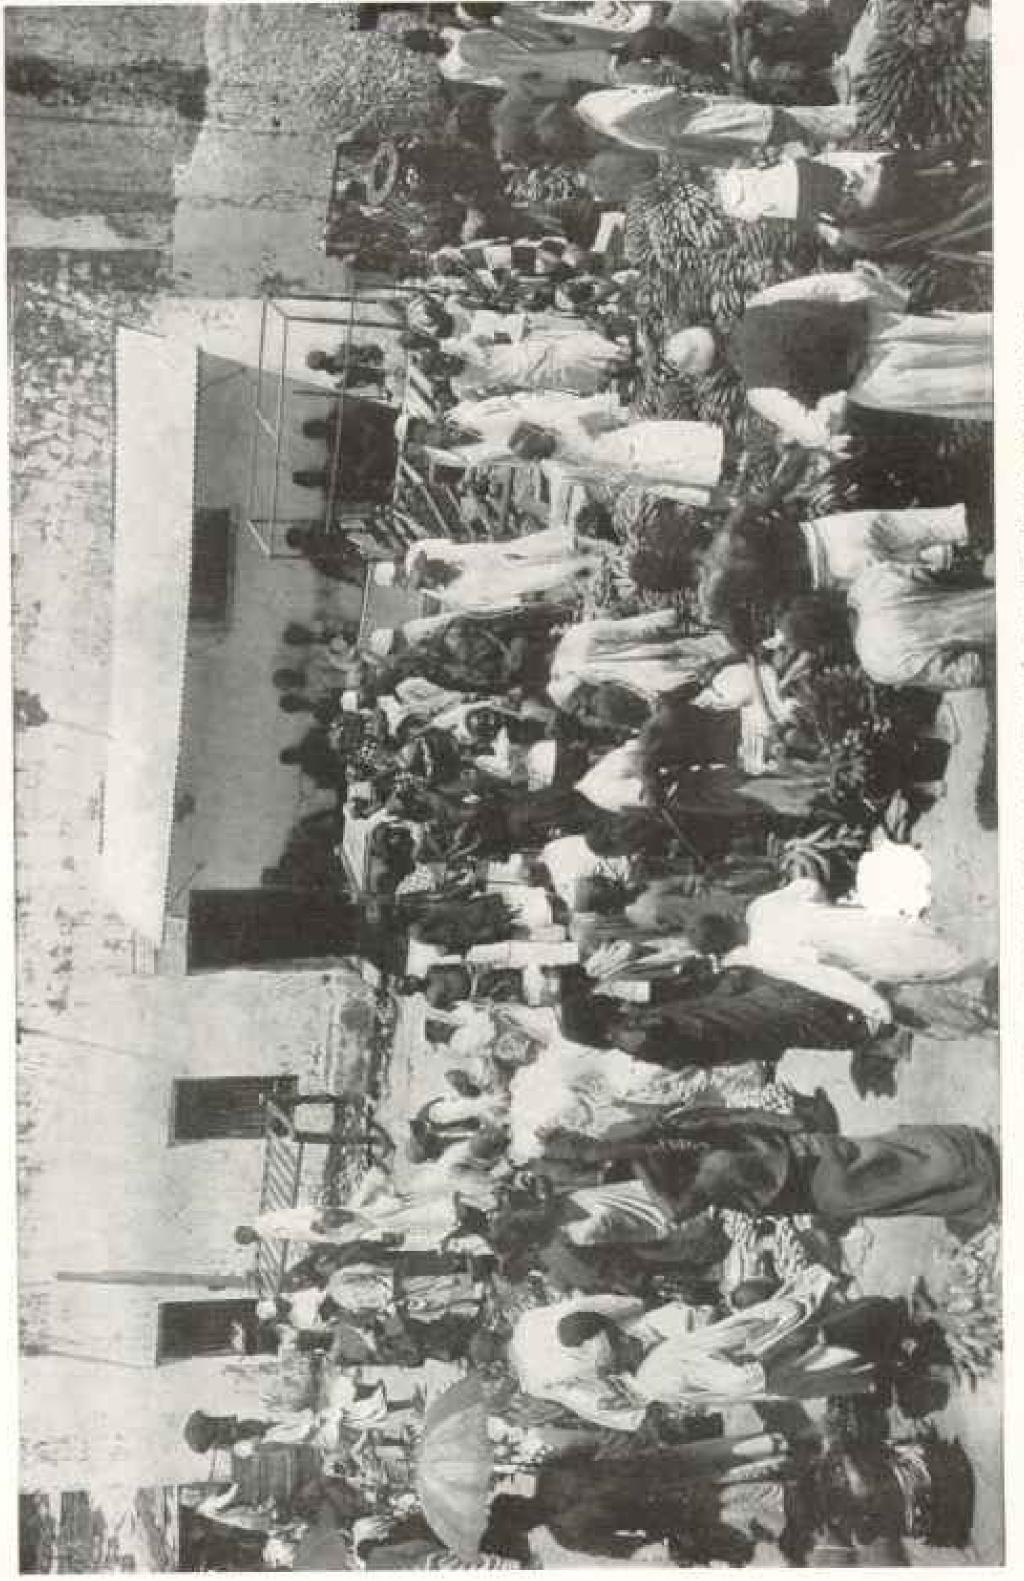

NATIVE MARKET: A COMMENTARY ON ZANZIBAR'S CONSUMPTION OF BANANAS

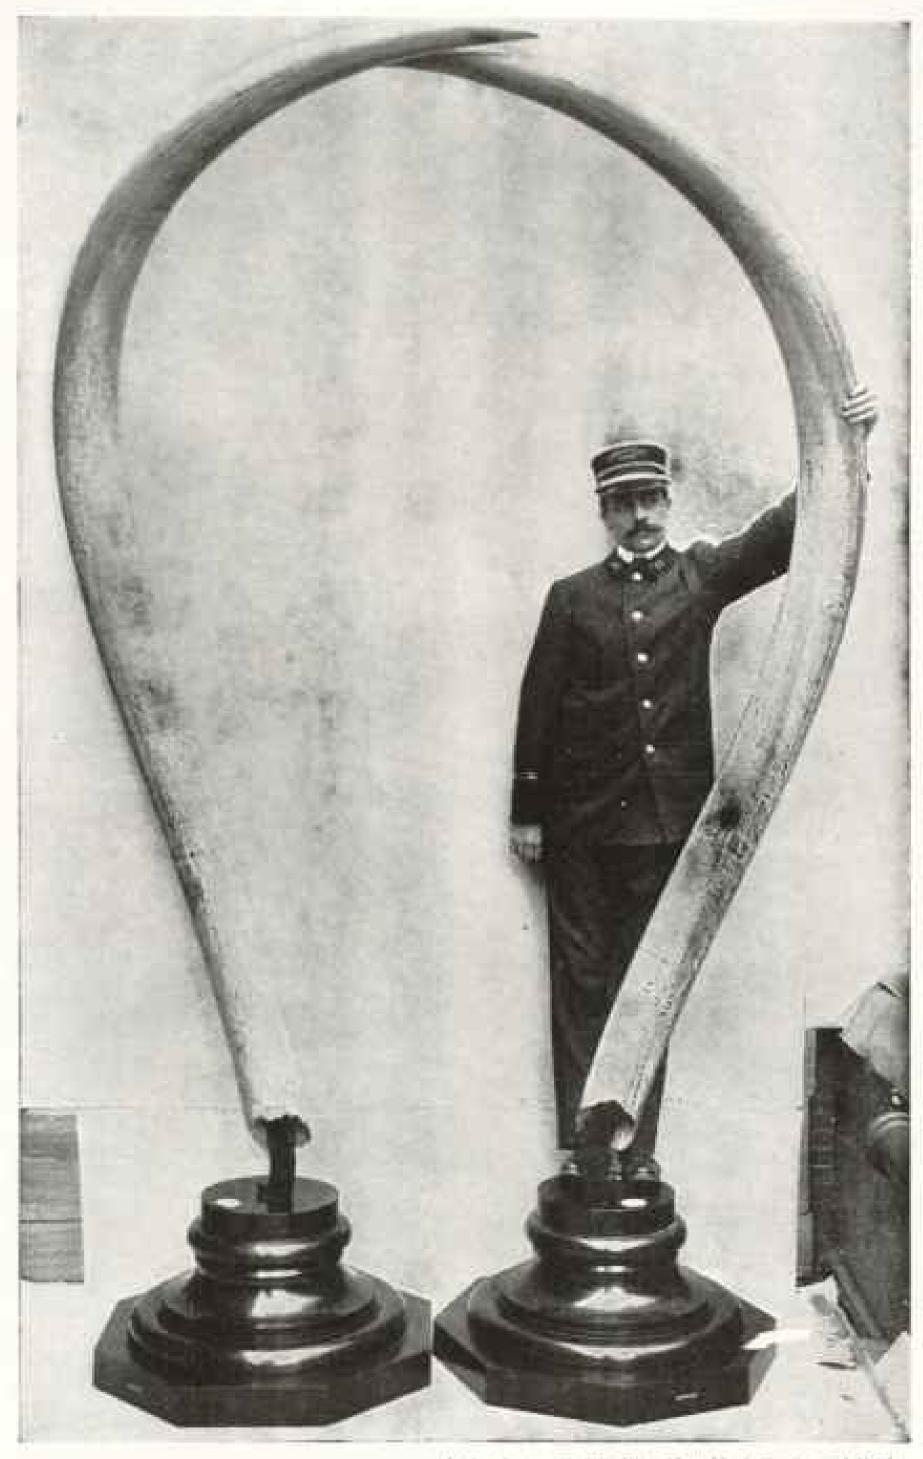


Photo by emittery of the New York Zoological Park PROBABLY THE MOST SYMMETRICAL ELEPHANT TUSKS 15: THE WORLD



THE TWO LARGEST TUSKS IN THE WORLD; NOW IN THE BELICATE CARVING

INSECT LIFE

The fanna of Zanzibar is meager. In 1873 an hippopotamus dropped in from German East Africa! and whatever exists in the way of wild cat or pig to the north of the island is quite as continental in origin. On a small and neighboring island a very peculiar rodent exists, for which I have never heard even a native name. But the insects of Zanzibar, although rarely venomous, possess a variety that is as extraordinary as their activity. There is the "breaker of sauce-pans," a green thing, terrible to behold,

and an army of ants, in different regimentals, the mosquito in its more harmless phase, and an occasional centipede.

The house-fly is almost unknown.

Zanzibar is perhaps the most interesting town to the negro that the world affords; plenty of old slaves, who haven't seen it for 20 years, dream ceaselessly of it, when a 12-mile walk would bring them to its market-place. And we, who have known European kindness and African quaintness within its far-away borders, turn to our memories of it after months of absence and acknowledge it to be a place of happy dreams.

VOLCANOES OF ALASKA

URING the first week in June Katmai Volcano, in southwestern Alaska, which had been generally believed to be an extinct volcano, unexpectedly burst into violent eruption and continued active for three days. Vast quantities of dust, pumice, and stones were ejected aloft. So dense was the cloud cast into the heavens that the people in the village of Kadiak, about 100 miles distant, were in total darkness for two days. All the crops on Kadiak Island were destroyed by the ashes; the fish in the sea and in the rivers were killed and all water supplies were poisoned. Through the courtesy of two members of the National Geographic Society, Capt.-Commandant E. P. Bertholf, U. S. R. S., and Mr. W. J. Erskine, of Kadiak, this Magazine publishes a very unusual series of views of the remarkable fall of dust and ashes after the eruption of Mt. Katmai. As all the photographs were taken at least 100 miles from the volcano, the reader can infer the tremendous nature of the cataclysm which could deposit such enormous quantities of dust and ashes so far away.

In the pictures Kadiak and vicinity appear wrapped in a mantle of snow, but the white covering in reality is the white volcanic dust. At the time of year the photographs were taken this region is always as green in vegetation and foliage as any part of the United States. All the land was covered with grasses, plants, and shrubs, whose luxuriant green is buried under the heavy fall of ashes, and a beautiful landscape changed to a scene of desolation.

EXTRACT FROM REPORT OF CAPT, K. W. PERRY, U. S. R. S., ON BOARD THE REVENUE CUTTED "MANNING"

On June 6, 1912, the U. S. R. S. steamer Manning lay moored at the wharf at St. Paul, Kadiak Island, taking coal. About 4 p. m., while standing on the dock, I observed a peculiar-looking cloud slowly rising to the southward and westward, and remarked to a friend that it looked like snow. Later distant thunder was heard, and about 5 p. m. I noticed light particles of ashes falling. At o o'clock the ashes fell in considerable showers, these gradually increasing. The cloud bank had spread past the zenith when I observed another bank to the northward, and the two met about 30degrees above the northern and eastern horizon. Thunder and lightning had become frequent at 7 o'clock, very intense at times, and though lacking two hours of sunset a black night had settled down. It was impossible, owing to electrical conditions, to use the wireless apparatus; consequently no information could be sent out. This was also found to be true of the Woody Island naval wireless station. Specimens of the deposit were



FRAME STRUCTURE CRUSHED BY WEIGHT OF ASHES

taken at various times and it was found to consist of dust and fine sand or granules. At 12 midnight the thunder and lightning diminished, but it continued intermittently until the storm (if this term may be used) ceased, on June 8.


The morning of the 7th dawned with volcanic matter falling, and it continued, although gradually diminishing until 9.10 a. m., when it ceased. We then believed that the cruption was over. All of this time no one knew where the cruption had occurred, for, owing to the excessive static, no work could be done by the wireless. About five inches of ashes had formed, and all streams and wells were fouled and choked, so water was furnished the inhabitants of St. Paul by the Manning and by the schooner Metha Nelson, anchored near by.

At noon ashes commenced to fall again, steadily increasing in density until at 1 p. m. it was impossible to see beyond a distance of 50 feet. At 2 p. m. pitch darkness bad set in, heavily static disturbances were observed, and our wireless was dumb. All ashes of the previous day had been removed, yet decks, masts, and yards were again heavily laden, as were also the ship's boats. The ashes now were fine dust and flakes of a yellowish color. Sulphurous fumes were at times in the air, and many thought and spoke of the destruction of Pom-


peii. Avalanches of ashes on the neighboring hills could be heard, and these sent forth clouds of suffocating dust, Men often collided in working about the decks, the feeble glow of the electric lights and lanterns failing to dispel the awful darkness. The crew kept constantly at work with shovels, and streams of water from the fire mains were playing incessantly on the deck in what at times seemed a vain effort to clear the ship of its deadly burden. The bells of the Greek church in the near-by village boomed out in the blackness, and there were few if any of its followers who did not grope their way to the call to prayer. I might state at this point that I believe the catastrophe appeared more terrible at St. Paul than at the near-by settlements, because of the suffocating clouds of volcanic debris that swept down from the hills close to the town, adding to the fall from above.

At 10 a. m. the people of the village had sought shelter in the warehouse on the wharf and on the Manning—about 835 souls—and others were added later from vessels, the salmon cannery, and the people of Woody Island.

Shortly before 11 a. m. Lieut. W. K. Thompson, of the Manning, informed me that several men were cut off in the cannery about one-half mile distant below our dock. He stated that he had a

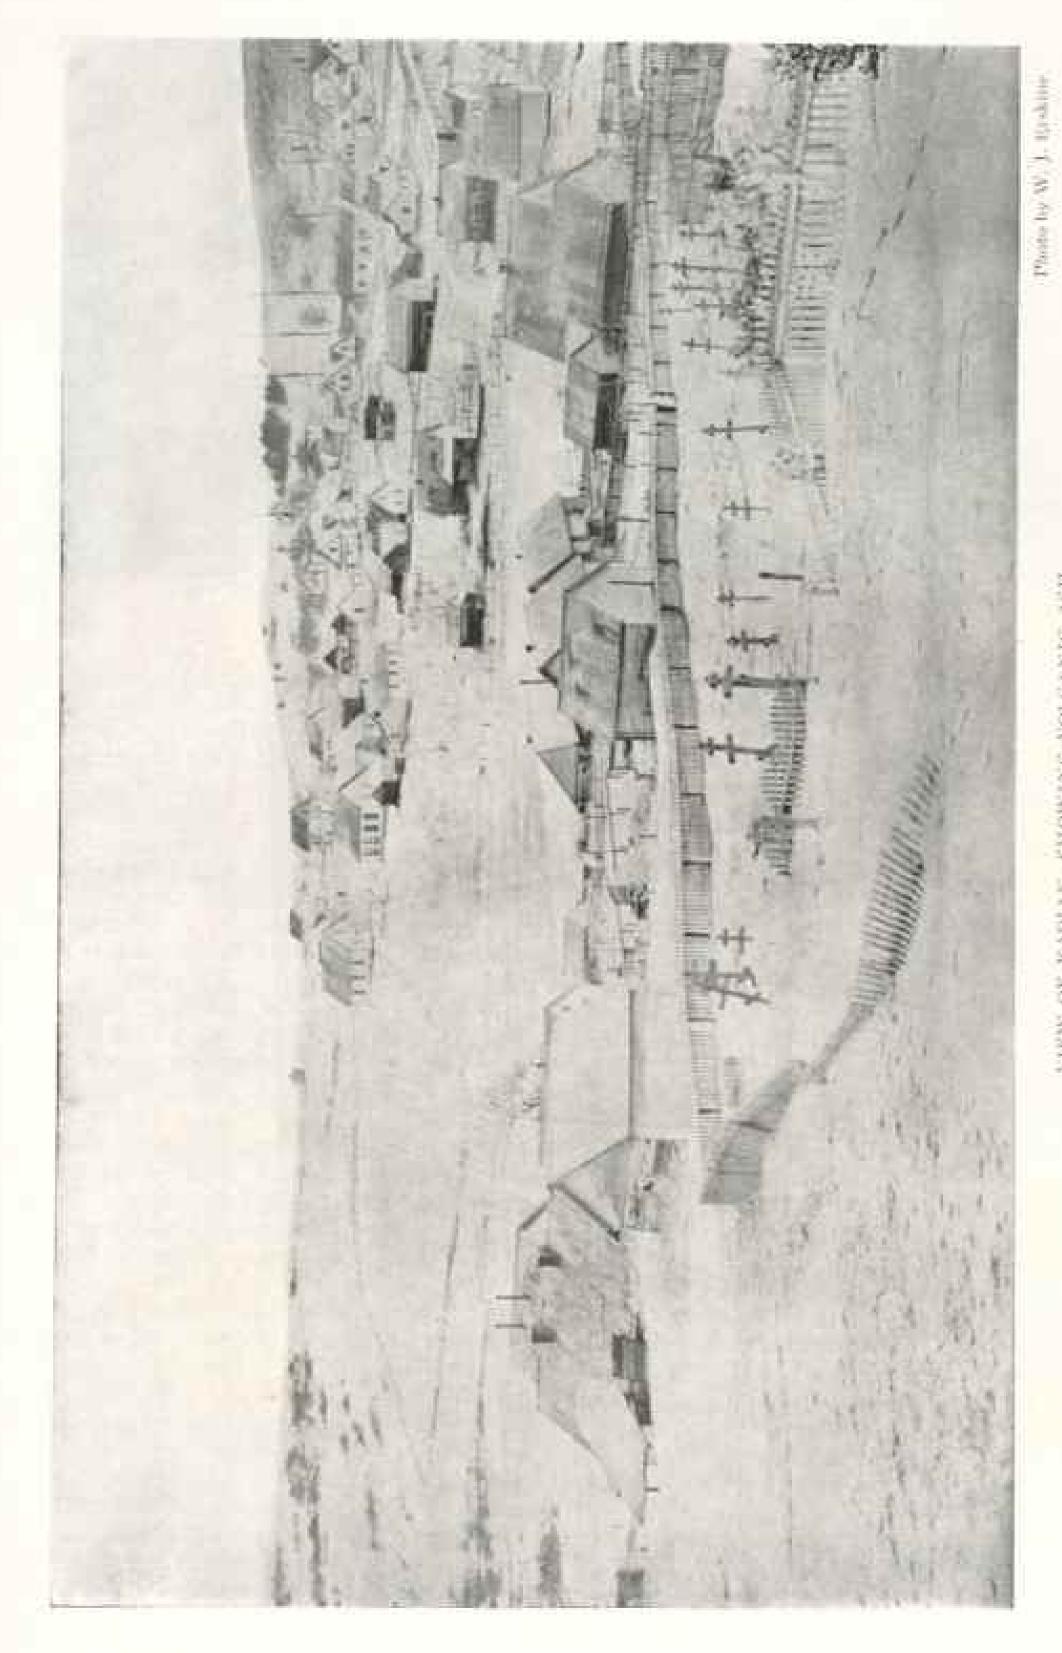

The depth in the foreground is about 12 feet. The lake in the center of the picture is completely filled. June 14, 1912 VIEW OF RABIAS, SHOWING VOLCANIC ASH

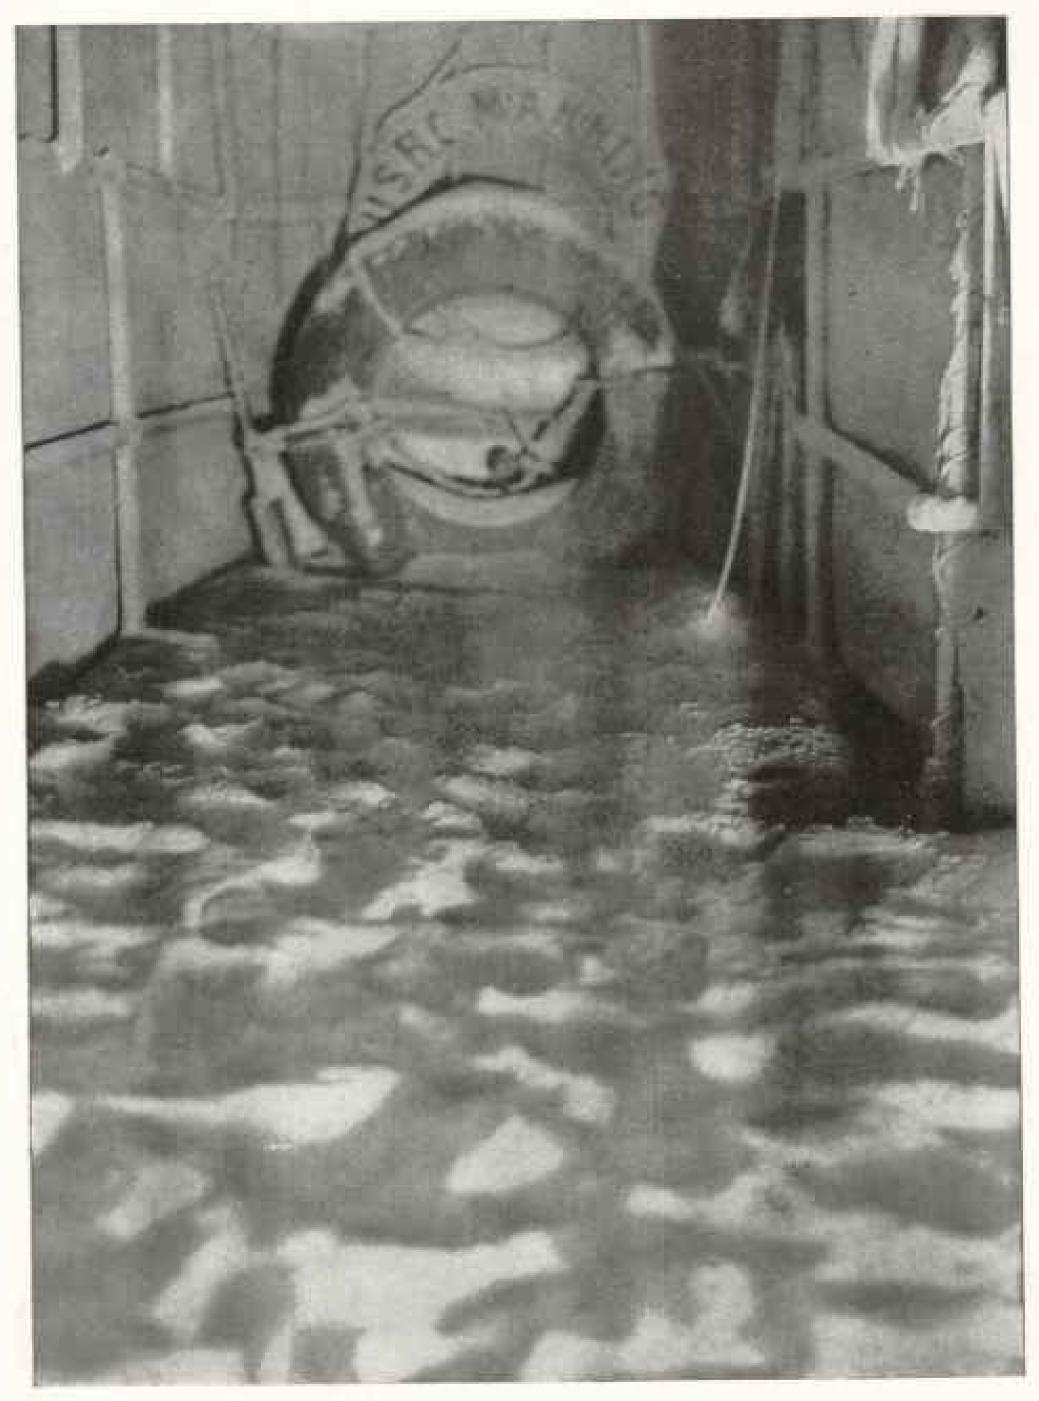

ON THE "MANNING'S" IRRIDGE

The decks of the Manning were repeatedly cleared of dust and askes, but a few hours would bring about the same condition. Note the effect of drifted snow.



THE A. C. COMPANY DWHLLING-HOUSE AT KADIAK.

Photo by W. J. Erskine
Porch broken down from weight of ushes. The deposit here was 24 inches thick on the
level. June 14, 1912



Photo by W. J. Erskins

A slide wrecked the rear of this house and the living rooms drifted half full. Note the line showing the level of the ashes in the window to the left. June 14, 1912


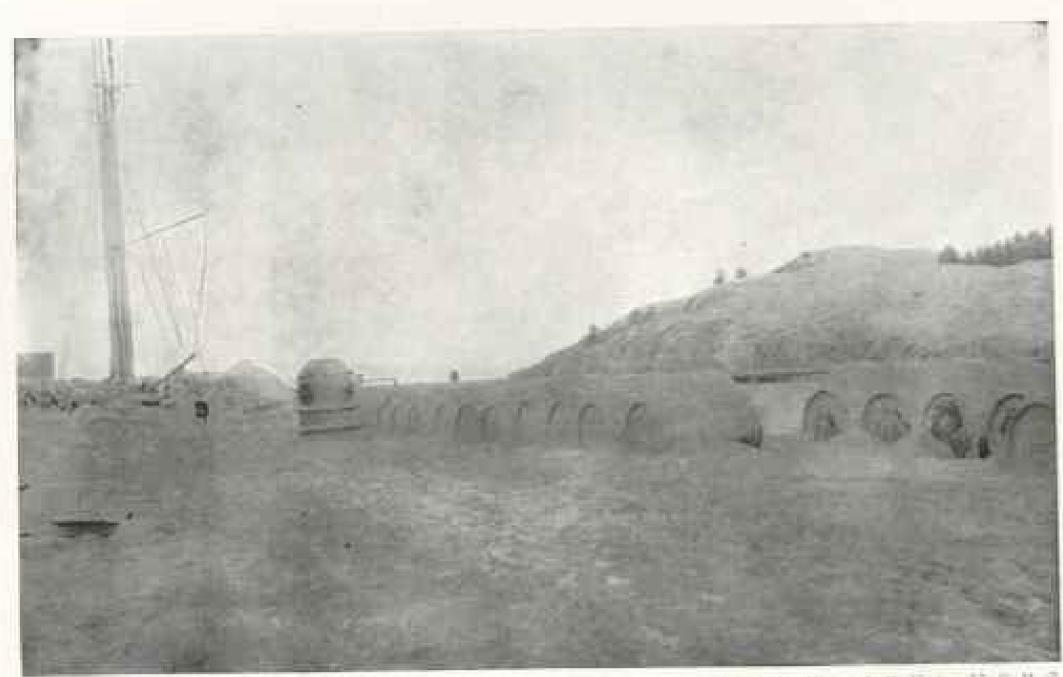


Photo by Livet, J. F. Haho, U. S. R. S. THE DOCK AT ST. PAUL, ON KADIAR ISLAND, SHOWING THE HEAVY PALL OF ASHES




ON BOARD THE "METHA NELSON" AT KADIAK

Ashes were still falling slightly when this was taken. The deposit here shown nearly all fell the last day of the disturbance; the fall of the first day had been fairly well cleared off. June 9, 1912

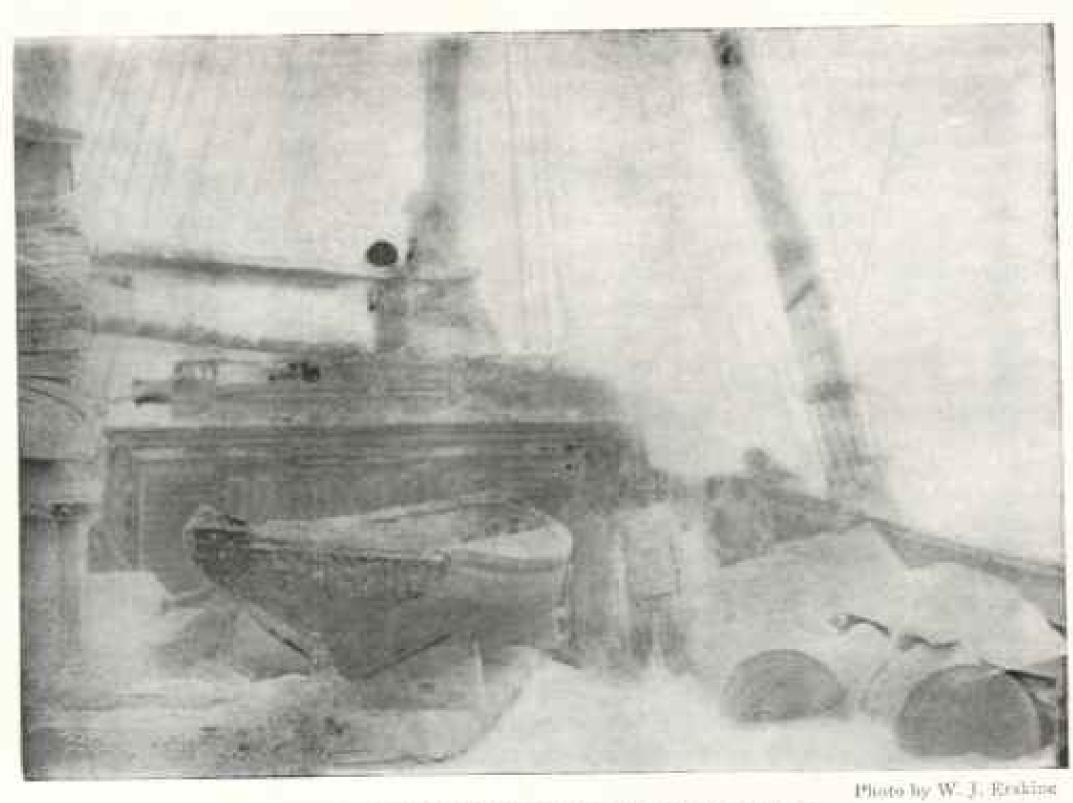

Weight of ashes from hillside avalanche crushed in roof and almost filled the interior of this boose. St. Paul. Kadiak, June 9, 1912

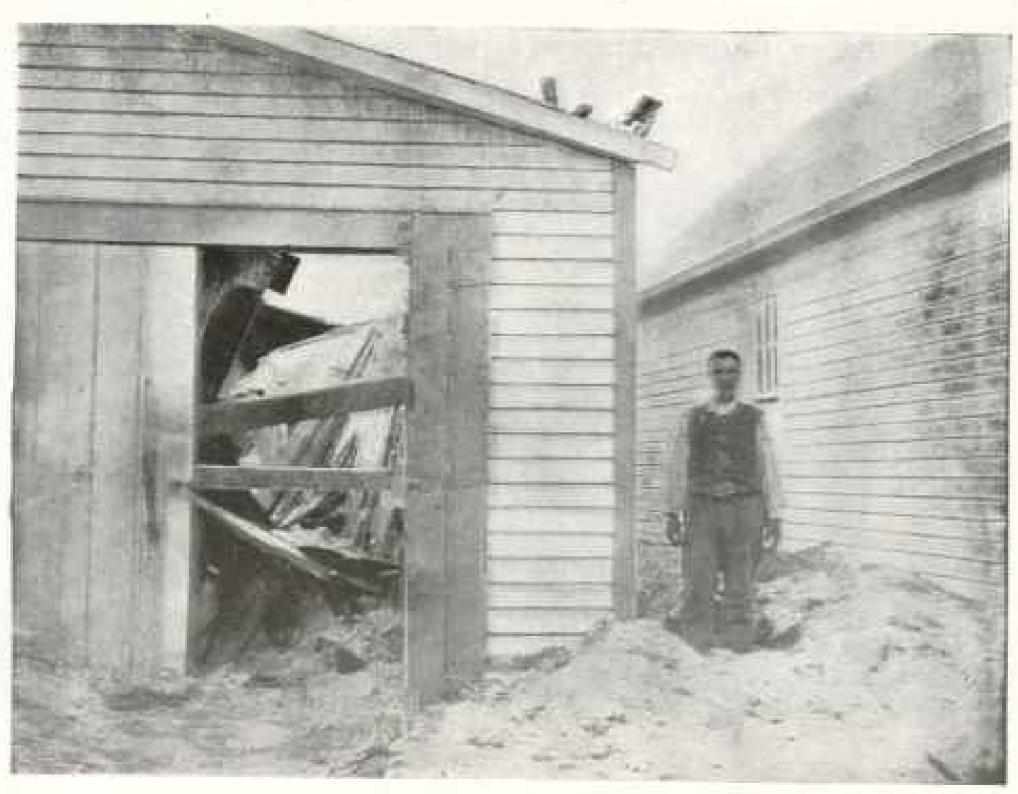

SHOWING MOOF OF FISH HOUSE AT KADINE MISSISEN DOWN FROM WEIGHT OF ASHER.
JUNE 14, 1912



VOLCANIC DUST 2 FEET DEED; SCENE AT KADIAK AFTER THE ERUPTION OF KATMAI VOLCANO

party willing to try a rescue and asked for orders. I replied that I dared not give him orders, for it might be sending men to death, but that he and his party had my permission to make the attempt. The party at once decided to go, departing at 11 o'clock, and returned on board with the rescued men at 130 p. m. It was an heroic act deserving of highest commendation.

At 2.30 p. m., June 8, the fall of ashes decreased, the skies assumed a reddish color, and finally objects became dimly visible. All clothed and festooned in ashes, nothing looked familiar, and as frequent seismic disturbances were still felt, much fear existed that worse was still to come.

The night of the 8th was spent in suspense, but when the morning of the oth dawned and all precipitation of ashes had ceased, it was felt that the eruption was over. Some time during the eruption the wireless station at Woody Island was destroyed by fire, doubtless caused by lightning, June 12 a message reached me from Lieutenant Thompson, in charge of the Redondo expedition, advising that he had been in the vicinity of the volcano, which was Mt. Katmai, on the mainland across the Shelikof Strait.

During the 9th, 10th, and 11th the appearance of the skies seemed to indicate that some substance was held in suspension, and at times most unpleasant and strangling gases filled the air, making it difficult to breathe.

The outlook for the future of this vicinity is at present a problem. While the fish are now very scarce, it is generally believed that they will return. Many gardens have been uncovered, but I doubt if they produce much this season, and their product will be greatly missed by the natives. Cattle are finding a little feed on the hillsides, where the deposits slid down, but all the feed is impregnated with sand and ashes.

The officers and crew of the Manning rendered gallant and unflinching service through an ordeal that was arduous and

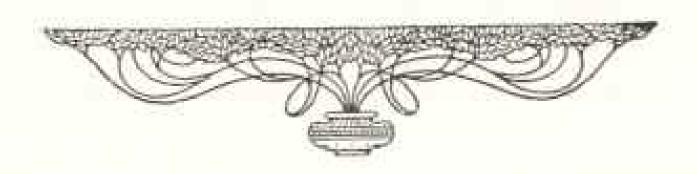



Photo by Lieut, J. F. Habu, U. S. R. S. REFUGEES FROM KADIAK ON BOARD THE "MANNING"

terrorizing beyond description, and I cannot refrain from paying the highest compliment to many of the inhabitants of Kadiak, who by their courage and forgetfulness of self in this time of peril cooperated with us in every way in giving help to the weak and suffering.

Katmai Volcano is one of the long belt of active and extinct Alaskan volcanoes which extend for 1,600 miles from Kenai Peninsula, along the Alaskan Peninsula and Aleutian Islands. No less than 60 active or recently active volcanoes are already known, and this number will probably be increased when the territory has been more thoroughly examined. The belt includes Mt. Wrangell, whose huge dome reaches 14,000 feet elevation; Mt. Shishaldin, a most graceful peak, whose outlines rival Fujiyama, and Bogoslof, whose suddenly appearing and as suddenly disappearing islands have startled mariners for the past roo years.

Immediately after the eruption the National Geographic Society, in cooperation with the U. S. Geological Survey, sent Mr. George C. Martin, a geologist of the Survey, to Alaska to make a reconnaissance of Mt. Katmai and neighboring volcanoes. Mr. Martin has been in the field of volcanic disturbance throughout the summer. His studies are preliminary to an extended investigation of the Alaskan volcanoes, which the National Geographic Society will inaugurate in 1913.



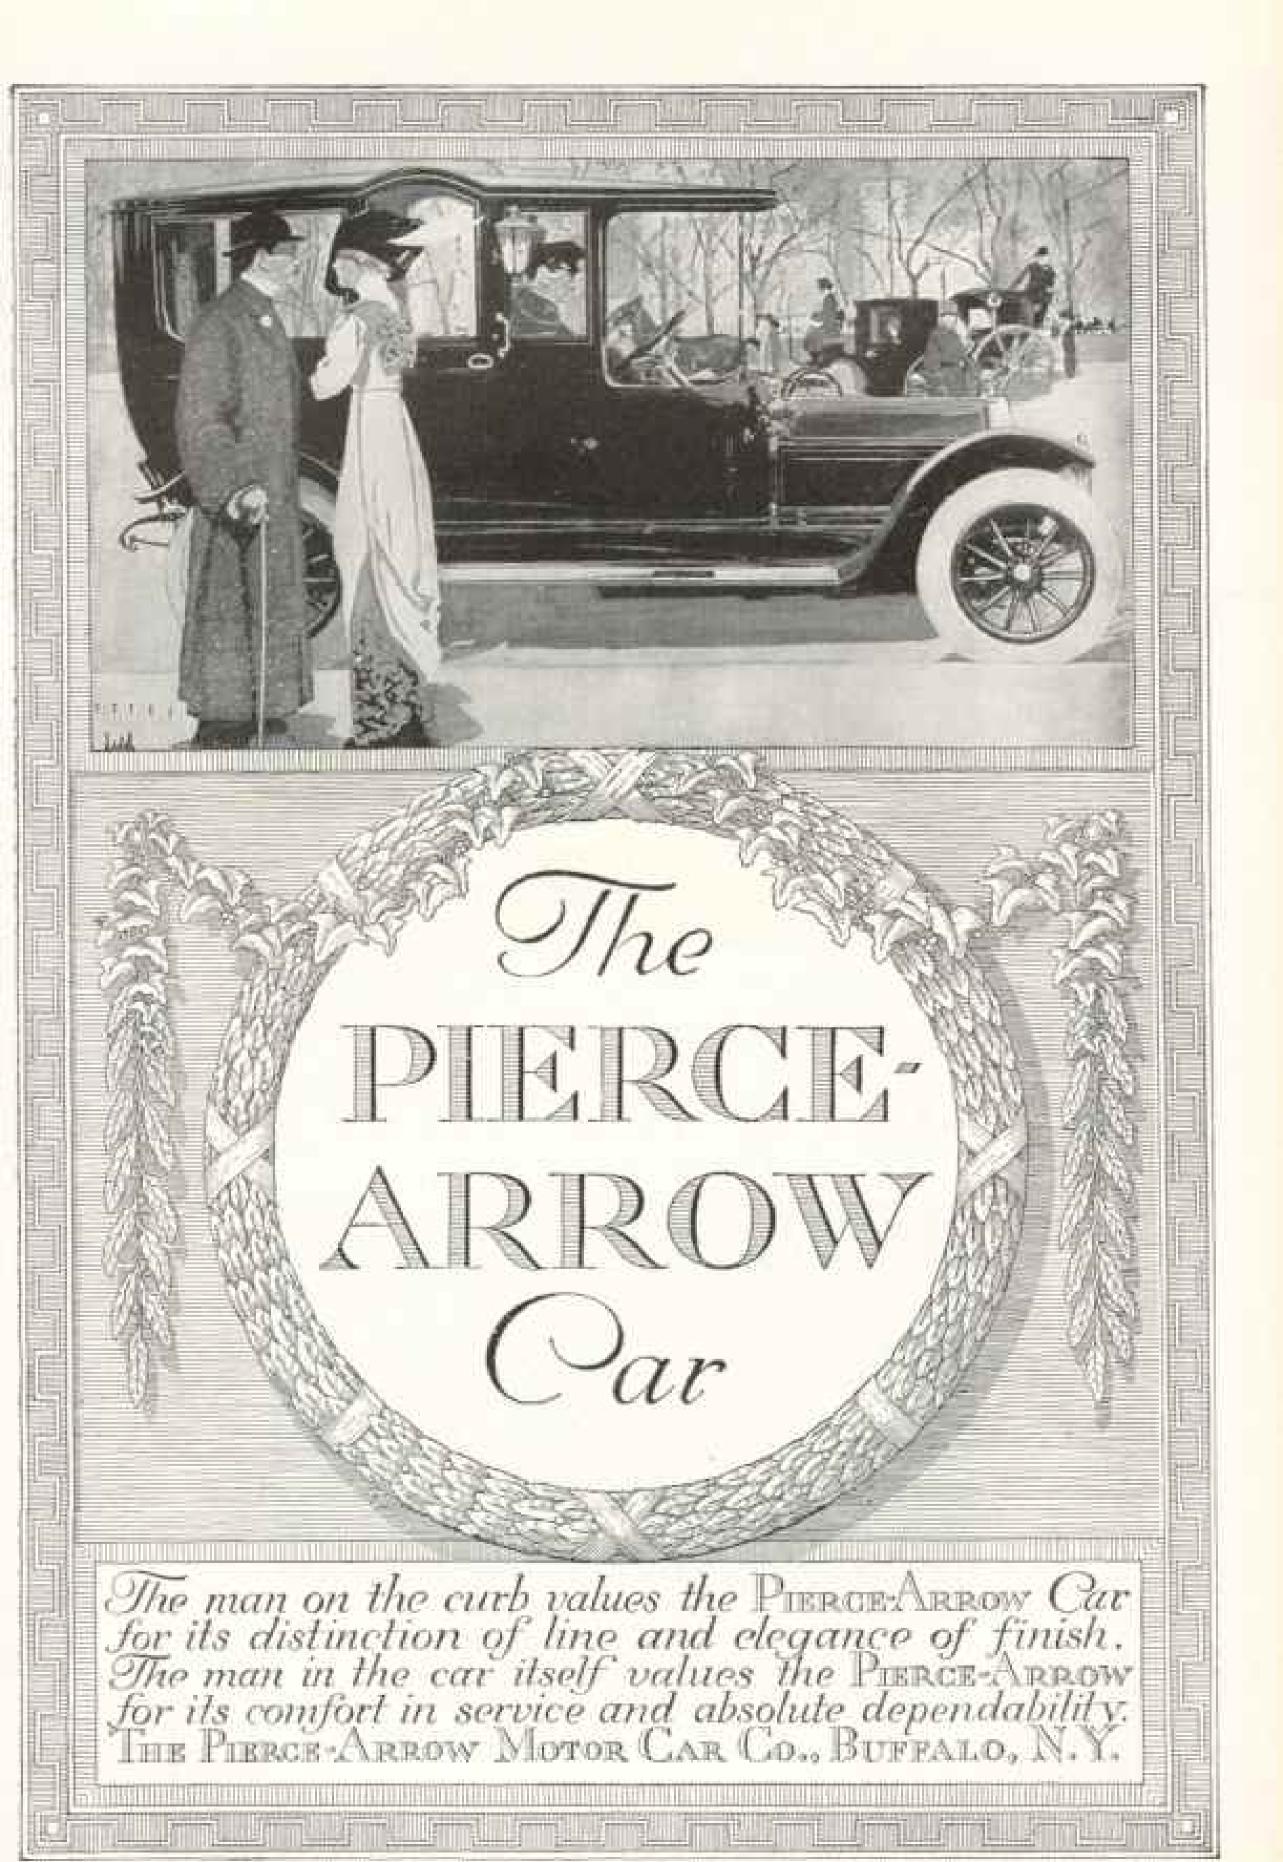

Royal Mail Service

UNION CASTLE LINE

Royal Mail Service

LONDON and SOUTHAMPTON to SOUTH and EAST AFRICA


CALLING AT MADEIRA, LAS PALMAS, TENERIFFE, ASCENSION, AND ST. HELENA WEEKLY VIA THE WEST COAST, CALLING AT GIBRALTAR, MARSEILLES, NAPLES, PORT SAID, ADEN, MOMBASA, AND OTHER EAST COAST PORTS, MONTHLY, VIA THE SUEZ CANAL

for RHODESIA

The.

BIG GAME PARADISE

The Country for Settlers, Tourists, and Sportsmen. Through bookings by the principal ateamship lines from New York to England. For hand-books, pamphlets, and all other information apply to—

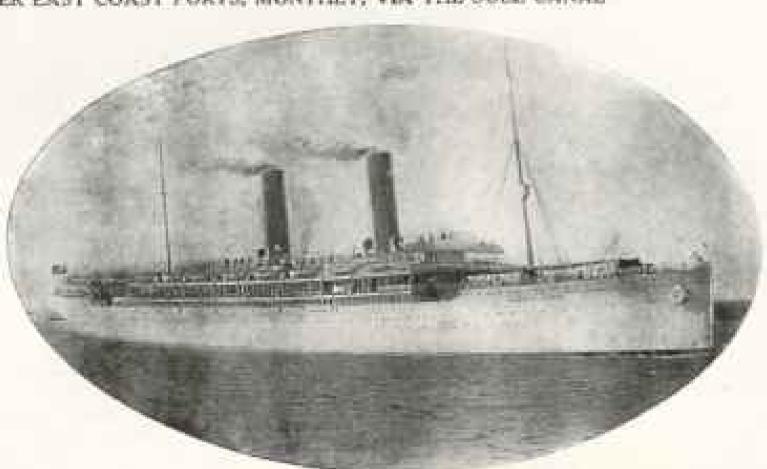

HEAD OFFICE, 3 FENCHURCH STREET, LONDON, ENGLAND NEW YORK OFFICES, 8 AND 10 BRIDGE ST. AND 281 FIFTH AVE.



See the GLORIOUS AUTUMN TINTS

SINE

along the Soo-Pacific Line

PACIFIC PACIFIC



PORTLAND

A. Gilberton, Re. (for Dockston, Stone Prices Man Trade

WRITE FOR THESE "500" LINE PUBLICATIONS

Via the Canyons, 2c. Eight Peaks and Valleys, 10c. Emecald Lake, the Peaceful, 3c. Hotels and Hydros, 15c.
Notes by the Way, Zc.
Mountain Trips, 6c.


Cleptes of above publications will be moderate and suidence whom everythest.

Adamps be every periods. "Pictured Stories" free.

W. R. CALLAWAY, Gen'l Passar, Agt. "Soo" Line, Minneapelle, Minn.

"Geographic readers may depend upon the character of our advertisers."



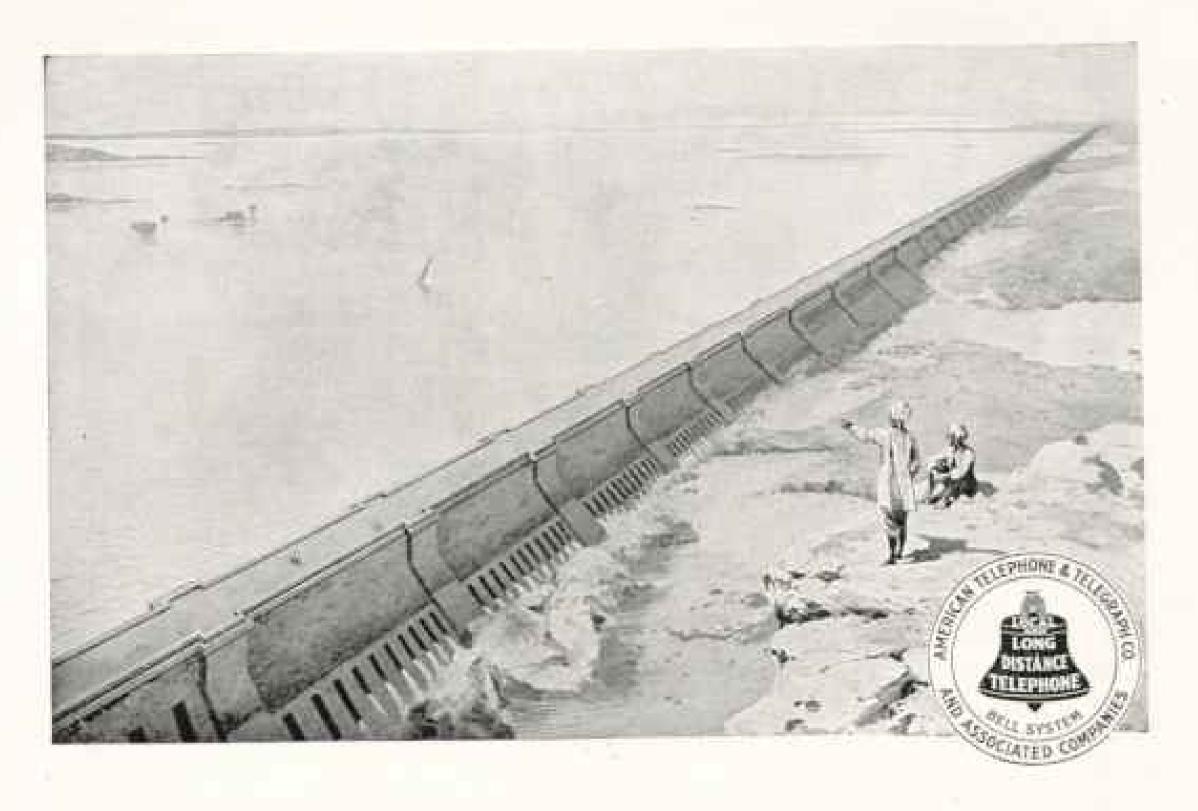

Assuan Dam, part of the Nile system, one of the greatest engineering projects of its kind.

The Nile System—The Bell System

For thousands of years Egypt wrestled with the problem of making the Nile a dependable source of material prosperity.

But only in the last decade was the Nile's flood stored up and a reservoir established from which all the people of the Nile region may draw the life-giving water all the time.

Primitive makeshifts have been superseded by intelligent engineering methods. Success has been the result of a comprehensive plan and a definite policy, dealing with the problem as a whole and adapting the Nile to the needs of all the people. To provide efficient telephone service in this country, the same fundamental principle has to be recognized. The entire country must be considered within the scope of one system, intelligently guided by one policy.

It is the aim of the Bell System to afford universal service in the interest of all the people and amply sufficient for their business and social needs.

Because they are connected and working together, each of the 7,000,000 telephones in the Bell System is an integral part of the service which provides the most efficient means of instantaneous communication.

AMERICAN TELEPHONE AND TELEGRAPH COMPANY AND ASSOCIATED COMPANIES

One Policy

One System

Universal Service

"Mention the Geographic-It identifies you."

THE MATTHEWS-NORTHRUP WORKS

PRINTERS ENGRAVERS AND

WRITING

DESIGNING

NEW YORK BUFFALO CLEVELAND

COLOR WOLK ELECTROTYPING

PRINTING

PHOTOGRAPHING

MAP MAKING

PHOTOLENGBAVING

COLOR WORK from this plant is remarkably attractive. The color sections entitled respectively "Glimpses of Japan" and "Scenes in Kores. and China," which appeared in previous issues of this magazine, were products of this plant, as were also "The Hour of Prayer," "Pannrums of Burgess Pass," and the "Bird's-eye View of the Panama CamaL" We do color work for books, maps, earls, catalogues, portralls, etc.,

MAPS. We are known as efficient map makers by publishers and practically all the steam and electric railmade of the country. We made and printed all the maps for the Century Atlas and Appleton's Catholic Encyclopedia, and most of those in the new Encyclopedia Britannica.

BINDING WAX ENGILAVING

CATALOGUES. Your trade cutalogue will be in the very best style of modern printing gractice If it is made in this plant. We give special attention to catalogue illustrations, to meet exactly the wants of your sales department.

GENERAL WORK, We do a large amount of printing of a miscellaneous nature, widely varied. We print beautificily illustrated booklets, fulders embodying special advertising ideas that we supply, books and illustrated folders for steam and electric militards, stramship lines and cities; hird's-eros, calmulars, daily reminders, hangers, posture, post-eards, and samptumis souvenir books - in fact, we do all kinds of letterpress printing and all styles of hinding. We are always glad to send samples and estimates-

THE MATTHEWS NORTHRUP WORKS

"THE COMPLETE PRESS"

CLEVELAND OFFICE CITIZENS HUILDING

HOME OFFICE AND WORKS WASHINGTON AND EXCHANGE STS. BUFFALO, N. Y.

NEW YORK OFFICE SINGER BUILDING TOWER

Baking Day In The Biggest Pottery

Every day is "Baking Day" in the Homer Laughlin pottery. We have 110 kilns. The process of packing kilns and removing finished china is continuous.

Baking is an important process in china making. A dish baked too hard will crack. If baked too soft it will chip. If the glaze is not properly baked it will craze; that is, innumerable tiny cracks will appear, making the dish unsightly and unsanitary.

Forty years experience has taught us how to make beautiful, durable china - china "as good as it looks." See that the Homer Laughlin trade-mark is on every piece.


Send for "The China Book", a beautiful

brochure on china making. The Homer Laughlin China Company, Newell, West Virginia

OMER AUGHLIN

UNDERWOOD & UNDERWOOD

WORLD'S MOST FAMOUS PHOTOGRAPHERS

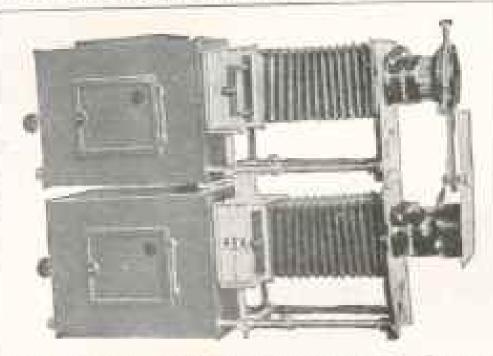

FINEST LANTERS Stines from your negatives, or our matchless collection of \$00,000 original subjects.

UNDERWOOD STANDARD SLIDES are carefully composed and compet attention. Travel Lectures and Lecture Sermons (with manuscript) for reat.

THE FAMOUS ACADEMIC DIMOLVING STERROPTICON. Best for lecture-hall or traveling lecturer, because simple, light, compact, but powerful and efficient.

ASK FULL PARTICULARS. DEPT. No.

UNDERWOOD & UNDERWOOD

12-14 W. 371H ST NEW YORK CITY

TRAVEL WITH DUNNING

AROUND THE WORLD, Westward, September 7, 27; Hastward, November 16. Book early.

JAPAN, Sept. 27, Chrysanthemum Season.

ALGERIA, EGYPT, and PALESTINE, January, February, 1913. Book early.

FOURTEENTH SEASON

Motor Tours for Private Parties
H. W. DUNNING & COMPANY

109 Congregational Building, Boston, Mass.

FRENCH-GERMAN SPANISH-ITALIAN

Is Easily and Quickly Mastered by the

Language-Phone

Combined with the


ROSENTHAL METHOD OF PRACTICAL LINGUISTRY

Threis the natural way to learn a foreign imprage. You hear the Felrig water of a matter Produced promotion with word and phrase. He specile no ten decreasing or specile, might be discoverable or members at a lam. It is a pleasant, fundamentally and y the before yakes or memorializable modern pension all members of the Intelly can useful. You stuply produced district spaces of the Intelly can useful. You stuply produced district spaces, and in a surgestingly about time you speak, real, and makes about a soon landings.

Soud for Booklet and Trenes for Easy Payment

THE LANGUAGE PHONE METHOD

980 Putnam Building, 2 West 45th Street, New York

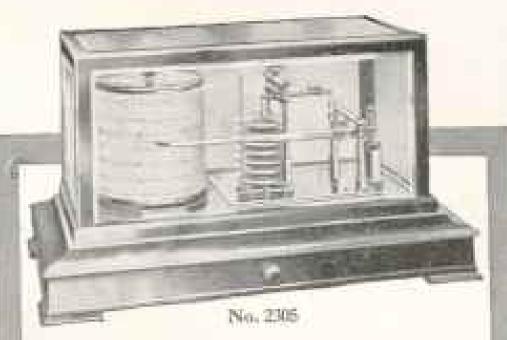

Be Your Own "Weather Man"

With an S&M "Tyeos" Recording Barometer (Barograph) you can forecast weather like an expert.

It ought to mean something to you in the way of definite usefulness, general satisfaction and pleasure to be able to know the weather ahead of time. Imagine what satisfaction it must be to know in advance as accurately as myone can know—about storms, fair weather, tain, etc.

S&M Trees Burometers are accurate, reliable and easy to read.

S&M "Tycos" Recording Barometers

(Barographs)

They are recognized as standard the world over. No. 2305 (illustrated above) writes a weather record, hour by hour, on a weekly chart—the most reliable form of Barometer. In its mahogany case, with plate glass sides and drawer for filing weather charts, it makes a handsome ornament besides. Price \$63.00.

The Barometer Book - FREE

Tells shout sturms, fair wenter, rain, how to forecast, etc., to plain language.

B. & M. Zycas". Weather Instruments are sold by the better class of Opticion and Scientific instrument Dealers.

If your dealer spaces supply you, write



Made by \$100KT & MASON, LTD., LONDON—makers of Scientific Tours means to the U.S., British, Japanese and ather Governments,

Division of

Keder Instrument Computous

65 Ames St., Rochester, N.Y.
"Where Tyras" Photometers

Line From."

We are the largest maker of Baremeters and Thermometers for endurated and howeleds used to the unried.

Judd & Detweiler, Inc. Master Printers

420-422 Eleventh Street N.W.

Washington, D. C.

EQUIPPED TO HANDLE LARGE ORDERS

The National Geographic is from Our Press

Take them Traveling in their Easy Chairs



You can belp old and runng to enjoy the delights and instruction of travel without leaving home com-

forts, if you have your photographic negatives made into lantern alides for the Balopticon. Or you can ascordingry lantern slides, of which there are thousands to choose from. The home circle or a large authoring can while away a winter evening - tour North, South, East and West-within

Bausch Balopticon


Every detail of a picture will show up clear and shorp in our Model C. It is simple to operate built to last a life-time. And it can be arranged to project photos, post cards, etc., in the original colors. It is not a tay, but constructed

Price of Model C Balopticon only \$25.00. Opaque attachment, \$30.00.


Send for From Circular 22-13 today and Jenry more about the Balaptican and its possibilities.

LOHDON ROCHESTER, NY. FRANKFORT



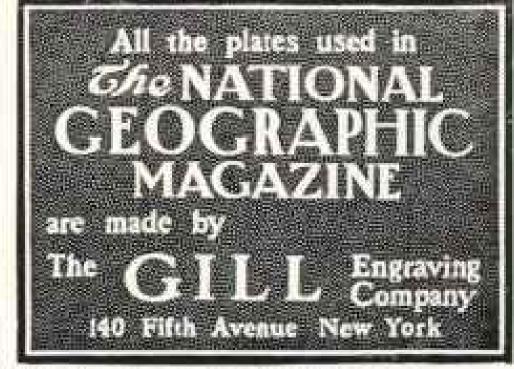

"Geographic readers may depend upon the character of our advertisers."

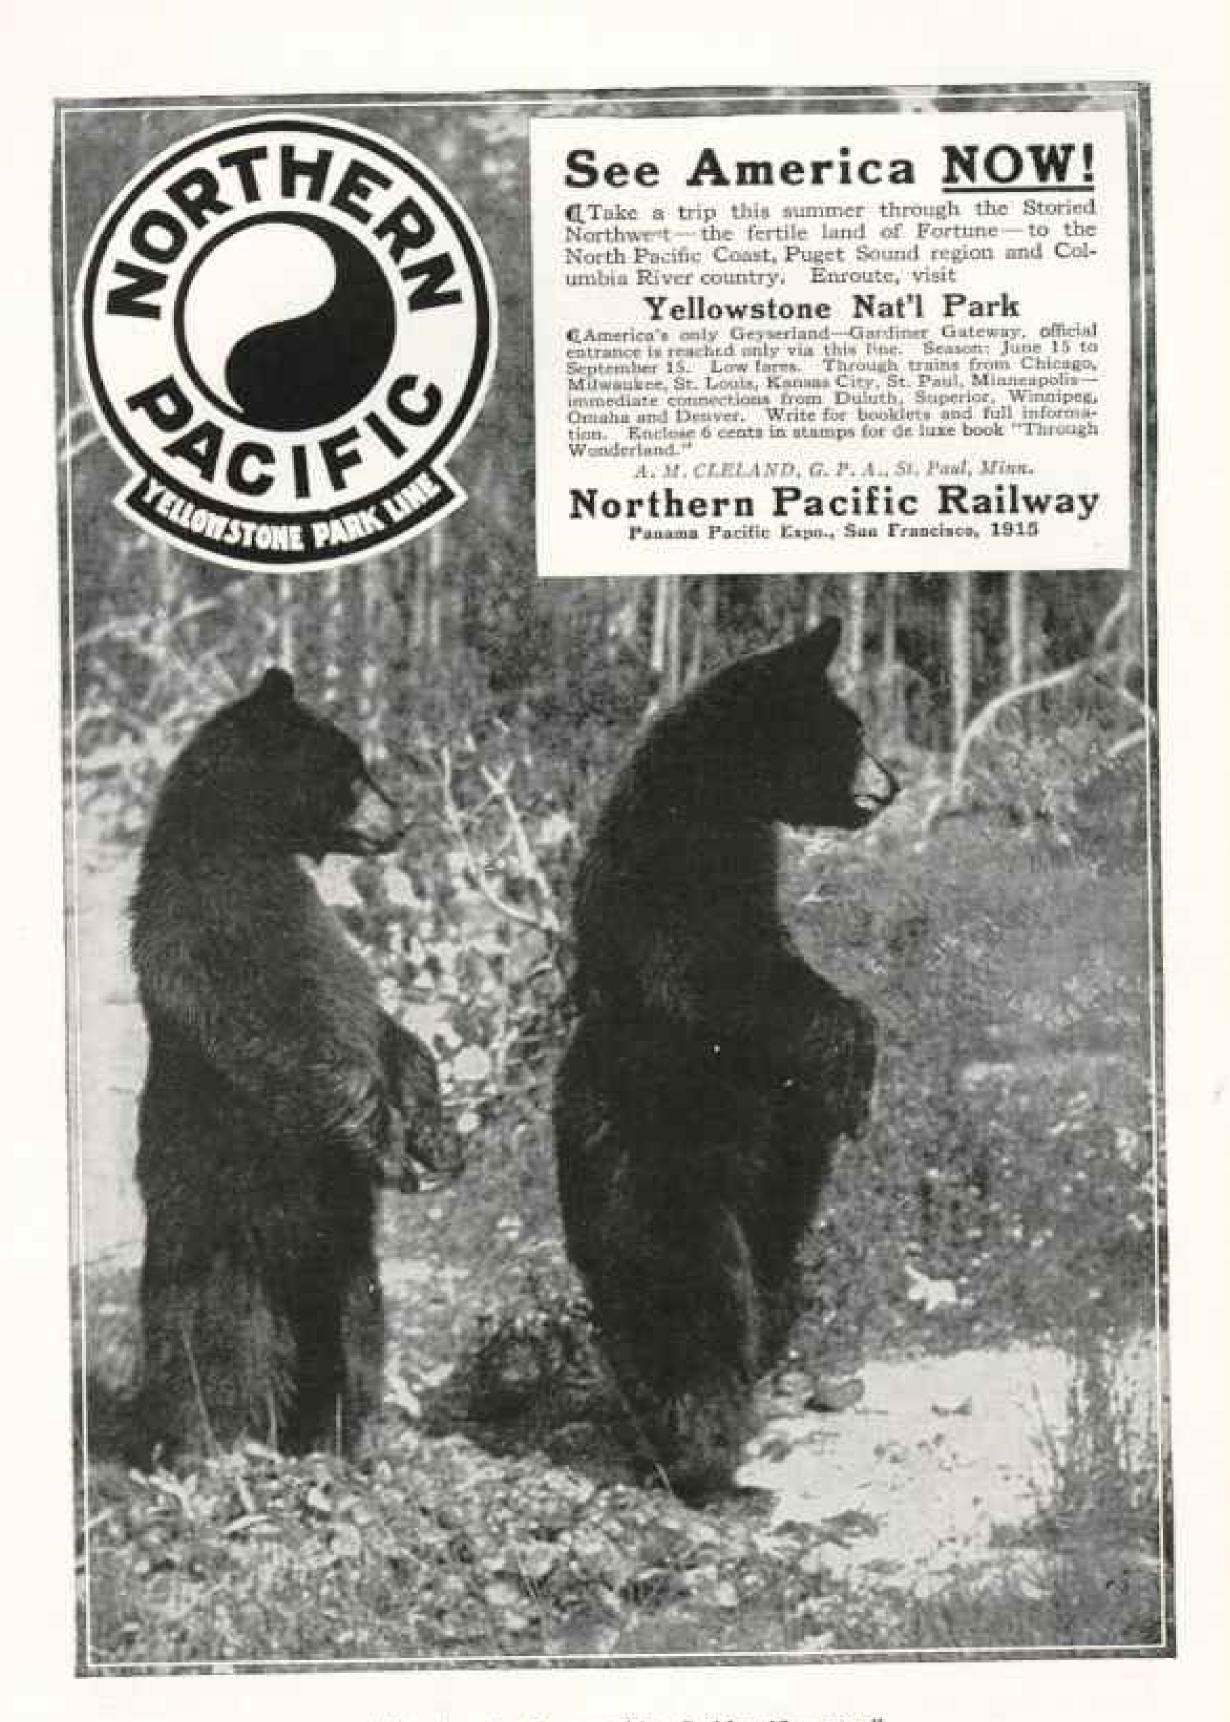



The Majesty of the Matterhorn

3

Copies of this striking picture produced on heavy art-mat board, size 17x22 inches, unfolded,


ready for framing; price, 50 cents. Beautifully framed, express collect, \$4.00. Address Department H, NATIONAL GEOGRAPHIC MAGAZINE, Sixteenth and M Streets N. W., WASHINGTON, D. C.

If you are interested in

TREES

WOODS

We will tell you of our Handbook of Trees



It is photo-descriptive and with it any one can easily identify the trees and learn about them. Our AMERICAN WOODS is illustrated by actual specimens which are wonderfully

interesting and instructive. On account of these works their author has been awarded the Elliott Cresson gold medal, See adv. in Nat'l Geographic



Mag. for Mayand June, 12. Our Mounts of Woods for Microscope and Stereofficon are invaluable.

BOMEYN B. HOUGH COMPANY, LOWVILLE, N. Y., U. S. A.

Bright and Clean—Just Like New!



You can keep nearly everything in home, office or store always perfectly oiled, "clean as a whistle," polished bright as new and as free from rust and tarnish as the day it was bought.

Try 3 in One for sewing machines, clocks, cameras, typewriters, furniture, bathroom fixtures, electric fans, lawn mowers, guns, fishing rods and reels, etc.

Three sizes-10 cts.-25 cts.-50 cts. Sold at all good stores.

FREE Write for denerous.

3 IN ONE OIL CO.

"Geographic readers may depend upon the character of our advertisers."

NEWLAND, TARLTON & CO., LTD.

"Safari" for African Hunting, Nairobi, British East Africa

WRITE FOR ILLUSTRATED BOOKLET TO THEIR AMERICAN AGENT, WHO CAN ARRANGE A TRIP IN DETAIL

DAVID T. ABERCROMBIE

311 BROADWAY

Camp Outfils

NEW YORK CITY

OLD MAPS, ATLASES, AND HISTORIES

OF

Cities, Counties, and States, Title Maps, Maps of Foreign Countries, Battlefields,
AND EXPEDITIONS: DATING FROM 1839 UP

WILLIAM B. BEAM

FORT LEE AND RIVER ROAD, BOGOTA, NEW JERSEY

"WASHINGTON"

THE LEADING SOCIAL CENTER

ENGRAVERS FOR WASHINGTON'S MOST EXCLUSIVE SET

ORIGINATORS OF STYLES FOR ALL FUNCTIONS

SHAD FOR SAMPLES

HAUSLER & COMPANY.

STATIONERS AND ENGRAVERS WASHINGTON, D. C.



THE PANAMA CANAL PANORAMA

THIS graphic bird's-eye picture of the Panama Canal, bringing out the features which mark the work as the greatest project of engineering history—showing the Giant Gatun Dam and Spillway, the enormous cut at Culebra, the big artificial lake, and the long double locks—immediately conveys a vivid realization of the entire work.

A limited edition of the Panorama, 10 x 19 inches, in five colors, has been produced on heavy art matboard, unfolded, ready for framing, 50 cents, postpaid. (Beautifully framed, \$3.00, express collect.)

DEPARTMENT H. NATIONAL GEOGRAPHIC SOCIETY
16TH AND M STREETS N. W., WASHINGTON, D. C.
"Mention the Geographic—It identifies you."

Geographic Readers Who Advertise

7 HY NOT direct the attention of your advertising man to your own magazine? Just say to him, 'The National Geographic guarantees 140,000 monthly circulation by direct subscription, and I know lots of my friends read it. Suppose you write them for advertising facts." He may not know the Geographic, because it is not for sale on any news-stand, but we can quickly convince him of its value for a high-class proposition by presenting real facts of the wonderful purchasing power of the homes into which the Geographic goes in such an intimate way each month. Quality and quantity of circulation, together with the personal interest each reader shows, spell an advertising value plus-Ask any one who reads it.

National Geographic Magazine

16th and M Streets N. W.

Washington, D. C.

To your Son, whom you want to be the heir of your own practical experience—

INTERLAKEN offers the usual academic course of the best schools, but builds into it an intimate knowledge of practical industries.

Building Your Boy's Future

It teaches books and mechanics, history and electricity, art and agriculture—weaving all useful knowledge into one complete, upbuilding course that seems as natural to the boy as his daily life at home.

INTERLAKEN boys of eight to eighteen years erect their own school buildings—build real houses—plan, create and operate their workshops—install electric lighting systems—conduct a seven-hundred-acre farm—and maintain satisfactory self-government.

At INTERLAKEN (on Silver Lake) work and play are carefully blended to suit individual needs. The life is in camp and dormitory—two boys only to one tent or room—meals planned for health—vices condemned by common consent.

For your son's future-character, helpful efficiency, individual effort, community spirit, earnest endeavor, success.


A school—not a commercial venture.

A center of constructive activity.

What can Interlaken do for your boy?
Write—let us tell you more in detail.

School

EDWARD A. RUMELY, M. D., President RAYMOND RIORDON, Superintendent B. W. TURNER, Principal

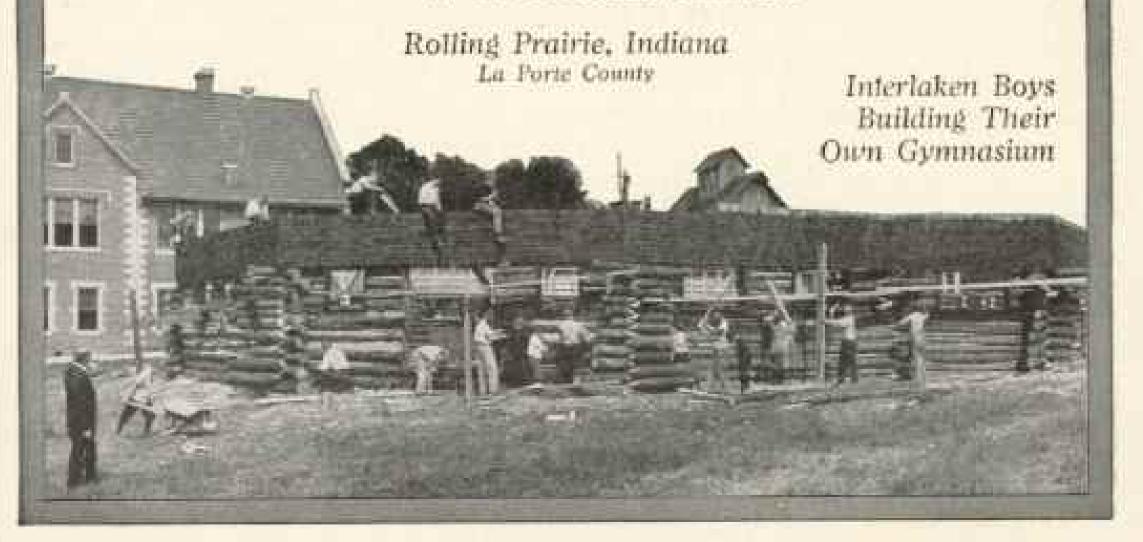

Globe-Wernicke Sectional Bookcases

HE boy who stuffed his little fist in the dyke and saved Holland knew that the ocean belonged on the other side of the dyke. After all, the most valuable home lesson for the coming generation is "A place for everything"...et cetera. The axiom is old, but there are twentieth century ways of teaching it. One way is to give the boys and girls a Globe-Wernicke bookcase

section for their use—or a two or three section library of their own. This will not only teach them system, but will encourage reading—the knowledge of a hundred centuries has been stored in books for them. This is the Globe-Wernicke period in bookcases. A Globe-Wernicke Bookcase grows with the library—no empty shelves yawning for books, no overcrowded shelves. The beauty of its lines is the result of fine cabinet work and lasting stability.

"Booklovers" Shopping List". This little book lists the works of great authors and gives the prices of the same in acts. The list includes the low priced, popular sets as well as the de loss editions. Every book buyer should have a copy. Sent free with the Globe-Wernicke cutalog. Address Dept. N. G.

The Slobe-Wernicke Co.,

Branch Stores: 3

New York - See any threadway. Phillipschips, 1913-1919 Chestout St. Cincinnati, Ohio

Chicagni, 271-225 Sm. Wabush Ave. Beston - 81-20 Perional St.

Weshington, 1315-1326 F St., N. W., Command, 125-334 Fourth Arts., H.

