

THE NATIONAL GEOGRAPHIC MAGAZINE

SEPTEMBER, 1913

CONTENTS

The Resurrection of Ancient Egypt

WITH 10 ILLUSTRATIONS AND MAP

JAMES BAIKIE

Reconstructing Egypt's History

WITH 21 ILLUSTRATIONS

WALLACE N. STEARNS

The Sacred Ibis Cemetery and Jackal Catacombs at Abydos

WITH 7 ILLUSTRATIONS

CAMDEN M. COBERN

PUBLISHED BY THE
NATIONAL GEOGRAPHIC SOCIETY

HUBBARD MEMORIAL HALL

WASHINGTON, D.C.

\$2.50 A YEAR

25 Crs A COP

NATIONAL GEOGRAPHIC SOCIETY

HUBBARD MEMORIAL HALL

AVENUE OF THE PRESIDENTS AT M STREET, WASHINGTON, D. C.

 O. H. TITTMANN VICE-PRESIDENT JOHN JOY EDSON . . . THEASURER F. B. EICHELBERGER . ASSISTANT TREASURER GEORGE W. HUTCHISON, ASSISTANT SECRETARY

BOARD OF MANAGERS

1911-1913

ALEXANDER GRAHAM BELL Inventor of the telephone

HENRY GANNETT Chairman of U.S. Geographic Board

J. HOWARD GORE Prof. Emeritus Mathematics, The Gro. Washington Univ.

A. W. GREELY

Arctic Explorer, Major Gen't U.S. Army

GILBERT H. GROSVENOR Editor of National Geographic Magazine

GEORGE OTIS SMITH Director of U. S. Geological Survey

O. H. TITTMANN Superintendent of U. S. Coast and Geodetic Survey

JOHN M. WILSON Brigadier General U. S. Army, Formerly Chief of Engineers

1912-1914

O. P. AUSTIN

Statistician, Bureau Foreign and Domestic Commerce

CHARLES J. BELL

President American Security and Trust Company

JOHN JOY EDSON

President Washington Loan & Trust Company

DAVID FAIRCHILD

In Charge of Agricultural Explorations, Dept. of Agric-

C. HART MERRIAM

Member National Academy of Sciences

GEORGE R. PUTNAM

Commissioner U.S. Bureau of Lighthouses

GEORGE SHIRAS, 3D

Formerly Member U. S. Congress, Faunal Naturalist, and Wild-Game Photographer

GRANT SQUIRES

New York

1913-1915

Pranklin K. Lane

HENRY F. BLOUNT

Secretary of the Interior.

Vice-President American Security and Trust Company

C. M. CHESTER

Rear Admiral U. S. Navy, Formerly Supt. U. S. Naval Observatory

FREDERICK V. COVILLE

President of the Washington Academy of Sciences

JOHN E. PILLSBURY

Rear Admiral U. S. Navy, Formerly Chief Bureau of Navigation

RUDOLPH KAUFFMANN

Managing Editor The Evening Star

T. L. MACDONALD, M. D.

S. N. D. NORTH

Formerly Director U. S. Bu-


To carry out the purpose for which it was founded twenty-three years ago, namely, "the increase and diffusion of geographic knowledge," the National Geographic Society publishes this Magazine. All receipts from the publication are invested in the Magazine itself or expended directly to promote geographic knowledge and the study of geography. Articles or photographs from members of the Society, or other friends, are desired. Contributions should be accompanied by an addressed return envelope and postage, and be addressed:

GILBERT H. GROSVENOR, EDITOR

ASSOCIATE EDITORS

A. W. GREELY
C. HART MERRIAM
O. H. TITTMANN
ROBERT HOLLISTER CHAPMAN
WALTER T. SWINGLE
ELIZA R. SCIDMORE

ALEXANDER GRAHAM BELL DAVID FAIRCHILD HUGH M. SMITH N. H. DARTON FRANK M. CHAPMAN FRANK EDWARD JOHNSON

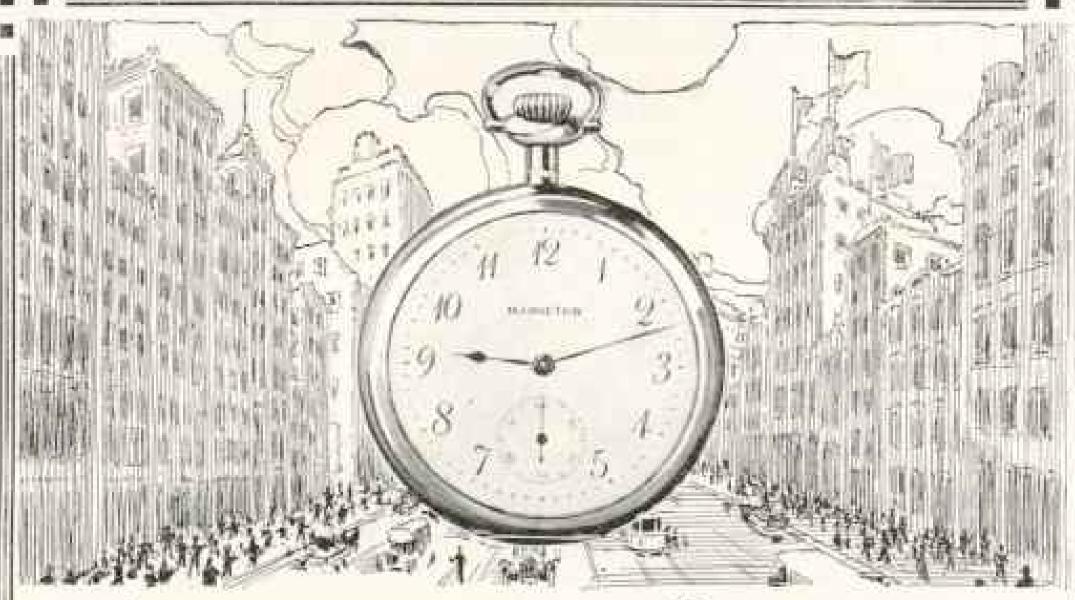

Hamilton Match

"The Railroad Timekeeper of America"

Every minute of every day the Hamilton Watch tells dependable time. When the Hamilton Watch says seventeen after three, you know that it is just that time; not sixteen after nor eighteen minutes after. Not only are those minutes valuable, but the feeling of perfect confidence in your timepiece, which a Hamilton Watch gives, is a great comfort. Railroad watches must be accurate. Statistics show that

Over one-half (56%) of the railroad men on American railroads where Official Time Inspection is maintained carry the Hamilton Watch

Hamilton Watches are made in correct sizes for men and women, and sold by jewelers everywhere. Movements only are\$12.25andupward. Completewatches. certain sizes, are \$38.50 to \$150.00. Ask your jeweler about them; also about fitting your present watch case with a Hamilton movement.

Write for "The Timekeeper"

It illustrates and describes the various Fiamilton models and is a book well worth reading if you are thinking of luying a fine watch.

HAMILTON WATCH COMPANY

Lancaster, Pennsylvania



Engineer W. L. COWAN, of Back feland Lines, has carried a framition Watels for years with profice surofaction.

COMPLETE INSURANCE FOR THE HOME Five Policies in One



E as the protection
insurance affords is the feeling
of accority it provides. You
cannot feel secure — whether you are owner or
occupant of a Private House, Flat or Apartment
— if you are only partly insured. The things
you are apt not to insure against are the ones
that quite often bring serious personal loss, ment. T

HOW far sighted it is to be thoroughly protected—to know that whatever may happen—Burglary, Theit, Glass

Brenkage, Damage by Leakage of Water or Explosion of Heating Boilers, Loss of Rent through Fire and other calamities, Injury to servants or the Public—you have no fear of financial embarrassment. This complete protection is afforded you by

THE ÆTNA'S Combination Residence Policy

(Sold in states where authorized)

If you value a feeling of absolute security against all possible financial loss

TO THE ÆTNA ACCIDENT AND LIABILITY CO., HARTFORD, CONN. Please mail me full particulars of your Combination Residence Policy.

(Fear of)

Not. Geng.

My Name and Address

MAPS for all purposes are drawn, engraved and printed

by the


AMERICAN BANK NOTE CO.

in the best style and by the most approved methods. Their excellence is attested by their almost universal use by publishers who know and require the best.

AMERICAN BANK NOTE COMPANY

70-72 Broad Street, New York



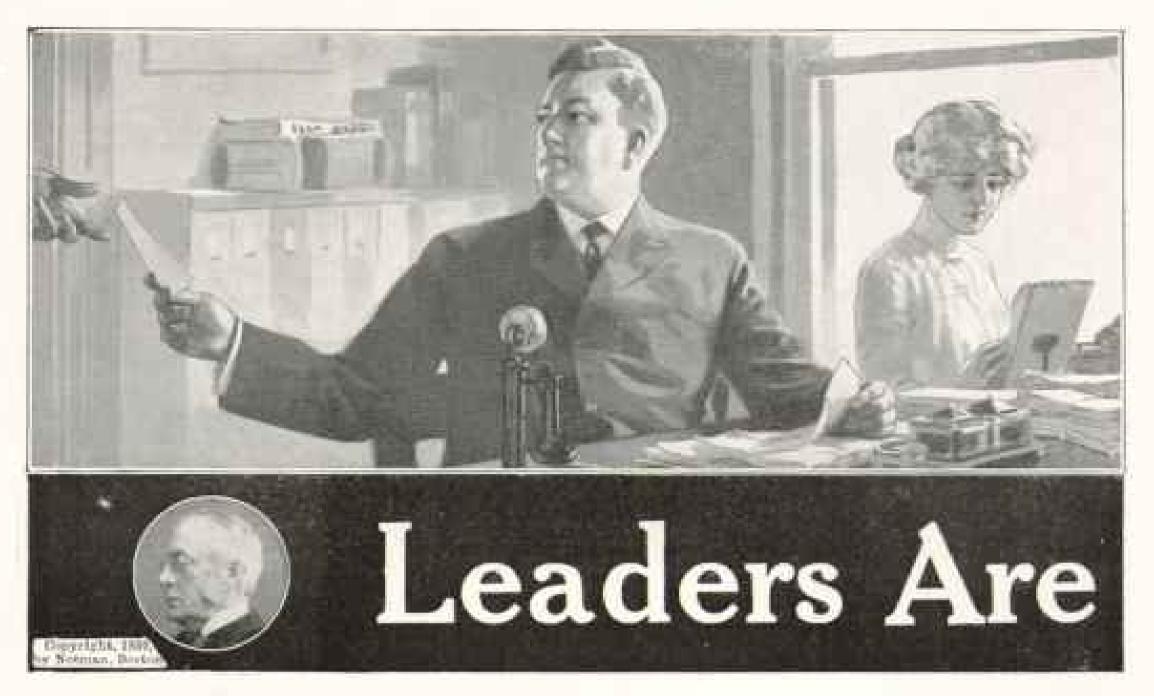

Dr. Eliot, President Emeritus of Harvard University, has in the last forty years trained some forty thousand men for success—for the doing of big things, the filling of big jobs, the earning of big salaries.

The successful man is the me/l-read man. Emerson says that a college training consists in the reading of certain books which contain the wisdom of the ages.

In his Five-Foot Shelf of Books, Dr. Ellot has perpetuated his great life work in the training of men and women for success—your success. Out of his many years of ripened educational experience,

he has brought to the busy American man or woman the essence of the best literature of the world, so edited and arranged that it affords you the essentials of a liberal education if you can devote to it but fifteen minutes a day.

No matter what you do-whether you are a professional man, office man, manufacturer, farmer, employer, salesman or mechanic, you need

DR. ELIOT'S Five-Foot Shelf of Books

The Harvard Classics

This is the library that will better your jobincrease your efficiency—add to your income.
These books give you a better understanding of
men, of affairs, of the conditions you meet every
day. In these fifty volumes, Dr. Eliot has collected
418 complete musterpieces of the 300 greatest
writers and thinkers of the world. He has supplemented them with notes, introductions and complete reading courses, thus enhancing their literary
and efficiency value.

Reading With Dr. Eliot


In these books Dr. Eliot introduces you to the most famous dramatists, biographers, travelers, poets, scientists, and novelists the world has ever seen.

You live through every age with Dr. Eliot, see its great plays, witness its great discoveries.

You have the guidance of Dr. Eliot at every page. The Five Foot shelf gives you a picture of the progress of civilization—and that is what Dr. Eliot means when he calls it "the essentials of a liberal education."

Dr. Eliot's Reading Courses 76,000 Subjects

Dr. Eliot has laid out course after course of reading for you on an infinite number of sub-

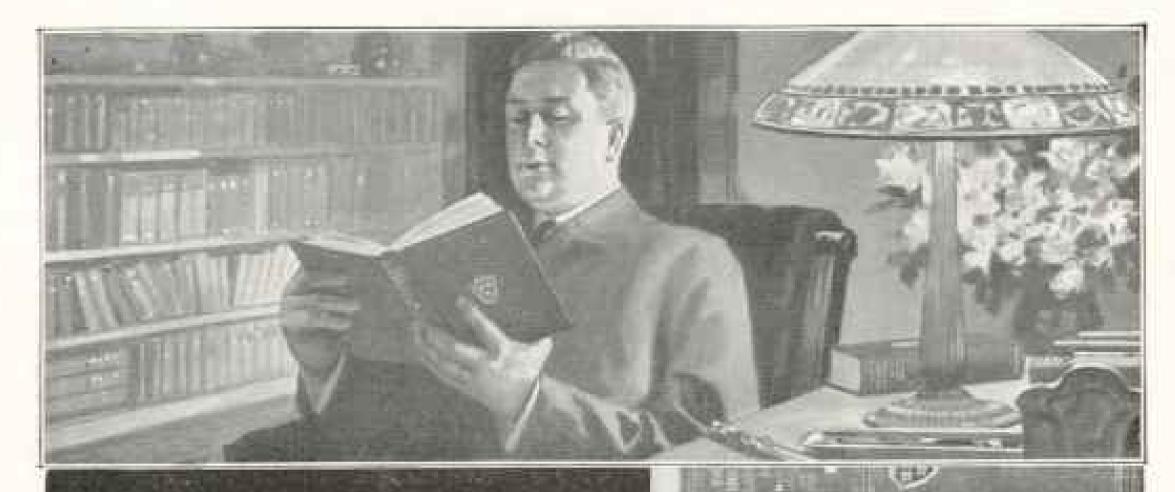

Readers

jects. No matter how limited your time you can turn to the great index in volume fifty and there find reference to the best that has ever been written on any chosen subject. In all, seventy-six thousand subjects are indexed for your instant reference. No sorting through a dozen books to find the quotation or information you want. Dr. Ellot has asticipated and met your needs in this great master-index to all literature.

A Few Cents a Day for the New Popular Edition

You need this great library in your work. You can have it. It will increase your efficiency. The Popular Edition has been issued at about one tenth the price at which the De Lune Edition was sold, at Dr. Eliot's request, for men and women who want the matter rather than the binding. But these books are printed from the same clear-cut type used in printing the costlier editions and the quality of binding and workmanship is the result of thirty-eight years' experience in the making of good books by P. F. Collier & Son.

At Least Send for This E

Dr. Eliot, Trainer of men for big jobs, tells YOU all about his Five-Foot Shelf of Books in this Free Booklet. Send for it.

P. F. COLLIER & SON, Inc.

Publishers of Good Books NEW YORK

(12)

 $^{\odot}$ 50 Volumes in All Containing 418 Complete Works P.F. Collier & Son, Inc. 401 W.13th St. New York City Mease send to me by mail, free of charge. and without any obligation on my part, the 32page book describing Dr. Ellot's Free-Frot Shell of Buoks and Reader's Course.



BURMESE DANCING GIRLS

World-Wide Travel by Photograph

THIRD SERIES, "SCENES FROM EVERY LAND"

20,000 Words of Text, 250 Wonderful Illustrations, and 24 Pages in Colors

By GILBERT H. GROSVENOR

Editor National Geographic Magazine

Here is a fascinating book which tells you about many curious and little-known peoples, shows you strange and picturesque customs in out-of-the-way corners of the world, and brings vividly before you many of the wonders of nature.

You do not have to read long pages of print; each of the 250 pictures tells its own story, and the few words of text beneath each serve to bring out the important points.

The book is printed on paper of the finest quality, and tastefully bound in buckram or in full red leather, so that it forms a delightful and useful gift.

No copies of the First and Second Series of "Scenes" can be supplied, as the entire edition is out of print.

| CUT ON | THIS LOSE | |
|---|---------------------------------|-----------|
| DEPT. H. NATIONAL GEOGRAPHIC SOCIETY, 16th and M. Streets, Washington, D. | C. | (0)= |
| Please sendcopies of Third Series "See | enes from Every Land," bound in | TI SERTES |
| for which I enclose herewith | ollars. | |
| If scientil copies are desired, write names and addresses and send with your card. | Name | |
| Bound in Royal Buckram, postpaid, \$1.00 Bound in Full Leather, postpaid, \$2.00 (De Luxe Edition) | Street Address | |
| | City and State. | |



THE CHALLENGE to "CASTLE CARELESS"

Amid the ranks of "Big Business" has appeared a new steelbrained champion, born in the best equipped typewriter plant in the world—the Master-Model of the Royal backed by an ironclad Guarantee.

The Royal Master-Model is a modern letter-maker in a class by itself. The Royal does the most, for it does the work of several typewriters in one: (1) General Correspondence, (2) Writing upon all forms and widths of Cards, Envelopes, Tags and Labels, and (3) Condensed Billing, Loose Leaf and Unit Order work—all this without a dollar of added cost to the purchaser.

ROYAL TYPEWRITER COMPANY

Royal Typewriter Bldg., 364-366 Broadway, New York

Branches and Agencies the World Over

The Osireion Excavation Fund

REQUIRES TEN THOUSAND DOLLARS FROM AMERICA.

Since the founding of the Egypt Exploration Fund in 1883, Dr. Naville has been identified with its work, a "Sed Period of Thirty Years." His labor has been unremitting, in active charge of excavations in Egypt, in editing the memoirs of his discoveries for the Fund, in his remarkably clear fectures and press articles, all making the Egypt Exploration Fund as well known in France and Germany as in England and the United States.

All members of this Society and tourists who are acquainted with Dr. Naville's achievements and wish to honor him in what he regards as the crown of his life's work are cordially invited by the American Committee to share in presenting him the sum be asks for his great compaign, the clearance of this stronge underground temple, the Osireion.

The Committee have received seventeen one hundred-dollar subscriptions. Donations from ten to fifty dollars augment this fund to two thousand dollars. One subscription of five hundred dollars is to be paid when the intervening amount is subscribed.

Cheques should be made payable to the Egypt Exploration Fund and sent to Mrs. Marie N. Buckman, Secretary for the United States, at 527, Tremont Temple, Boston, Mass.

CHESTER L. CAMPBULL,
Homography Transper for the United States.

The American Committee:

CHARLES L. HUTCHINSON, Prosperient HERBERT WEIR SMYTH, Pro-President WALLACK N. STEARNS, Pro-President CHESTER L CAMPBELL, Non. Treat. for C. S.

DWIGHT LATHROF ELMENDORF,

Homorary Secretary for the United States
CAMDEN M. COBERN, Homorary Secretary

THOMAS WHITTHMORE, And Director in Egypt

American Representation on the Committee in London



Stop wasting money in film failures — Save money and disappointment by having your camera fitted with a

Bausch Lomb Zeiss TESSAR LENS

—the lens that is so much more rapid than ordinary lenses that it gives you bright pictures even in a weak light—and catches the quickest movement.

If you are interested in better remaits, and for literature.

Bausch & Jomb Optical O. 61851. PAUL ST. ROCHESTER, N. Y.





Your Home Is Your Weather-Bureau

To know the weather before it happens is to combine pleasure, satisfaction and convenience. You are 24 hours ahead of your newspaper. The motor trip is planned and taken, without worry. The golf dater-cancel that. You can dress properly and make engagements adely. All this satisfaction to yourself and pleasure to your guests are assured by putting into your home an

S & M"Tycos" Barometer

They are the standard the world over. No. 2590 (illustrated) is of solid mahogany, missid, Shezaton design, first quality compensated movement; 59 x 11 in; a handsome ornament for any room or ball. Price 241.50. Many other types of Weather Instruments are shown in the

BAROMETER BOOK-FREE

Write for it. Tells about storms, fair weather, etc., in simple language. S & M 7 cor Weather Instruments are sold by Opticions and Scientific Instrument dealers. If yours cannot supply you, THE. HAROMEYEE

Made by the world-tamess boose of SHORT A MASON, LTD., LONDON, makers of Scientific Impressents to the U.S., British, Japanese and other potenti-DIVISION OF

Taylor Instrument Companies

65 AMES STREET Nos...2090**Legistered**

ROCHESTER, N. Y.

Largest Makers of Dayometers, Thermameters and other Meleor-Magnet Instruments for all Parjours,

RECOMMENDATION FOR MEMBERSHIP

National Geographic Society

The Membership Fee Includes Subscription to the National Geographic Magazine

DUES: Annual membership in U.S., \$2.00; annual membership alitual, \$3.00; Canada, \$2.50; life membership, \$50. Please make remittances payable to National Geographic Society, and if at a distance remit by N. Y. draft, montal or express order.

Please detach and fill in blank below and send to the Secretary

BOOK

To the Secretary, National Geographic Society, Statement and M Streets Northwest, Washington, D. C .:

Dissign

I nominate

Address

9.35

for membership in the Society.

[Within your pildties]

Farm Lands Offer Indestructible Security

Invest in our First Mortgage Farm Loans and-

Know that back of each loan is a good farm and a good farmer.

Know that the loan is made on a basis never exceeding 50% of the salable value of the land and generally less than 40%, and that the value of the security is continually increasing.



PARM BUILDINGS IN WILLS & DICKEY CO.'S LOANING FIELD IN MONTANA

Know that in making an investment through this house you are dealing with a company well known for conservative and successful methods covering a period of 35 years.

Know that our system of handling investments relieves you of any care whatsoever. We assume the care of all details without expense to you.

Write us for Loan List " N."

Wells & Dickey Company

Established 1878

Capital and Surplus, \$750,000

McKnight Building Minneapolis, Minn.

The Safety of the Bonds that Savings Banks Buy

State laws governing the investments of Savings Institutions are drawn with a view of limiting the accurities which are eligible, to bonds regarding the safety and soundness of which there can be no question.

We number among our clientele throughout the country, Savings Banks, Trustees, and other institutional investors who are restricted to recurities conforming to and available under existing statutes.

It follows that considerable attention is given by our organization to the selection of bonds legal in various states.

In view of the nature of the funds demanding

legal inventment, we are especially exacting in our selections.

Security—Yield—Appreciation—Market—are the salient features to be considered.

Rates for capital, the world over, are now the highest for many years. Because of these conditions, the investor has a rare opportunity to now buy the soundest bonds at prices seldom realized in the past.

Our present offerings of savings bank bonds legal in one or more states vary in yield from 334% to over 5%.

Send for our booklet, "Savings Bank Bonds— New York State," or special list of bonds available in your state, A.N.-6.


N. W. Halsey & Co.

NEW YORK

PHILADELPHIA 1421 Chestnut St.

CHICAGO La Salle and Adams Sts. SAN FRANCISCO 424 California St. HALSEY & CO., Incorporated 55 Congress St., BOSTON

LONDON Halasy & Co., Ltd. GENEVA Switzerland

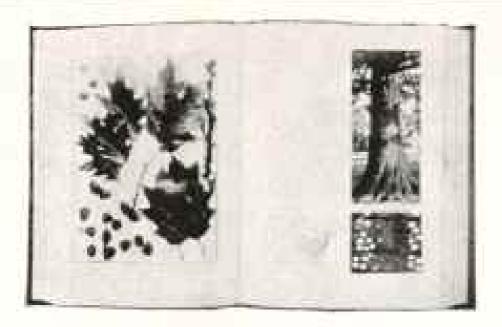

HANDBOOK OF TREES, Photo - descriptive By Romeyn Beck Hough

"With it one unfamiliar with botany can easily identify the trees." - Melvil Dowey, Pres., Vt. Library Ass'n.

"The most valuable guide on the subject ever published."Springfield Republican.

It is doubtful if any book before the public in recent years possesses the peculiar charm of this."-St. Louis Lum-berman.

"No other book out take the place of this musterly production."—Journal of Education.

Extraordinarily thorough and attractive. "-N. Y. Times.

AMERICAN WOODS, Illustrated by Specimens By Romeyn Beck Hough

Of such unique value and interest that its author has been awarded the special Elling Coveres gold medal by the Franklin bast(one, Philadelphia, Pa.

Mounts of Woods for Microscope and Mounts of Woods and Views of Typical Trees, their Leaves, Flowers, Fruits, Barks, etc., for Lantern.

Exhibits of our lines may be seen at the following blaces: New York—Permanent Educational Exhibition, to ath Ave. Philadelphia—Office of Pa. Popestry Ass'n, rore Walnut St. Washington—Office of P. H. Hough, Esq., one P. St., Salte Star Boston—Office of Mr. F. W. Hane, Forester, & Bencon St.


I'me are contially invited to call and see the exhibit west convenient to you, or address for particulars and samples—ROMEYN B. HOUGH COMPANY, Lowville, Box K. N. Y.

Limbert's Holland Dutch Aris and Crafts Fornithers
Let us stell tem Limbert's authorative Byle Scook and Fornithers
History, with restored pulses sint there hundred pettern of true
altothaid Dutch Aris and Crafts fornishings that will give your
tasty, wholessees hormonistic attendants the sale of expenditure.

Write for Nete July Buck
heles establing freither. As one beed form to may you thesely
Aris and Crafts with since prior many breaked this like one. We not
form the action of one decrease distinguis starred you.

CHARLES P. LIMBERT COMPANY
GRAND RAPIOS, MICH. BIFTE. HOLLAND, MICH.

"Mention the Geographic-It identifies you."

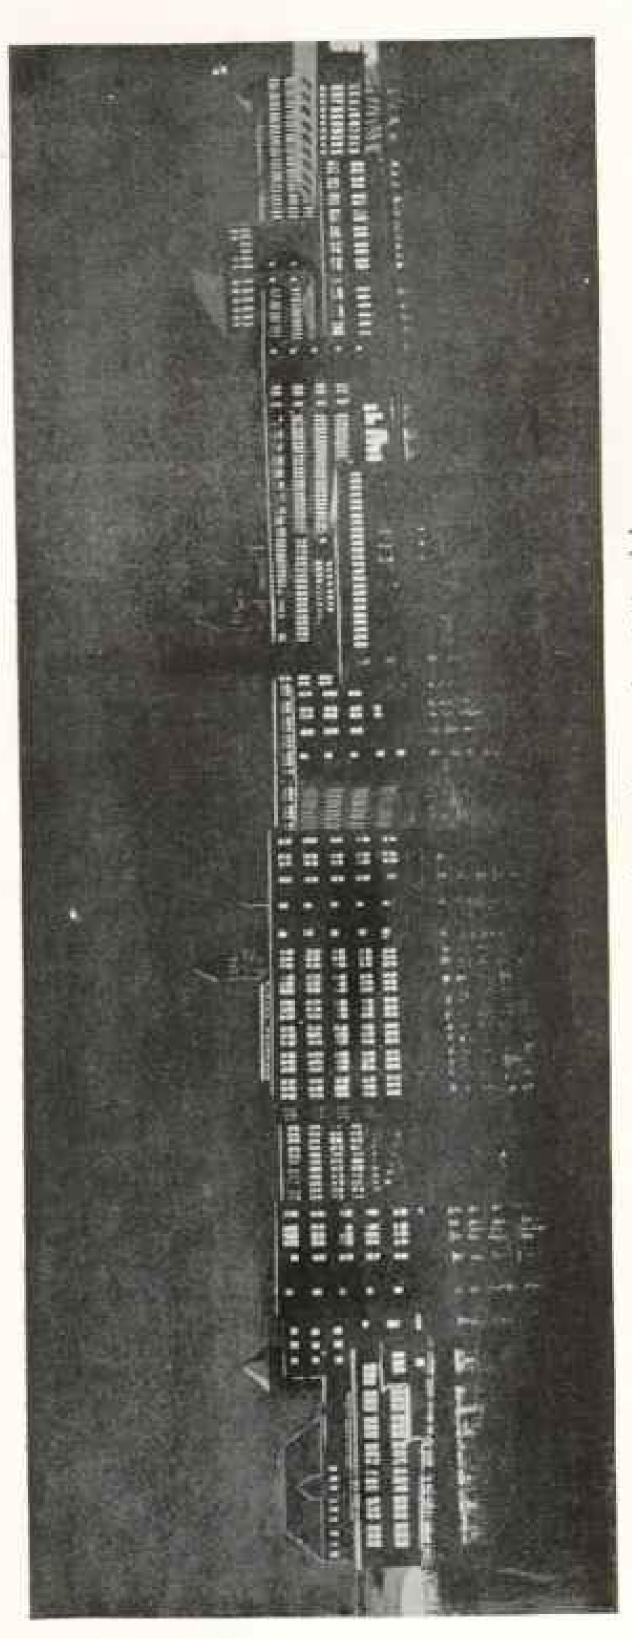

The Factory that times the World

By night, from the River Charles, one gets an impressive "picture of the Walthum Watch plant.

In capacity it is so great that it manufactures three thousand

watch movements a day.

In the delicacy and scientific exactness of its processes, it has been accorded first place the world over.

From it to every corner of the earth have gone This is the oldest watch plant in America-the largest in all the world.

Twenty million men and women time their daily movements the Waltham instruments of precision.

Jewelers everywhere regulate their timepieces by the by the Waltham Watches manufactured here.

Waltham Chronometers, which they unhesitatingly accept as


standard.

Motorists in every land depend upon the Waltham Auto-The United States Government purchases the Waltham Marine Chronometers for use in the Navy.

mobile Timepleces to give them the exact hour under all conditions of wind, wenther, and road

And so we speak the literal truth when we say; "This is the Factory that times the World."

welcome any inquiry you might wish to make regarding the The Waltham Watch Company, Waltham, Mass., would Waltham instruments.

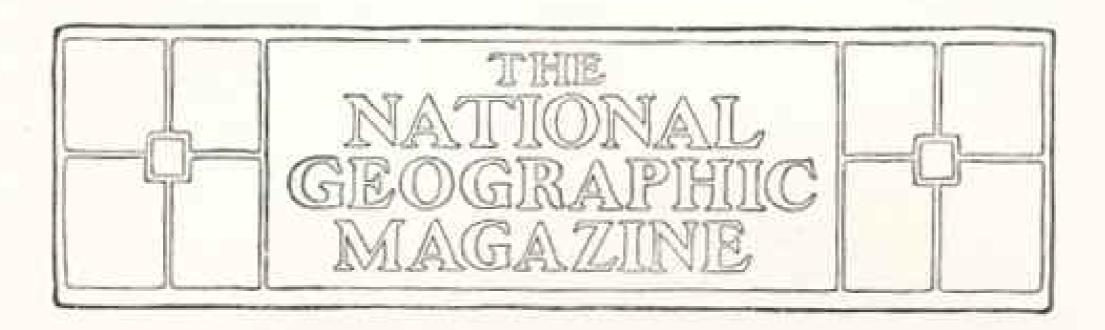

THE RESURRECTION OF ANCIENT EGYPT

By JAMES BAIKIE

AUTHOR OF "SEA KINGS OF CRETE," IN THE NATIONAL GEOGRAPHIC MAGAZINE, JANUARY, 1912

THE Elizabethan age was the period of the discovery of new worlds, a period bright with all the romance and fascination of man's adventure into the unknown, our own age may be defined as the period of the resurrection of ancient worlds, and the romance of the explorations which have given back to us the buried civilizations of Assyria, Babylonia, Egypt, Crete, and Asia Minor has in its own way been almost as thrilling as that which marked the discoveries of Columbus, Cortex, and Pizarro. Ancient and mighty empires, which lived for us only in the dim traditions and distorted pictures of classical historians, have risen out of the dust of the past.

They have begun to take shape and solidity before our eyes; their palaces, their temples, and their tombs have yielded us unquestionable and vivid illustration of the height of culture which they had reached in almost incredibly ancient days. It is scarcely an exaggeration to say that we know as much of the life and the customs of the leading peoples of four millenniums ago as we do of those of the European nations of the Middle Ages.

In the wonderful record of exploration which has restored to us the civilization of the great pre-classical nations, there is no more remarkable chapter than that which tells of the resurrection of

ancient Egypt. It contains perhaps no incident so thrilling as Layard's discovery of the buried palaces of Assyria, or Evans's unearthing the legendary Labyrinth of Minos in Crete, for the mightiest relies of the power of ancient Egypt-the Pyramids, the Colossi, the temples of Karnak and Luxor-have never ceased through all the centuries to bear their evidence to the greatness of the men who reared them. But it is only within the lifetime of the present generation that exploration of the wonders of which these were the surface indications has become systematic, and that we have begun to pass from the stage of mere wonder to that of scientific research and coordination of the facts disclosed by exeavation.

The science of Egyptology, which is slowly and patiently reconstructing for us the ordered history of the 3,000 years before Christ, and enabling us to see the types of men, the manner of life, the forms of government, the religious customs and beliefs of period after period, from the very dawn of Egyptian nationality, is specifically a growth of our own time.

ROUGH AND READY METHODS OF EARLY EXPLORERS

The older period of Egyptian exploration may be said to have closed with Mariette, Despite his abundant energy. his wonderful instinct for a promising site, and the astonishing amount of interesting material which he accumulated during his explorations, this devoted explorer had not the genius of patience and orderliness, the sense of relation, and the conviction of the importance of all facts and things, however small, which characterize the modern scientific spirit. His underiably important work was done in a big, broad, and also somewhat loose and wasteful fashion; and while we can see and acknowledge how much he discovered and preserved, we can only conjecture how much was overlaid and lost in the process.

The meshes of his wide-flung net were too large to deal with the smaller spoil of the archeologist, and he could not understand that from the point of view of knowledge to be gained from it a potsherd may be more important than a pyramid. Modern investigation no longer proceeds on his somewhat slapdash and wasteful methods. It holds no site to have been really explored till every scrap of pottery which it yields has been collected, numbered, and studied, and the very earth and sand have been painfully riddled through a

SECVE.

The result of all this laborious investigation is that instead of being confronted with a confused mass of facts, wonderful enough individually, but unrelated and perplexing, we are gradually being presented with a coherent picture of the history and the life of the various periods of the ancient Egyptian nationality from its earliest days down to historic times.

Modern exploration has not, of course, followed and could not follow a strictly chronological order in its researches. Explorers had to take and to interpret whatever a site yielded to them, whether it belonged to the first dynasty or the thirtieth, or to both. As a matter of fact, perhaps the greatest impulse was given, as certainly the greatest popular interest. was excited, by a discovery whose fruits belong largely to what must be considcred a comparatively late period of Egyptian history—the discovery of the

cache of royal mummies at Deir-el-Bahari.

But our purpose will best be served by disregarding the order of time in which the discoveries have been made and tracing the growth of modern knowledge concerning the various historical periods, beginning with the earliest dynasties.

THE DISTORY OF MANETHO VERIFIED

We owe the framework into which we try to fit the facts of Egyptian history to the ancient historian, Manetho, scattered fragments of whose history of Egypt, dating from the reign of Ptolemy Philadelphus, in the third century B. C., have come down to us in the works of various ancient authors. He recognized thirty dynasties of Egyptian monarchs, and he has left lists of the names of the kings in each of these dynasties, together with occasional notes upon matters of historical interest in particular reigns.

It has long been known that, whatever problems and difficulties might be connected with Manetho's later king lists (and these difficulties are neither few nor small), we at least began to get into touch with actual historic realities at the point where his fourth dynasty commences; for it was recognized that in his Souphis, Saphis, and Mencheres we had corruptions of the names of Khufu, Khafra, and Menkaura, the builders of the three largest pyramids (see pages

960, 96t, 964, 966, and 967). Beyond that point, however, history seemed to vanish into the mists. The kings of the earlier dynasties. Menes and the rest of them, were shadowy, unreal figures, who perhaps never existed save in the imagination of the historian-mere creatures of legend, such as we find at the beginning of all national histories. But if there has been one thing which modern investigation has taught us clearly, it is that the legends which describe the beginnings of national history are never mere figments of the imagina-

tion.

The generation which has seen the Labyrinth of Minos and the dancingground of Ariadne rise from the earth at Knossos may be held to have learned

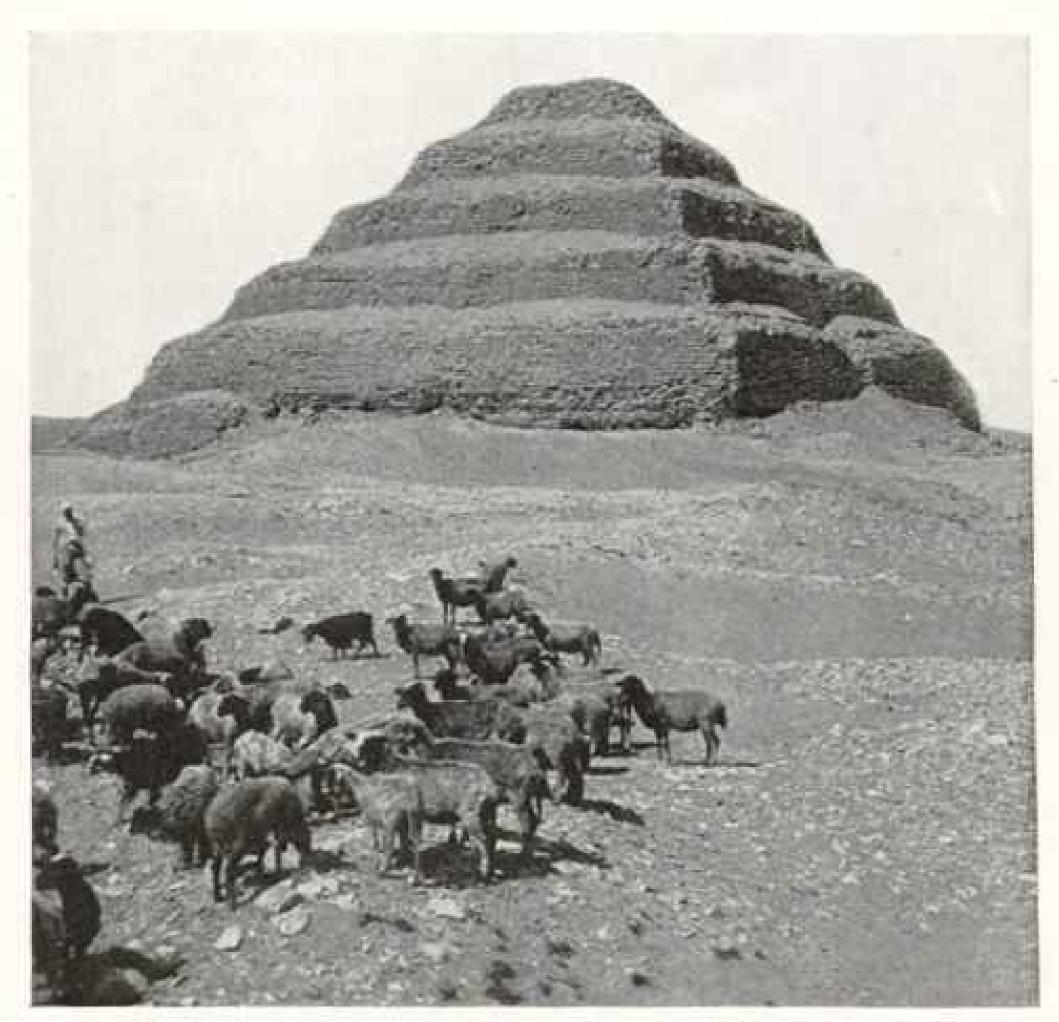


Photo and copy right by Underwood & Underwood

THE FIRST ATTEMPT AT A PERAMID: SAQQARA, EGYPT

According to the Greek historian, Manetho, this was the first stone building in the world. It was built by the architect Imhotep as a burial place for his master Zeser or Neterkhet, a king of the third dynasty. On the east and west sides the base measures 300 feet, the other two sides being 352 feet, while the height is about 105 feet. The chambers and passages within this step-pyramid are lined with blue and green glazed tiles, which bear the king's name and titles. This building represents the transition between the so-called "Mastaba" tombs in which the earlier kings were buried and the true pyramid of later date.

that lesson once for all. The people of the world's childhood were less imaginative and more truthful than we had supposed, and a legend on the surface of history means a historical fact buried somewhere beneath if only you can unearth it.

THE SEMI-MYTHICAL KINGS PROVE TO DE

So it has proved to be with these shadowy kings of the earliest Egyptian dynasties. Manetho's fables about one of them being slain by a hippopotamus, while in the reign of another the Nile flowed with honey, may be mere fables; but the men were there, and their royalty was a very real and tangible thing. Since the early nineties investigations have been carried out by de Morgan at Naquela and elsewhere, and by Amelineau, and especially by Petrie at Abydos, which have resulted in the discovery of the tombs of many of these ancient roy-

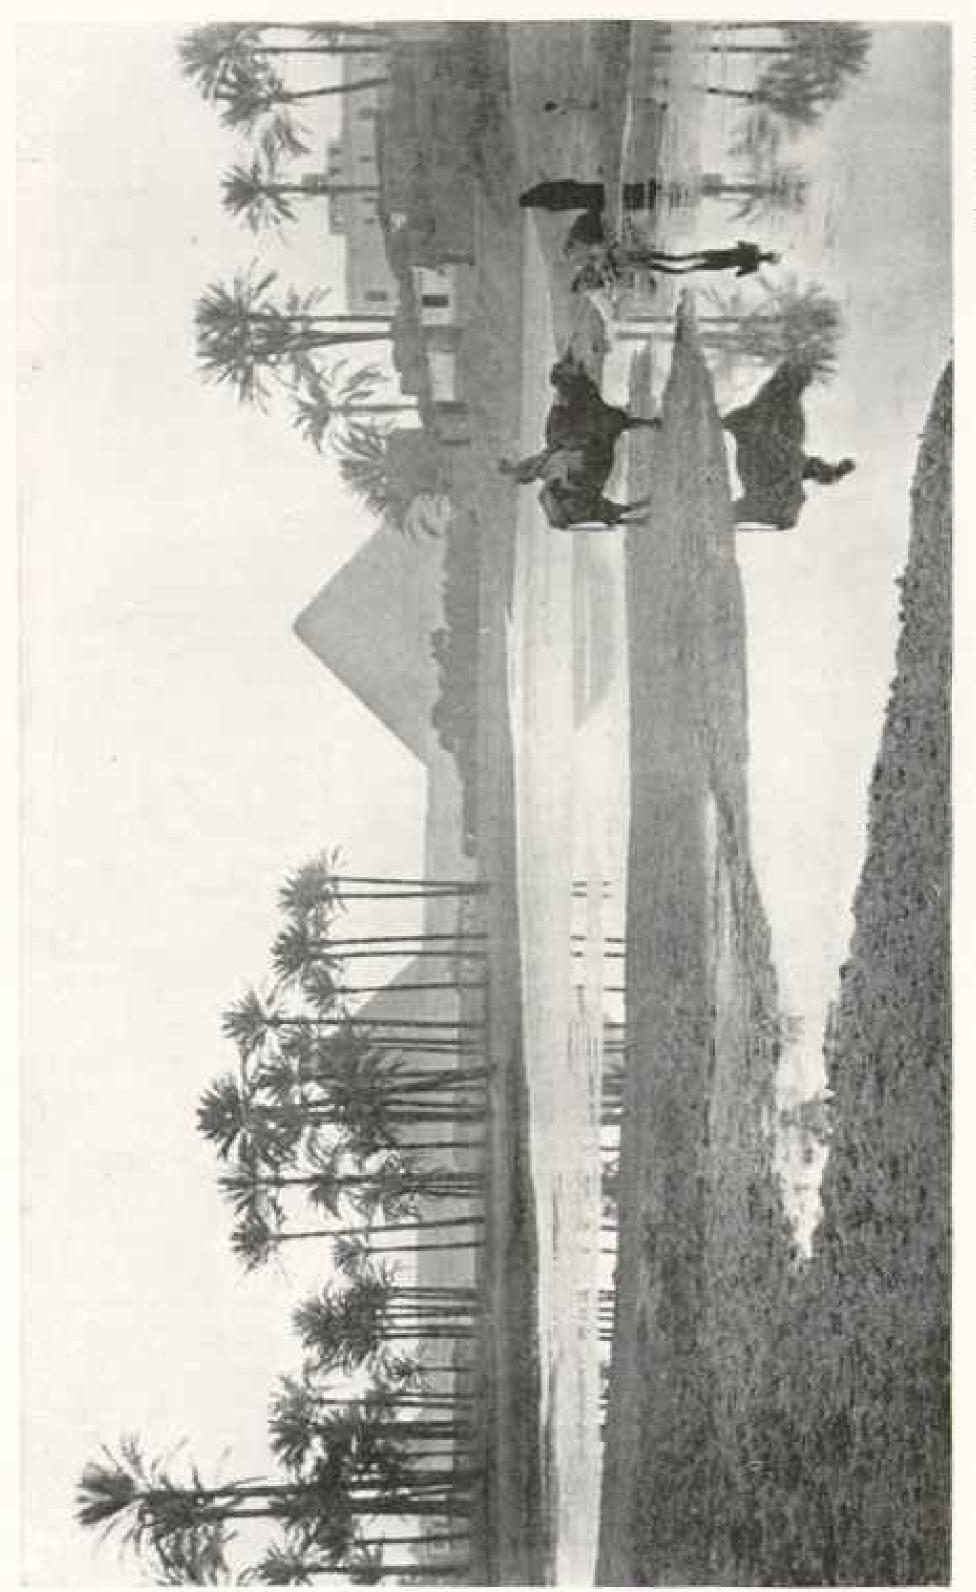


Photo by A. W. Cutter

AN EVENING VIEW OF THE PYRABIDS, AS SEEN PROM THE VILLAGE OF RAFE

The little Arab village of Kafr is the nearest inhabited point to the pyramids of Gieth, which stand on the sellow-brown sands of the vast Library desert, which stretches away to the west until it merges into the Sahara. These wonderful monuments are the property of a trible of desert Araba, who levy a toll (now fixed by the government) on all who come to view them. They lie on the west tank of the Nile about 5 miles southwest of Cairo, with which they are connected by a transway.


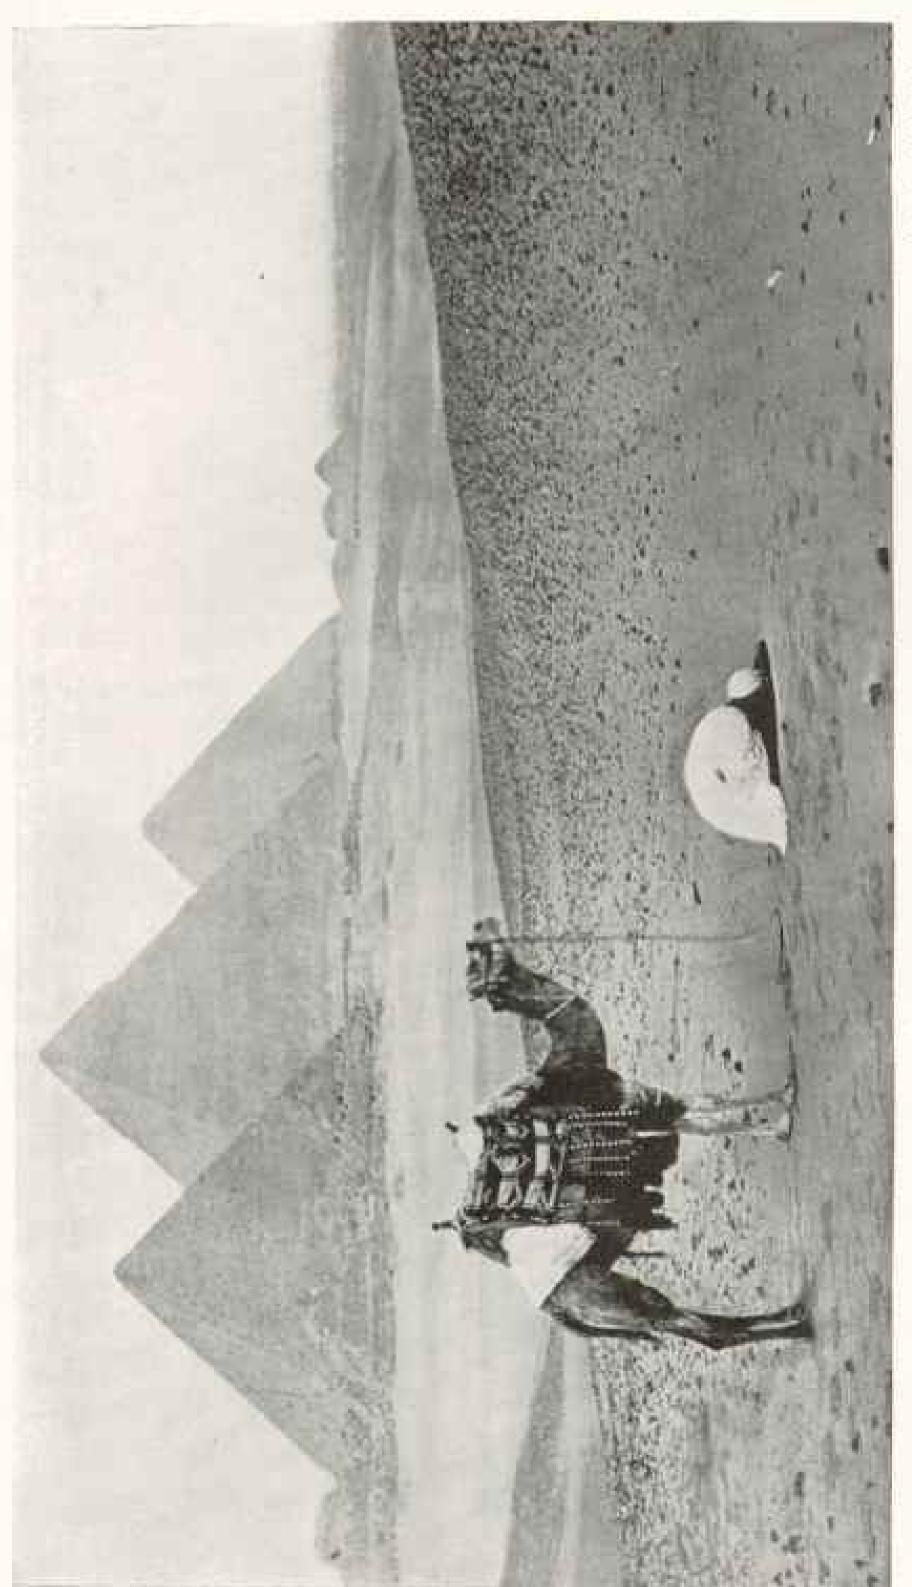


Photo by A. W. Cutter.

SHADOW OF THE THREE PYRAMIDS OF GIZER ESEKT, UNDER THE PRAYER ON THE GREAT D

Pyramid is only a few feet less than that of Khufu, but it stands Menkaura's pyramid is less than half the height of the others The sarcophagus of the king was discovered in it in 1838, but was unfortunately lost at sea At the extreme right of the piet were built as tombs for three kings of the fourth dynasty. ture stands the Great Pyramid, the tomb of Khufu is the Third or smallest pyramid, that of Menkuura These most famous of all the pyramids of Egyp on a platform of rock, which gives it the appearance and is inferior both in dimensions and workmansh while being shipped to England,

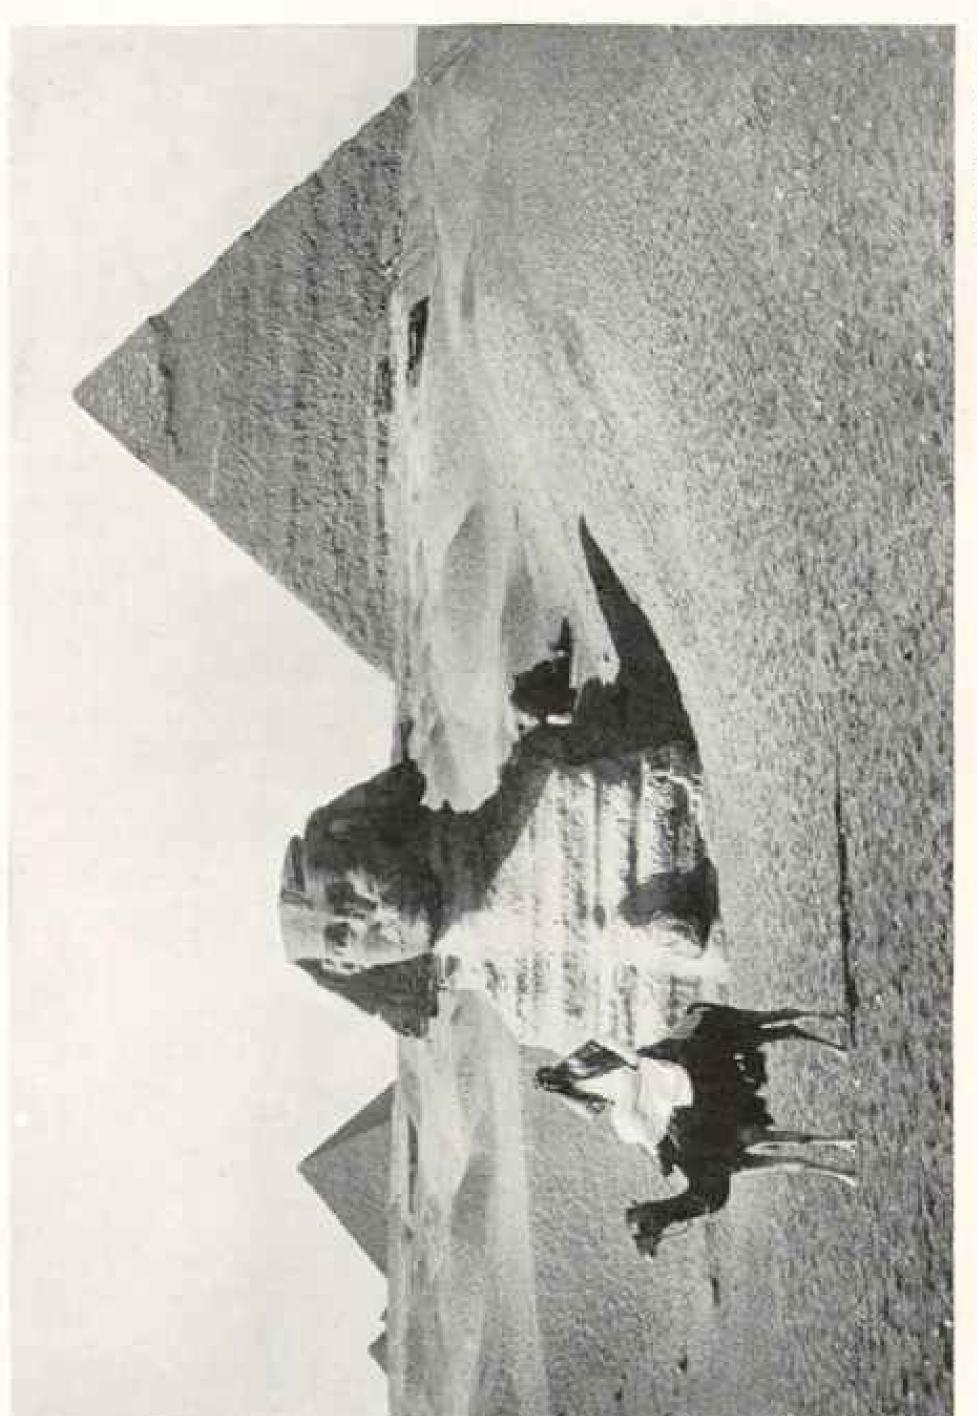

Ploto by J. P. Altherger

THE SPHINS

the Ptolenties, and the Romans restored broken parts, and at the last elegring of the sand the paws are so feet, and from the base to the top of famous and mysterious of all Egyptian sculptures. seems prohab name of the Sphins in Egyptian was Hu. half harried in the sand looking due east across the Nile, head the height is 70 feet. No one knows when this roy fourth dynasty. Between its paws is a tablet relating in a response to a vision, he excavated it. Rameses portions of the beard were found between the paws. Near the Second Pyramid stands the Sphins, the

alties and the accumulation of a most interesting mass of information with regard to the civilization of their time, the organization of their courts, and the attainments of the race over which they ruled.

The tombs of these ancient monarchs were not such as could be erected by a race undeveloped or just emerging from barbarism; they could only have been the product of a people comparatively far advanced in culture, and their contents revealed evidence not only of an astonishing proficiency in the arts of peace, but also of an elaborate and complex social organization, such as we should scarcely have deemed possible at so early a date.

The kings of the earliest dynasties reared no pyramids. Their tombs were great structures mainly underground—that of Aha (who is possibly Mena, the first king of Egypt) at Naqada measures 175 feet by 88 and contains 21 chambers—built sometimes of brick, with a lining of wood, and sometimes floored with stone, as in the case of the tomb of King Den at Abydos, whose granite floor furnishes the earliest known example of the use of stone in building.

These huge homes of the dead were filled with all sorts of objects which might be necessary or useful for the deceased king in the underworld.

THE KING'S SLAVES WERE SLAIN AT HIS GRAVE TO ACCOMPANY AND SERVE HIM IN THE AFTER-LIFE


Around him were buried his slaves, who were doubtless slain at his grave that they might accompany and serve him in the after-life. The chambers of his tomb were stored with stacks of great vases of wine and corn, with pottery dishes, splendid copper bowls, carved ivory boxes, golden buttons, palettes for grinding face paint, chairs and couches of claborate design and decoration, ivory and pottery figurines, and plaques bearing records of the king's valor in war or his piety in the founding of temples.

Here and there in this wreckage of inunemorial splendors a little touch helps us to realize that these dim historic figures were real men, who loved and sorrowed as men do still. Close to Mena's second tomb at Abydos lies that of his daughter—Bener-ab, "Sweetheart," as he called her—to suggest how love and death went side by side then as now.

The furniture of the tombs reveals an amazing proficiency in the arts and crafts. Ebony chests inlaid with ivory, stools with ivory feet carved in the shape of bull's legs, vessels cut and ground to translucent thinness, not only out of soft alabaster, but out of an iron-hard stone like diorite, finely wrought copper ewers, all tell us that the Egyptian of the earliest dynastic period was no rude barbarian, but a highly civilized craftsman. Perhaps the daintiest and most convincing evidence of his skill is given by the bracelets which were found encircling the skeleton arm of the queen of King Zer. of the first dynasty, which, alike for the grace of their design and for the skill with which the gold is wrought and soldered, are admirable.

But these tombs have not only yielded evidence of the skill of the Egyptian workman; they have taught us that even at this incredibly early date the nation had a complete method of expressing its thought and had reached a thoroughness of organization which we should not have imagined possible. At an early period in the first dynasty hieroglyphic writing has begun to make its appearance; by the middle of the period it is completely developed; before the end of the dynasty it has already become so familiar that the symbols are carelessly engraved. On the very lowest date which may be assigned to the dynasty this fact gives the Egyptian an astounding start of all other nations in the art of writing.

The inscriptions tell us of a court fully organized, with a complete bureaucracy. Mena has his chamberlain. His successor, Zer, tells us of a "commander of the inundation," a proof of the early date at which the Nile flood was utilized and regulated for the benefit of the land. In subsequent reigns of the same dynasty we meet with a "commander of the elders," a "keeper of the wine" (the ear-

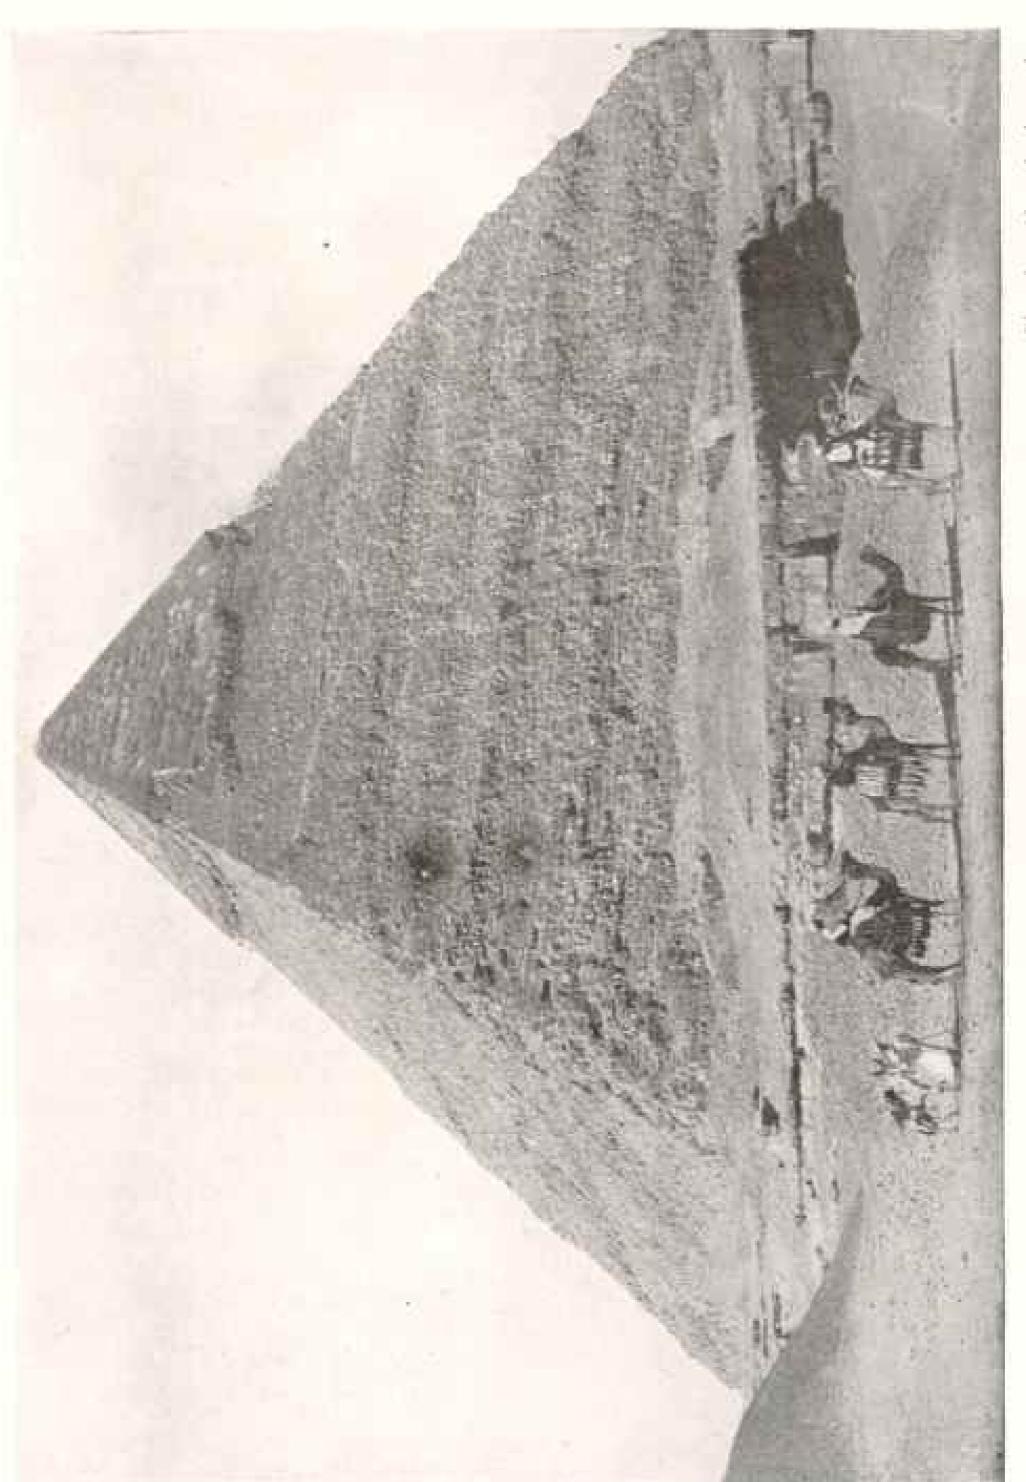

Plante from Alexander Azronneho

THE SECOND PURKNED

manancy cap extends for 150 feet and formithes an excellent scale by which some idea of base to stimmit in magnificent country o perfect workmanship as the Great The Second Pyramid, the tomb of Khafra, is not served. All three pyramids were originally sheath finished that it was almost impossible to discern a hallders of Cairo despoiled the pyramids to obtain Second Pyramid, as can be seen in the picture. This liest ancestor of the "Pharaoh's chief butler," with whom we have so long been familiar), a "leader of the peers," head of the most ancient of earthly aristocracies, and a "master of ceremonies," while the titles of "royal seal bearer," "scribe of accounts of provisions," "keeper of the king's vineyards," and "royal architect" show us with what minuteness the business affairs of the court were regulated.

THE CIVILIZATION OF EGYPT A SLOW GROWTH

In a sense these revelations of the earliest Egyptian dynastic civilization have done much to simplify the enigma presented by Egyptian history. The civilization of the Nile Valley no longer challenges us with the Great Pyramid as the first essay of its development or seems to spring full-grown like Athene from the head of Zeus.

We can see that civilization in Egypt followed the natural course of development by which it has grown to maturity in all other lands. It was the gradual growth of many centuries of patient effort on the part of pioneers whose greatness the later Egyptians reverenced by a true instinct, though perhaps their actual knowledge of them was even scantier than that which the excavations of Abydos have given to us.

In another sense, however, the wonder has only been increased by the disclosure of the fact that the rise and development of this race are so much more ancient than was believed a few years ago to be the case. The emergence from the mists of the past of this ancient world, with its great kings, its ordered courts, and its highly organized government, is surely one of the most dramatic surprises which the progress of scientific investigation has presented to the modern mind.

AT WHAT DATE DOES HISTORY DAWN IN EGYPT?

To what date are we to assign these earliest beginnings of monarchy? Here, unfortunately, we become at once involved in a controversy in which a century is but "as yesterday when it is past,

and as a watch in the night." Egyptology is at present hopelessly divided against itself over the question of all dates prior to 1580 B.C. Into the details of the controversy it is useless to dream of entering.


Between the dating of the Berlin school, represented by Mayer, Erman, and Breasted of Chicago, and the longer system, whose chief advocate is Flinders Petrie, there is a systematic difference of many centuries. Petrie places the beginnings of the first dynasty at 5510 B. C., while the Berlin school brings them down to 3400 B. C.

The difference is staggering and no compromise upon a middle term is possible; only the emergence of fresh facts can settle the question. At present the balance of opinion inclines toward the shorter system of dates; yet it must be remembered that new discoveries may at any moment make it untenable and force us back upon Professor Petrie's ampler scheme. In any case, and upon the most conservative estimate, we must accept the fact that by the middle of the fourth millennium B. C. society in Egypt was already in a state of high organization and culture.

Thus the discoveries of the last few years, and especially those of Professor Petrie at Abydos, have put our ideas of these earliest dynasties of Egypt upon a solid basis of material fact. The interpretation of the results and the identification of the various kings whose relics have been discovered are slow and laborious processes, involving much controversy; but the uncertainty of many of the details does not affect the outstanding historical fact. The kings existed and ruled over a state which, far from being barbarous, was already far advanced in the scale of civilization.


AN HISTORIAN'S REPUTATION RESTORED BY

That these early centuries witnessed a steady growth in knowledge and power on the part of the rulers of the Nile Valley is evidenced by the explorations which have been made with regard to the kings of the dynasties immediately

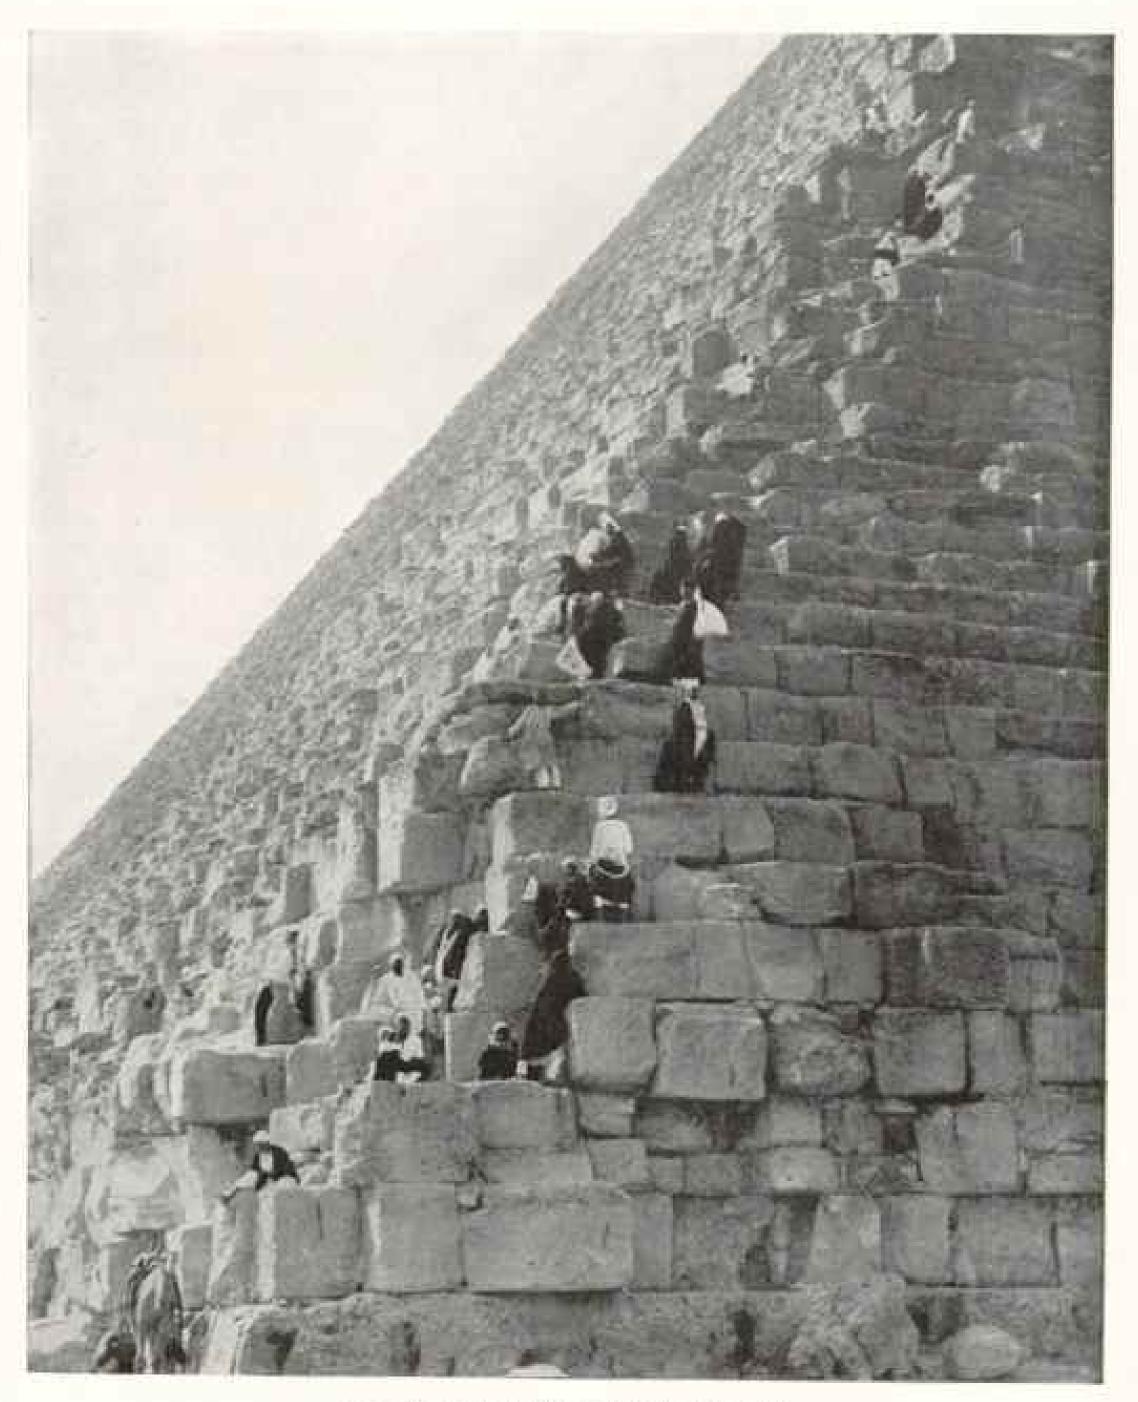

A NEAR VIEW OF THE GREAT PYRAMID

No building, ancient or modern, has ever commanded so much interest and attention as this vast tomb of Khufu. Today it measures about 755 feet at the base and its height is 451 feet. Before its outer limestone casing was removed the sides were 20 feet longer and the top 30 feet higher. It has been calculated that the weight of its stones amounts to some 6 million tons and that it contains enough material to build a town large enough to house 120,000 people. The Greek historian, Herodotus, states that 100,000 men were employed for over 20 years in its erection, working in relays of three months at a time. Near the Second Pyramid the remains of barracks, affording accommodation for 4,000 skilled masons, can still be traced. The stone was cut from quarries on the opposite side of the Nile and floated across at the time of the annual inundation,

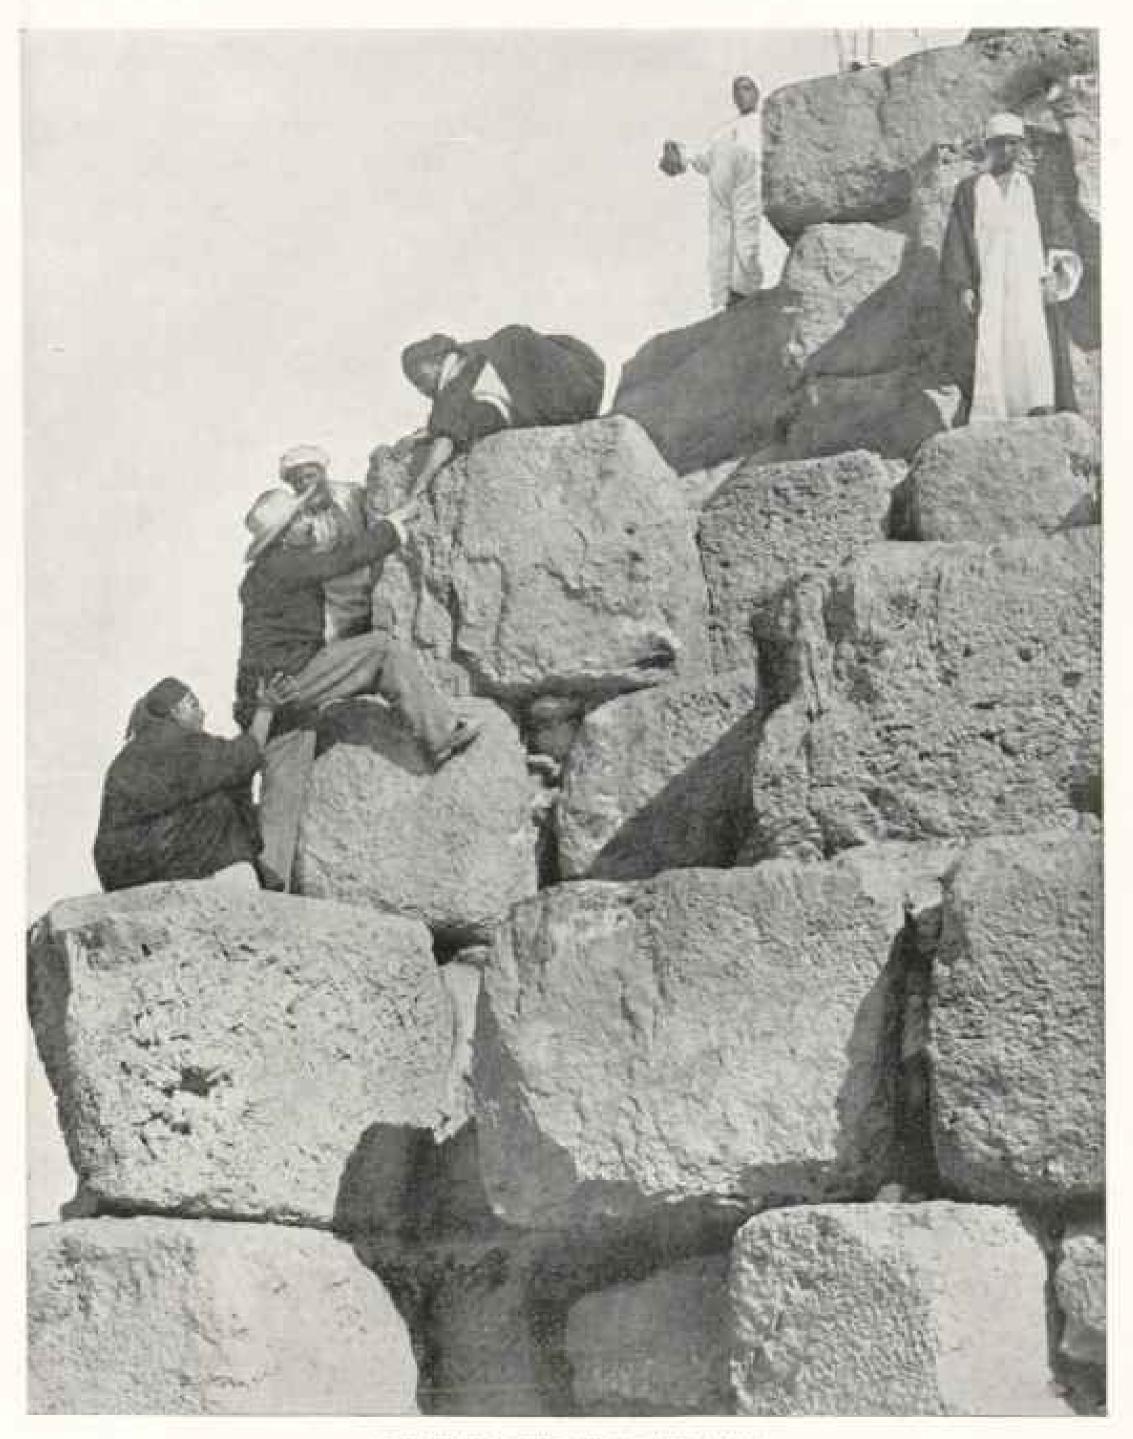

ASCENDING THE GREAT PYRAMID

"Accuracy equal to obtician's work, but on a scale of acres instead of inches, is scarcely what one expects in buildings reared nearly 5,000 years ago, but the huge blocks of the Great Pyramid, 2,300,000 of them, weighing on an average of 2% tons apiece, while some run to 40 and 50 tons, are squared, fitted, and leveled with an accuracy which puts to shame our best modern work, and compels our respect not only for the strength, but for the skill, of these mighty builders before the Lord" (see page 973).

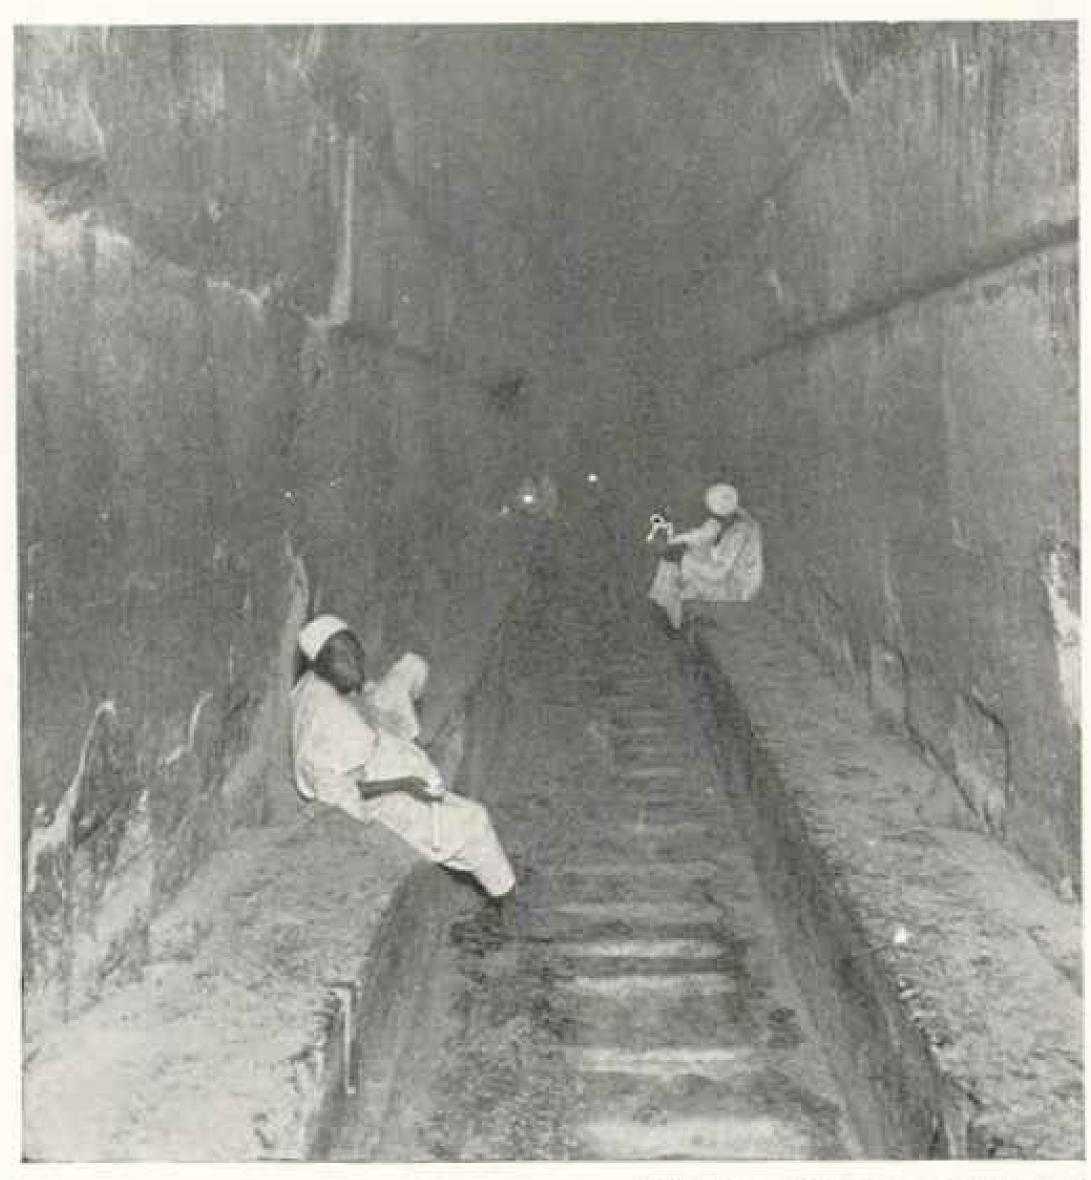


Photo and copyright by Underwood & Underwood

LOOKING DOWN THE MAIN PASSAGE LEADING TO KHUFU'S SEPULCHER WITHIN THE GREAT PYRAMID

Right in the heart of the Great Pyramid was the sepulchral chamber of Khufu (Cheops), approached by this gloomy passage. It is 175 feet long and 28 feet high, but only 7 feet in width. The four natives with candles give some idea of its length and gloom, the last candle showing as a mere spot of light glimmering in the distance. Notice the perfection with which the stones join each other, especially at the right of the picture. Some of these blocks, weighing many tons, are set together with a contact of one five-hundreths of an inch, a refinement of the mason's art which is seldom or never equaled in our own day.

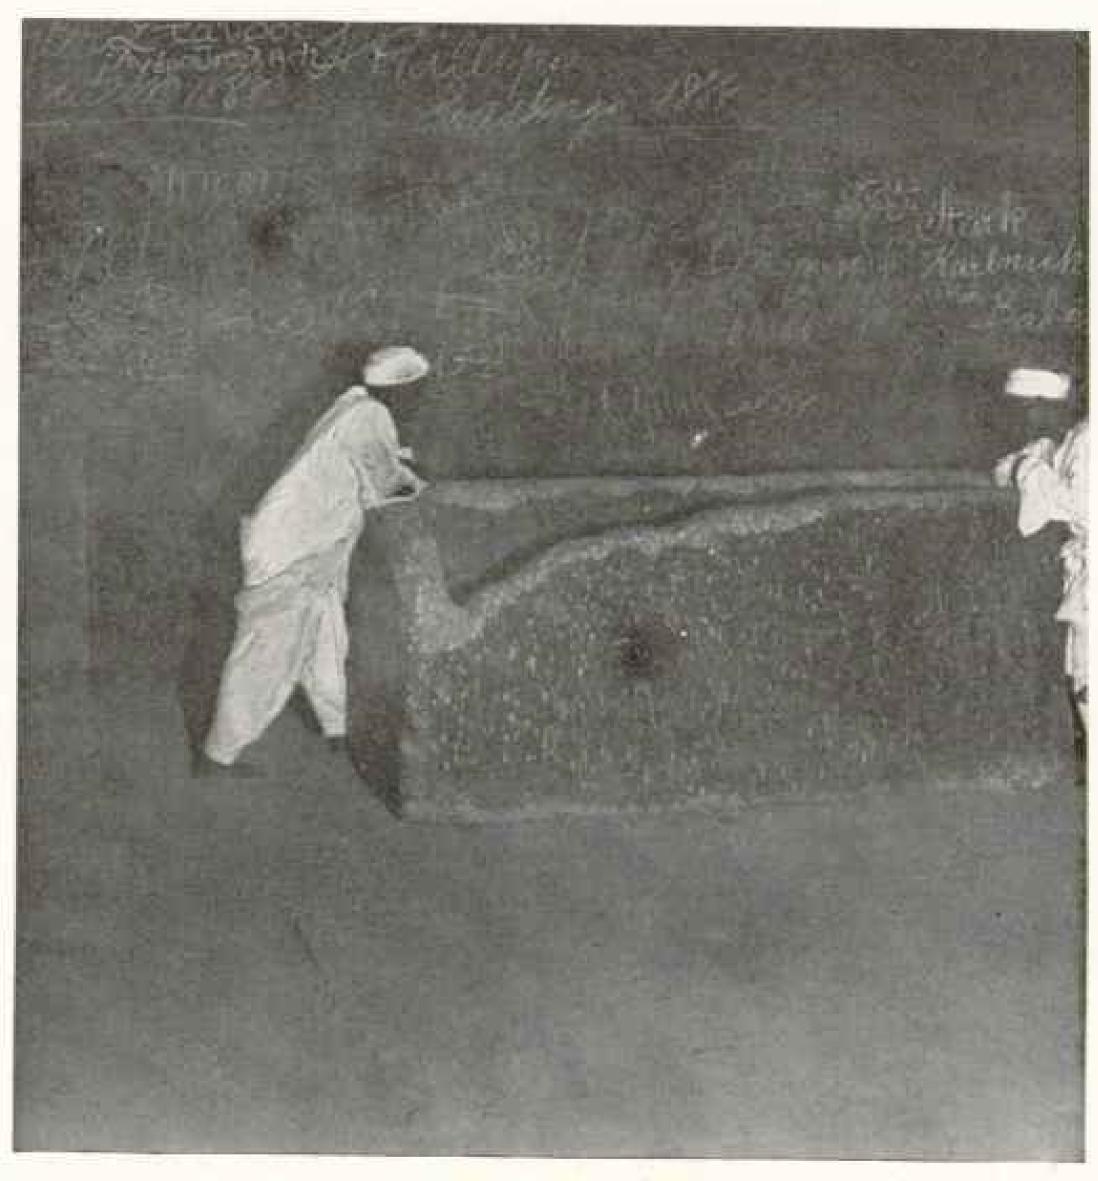


Photo and copyright by Underwood & Underwood

TROKEN BY ROBBERS: KHUFU'S SARCOPHAGUS, IN THE SEPULCHER CHAMBER OF THE GREAT PYRAMID, EGYPT

Unlike the rest of the pyramid, which is faced with limestone, the burial chamber of Khufu is constructed of great blocks of weathered granite cut from the rocks at the first cataract of the Nile. Over it are five small chambers, one above the other, designed to render the roof of the burial chamber safe by relieving it of some of the weight of the vast mass, which would otherwise press dangerously upon it. After the body of Khufu was laid in his great surcephagus, the entrance to this chamber was scaled and workmen dropped into their places great blocks of granite, filling the end of the passage for 17 feet; then a cumningly devised block was filled into the entrance which hid all appearances of an opening. Yet, despite all these precautions, the rest of the great King was disturbed by Arab tomb robbers, who forced their way in, plundered the sacred body, and carried off the jewels and the rich furniture which always surrounded the royal dead.

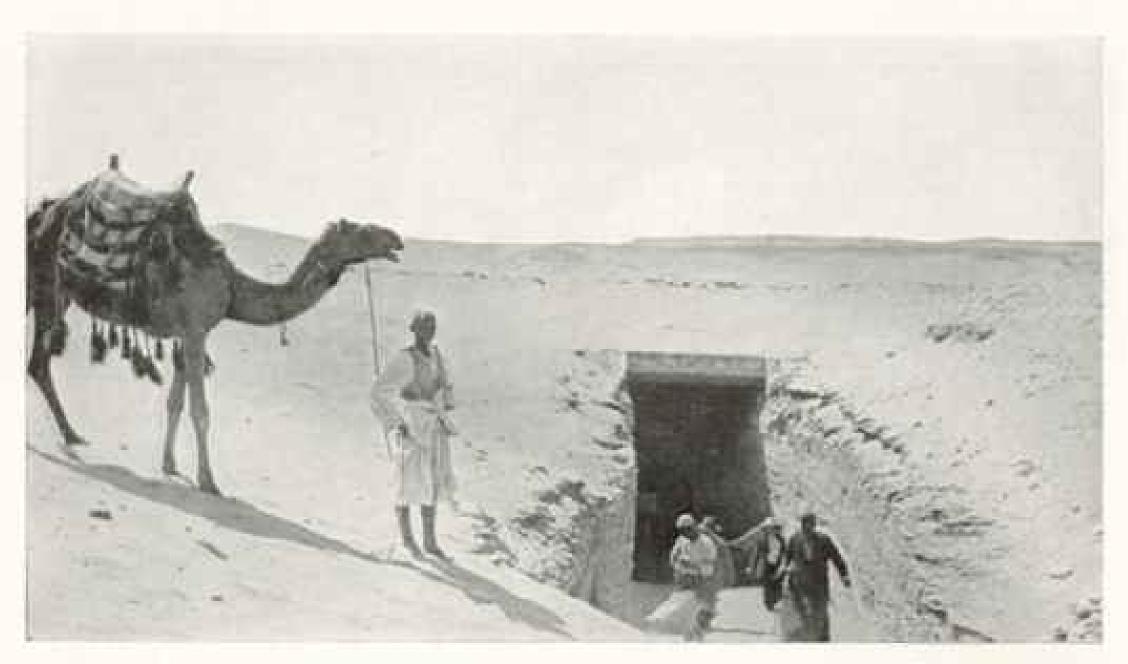


Photo by A. W. Cuther.

ENTRANCE TO THE TOMBS OF THE SACRED BUILLS AT SAQQARA

The tunneling goes far under the desert. There are 24 huge marble sarcophagi, each dedicated to one of the sacred bulls

at Bet-Khallaf, near Abydos, the tombs of two of the earliest kings of the third dynasty—Zeser and Sa-nekht. The tomb of Zeser is a huge mass of brickwork 300 feet in length by 150 in breadth and 40 in height. The actual tomb chambers are hewn in the rock 20 feet below the ground level and 60 feet below that of the summit of the tomb.


Unfortunately, like so many of the royal tombs of Egypt, the great sepulcher had been rifled in ancient days; but sufficient relics survived, in the shape of clay jar-sealings, alabaster vases and bowls, and other articles, to identify the owner of the tomb. Sa-nekht's tomb was very similar to Zeser's, and the skeleton of the dead king, which was found in it, seems to suggest that poor Manetho, whose credit as an accurate historian has often suffered at the hands of incredulous moderns, was not always so inaccurate as he has been accused of being.

Among the marvels which he relates of the early kings there is a statement that a certain king named Sesokhris measured 5 cubits in height. The skeleton of Sa-nekht proves its owner to have been a giant 7 feet high, and it is tempting to identify him with Manetho's fivecubit Sesokhris, especially as names were never Manetho's strong point.

THE BUILDERS OF THE PYRAMIDS

Like many of these ancient kings, Zeser was not content with a single tomb.
He had another at Saqqara, near Memphis—well known to Egyptian tourists
as the Step Pyramid—the most imposing
structure which has survived from such
an early date. It measures between 300
and 400 feet in length on the sides and is
195 feet in height, while the chambers of
the interior were lined with fine blue and
green glazed tiles (see page 959).

A king who could rear such a structure had evidently at command the resources of a very well organized state and capable architects. Zeser's architect and vizier, Imhotep, became in later days the typical wise man of Egypt, "whose counsel was as though one inquired at the oracle of God," He was the patron saint of the Egyptian scribe, who always poured a libation to him from his waterjar before beginning to write. Two

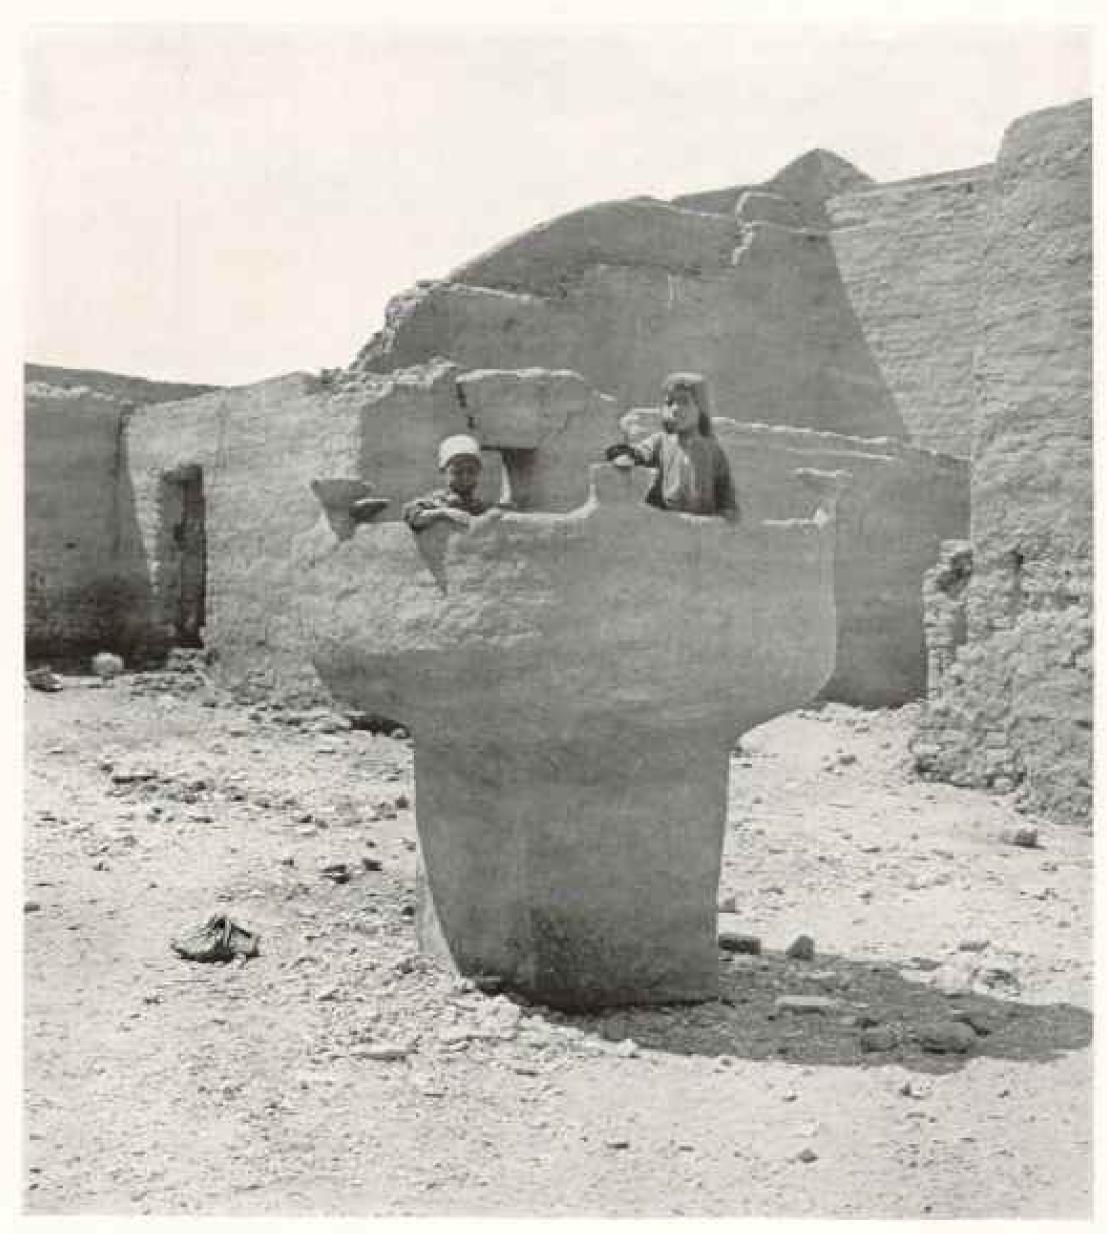

Phisto by A. W. Cintin


COING TO BED IN A CUP

These curious cup-like structures, made of sun-baked mud, are seen in Egyptian villages. Families aleep in them at night during the great heat of the summer to escape the snakes and acorpions which abound.

thousand five hundred years after his death be had been transformed into a god of medicine, whom the Greeks knew as Imouthis and whom they identified with their own Asklepios.

The head of the giant Sa-nekht, carved in the rock of the Wady Maghareh at Sinai, presents strongly marked Ethiopian characteristics, and Petrie infers that the third dynasty marks an infusion of Ethiopian blood into the ruling race, whether by conquest or marriage, the mixture of race giving rise to the remarkable development of energy which characterized the succeeding dynasty.

That development, of course, is sig-

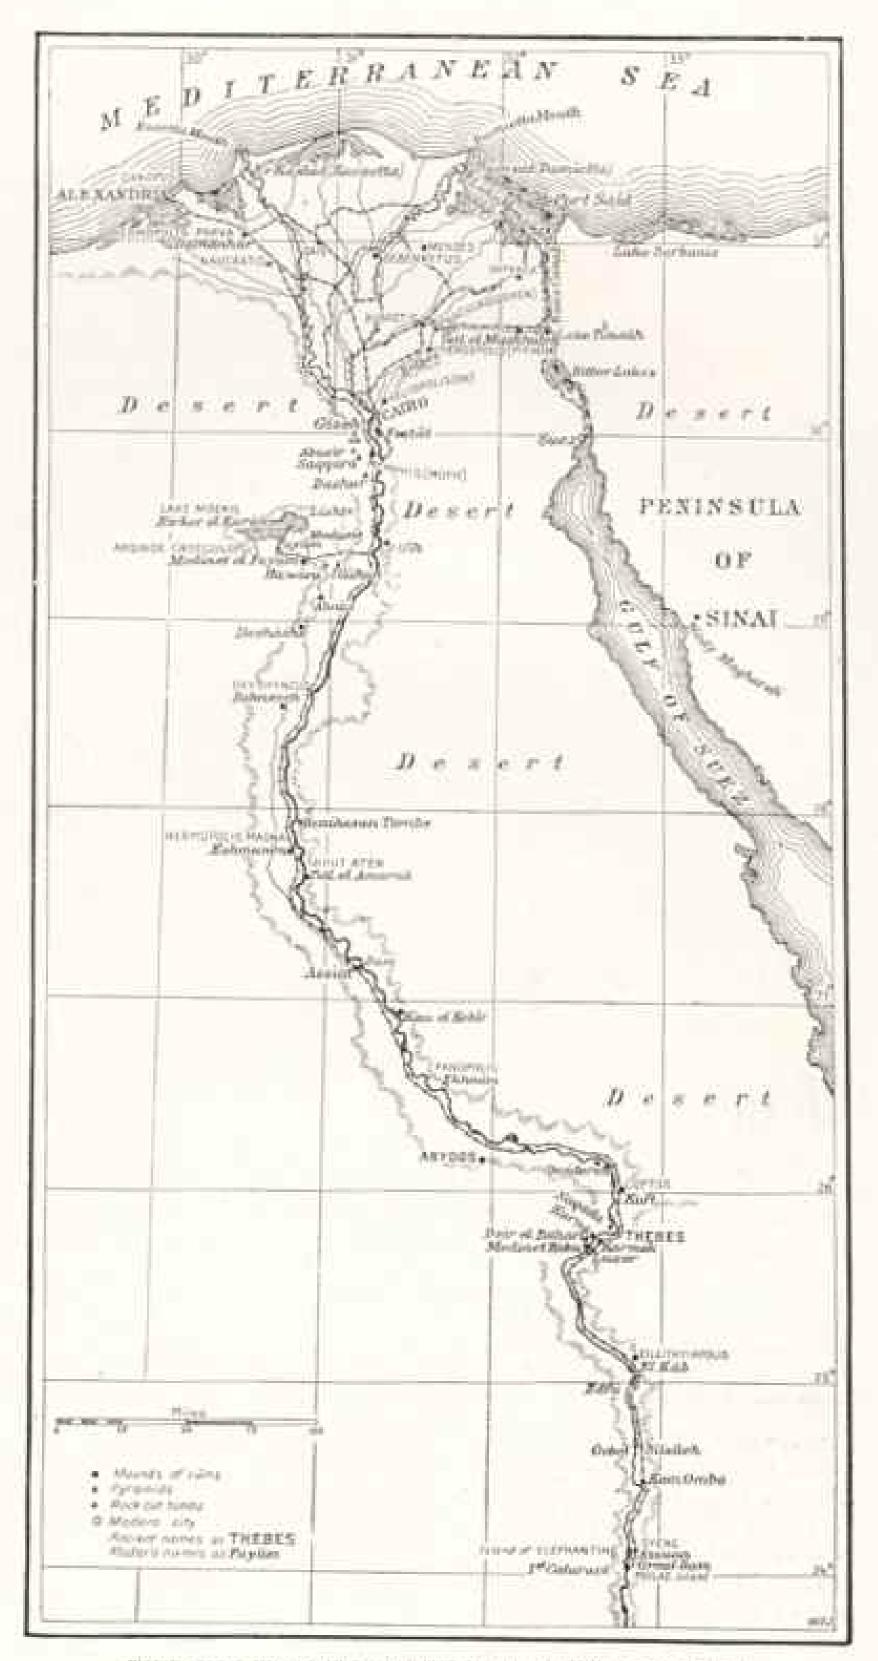

THE NILE FROM ITS MOUTH TO THE FIRST CATARACT

nalized by the achievements of the great fourth dynasty—the race of the pyramid builders. Modern investigation has added nothing very striking or novel to our knowledge of the mighty men who reared the greatest masses of stone ever heaped upon earth by the hand of man; but Petrie's course of systematic triangulation and measurement, carried out in 1881-1882, has only added to the wonder and admiration which the mere aspect of the pyramids compel.

Accuracy "equal to optician's work, but on a scale of acres instead of inches," is scarcely what one expects in buildings reared nearly 5,000 years ago. But the huge blocks of the Great Pyramid, 2,300,000 of them, weighing on an average 2½ tons apiece, while some run to 40 and 50 tons, are squared, fitted, and leveled with an accuracy which puts to shame our best modern work and compels our respect not only for the strength, but for the skill of these mighty builders before the Lord (see pages 956 and 967).

No amount of mere brute strength could have accomplished such a feat. There must have been controlling intellect of the very highest type at work, supplemented by a determined and despotic will capable of bending the whole resources of the nation to a single task. That the task may have had as its sole object the glorifying of the egotism of a single individual need not diminish our wonder at the patience and skill with which it was carried out.

The most interesting result of modern investigation on this period of Egyptian history has, however, been one not of exploration, but of historical and literary work. An Egyptian papyrus of the twelfth dynasty, brought home by an English traveler, was transferred by its owner, Miss Westcar, to the famous German Egyptologist, Lepsius, from whose property it was purchased by the Berlin Museum. The Westcar papyrus has afforded us the earliest series of wonder tales known to exist in the world; but it has also yielded the hint of a sudden revolution in Egyptian history, and of the usurpation of the throne at the close of the great period of the pyramid builders by a line of priestly kings.

THE ARABIAN NIGHTS OF ANCIENT EGYPT

The story pictures to us King Khufu, the builder of the Great Pyramid, listening to his sons as they tell him tales of the great magicians of former days.


One of them, Prince Hordadef, tells him of a magician of the present time who can do deeds as great as those of any wonder-worker of the past. He is dispatched to summon the wizard, and, after the latter has given evidence of his power, he prophesies to the king of the approaching birth of three sons of a priest of the sun-god Ra, who shall be really children of the god and shall reign over the whole land of Egypt. The king is naturally troubled at such a prophecy, and the magician consoles him by telling him that the change of dynasty shall not come in his day. "Thy son, his son, and then one of these." The story then goes on to tell of the birth of these wonderful children and of the divine honors which attend them. Obviously we have here an attempt to give a popular account of the rise of a new race of kings devoted to the worship of Ra, the sun-god.

THE NEXT (FIFTH) DYNASTY WERE SUN-WORSHIPPERS

The complement of the narrative has been furnished by the excavations of the German explorers at Abusir, which have yielded unmistakable evidence of the fact that the kings of the fourth dynasty were succeeded by a dynasty of sun-worshipers. Von Bissing, Schaefer, Thiersch, Rubensohn, and Borchardt have there laid bare the great sun temple of Neuser-ra, sixth king of the fifth dynasty.

Its whole plan and conception are unlike those of the normal Egyptian temple. It consists of a large, open court, with chambers surrounding it; in the center of the court stands a huge altar of fine alabaster, on which slain oxen were offered to the sun; west of the altar rises a large mound, on which was placed a truncated obelisk—the emblem of the solar deity. There was no holy of holies, the emblem of the god standing open to the sky to catch the sun's rays.

The interior walls of the court were covered with reliefs representing the production of life, scenes from the river,

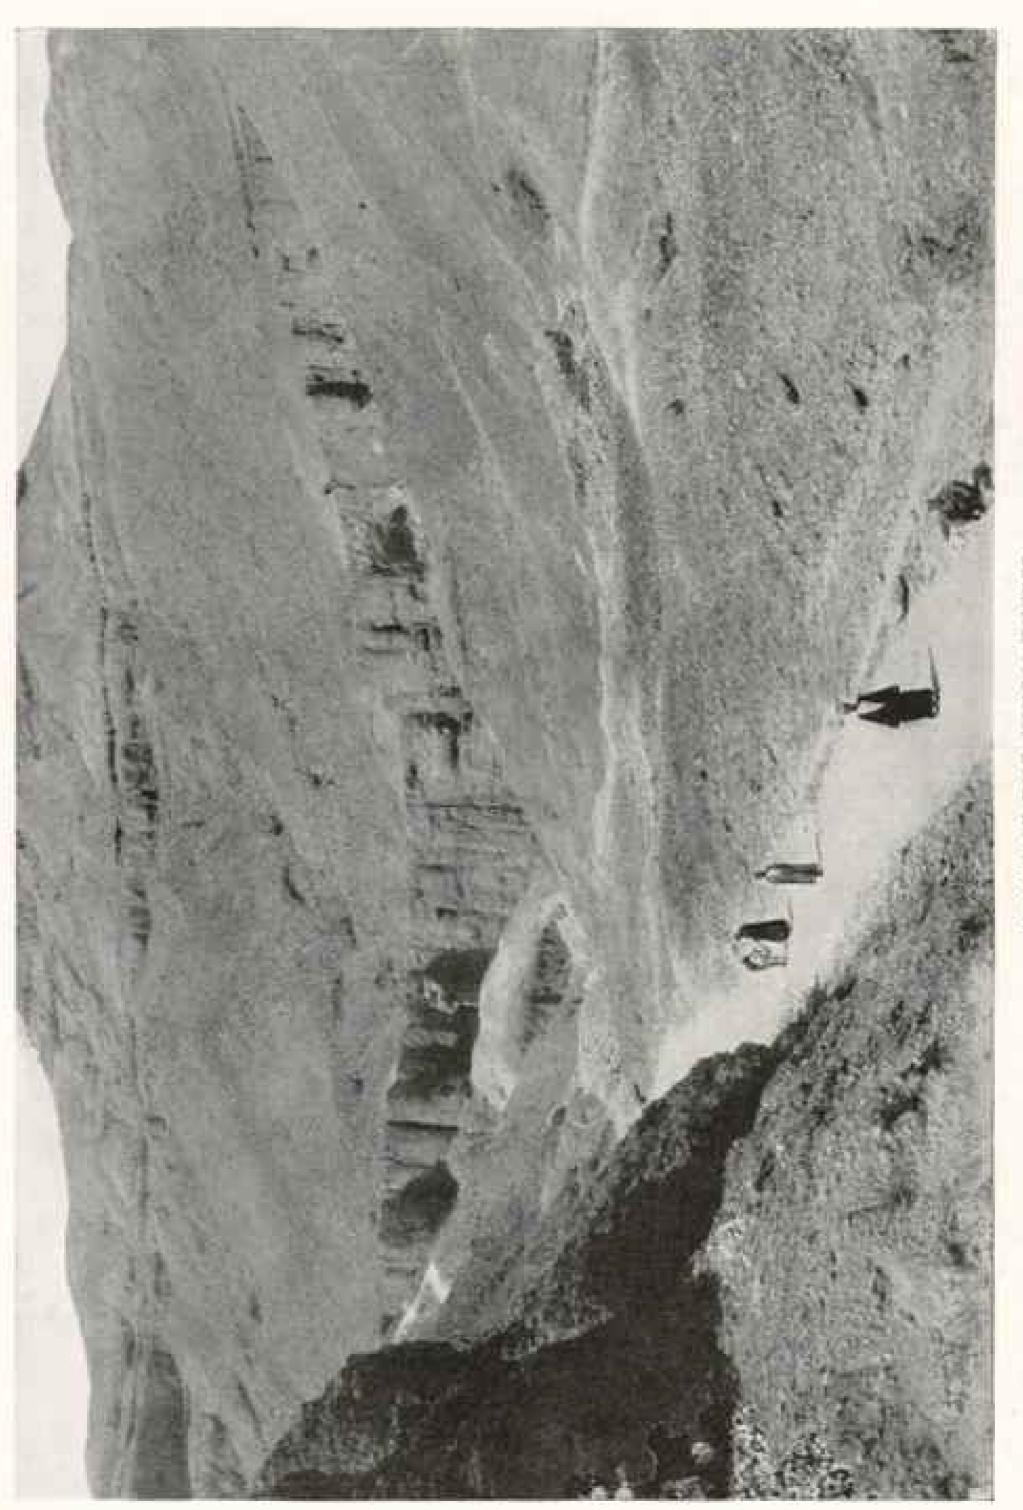

YOMES OF THE KINGS: THERES

obsence to baffle their relentlets enemies stricken priests shifted the bodies of their dead masters from tomb to tom the cliffs of Deir-el-Bahar to the mouth of a disused tomb at the foot - Sahari a resting place sufficiently bowels of the earth, was discovered the most wonderful HIBRERLY "In 1881 M. (now Sir Gaston) Maspero was , they found in the pit of The mummies were found, 22d dynasties. history. . . The m priests of the 21st and at last, about 940 B. C., 986 and 989).

swamps, fields, and incidents in the state worship, while on the outer walls were pictures of the warlike achievements of the Pharaoh. Beyond the court. on the south side, lay a great model of the bark of the sun-god, 00 feet long. built of brick. Apparently each king of the dynasty crected such a temple, as a complete series can be traced, extending to the reign of Assa, the eighth king.

A RACE OF EXPLORERS AND ADVENTUROUS TRADERS

The kings of this line are also the first to begin systematic exploration of the surrounding countries. Already, a century and a half before, Senefern, the last king of the third dynasty, had sent a fleet to Syria; but Sahura, the second king of the priestly line, records a voyage to Punt, or Somaliland, which resulted in the bringing back of 80,000 measures of myrrh, 6,000 pounds weight of electrum (goldsilver alloy), and 2,000

staves of ebony wood. Assa, one of Sa- tians, even at this early period of their hura's successors, began that exploration of the Sudan which was continued so vigorously by the barons of Elephantine under the kings of the next dynasty. Altogether the priestly line of Heliopolis seems to have been more vigorous than priestly lines have usually been in the experience of other nations.

Perhaps the most remarkable result of investigation into the story of Egypt during the period covered by the next line of kings with whom the Old Kingdom, as it is named, closes is the proof afforded by the records that our old idea of Egypt, as a kind of China of ancient days, strictly isolated from other nations and jealous of all communication with them, must be entirely discarded. Far from being a secluded people, the Egyp-



Photo from Egypt Exploration Fund

USHAUTIS, OR ANSWERERS

It was the custom with the earlier dynasties when a king died to slay all the members of his harem and many slaves, that they might be buried with him. Later, instead of human sacrifices, these little figures, or mimic servants, were substituted (see pages 981 and 983).

> history, were active and enterprising merchants and explorers, pushing their trade far into the Sudan and maintaining regular communication by sea with Somaliland and Syria, and in all probability with the rising Minoan Empire of Crete.

THEY CAPTURE A PIGMY FOR THE KING

The story of the exploration of the Sudan and the Red Sea voyages we owe to the decipherment of the tomb inscriptions of the barons of Elephantine, who during the reigns of the sixth dynasty were the wardens of the Egyptian marches on the southern frontier-"Keepers of the Gate of the South"-as they called themselves. The most interesting of these inscriptions is that of

Herkhuf, who tells us of four expeditions which he made into the Sudan for gold-dust and ivory. On the last of these he got into touch, as Assa's caravan leader had done before him, with a tribe of that race of pigmies whom Stanley encountered in his search for Emin Pasha. Herkhuf succeeded in capturing one of the dwarfs and bringing him back

to Egypt in safety.

His king, Pepy II, who at this time was a boy of 8 years, was highly delighted at the news of the capture of so choice a plaything, and wrote Herkhuf a gracious letter of thanks, full of minute instructions as to the care to be exercised over his precious charge. Herkhuf is to take great precautions lest the dwarf should fall into the river on his way down the Nile, and proper people are to watch behind the place where he sleeps, and to look into his bed ten times in the course of each night to see that all is well.

A QUAINT LETTER

"My Majesty," says the king, "wisheth to see this pigmy more than all tribute of Bata and Punt. And if thou comest to court having this pigmy with thee sound and whole, My Majesty will do for thee more than was done for the divine Chancellor Baurdeed in the times of King Assa, and conformably to the greatness of the desire of the heart of My Majesty to see this pigmy." Herkhuf was so proud of the king's letter that he caused it to be engraved, word for word, on the wall of his tomb at Elephantine as proof of the royal favor which he

enjoyed.

by the kings of this and the preceding dynasty, and mainly opened by Maspero in the early eighties, that there were found the so-called "Pyramid Texts," which have furnished us with most of our knowledge as to Egyptian religious beliefs in the earliest historical periods. These texts reveal an exceedingly primitive and almost savage set of religious conceptions, especially with regard to the life after death, which contrasts somewhat strangely with the high standard of material civilization which the period had attained.

A wild fancy pictures the deceased king ascending to heaven as a herce huntsman who lassoes the stars and deyours the gods. "Heaven rains, the stars fight, the Bowmen [one of the constellations | wander about when they have seen how he ascends and lus a soul as a godwho lives upon his fathers and feeds upon his mothers. . . . He devours men and lives upon the gods. . . . He it is who devours their magic and swallows their illuminated ones. The great ones among them are his morning meal. the middle ones are his evening meal, and the small ones his night meal. Their magic is in his body; he swallows the understanding of every god."

Such ideas are not uncommon among cannibal tribes at the present time; but they coexist somewhat strangely with all the material splendors of the Old Kingdom and with the placid common sense and genial worldly wisdom which have already begun to find literary expression in the precepts of Ptah-hotep and Gem-

milcan.

THE DARK AGES OF EGYPTIAN HISTORY

With the decline of the Old Kingdom, at the close of the sixth dynasty, we enter upon one of the great dark periods of Egyptian history, whose darkness even the industry of modern exploration has done very little to lighten-probably because there is very little to discover about the period. It seems to have been a time when the elements of society in the land were in a state of solution, when the central power of the old Memphite monarchy no longer sufficed to control the feudal barons and princelets, and when the strife for dominion between the northern and southern sections of the community prevented that settling down to peaceful industry without which great work cannot be done.

The seventh, eighth, ninth, and tenth dynasties remain more or less shadowy to us, and we have only brief suggestions and glimpses of a civil strife which surged hither and thither in the narrow Nile Valley, as the princes of the north or the south alternately prevailed. The outcome of all the confusion was the shifting of the national center of gravity.

from Memphis to Thebes.

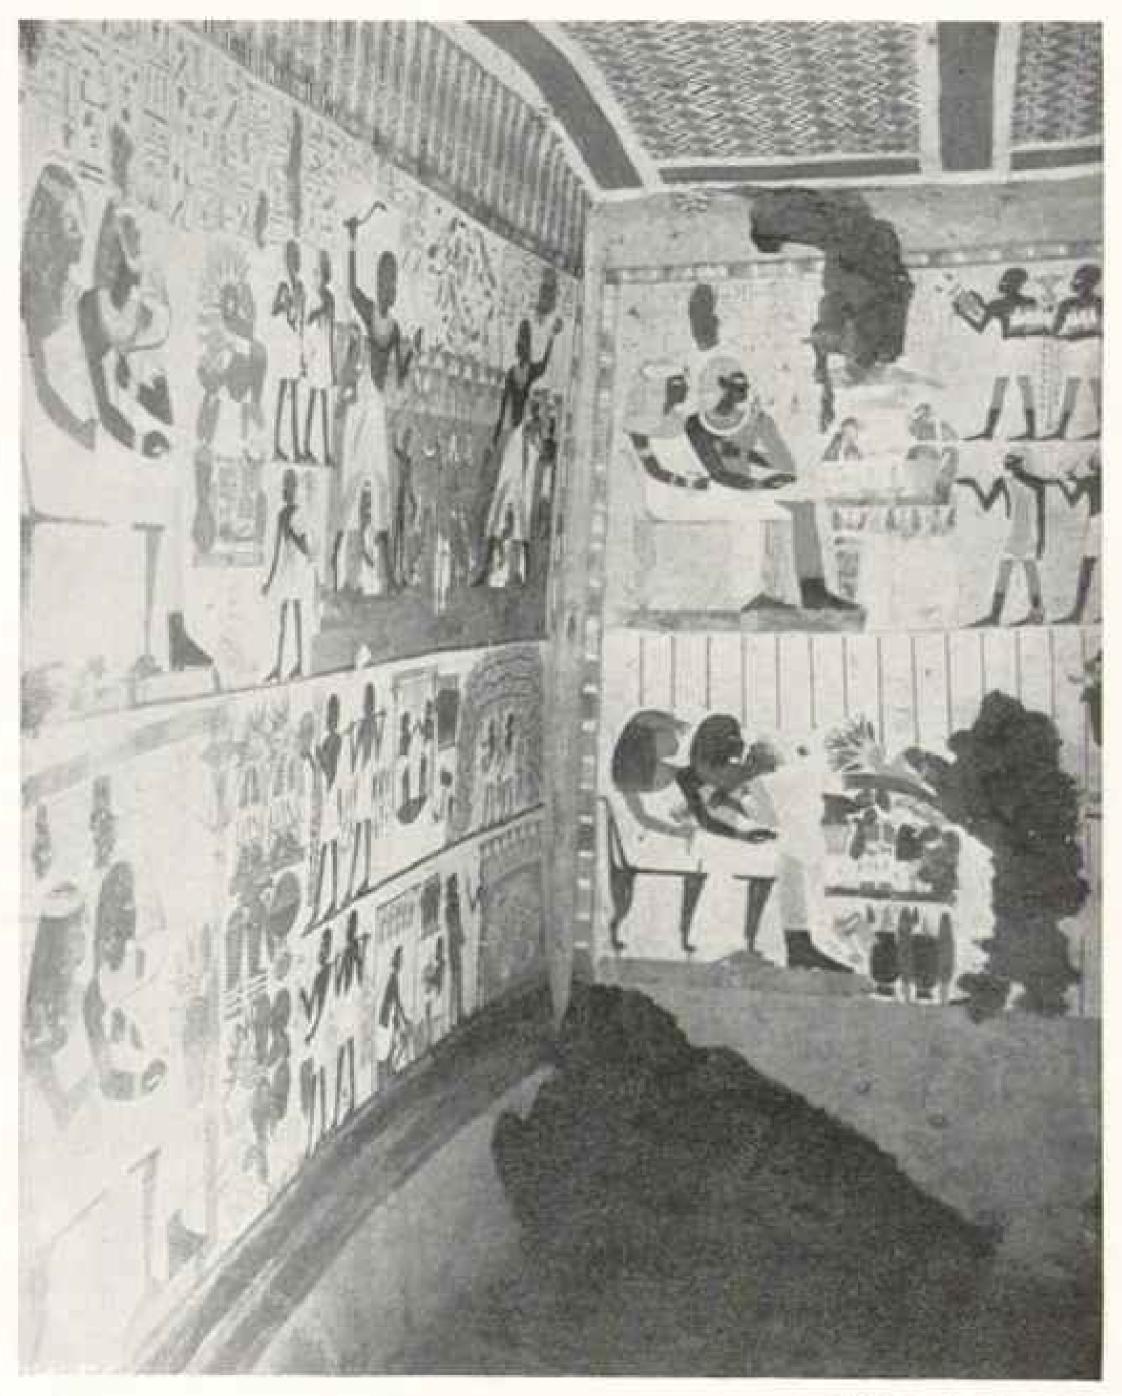


Photo from Rev. James Barkle.

AN EGYPTIAN NOBLE AND THE WIFE

This mural painting is in one of the rock-hewn tombs at Thebes, in the room where the deceased nobleman and his wife were supposed to live and eat the offering of food and drink supplied by their surviving relatives and friends. In the upper left-hand corner the whole family are depicted fowling and fishing. Like all the wall paintings in the Egyptian tombs, the colors are as fresh and vivid as if laid on yesterday, instead of more than 3,000 years ago.


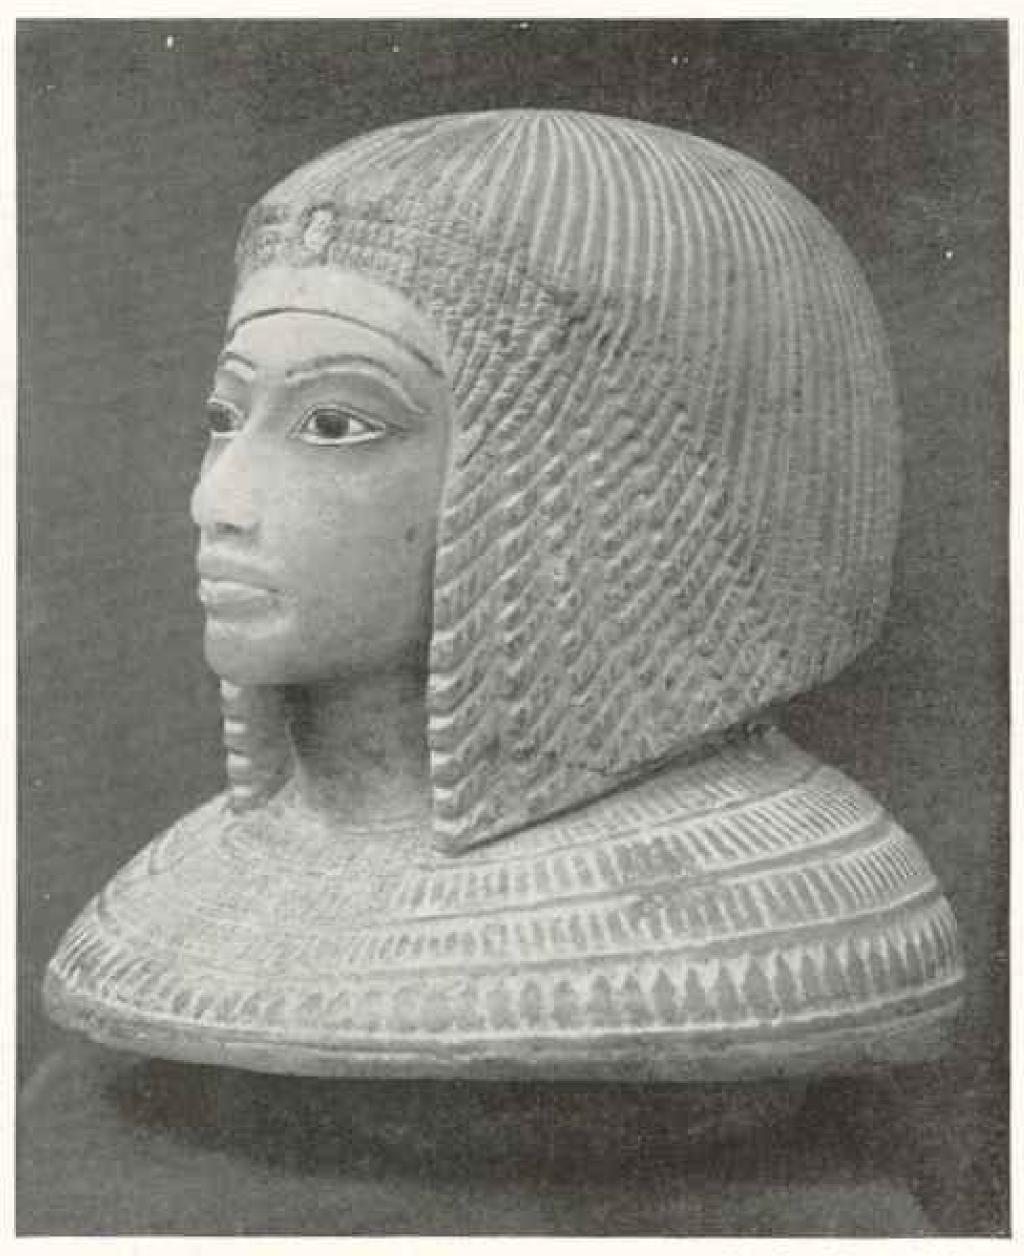


Photo from Theodore M. Davis

QUEEN TYL

"Queen Tyl deserves to rank with Queen Hatshepaut as one of the two most remarkable women whom Egypt has produced. . . In February, 1005, Mr. T. M. Davis discovered the tomb of Yuna and Thuaa, the father and mother of that Queen Tyl, whose influence played so great a part in Akhenaten's religious reformation. It had become almost an accepted belief that Tyl, whose influence was so pronouncedly pro-Mesonotamian, must have been herself of Mesopotamian origin. The tomb of Yuna and Thuaa, however, reveal the fact that her parents were purely Egyptian, and . . . though probably not of royal rank, Queen Tyl's parents were at least people of considerable importance" (see pages 90) and 999).



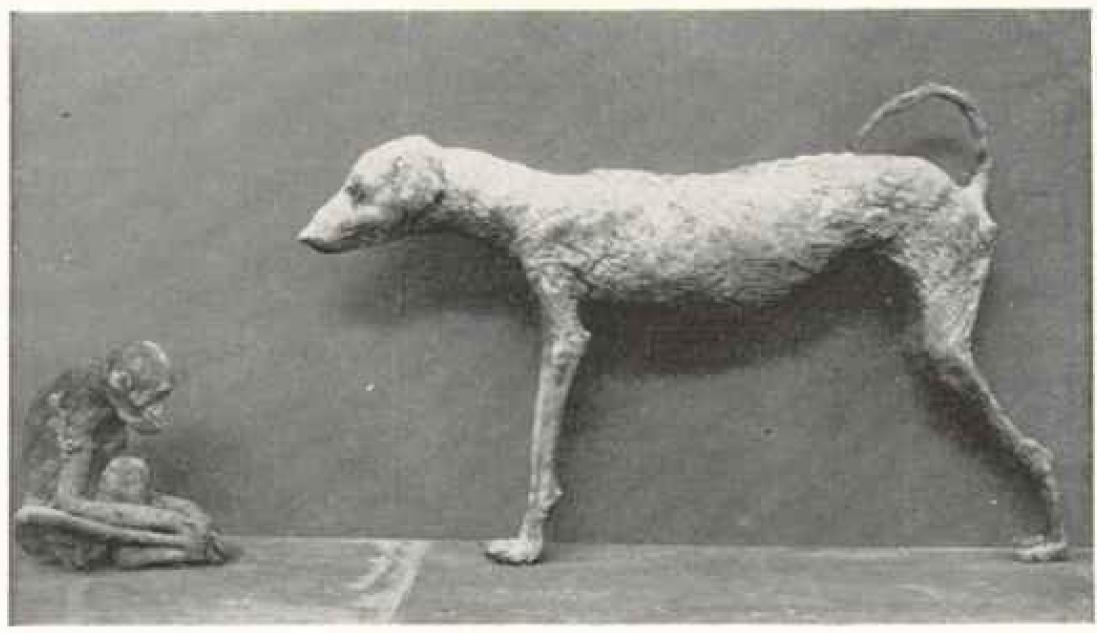

Photos from Theodore M. Davis

MUMMIFIED MONKEYS AND DOG FOUND BY THEODORE M. DAVIS IN THE TOMB OF AMENDIOTEP D

This king was very fond of monkeys, and when he died his pets were placed near him. The Egyptians seem to have minimised almost everything that had life; animals, birds, fishes, and insects were embalmed, and even the meat ceremonially offered to the dead was subjected to a similar process. Vast remeteries of sacred animals and birds have been found, such as the great cut cemetery at Bubastis. In preserving the larger animals it was not the custom to embalm the entire body; thus, in the case of a cow, for example, it would be represented in the mummy by the head and a selection of the bones.



Phino from Theodore M. Duris


MORE MUMILIFIED MONKEYS FROM THE TOME OF AMENHOTEP II

Other curious contents of the tombs were mummified ducks and chickens. These were preserved in wooden vessels, carved to represent the bird they contained. Another vessel contained delicious honey, which had been there for thousands of years:

This took place under the eleventh dynasty, which may be dated about 3500 B. C. or 2160 B. C., according to the scheme of chronology which is preferred. The twelfth dynasty indeed shifted the seat of government again back to the neighborhood of the old northern capital; still they were Theban princes, and it is with Thebes that the story of Egypt's greatness is bound up during all the rest of her history.

One of the remarkable finds of modern excavation has been that of the great funerary temple of King Mentubotep Neb-hapet-ra, of the eleventh dynasty, which has conclusively shown us that this line of kings, hitherto almost as shadowy as its immediate predecessors, was indeed a great and powerful dynasty, the worthy forcrunner of the Amenemhats and Senuserts of the following line, who brought in the Golden Age of the Middle Kingdom. ONE OF THE MOST BEAUTIFUL TEMPLES EXCAVATED.

At Deir-el-Bahari, near Thebes, there lies in a great bay of the limestone cliffs one of the most famous and beautiful of Egyptian temples, the terraced temple of Queen Hatshepsut, of the eighteenth dynasty. This wonderful building has always been known to exist and was completely excavated by Professor Naville in the nineties of last century. But on the completion of the work in 1898 there still remained a large tract to the south of Hatshepsut's temple covered with mounds of débris and awaiting exploration. Here, in 1903. Prefessor Naville resumed work for the Egyptian Exploration Fund. Excavation speedily revealed the existence of a temple of considerable importance, and the completion of the work laid bare the remains of a building fairly comparable in scale with the more famous temple beside it, anticipating to

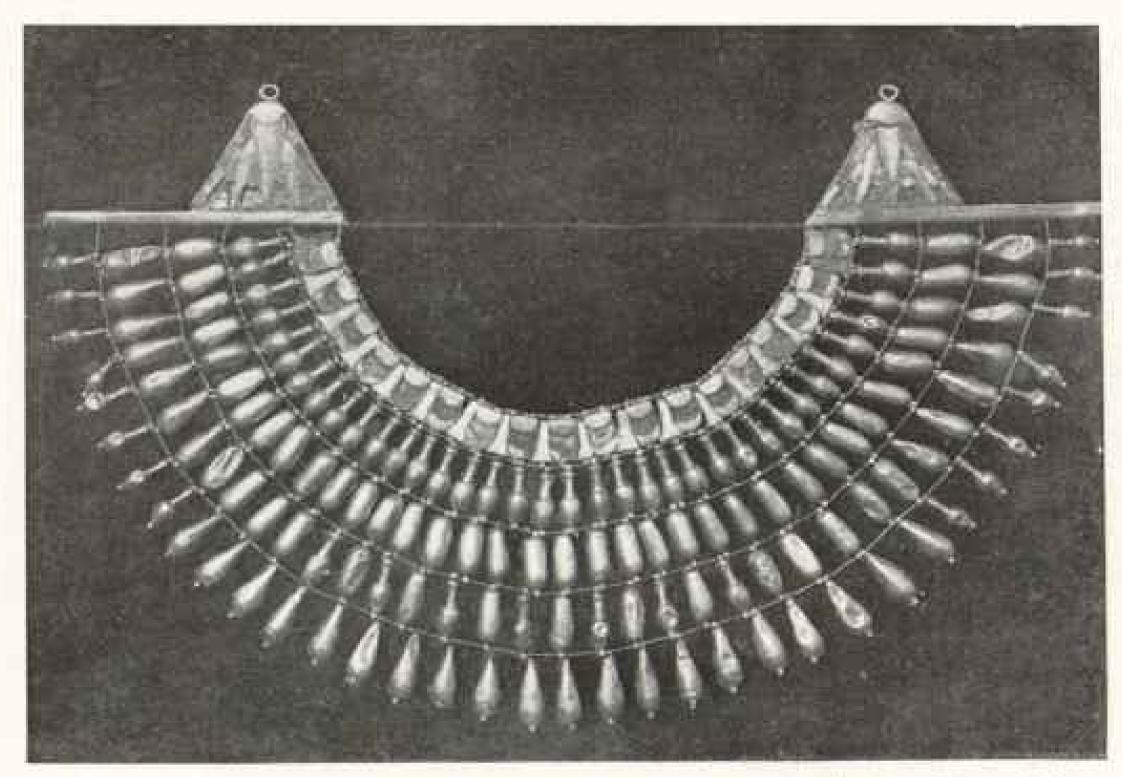

Plasto from Theodars M. Davis

GOLD NECKLACK POUND BY THEODORE M. DAVIS IN THE TOMB OF QUEEN TYL JANUARY, 1907

"Egyptian jewelry, which has been familiar enough in specimens of the work of later periods, has often been open to the repreach of being somewhat heavy and overloaded in design, though admirable in execution; but the diadems of these royal ladies are of the most exquisite lightness and grace, combined with a skill in workmanship which would do honor to the most cunning craftsman of the present day" (see page 985).

features of the latter, hitherto supposed to be unique, and excelling the eighteenth dynasty building in solidity of workmanship.

On an artificially squared rectangular platform of natural rock about 15 feet high was reared the pyramid of the king-a dummy, for his tomb has not been found. Around the pyramid was an ambulatory, whose roof was supported by octagonal pillars, while its outside walls were decorated with scenes of religious festivals, processions, husbandry, and so forth. To north and south were open courts, and the faces of the rock platform were riveted with large blocks of white limestone, some of them measuring 6 feet by 3 feet 6 inches, beautifully squared and laid. A sloping ramp led up to the platform of the temple, and

some extent the peculiar architectural was bordered by colonnades of 22 pillars. each inscribed with the king's names and titles

> The royal tomb, as already mentioned, was not found; but all around the central pyramid priestesses of the goddess Hathor were buried in small chambertombs. They were all members of the king's harem, and were called "royal favorites." From the fact that they were all buried at one time before the completion of the temple, it has been inferred that they were strangled at the king's death that their spirits might accompany him into the underworld. If so (the inference is not certain by any means), then this is the last instance of the occurrence of so savage a custom.

> Already these royal favorites have buried with them the little figures, ushabtis, or "answerers," upon which



MEMNON ON THE PLACE OF THEHES, LUNOR; EGYPT COLOSSITOV

the right was damaged and began to emit a cry every morning shortly after sunrise, and the the statue as Memoria, son of Eos, the Dawn. Many victors were attracted by this phenomenon, o. following the immemorial habit of tourists, scrutched his name at the base. This strange ery The measurements of the colossi 415 feet; area of nail, middle inger, 35 square inclicaa salid block of Assonan granite, weighing some tooo tons. 355 feet; breadth of foot across toes, by the heat of the morning sunwas due to the rapid expansion of the stone caused Greek residents of Egypt immediately identified the including, in 130 A. D. the Emperor Hadrian, who, are startling; length of ear, 3½ feet; index finger After an earthquake in 27 B. C. the colessus on

the later Egyptians depended for service in the life beyond. Henceforward even royalty had to content itself with these mimic servants instead of the human ushabtis who had formerly been sacrificed to its importance (see page 975).

AN ARTIST'S AUTOMOGRAPHY

Fortunately the name of the chief artist of Mentuhotep's reign has been preserved to us, with his description of his own qualifications. On a tombstone from Abydos, now in the Louvre, this great man, Mertisen by name, thus describes himself:

"I was an artist skilled in my art. I knew my art-how to represent the forms of going forth and returning, so that each limb might be in its proper place. I knew how the figure of a man should walk, and the carriage of a woman, the poising of the arm to bring the hippopotamus low, the going of the runner. I knew how to make antulets, which enable us to go without fire burning us and without the flood washing us away. No man could do this but I and the eldest son of my body. Him has the god decreed to excel in art, and I have seen the perfection of the work of his hands in every kind of rare stone, in gold and silver, in ivory and ebony."

In all probability it was this great and modest artist who planned Mentuhotep's temple, and, if so, we know the names of the builders of both the great temples at Deir-el-Bahari, for that of Hatshepsut was executed by Sen-mut, the queen's

famous munister and architect.

The reasons which induced the Theban princes of the following dynasty to shift their court once more to the neighborhood of Memphis are unknown, though we may conjecture that the northern part of the kingdom, long accustomed to political supremacy, was proving restive under the transference of authority to the south. At all events the kings of the twelfth dynasty, who must rank among the greatest monarchs of the land, held their court at a fortified palace called Thet-taui, near the ancient Memphis, and much of the great work which they did for Egypt was accomplished in the neighborhood of the Fayum.

It was there that they were laid to rest in their brick pyramids, which have been explored, at various periods from 1888 onward, by Professor Petrie, M. de Morgan, and MM. Gautier and Jequier. Had it not been for the evidence afforded by the results of these excavations, we should have been left without any adequate illustration of the greatness of the period, for the twelfth dynasty work has otherwise largely disappeared from the land.


The earliest excavation was that of the pyramid of Amenembat III at Hawara. The pyramid itself yielded but little spoil. Its chief interest lay in the elaborate precautions which had been taken, by means of false passages and gigantic plug blocks of stone closing the true passages, to weary and defeat the efforts of tomb-robbers. Yet, in spite of all, it had been robbed in ancient days, not improbably with the connivance of the priests or officials in charge of the building, as only the outermost of the three great plug blocks closing the passages had ever been secured in its place.

But the amazing feature of the whole structure was the sepulchral chamber in which the royal sarcophagus had lain, No mere built chamber had been considered costly or safe enough for the remains of so great a monarch. A huge block of quartzite had been hollowed out into a chamber measuring inside 22 feet by 8, with walls 3 feet in thickness. A single block of the same stone formed a roof, the chamber itself weighing 110

tons and the roof 45.

The later Egyptians of the eighteenth and nineteenth dynasties handled, in the open, blocks much larger than this, the record being the seated colossus of Rameses II at Thebes, which weighed 1,000 tons (see page 1004), but the skill and resource involved in the accurate placing of such a mass of stone in its confined situation inspire a wholesome respect for the Egyptian workman of the twelfth dynasty.

The pyramid of Senusert II at Dashur was excavated in 1894-1896 by M. de Morgan, with the assistance of MM. Legrain and Jequier. The chief find of importance lay outside the pyramid,

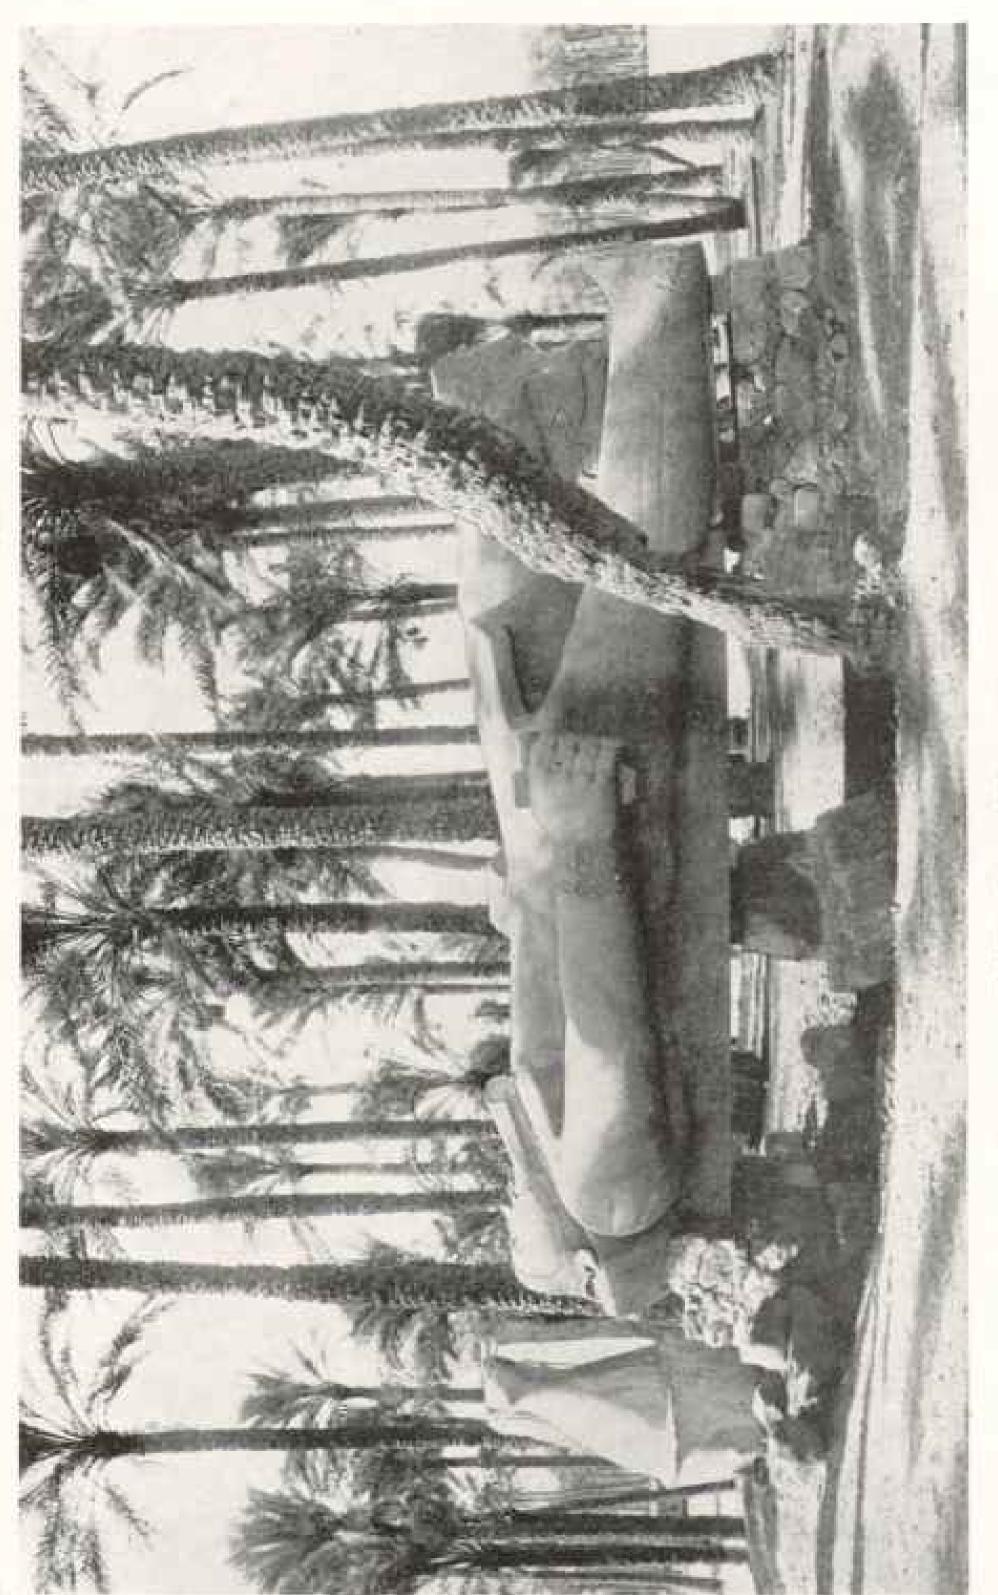

STATUTE OF RAMESUS ILL MEMPIRS

Looking at this picture, it seems difficult to realize that these palm trees are growing in what were once the streets of the basy metropolis of ancient Egypt. As late as the Moslem conquest Memphis was still an important city, but after the twelfth century it largan to serve as a quarry of building stone for the Arab cities of Fostat and Cairo, and so continued until all that is left is the solitary portrait statue of the Kamener II, which copie stood at the entrance of one of its temples. The statue is of granite brought from the quarries at the first catariset of the Nile, foormiles away, and, excluding the crown, is 25 feet long.

where some of the princesses of the royal house had been buried in a series of tombs opening out of a subterranean gallery. Here were found the wonderful jewels of the princesses Sit-hathor and Merit, which have given us a new conception of the skill and taste of the

Egyptian goldsmith.

Egyptian jewelry, which has been familiar enough in specimens of the work of later periods, has often been open to the reproach of being somewhat heavy and overloaded in design, though admirable in execution; but the diadems of these royal ladies are of the most exquisite lightness and grace, combined with a skill in workmanship which would do honor to the most cumning craftsman of the present day. Worthy to stand beside them are the great pectorals, or breast ornaments, bearing the names of Senusert II, Senusert III, and Amenemhat III, with their brilliant designs in cloisonne, where beautiful colored stones, lapis-lazuli, carnelian, and green feldspar take the place of enamels (compare page 081).

THE RESURRECTION OF AN ANCIENT COUNTRY TOWN

Totally devoid of beauty, but more valuable to us than the most beautiful works of art, was the discovery made by Petric in 1889-1890 of the remains of the town of Kahun, close to the pyramid of Senusert II at Illahun. It was known that Senusert had established a town for the builders of his pyramid, naming it "Ha-hetep-Senusert," "Senusert is content."

Petrie's excavations revealed the beginnings of the town wall close to the
north side of the pyramid, and street by
street the whole was cleared, until the
practically unchanged plan of an Egyptian working-class town of the twelfth
dynasty was revealed. The workmen of
those days were poorly lodged. Their
low mud-brick thatched houses were
crowded into congested groups, separated by narrow alleys, while there were
great ranges of barrack-like structures
with a multitude of small chambers under one roof, open passages affording access to the various rooms.

Even in these congested quarters, however, evidences were not wanting that the life of the inhabitants was on a higher plane than we should have imagined from the character of their homes. Various paperi, included among which were two wills, the earliest known instances of such documents, a hymn of praise to Senusert III, and some pages of a medical treatise, showed that letters were not unknown. Toys of various kinds—whiptops, model boats, dolls and draughtboards—suggested that child life has varied but little in its tastes through all the centuries.

HOW THE EGYPTIANS MADE FIRE

The question of how the Egyptians made fire was one that had often exercised archeologists. No representation of the process existed on the monuments, nor does the nation appear to have attached any religious significance to the origin of fire. The question was settled by the discovery at Kahun of a regular bow-drill for making fire, together with several sticks showing the burnt holes caused by fire-drilling.

Mixed with remains of twelfth dynasty Egyptian pottery were fragments of vessels which we now know to be of mimistakably Egean fabric. Thus, more than eleven years before the treasures of Knossos were brought to light, evidence was revealed of intercourse between the Egypt of the Middle Kingdom and the great sister civilization of Crete.

ANOTHER PERIOD OF DARKNESS

The close of the twelfth dynasty, which seems to have been a period of great and solid prosperity, is followed by the second of the great dark gaps in Egyptian history. Of the dynasties from the thirteenth to the sixteenth and the great catastrophe known as the Hyksos domination, which falls within this period, little is known save from the fanciful and conflicting stories which have been preserved for us in Josephus and other more or less untrustworthy historical writers.

Nor can it be said that modern exploration has done much to lighten the darkness. We know that upon a decadent Egypt, suffering perhaps from the reaction which seems so often to follow upon the rule of a race of strong and masterful monarchs, there descended a horde of invaders, probably of Semitic origin; that Egypt was conquered and lay under the dominion of these invaders for several generations, and that the yoke of the oppressor was not thrown off till the rise of the seventeenth dynasty, when the Theban princes asserted their power and, after a long war of independence, drove out the alien rulers. In spite of exploration and speculation, the Hyksos remain almost as much of a mystery as ever.

AN AGE OF SPEENDOR AND POWER

We come now, however, to that period of Egyptian history which has left us the most abundant and convincing evidences of its greatness and splendor. Quite probably the actual prosperity and power of the land under the empire was no greater than under the Middle Kingdom, and indeed the period of the Senuserts and Amenembats comes more and more to be regarded as the true Golden Age of Egyptian history; but in the eighteenth dynasty Egypt begins to take definite rank as a world empire, and under the brilliant leadership of kings like Tahutmes III makes her one real appearance on the stage of history as a great military power, while the kings of the nineteenth dynasty, less successful in their warlike ventures, exhibit a splendor and lavisimess in their domestic enterprises which are elsewhere imparalleled in the national history.

The mass of material coming down to us from this time is far greater than that which we possess from any earlier, and far more interesting than that from any later period, and it is in connection with eighteenth and nineteenth dynasty history and personalities that the romance of modern exploration has perhaps been

most conspicuous.

The power and magnificence of the Egyptinn monarchy in this period has for long, of course, been no novelty. Evidence of both was manifest and unmistakable in the great temple buildings at

Karnak, Luxor, Abydos, the Ramesseim, and elsewhere. What modern discovery has done is to fill in the outlines. to give color and movement to the picture, to reveal to us documentary evidence of the historical processes whose lines could be already traced, and to bring us, strangely enough, into contact with the actual remains of the men and women who guided the destinies of

Egypt in these far-off days.

Nothing has more profoundly moved the imagination of the intelligent public than the fact that it has become possible to look upon the very faces and forms of men whose actions were familiar to us from our childhood in the Bible storythe Pharaoh who oppressed the Israelites and ordered their children to be cast into the river, and his successor, whose hard heart was humbled by the plagues of Egypt.

THE MUMMIES OF THE GREAT KINGS OF BLUCKE TIMES DISCOVERED

From about 1871 it became evident, by the relies of certain kings which were coming by illicit channels upon the antiquity market, that tomb-robbers had obtained access to some hitherto unsuspected tombs. The authorities in Egypt took up the matter; methods of somewhat primitive justice were employed to extract the facts, and in 1881 M. (now Sir Gaston) Maspero was led to the mouth of a disused tomb at the foot of the cliffs of Deir-el-Bahari, where, in the bowels of the earth, was discovered a most wonderful collection of the mummies of the great kings of this most glittering period of Egyptian history (see page 974).

Talutmes III, the great soldier of Egypt, was there, proving, like so many other famous captains, to have been a man of somewhat small stature and insignificant appearance. Rameses II, the Great Oppressor of Hebrew story and the most grandiose figure of Egyptian history, and, most stately and kingly of all, Sety I, the father of Rameses, whose wonderfully preserved features, clear-cut and aristocratic, convey a remarkable impression of royal dignity; these, and many other figures of less significance.


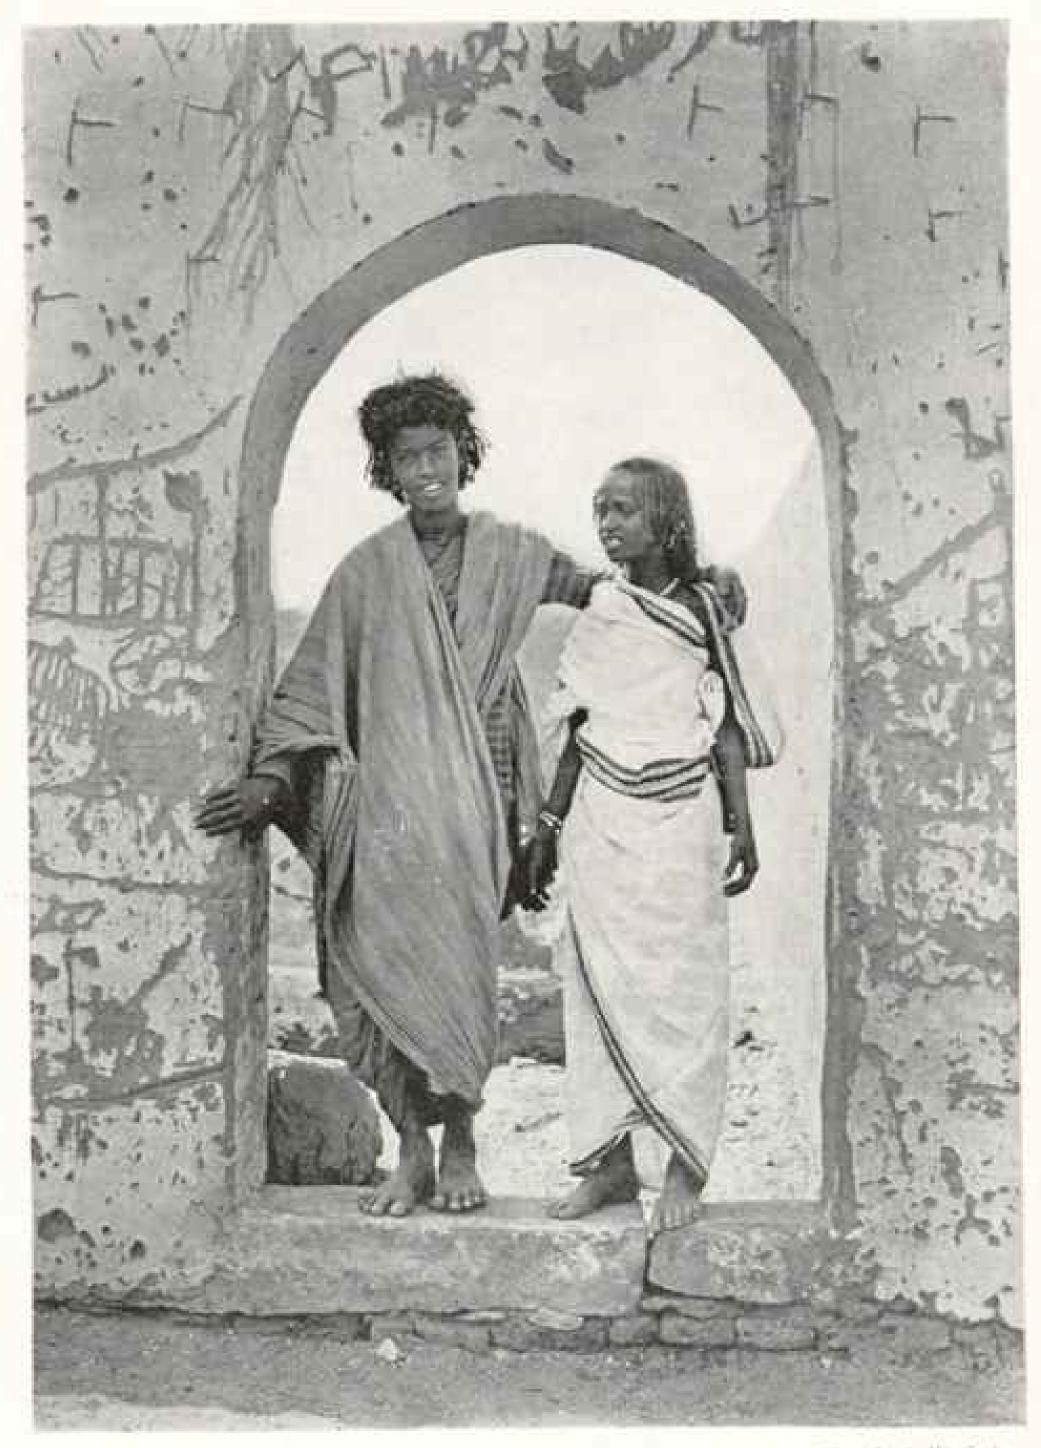


Photo by A. W. Cutler

A BISHAREEN DOY AND GIRL AT ASSOUAN

The Bishareens are the aborigines of Nubia and an encampment of them may be seen on the outskirts of Assouan, near an old Arab cemetery. This photograph was taken at the threshold of one of the burial grounds.

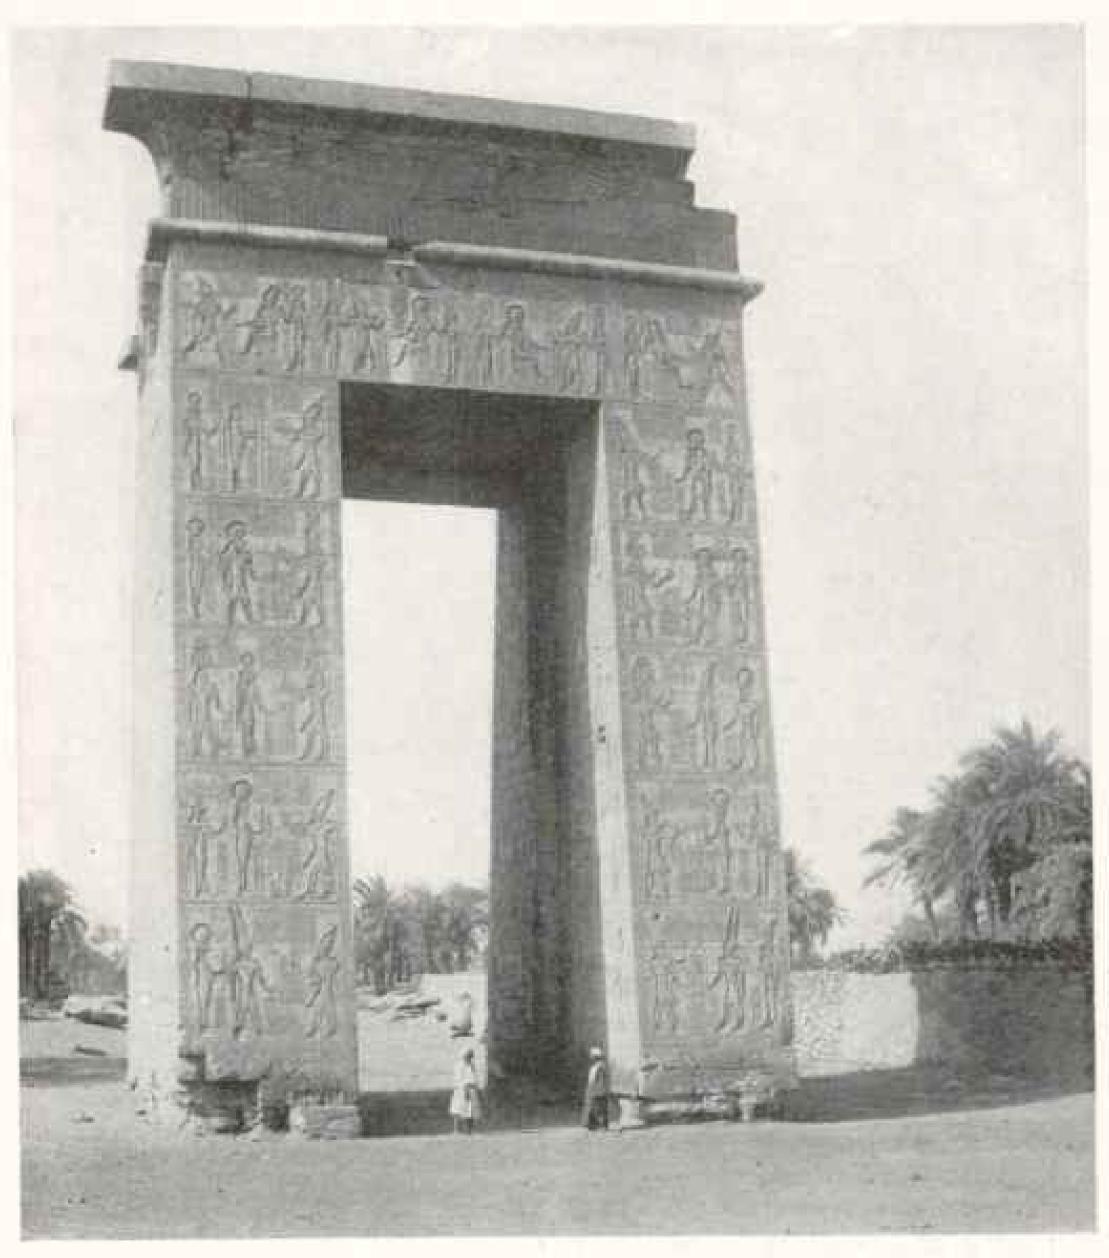

THE GATEWAY OF PTOLEMY EUERGETES AT KARNAK

This monument, erected by a member of the last royal line in Egypt about 230 B. C., is the best preserved structure at Karnak. It stands at the entrance to the temple of the god Khons, the Son of Amen, and his consort Mut, who were the three gods chiefly worshiped at Thebes. On the other side of the portal is another magnificent avenue of sphinxes similar to that shown on page 990. Nothing now remains of the temple of Khons, which was built by Rameses II in the twentieth dynasty, except a few stones sufficient to show the ground plan.

royal and princely, proved to have been all huddled together in this obscure pit.

The discovery of this astonishing cache of ancient royalties, and especially the fact that some of the bodies discovered were those of men who must have been in touch with scriptural heroes and events, gave a great impulse to popular interest in Egyptology. The mummies were found, by hastily scrawled inscriptions on their bandages, to have been gathered in their hiding-place by the priests of the twenty-first and twentysecond dynasties. At that time the decaying authority of the later Pharaohs had proved insufficient to protect the royal tombs from the raids of the tombrobbers, who have always found a profitable business in Egypt.

In vain the panic-stricken priests shifted the bodies of their dead masters from tomb to tomb, recording each reburial as it was made. Each successive hiding-place was violated, until at last, about 940 B. C., they found in the pit of Deir-el-Pahari a resting-place sufficiently obscure to baffle their relentless enemies. There this grim company of ancient dignities slept undisturbed for nearly 3,000 years, till modern science, as remorseless as ancient knavery, dragged them from their rest to become a gazing-stock in modern museums.

A KING WHO RESTED UNDISTURBED

Since Maspero's great find, there has been no discovery of royal mummies on anything like so extensive a scale; but now and again research in the Valley of the Kings at Thebes has added another royalty or two to the stock. The most important of the later discoveries have been that of the mummy of Amenhotep II, the only Egyptian king whose body has so far been found resting within its own tomb; that of Merenptah, supposed to have been the Pharaoh of the Exodus, the actual opponent of Moses, and that of the bones of Akhenaten, the heretic king, which were found in the grave of his mother, Queen Tyi, by the American explorer, Mr. Theodore M. Davis, whose good fortune in this form of exploration has been phenomenal.


The tomb of Amenhotep II was discovered in 1898 by M. Grébaut. The great king was found lying in state in his rock-bewn sepulcher with its goldstarred blue-painted roof, his bow, of which he boasted that none save himself could bend it, lying beside him. The Egyptian authorities have allowed him to rest in the grave where his mourning subjects laid him; but his tomb has been made the scene of an exhibition whose taste is perhaps rather more than doubtful.

"The royal body," says Mr. H. R. Hall, "now lies there for all to see. The tomb is lighted by electricity, as are all the principal tombs of the kings. At the head of the sarcophagus is a single lamp, and when the party of visitors is collected in silence around the place of death, all the lights are turned out, and then the single light is switched on, showing the royal head illuminated against the surrounding blackness. The effect is indescribably weird and impressive." Some might feel tempted to say indescribably. vulgar; and one wonders what Amenhotep's own opinion of it all might have been.

THE PHAROAR OF THE EXORUS

Amenhotep's tomb contained also another mummy, which occupied a coffin bearing the name of Set-nekht. When the coffin was opened the minning was found, by means of a scribe's inscription on one of the bandages, to be really that of the Pharaoh who is above all others most interesting to students of biblical history—Merenptah, the Pharaoh of the Exodus. Hitherto the absence of his body from its sarcophagus in the royal tomb in the Valley of the Kings had been accounted for by careless readers of the Bible as quite natural, seeing that the Pharaoh of the Exodus was drowned in the Red Sea. The Exodus parrative, of course, makes no such statement, and Merenptah's absence from his own tomb is now accounted for. He had simply been moved to Amenhotep's tomb for greater security against the attempts of tomb-robbers.

On July 8, 1907, Merenptah's munumy was unwrapped by Prof. Elliot Smith in

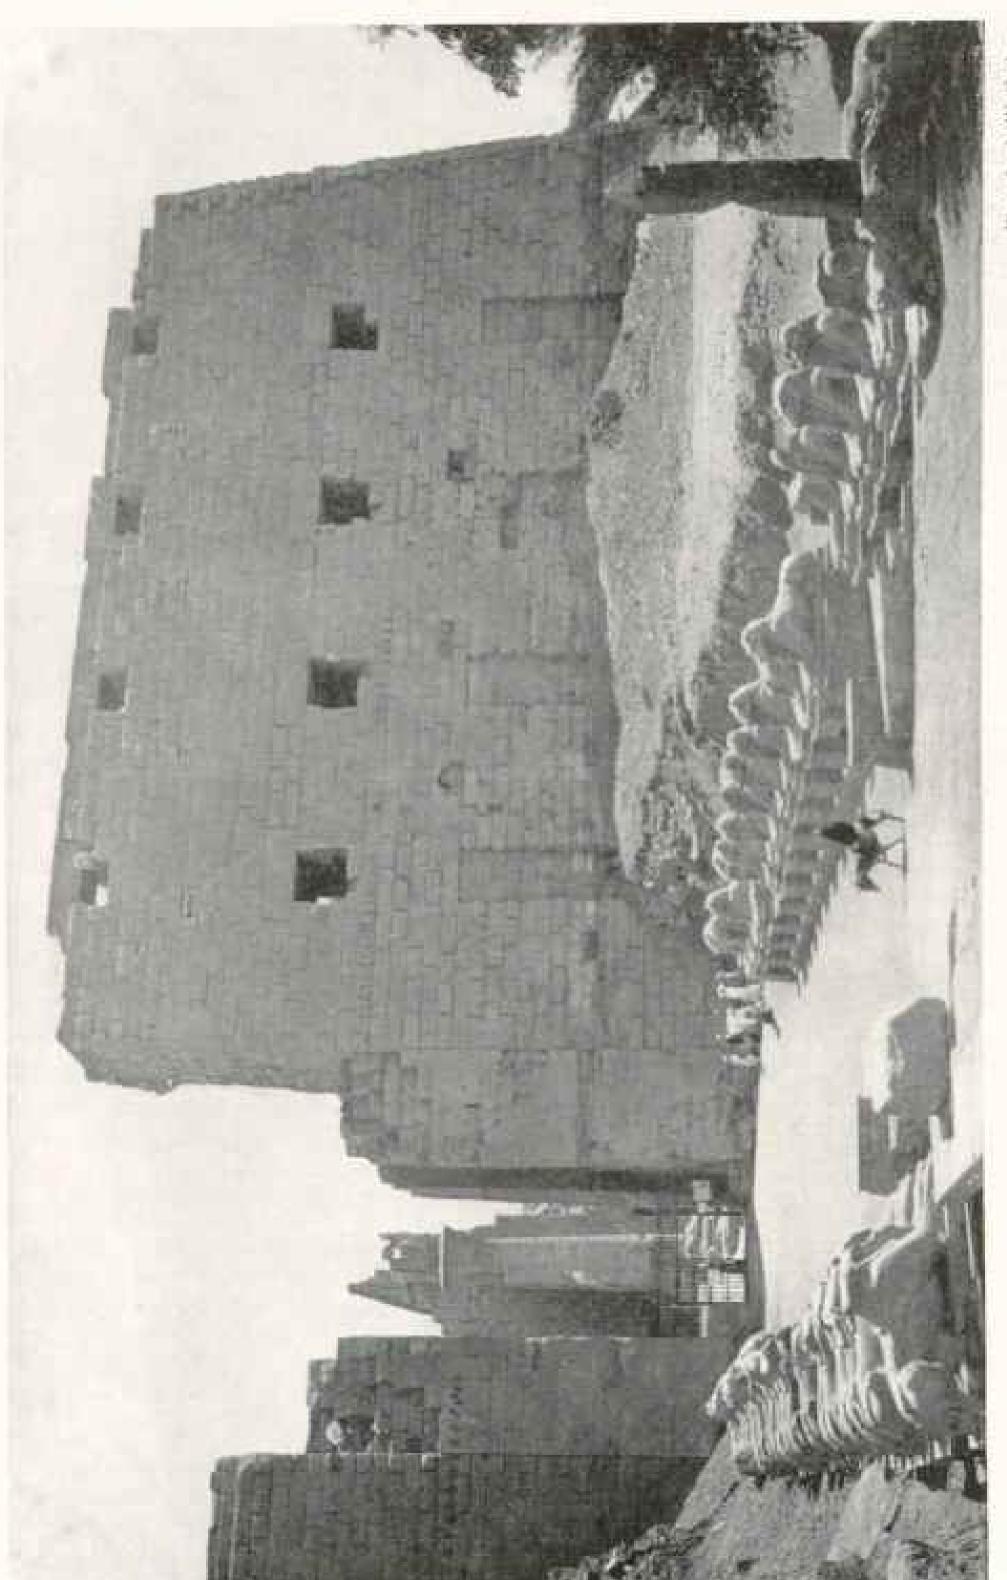

Placto by A. W. Carley

THE PAMOUS AVENUE OF SPHINNES, LEADING TO THE CREAT TEMPLE OF AMEN-BAL KARNAK

Rameses II, who placed between the paws of each sphinx a portrait icture is that of Sety II, a king of the nineteenth dynasty. The great or rather rams-one leading to the temple of Khons and the other, by far the best figures proungo feet thick, and having a total frontage of 376 feet, sacred to Amen-Ra, the great god and protector of Thebes, and consequently the enthusiasm of one of the later Pholemics. the picture is t pylon which crosses the avenue is the largest in Egypt, being 142 feet high, built is not known, but it is probably the result of the enthusiasm of one of the was erected probably by the extreme right of sphinxen-At Karnak there are two of these avenues of The ram was This avenue The obelish at nently in the decorations of the city, statue of one of his predecessors. T preserved, is shown in the picture,

the presence of Sir G. Maspero and others. The face was of the characteristic family type already seen in the munmies of his father, Rameses II, and his grandfather, Sety I — high-bred and aristocratic in its lines, with pronouncedly aquiline nose and strong, determined jaw. Surely in such discoveries the pure romance of exploration reaches its highest point, as we are brought face to face with the actual bodily presence of men whose actions have formed one of the most familiar and striking stories of history to countless thousands of readers.

The explorer, however, is but slightly concerned with the mere romance of his work; it is a byproduct. What he is searching for is the actual historical evidence, which will enable him to fill up gaps in his scheme of history, or the archeological evidence, which will help him to reconstruct the life of ancient times. In these respects modern exploration has given as several discoveries which have been of very high importance in their bearing upon our knowledge of the central period of the Egyptian empire.

A TREASURE THAT WAS NEARLY LOST


By the first of these, the discovery of the Tell-el-Amarna letters, archeology can scarcely be said to have reaped any great credit, though it has been, perhaps, the most far-reaching of all recent discoveries in its influence upon our conception of the life of the great nations of the world in the second millennium B. C., and the most valuable for the reconstruction of the lines of history.

About the end of the year 1887 a woman who was digging out dust for top dressing from among the ruins of the former palace of Amenliotep IV (Akhenaten) at Tell-el-Amarna came upon a heap of little tablets made of baked clay and inscribed with arrow-headed writing. She disposed of her interest in the find to a friend for the sum of ten piastres (half a dollar)! The tablets were hawked about from dealer to dealer, offered to at least two archeologists, and refused by them as being probably forgeries. Many were smashed or ground to dust in the process of being carried in sacks from place to place.

Finally, when an amount of priceless material, whose importance can never now be estimated, had been forever lost, the scientific world tardily awakened to some conception of the value of the tablets, and the bulk of what remained was acquired by the museums of Berlin and Cairo and the British Museum, a few scattered tablets finding their way into private collections. The loss incurred by the apathy of official archeology can scarcely be overestimated, for the tablets proved to be from the archives of the Egyptian Foreign Office of the fifteenth century B. C., and contained correspondence from the kings of Mesopotamia and the vassal princes and residents representing Egypt in Syria during precisely that period of Egyptian history which is being more and more recognized as the crisis of the fortunes of the empire.

The earlier letters date from the reign of Amenhotep III, the most magnificent king of the great eighteenth dynasty, and are full of interest as revealing the close and constant communication which prevailed among the kingdoms of the ancient East; but the greater part of the correspondence belongs to the reign of Akhenaten, the son and successor of Amenhotep III and the most interesting and pathetic figure of Egyptian history.

Amenhotep III, a luxurious, broadminded, and lavish monarch, who expended in works and habits of splendor the great resources of the empire acquired by his warlike ancestors, had imbibed a great liking for the Semitic customs and ideas brought into the land by the numerous captives and hostages drawn from the Syrian tribes during the long wars and developed by the years of peaceful intercourse which followed. He married an Egyptian lady, not of royal birth, Queen Tyi, a woman who deserves to rank with Queen Hatshepsut as one of the two most remarkable women whom Egypt has produced (see page 978). Even during the lifetime of Amenhotep III Syrian conceptions of religion began to assert their hold, evidently largely because of the influence of Queen Tyi, and indications are not wanting that the cult of a form of solar deity called

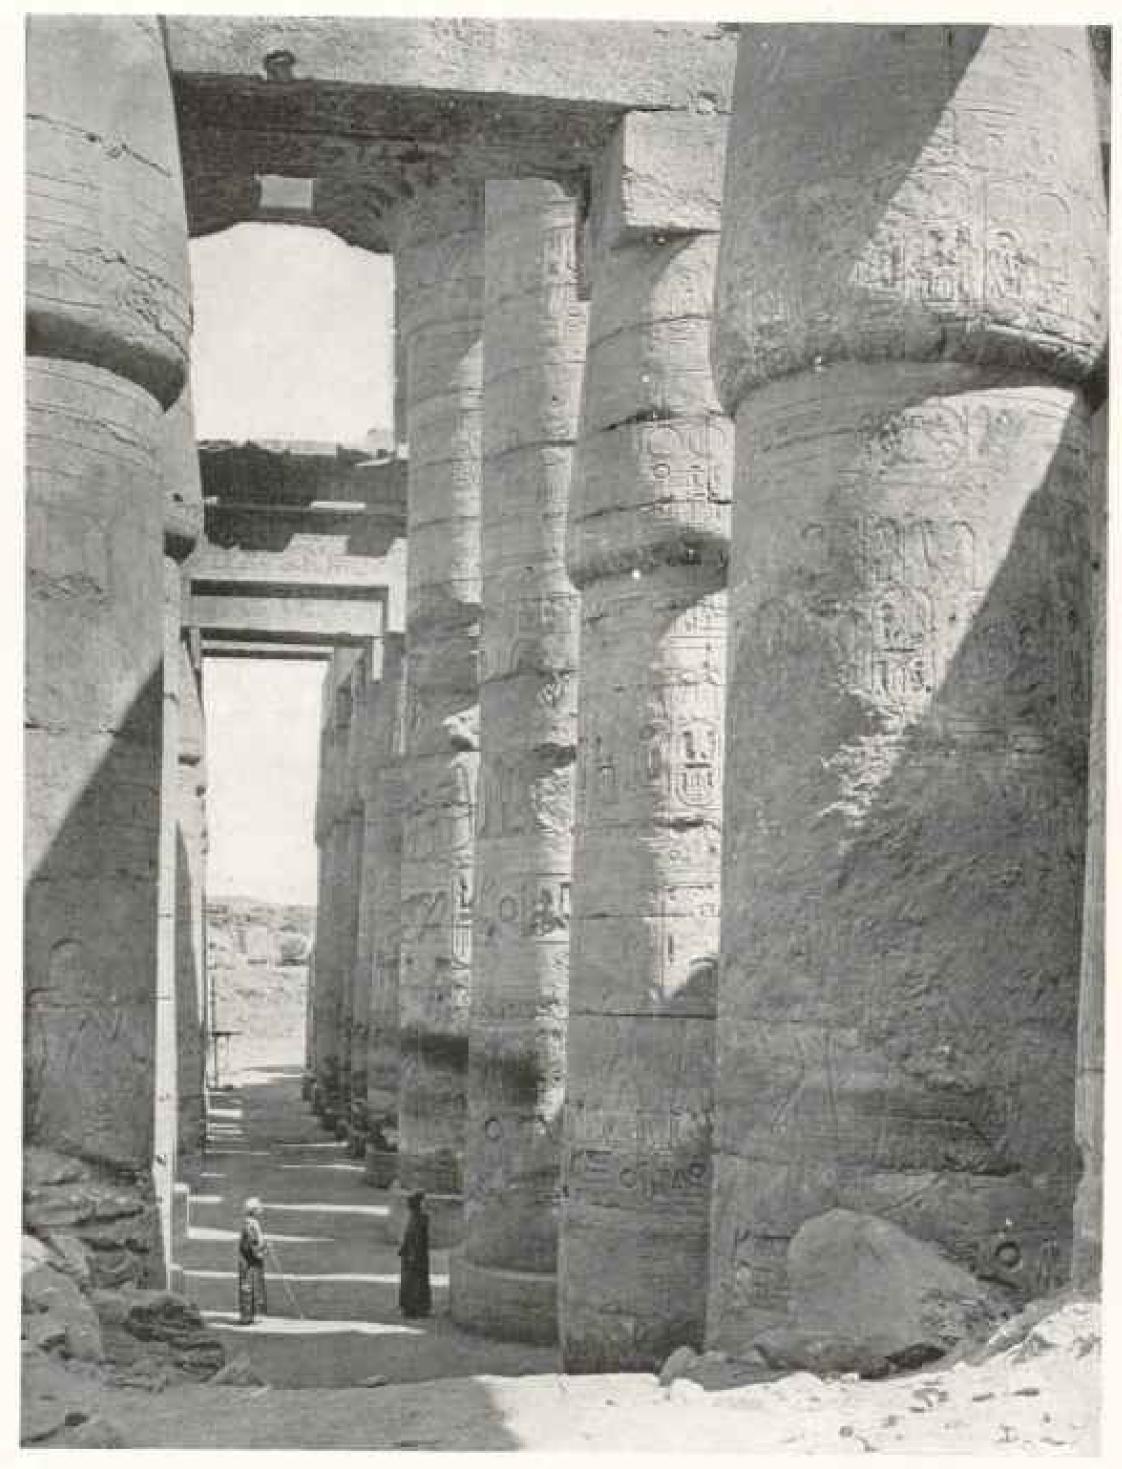

Phinto by A. W. Cirtier

LOCKING ACROSS THE GREAT HYPOSTYLE HALL OF THE TEMPLE OF AMEN-RA:
KARNAK

The date is 1200-1500 B. C. There are 134 columns, and the two between which the men are standing in this photograph are 80 feet high and 33 feet in circumference. This great hall, one of the finest achievements of Egyptian architecture, was begun by Rameses I, but he only erected the pylon and one of the pillars, and it was left for his son, Sety I, to accomplish the great majority of the work, and for his grandson, Rameses II, to finish it. This ball is the largest single chamber ever reared by the Egyptians, and, although opinions differ upon its artistic merits, it is certainly among the most imposing buildings in the world. Almost all the sculpture on the columns is due to the completing hand of Rameses II.

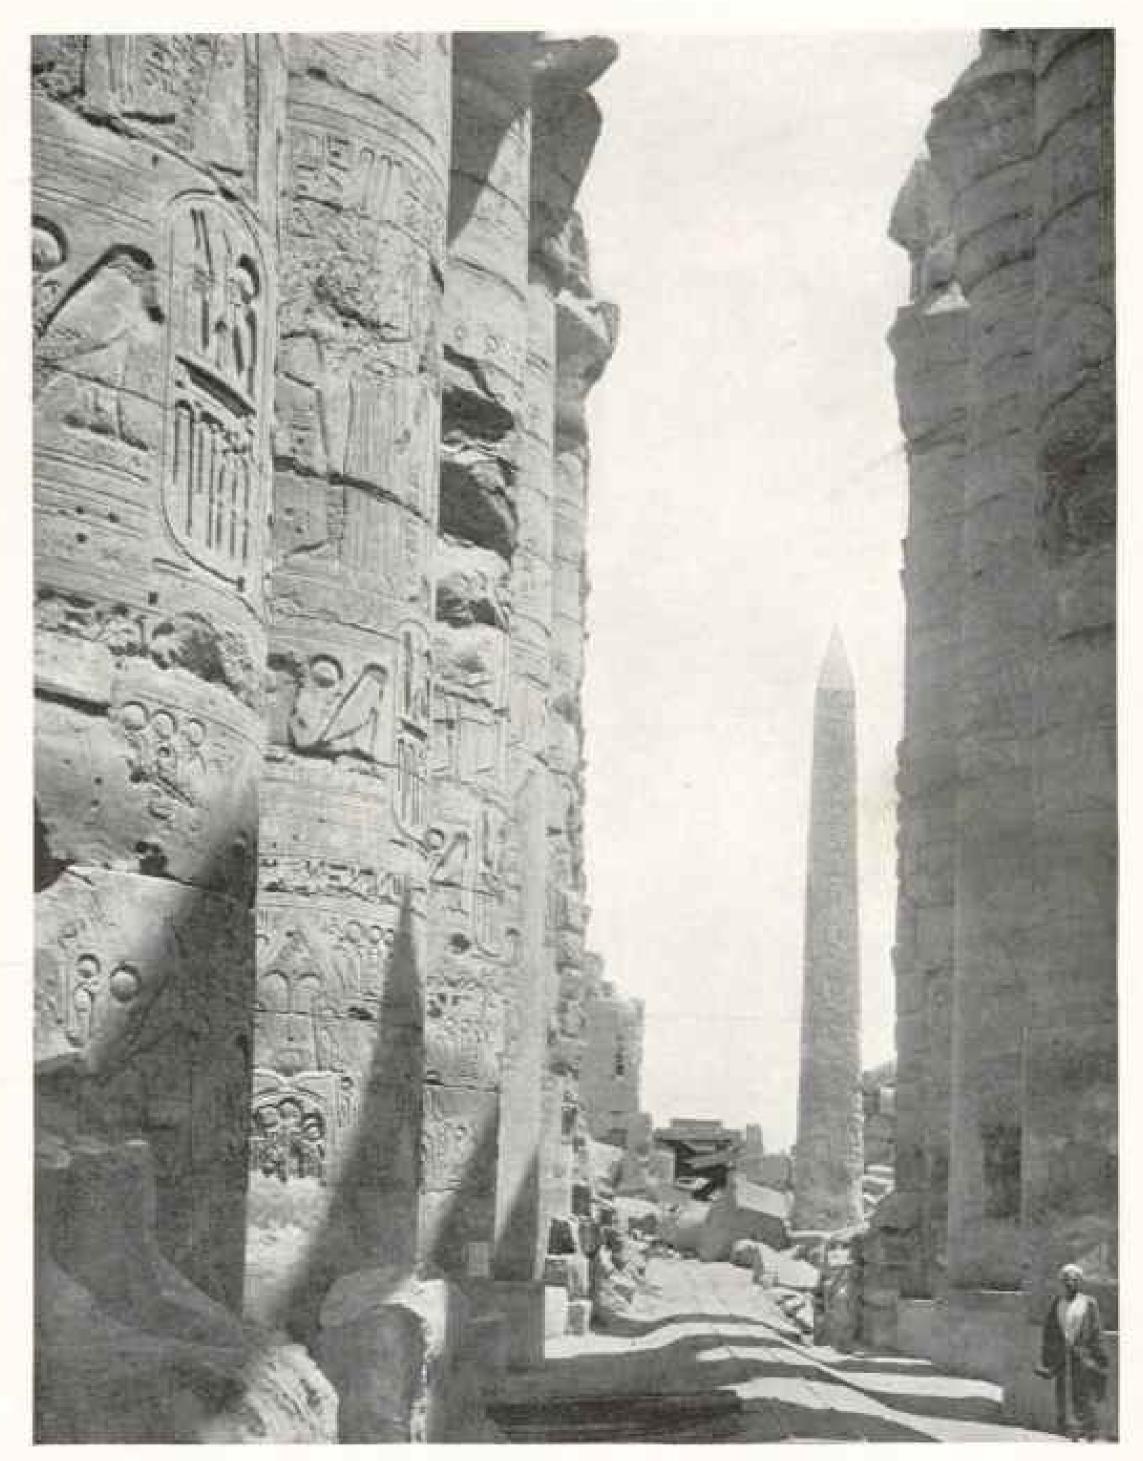


Photo from Rev. James Bailde

GREAT COLUMNS OF THE NAVE AT KARNAK, WITH OBELISK OF TAHUTMES I


The first of the great soldier kings of Egypt was Tahutmes (Thothmes) I, the conqueror of Nubia and Syria. At Karnak, which is a modern name for the northern half of the ruins of Thebes, he built two great pylons or gateways before the temple of Amen-Ra, and in front of one of them set up the great obelish, 76 feet in height, shown in the picture. Fine as this obelish is, it is overshadowed by a still larger monolith erected by his great daughter, Hatshepsnt, the Queen Elizabeth of ancient Egypt.



Photo from Rev. James Baikie

NAVE OF THE GREAT TEMPLE OF KARNAK: THERES

On the capitals of each of the columns 100 men could stand, and the human figures in the foreground give an admirable idea of the size of these huge pillars. This nave is entirely the work of Sety I, as are the columns in the whole of the northern half of the hall. On the outer walls Sety had sculptured, in relief, scenes from his wars against the Shasu, the Libyans, and the Hittites, and in this series, over 200 feet long, are some of the most vivid battle pictures found in Egypt.

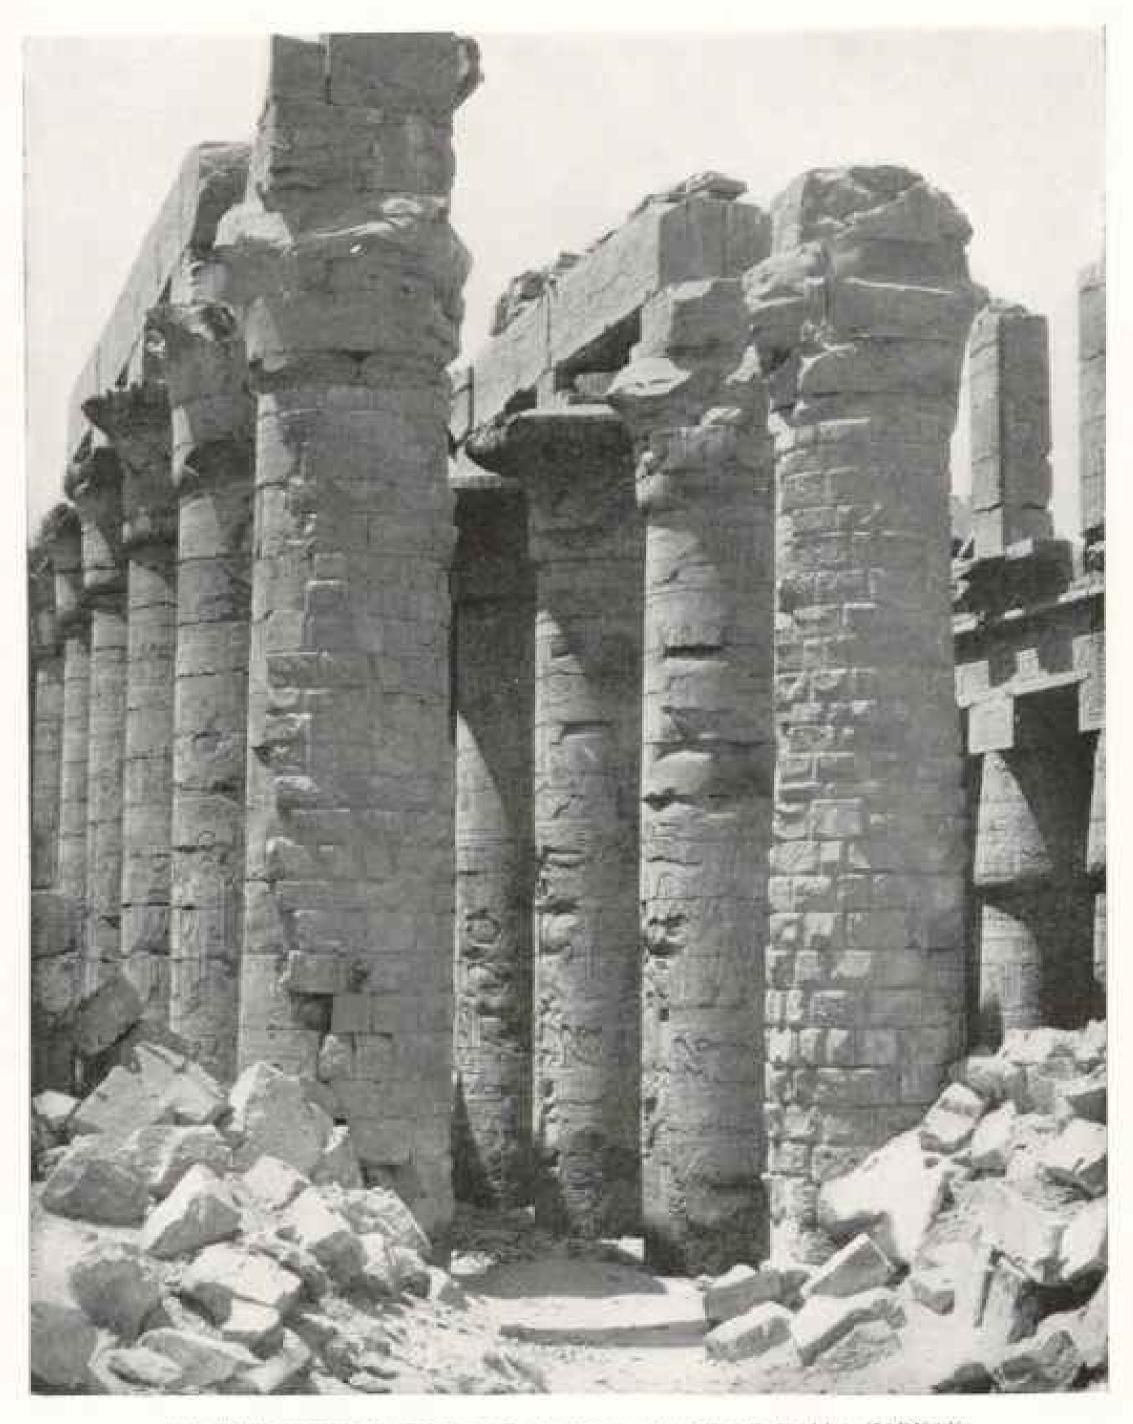

ANOTHER VIEW OF THE NAVE OF THE HYPOSTYLE HALL: KARNAK

Compared with this temple of Amen-Ra, even the greatest of modern religious edifices is insignificant. The hypostyle hall was the smallest of the three groups of buildings of which the temple was composed. It measured 170 feet by 329 feet and yet it occupied less than one seventh of the entire length of the temple. A clearer idea of the size of this hall may be gained when it is stated that the great cathedral of Notre Dame at Paris could be put into it and there would still be plenty of room to spare.

the Aten was beginning to make head-

way at the court.

But when, on the death of Amenhorep, his son Amenhorep IV, a mere boy, ascended the throne, the full extent of this influence speedily began to make itself felt. Doubtless influenced at first to a large extent by his mother, Queen Tyi, but driven also by the convictions of his own keenly religious and even functical nature. Amenhorep IV drifted away from the accepted Eigeptian creed and substituted for it as the court religion a purely monotheistic and spiritual system, the worship of the Aten, or vital energy of the solar disc.

He endeavored to thrust his new religion upon the nation to the exclusion of all other cults. The worship of Amen and the other gods of Egypt was proscribed, the temples were shut up, and even the name of Amen was hammered out of all inscriptions. As it occurred in his own name, the king discarded the title which his ancestors had made glorious, and named himself Akhenaten, "Spirit of the Aten." To complete the religious revolution, he abandoned Thebes and built for himself a new capital at Tell-el-Amarna, naming it "Khut-Aten."

The importance of the change which the young king contemplated can scarcely be overestimated. It was the first attempt in human history to set up a genuinely spiritual religion and to substitute for the old polytheistic congeries of gods the conception of one universal deity—invisible, intangible, and spiritual. Akhenaten's religious conceptions were embodied in two beautiful bymns to the Aten which have come down to us, and whose authorship has, with great probability, been ascribed to the king himself.

THE HEBREW PROPERTS ANTICIPATED

A study of these hymns reveals the fact that he had reached very much the same beliefs with regard to the nature of God which animated the Hebrew psalmists of seven centuries later. Professor Breasted, of Chicago, who has presented a brilliant sketch of Akhenaten in his "History of Egypt," thus sums up

the man and his daring attempt to revo-

lutionize religion:

"Such a spirit as the world had never seen before-a brave soul, undauntedly facing the momentum of immemorial tradition, and thereby stepping out from the long line of conventional and colorless Pharaohs that he might disseminate ideas far beyond and above the capacity of his age to understand. Among the Hebrews, seven or eight hundred years later, we look for such men; but the modern world has yet adequately to value or even acquaint itself with this man, who in an age so remote and under conditions so adverse became the world's first idealist and the world's first individual."

Akhenaten, however, was a man born out of due time. The world was not ready for him and his advanced ideas The empire of Egypt required at the moment not a religious idealist, but a practical soldier for its ruler, and the results of the king's devotion to his new ideas were disastrous in the extreme to the empire which he ruled. In the north of Syria the rising power of the Hittites was pressing upon the nations bordering upon the Egyptian empire; within the Syrian province of the empire itself revolutionary and rebel forces were at work, and the Tell-el-Amarna correspondence reveals to us the process by which the empire which the great soldier kings of the eighteenth dynasty had built up crumbled to pieces during a single short reign.

A PATHETIC CRY FOR HELP

Letter after letter came from the vassal princes and governors of Syria, detailing the progress of the enemies of Egypt and vainly imploring the king to send help. The letters of Rib-addi of Gubla, Abi-milki of Tyre, and Abd-Khiba of Jerusalem are infinitely pathetic in their hopeless loyalty. Again and again they sound in the king's ears the note of warning. If he will only bestir himself, only send them even a handful of Egyptian soldiers, the situation may yet be saved. Such a cry as the following, from a loyal town hard pressed by

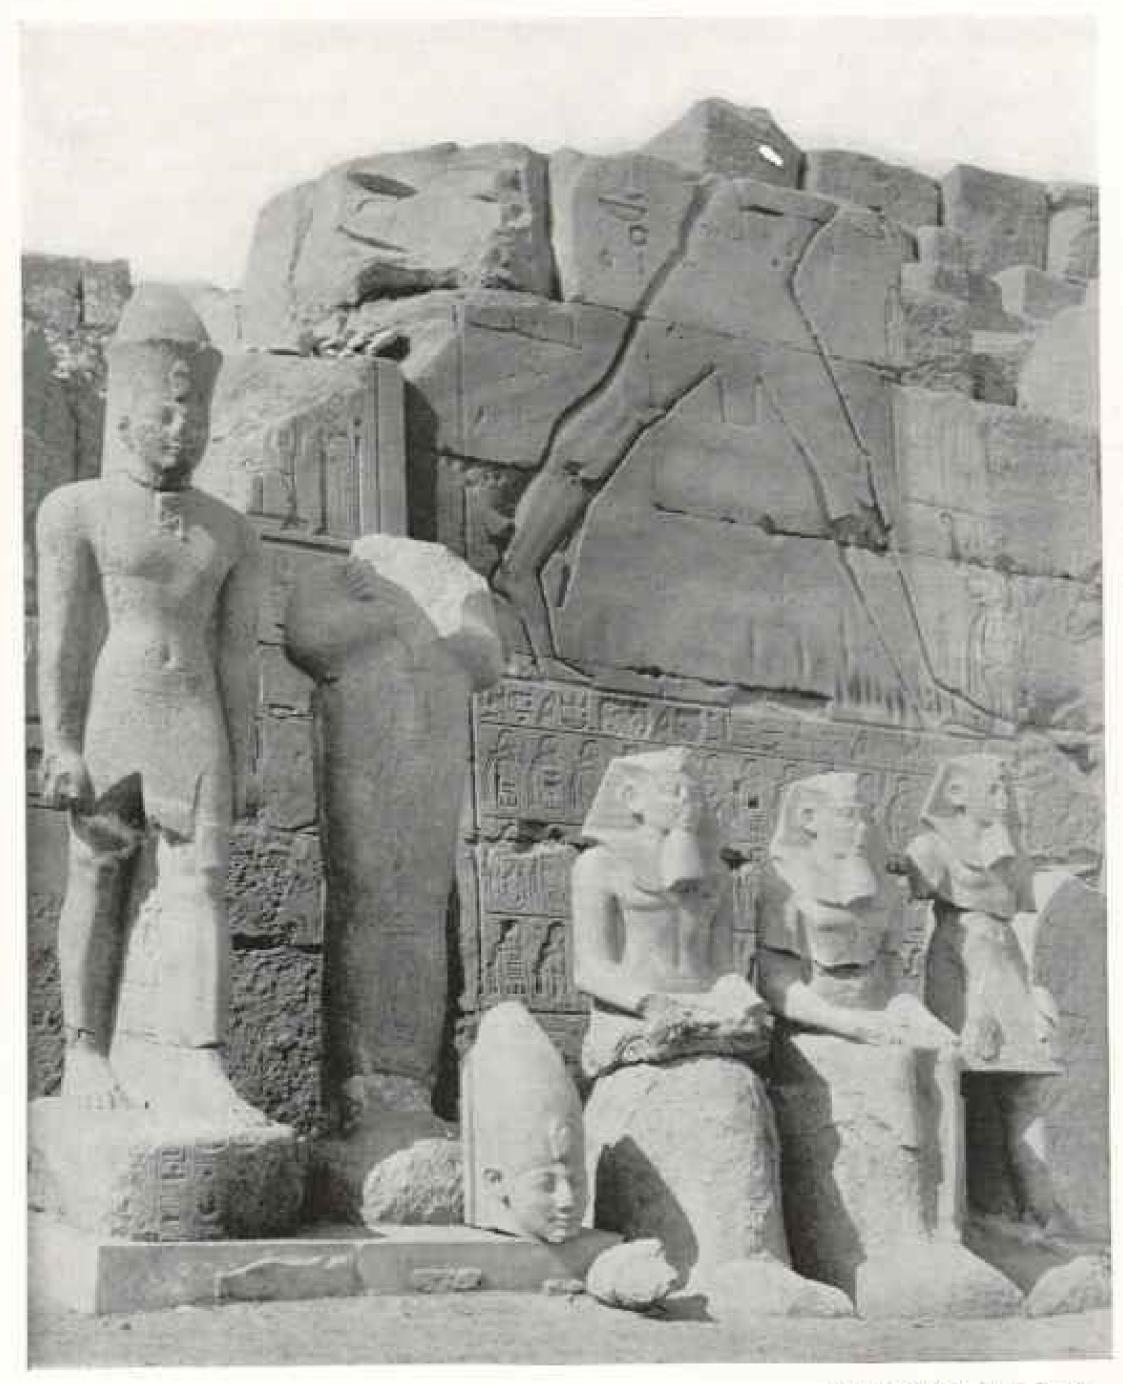


Photo from Rev. James Bailcie

ROYAL STATUES, PYLON OF TAHUTMES III: KARNAK

The holy of holies and one of the pylons of the temple of Amen-Ra were the work of another great warrior king, Tahutmes III, the half brother and nephew of Hatshepsut, whom he succeeded on the throne. On the walls of his additions to the temple he caused the stories of his victories to be inscribed, together with pictures of all the rure plants which he had brought back from his Syrian campaigns. This monarch has a peculiar interest for the people of America, as the obelisk commemorating his fourth jubilee, which he erected at Heliopolis, now stands in Central Park, New York.

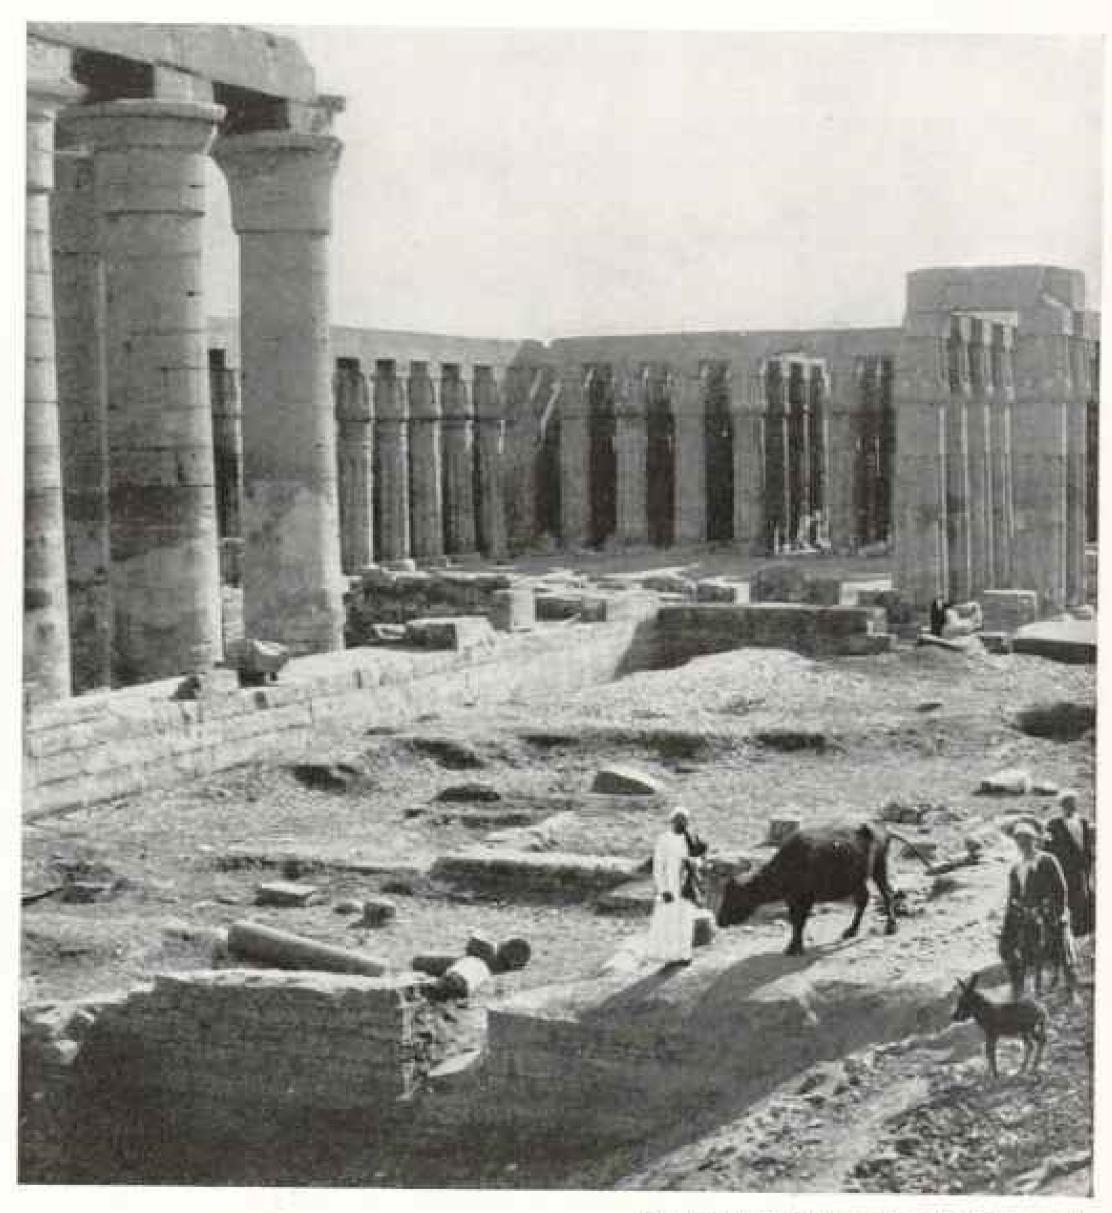


Photo and copyright by Underwood & Underwood.

THE MOST BEAUTIFUL COLONADE IN EGYPT, LOOKING SOUTH ACROSS THE COURT OF AMENHOTEP III, LUXOR TEMPLE: THERES

The temple of Luxor is one of the finest of the monuments of ancient Thebes and is of enormous dimensions, measuring 900 feet from back to front. The columns surrounding the open court shown in the picture are characteristically Egyptian. Each column is means to suggest a cluster of papyrus buds, the shaft being the stems and the capital the buds, while the plain broad surface below is the band of linen holding the cluster together. The larger columns to the left, forming the nave of an unfinished ball, are of the open flower type, the capital showing the open bell of the lotus blossom. These columns were painted in the natural bues of the flowers they represented and the effect of these vivid colors under the intense blue of an Egyptian sky can easily be imagined.

enemies, moves the heart even yet, across all the centuries:

"And now Dunip, your city, weeps, and her tears are running, and there is no help for us. For twenty years we have been sending to our Lord, the King, the King of Egypt; but there has not come to us a word from our Lord, not one."

The letters drew no answer, or none that availed. Akhenaten was entirely engrossed with spiritual interests. One by one the Egyptian vassals, deserted and despairing, succumbed to the pressure of their enemies; and before the king died, still in early manhood, brokenhearted, one may imagine, by the failure of his life's work, practically the whole of the Egyptian empire in Syria had passed away from the rule of the Pharaohs. Within a generation or two his new capital had been abandoned and was falling into ruins, his name had become a hissing and an execration in Egypt, and the land had gone back to its old gods.

THE CITY OF THE HERETIC KING

One of the most brilliantly successful chapters of modern excavation is connected with the heretic king, his mother, and his capital of Tell-el-Amarna. Flinders Petrie's excavations on the abandoned site revealed a palace whose inclosure measured 1,500 by 500 feet and whose decoration showed the development of a naturalistic form of art unknown in Egypt save during this reign, while the great temple of the Aten proved to be a building 250 feet square and standing in an inclosure nearly half a mile long. The relics of the adornment of the palace were exceedingly strikinga love for brilliant color, for all forms of open air and plant life, and a desire to represent them not formally or conventionally, but in all the truth of nature, being the chief characteristics of the work.

In February, 1905, the American explorer, Mr. T. M. Davis, whose extraordinary good fortune had already led him to the discovery of the tombs of King Tahutmes IV and the great Queen Hatshepsut, discovered the tomb of Yuan and Thuaa, the father and mother of that Queen Tyi whose influence played so great a part in Akhenaten's religious reformation. It had become almost an accepted belief that Tyi, whose influence was so pronouncedly pro-Mesopotamian, must have been herself of Mesopotamian origin. The tomb of Yuaa and Thuaa, however, revealed the fact that her parents were purely Egyptian; and the wealth of its occupants showed that, though probably not of royal rank, Queen Tyi's parents were at least people of considerable importance.

The tomb was intact and the objects it contained were as perfectly preserved as though they had only been shut up a few weeks before. Mr. Weigall describes his sensations on entering the place as being very much like those of a man who enters a town house which has been shut up for the summer. Armchairs stood about, beautifully carved and decorated with gold, the cushions on one of them stuffed with down, and covered with linen so perfectly preserved that they might have been sat upon or tossed about without injury. Two beds of fine design decorated with gold occupied another part of the chamber, while a light chariot in perfect preservation stood in a corner.

FRESH HONEY 3,000 YEARS OLD

Most startling of all was the discovery of a jar of honey, still liquid and still preserving its characteristic scent after 3.300 years! "One looked," says Mr. Weigall, "from one article to another with the feeling that the entire human conception of time was wrong. These were the things of yesterday, of a year or two ago."

But a still more brilliant gift of fortune was yet awaiting Mr. Davis's efforts. In 1907 he discovered in the Valley of the Kings a tomb whose inscriptions stated that King Akhenaten had made it for his mother, Queen Tvi. Toilet articles lying in the tomb also bore the queen's name, and the Canopic jars, or jars for holding the viscera of the deceased, bore, instead of the usual heads of the Canopic deities, four portraits of a female face of peculiar charm—evidently that of the great queen. Accordingly it was assumed that the coffin which contained a munumy wrapped in gold foil and crowned with a golden vulture of exquisite workmanship was that of one of the two supremely great women of

Egyptian history.

The inscription on the coffin, however, written in rare stones, gave the titles of Akhenaten, "the beautiful Child of the Sun;" and when the bones were sent for examination by Mr. Weigall to Prof. Elliot Smith as those of Queen Tyi, his answer was, "Are you sure that the bones you sent me are those which were found in the tomb? Instead of the bones of an old woman, you have sent me those of a young man. Surely there is some mistake."

There was no mistake, however, and the bones were not those of Queen Tyi, but of her extraordinary and unfortu-

nate son, Akhenaten.

When the court returned to Thebes, after his death, his body had been brought back and laid with reverence in his mother's tomb; but when the reaction set in, and his memory was exccrated as that of a heretic, priestly hatred pursued the dead king even to his grave. His body was felt to have polluted the chamber where his mother lay. Accordingly the tomb was opened again; Akbenaten's name was erased, so far as possible, from the inscriptions: Tyi's body was removed from the defiling neighborhood of her son's nummy and buried elsewhere-where is as yet unknown. This miserable revenge accomplished, the body of Egypt's great uncomprehended reformer was left to loneliness and shame—the usual fate of men who are too great or too far in advance of their time.

THE POSITION OF WOMAN IN ANCIENT

The frequent mention of the influence exerted upon the course of Egyptian history by the two great queens. Hatshepsut and Tyi, leads us to consider briefly the subject of the position of women in the kingdom of the Nile Valley during the dynastic period. The habitual view

of the modern mind with regard to the status of women in the ancient kingdoms of the East has been that it was fundamentally contrasted with the position accorded to them in Western lands.

"In the West, woman is the companion of man; in the East, his servant and
his toy." Like most epigrammatic statements, this statement of the case has
more point than fairness. Certainly it is
unfair to the chief Eastern nationalities
during the period of their greatness,
however much it may apply to them in
the period of their hixurious decadence.

As Erman has pointed out, the position of woman is very much the same in all nations which have reached a certain degree of culture, unless that position is affected by particular religious views such as those of Mohammedanism or Christianity. "As a rule, one woman is the legitimate wife and mistress of the house; at the same time the man may, if his fortune allow it, keep other women, and it is generally considered that the slaves of the household belong to him.

"This state of things, which appears to us most immoral, does not seem so in the eyes of a primitive people; on the contrary, the slave feels it a disgrace if she does not 'find favor' in the sight of her lord." On the whole, this view, which readers of the Bible will recognize as that of the Hebrew patriarchs, is that which obtained in ancient Egypt during the historic period.

It coexisted, however, with a much higher sentiment of respect for womanhood, and with a position of much greater influence for women than one would have imagined possible under such conditions.

THE REVERENCE FOR MOTHERHOOD

There existed in the Egyptian mind a sentiment that could almost be called reverence for womanhood, particularly in respect of its great function of motherhood—a sentiment which is much more akin to our modern Western view than anything else that we meet with among ancient peoples.

The mother was respected for her supreme share in the life and upbringing of her children, and for all the self-sac-


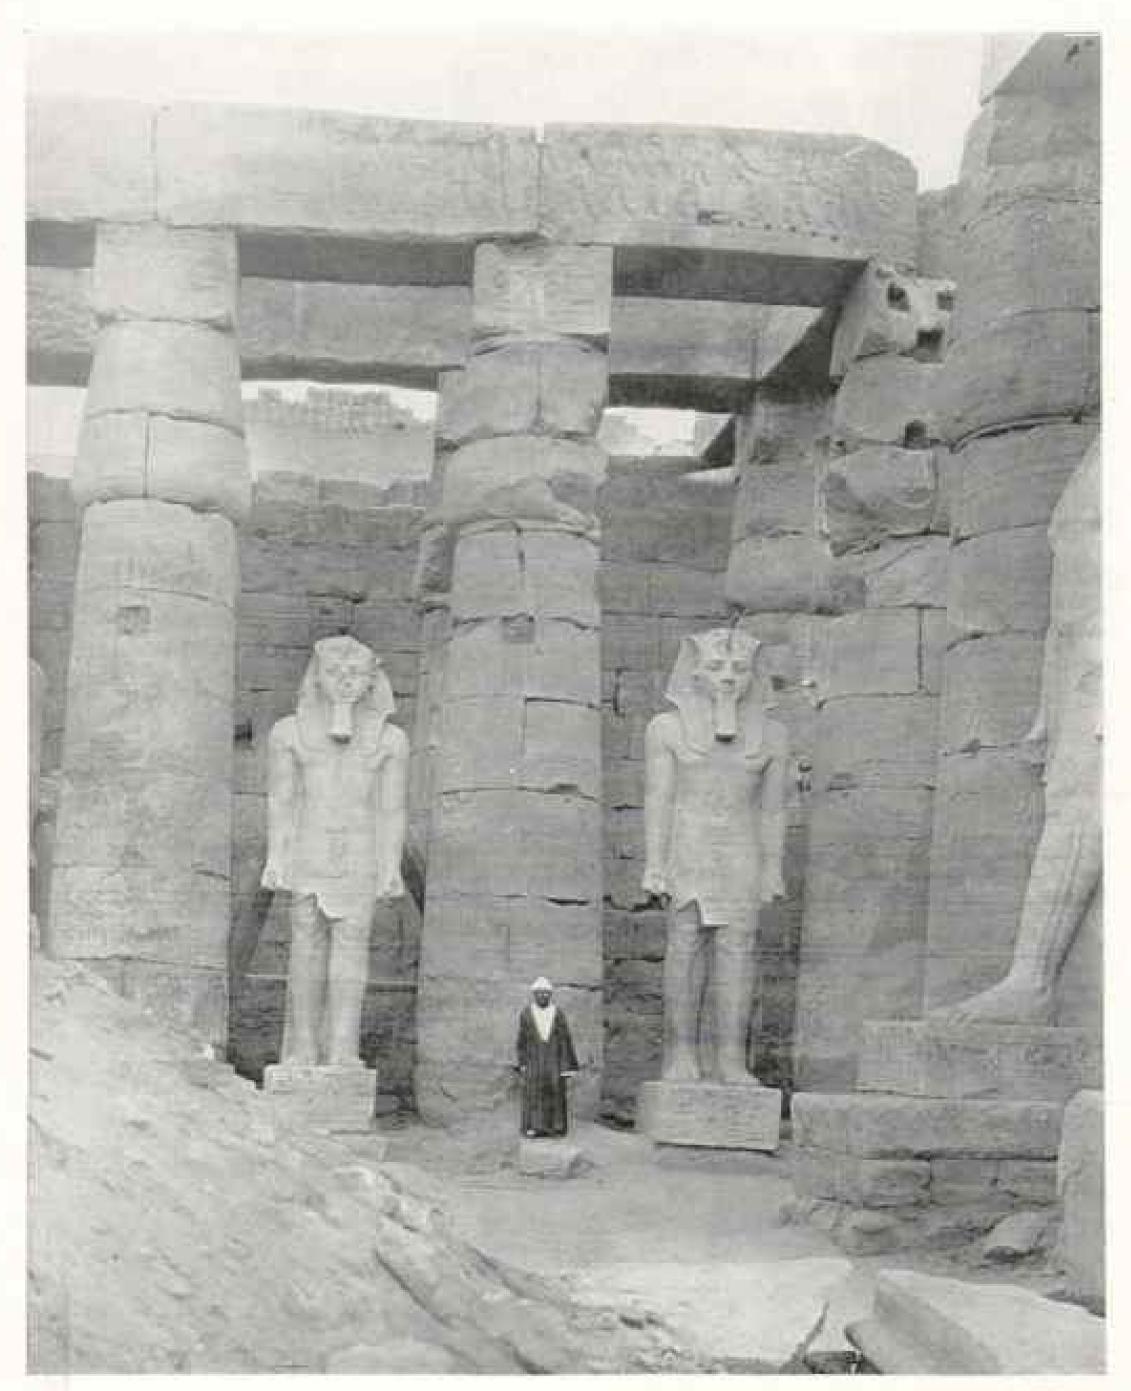


Photo by A. W. Cutler

TWO COLOSSI OF RAMESES II IN THE TEMPLE OF LUXOR: LUXOR

Up and down Egypt, at almost every temple, can be found some evidence of the activity of Rameses II, and his portrait statues are innumerable. He seems to have been a character of whom the Egyptologist gets a little tired. Writing about him, Mr. Baikie says: "When Rameses II laid hands upon a building, it was not to complete another's work and give the glory to the man who really deserved it; it was to steal the work of better men than himself and to batter his own eternal cartouche in upon their inscriptions, regardless of the truth. The most valuable records have been ruthlessly falsified by being appropriated to the vainglory of that sublime egoist."

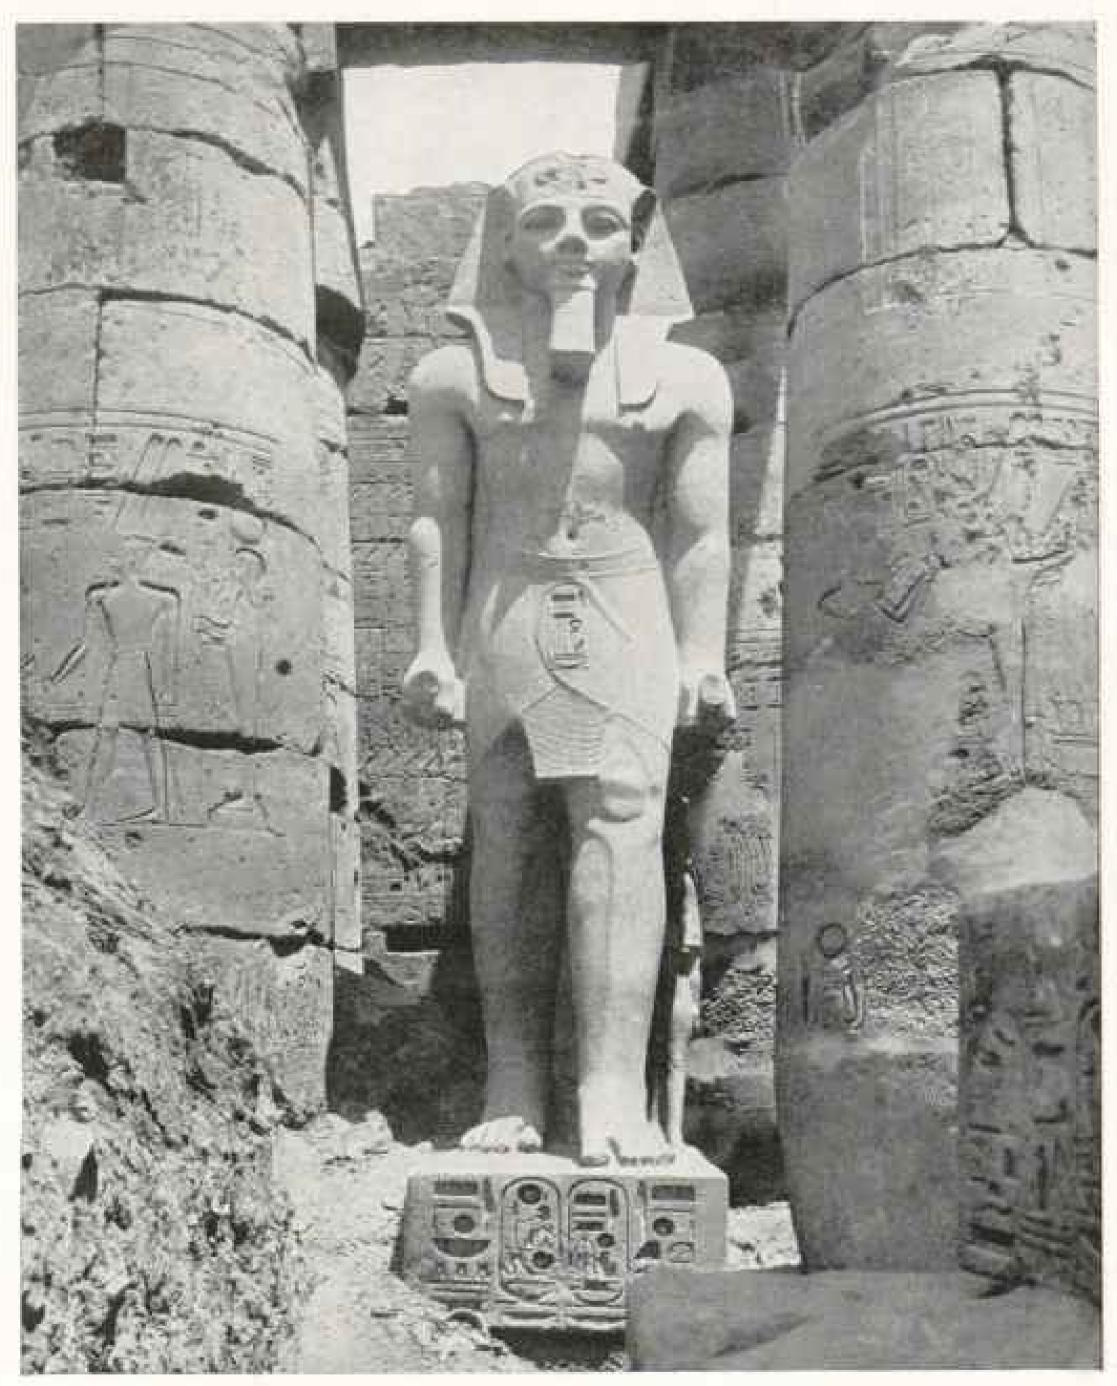

Phiero from Rev. James Baikie.

COLOSSUS OF RAMESES IF: LUXOR

Rameses II, one of the best known of all the kings of Egypt, was the third sovereign of the nineteenth dynasty and reigned for 67 years. The earlier years of his reign were passed in almost constant warfare against the Nubians, Libyans, Syrians, and Hittites, the latter being his most redoubtable foes. After 20 years' fighting, Rameses entered into an offensive and defensive alliance with them and subsequently married the daughter of the Hittite king. The activity of this monarch as a builder was remarkable and his hand can be traced over the length and breadth of Egypt. His two finest works were the rock temples of Abu Simbel and the completion of the great hypostyle hall at Karnak. His wife, Nefertari, stands in the shadow behind his leg (see next picture, page 1003).

rifice which is essentially involved in true motherhood, and from the very earliest days the child was carefully indoctrinated with the duty of reverencing and loving the mother who bore and nourished him. "Thou shalt never forget," says the wise Ani in his "Instructions," "what thy mother hath done for thee. She bare thee and nourished thee in all manner of ways. If thou forgettest her, she might blame thee; she might lift up her hands to God, and he would hear her complaint."

So strong was this sentiment that on the tombs of the Old Kingdom the mother of the deceased is, as a rule, represented together with his wife, while his father rarely appears. Further in the funerary inscriptions of later times it is the usual custom to trace the descent of the dead man on the mother's side rather than on that of the father. We read of "Ned-emu-senb, born of Sat-Hathor; of Anhor, born of Neb-onet; or of Sebek-reda, born of Sent; but who were the respective fathers we are not told or they are only mentioned incidentally." Even when the father is mentioned, it is the natural thing that the mother's name should accompany his Thus the Middle Kingdom statuette which Sir Arthur Evans found in the palace of Knossos is inscribed as that of "Ab-nub, Sebek-user's son, born of the lady Sat-Hathor."

A CURIOUS SYSTEM OF SUCCESSION

In accordance with this view of the superior importance of the maternal relationship is the fact that in noble Egyptian families the general, though not invariable, custom was that the heir of the house was not the eldest son, but the son of the eldest daughter. Under the Middle Kingdom this rule prevailed to such an extent that the inheritance passed from one family to another through heiresses. He who married an erpat, or heiress, gained for his son the inheritance of his father-in-law; and these heirs on the distaff side, erpate, or hereditary princes, whose title is constantly displayed on their tombs, evidently formed the highest aristocracy of the land.

The principle was carried to curious and, to our minds, amusing lengths. Successive generations of Western nations

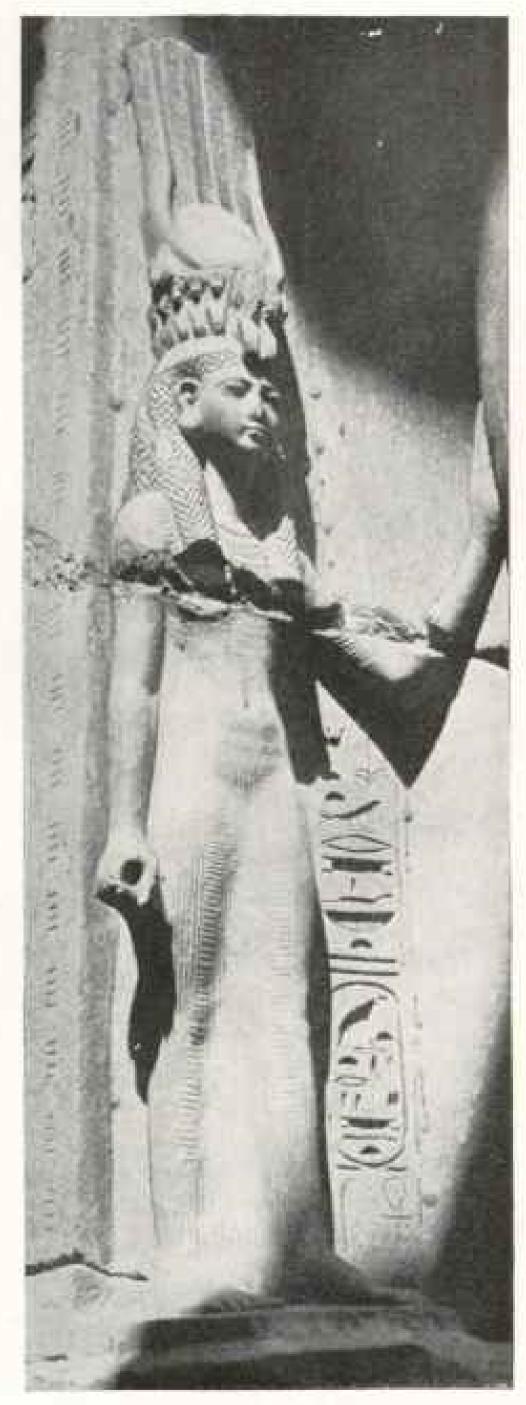


Photo from Rev. James Baikie NEFERTARI, THE SISTER AND PAVORITE WIFE OF HAMESES II

She is clinging to the colossal leg of her husband's statue. This is a fine example of later Egyptian art (see preceding picture, page 1002).


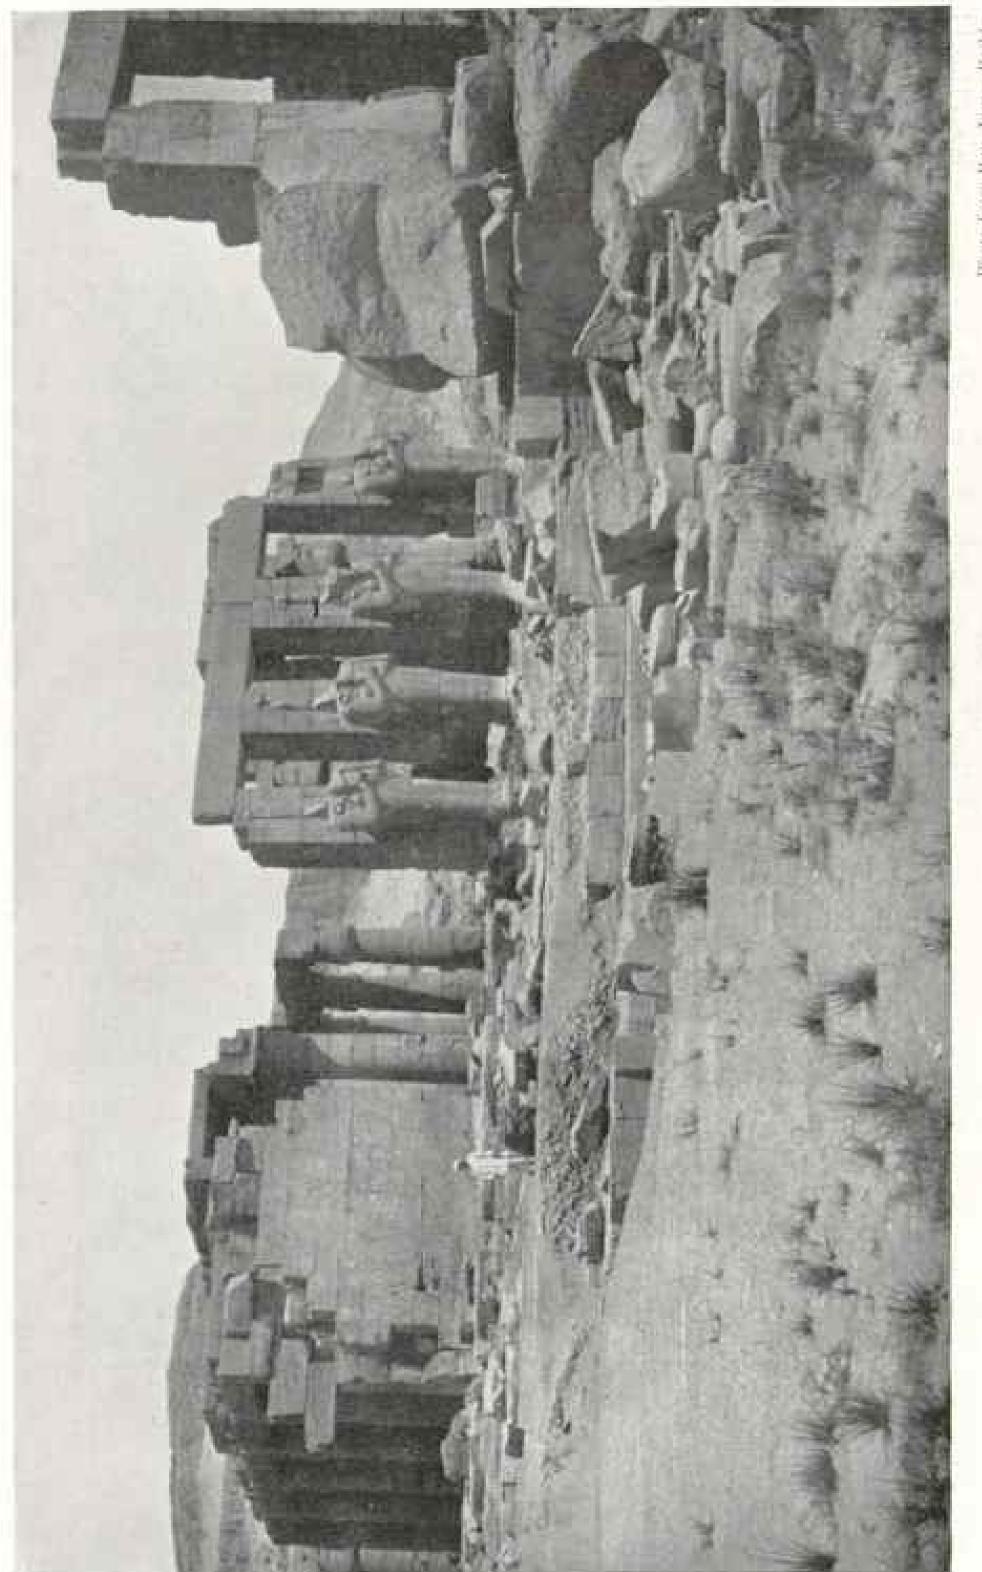


Photo-From Rev. Junes Rahle-


THE RAMIESSEUM, THEREST PUNERARY TEMPLE OF BAMESES II

store-rooms of the temple in which may be picked up to this day the leaden seals of the wine and oil jars bearing the king's name, which were broken off by the temple servants in the days when the Hebrews were living in Egypt before the Exodes. our statues of Osiris, which stand at the entrance of the court before the hypostyle hall, were the uneses II was expended upon this great temple, which was to serve us the king's final resting place. itemedf, go feet in height and tano tons in weight, a fragment of which lies at the foot of the gateway, at the right of the picture. Beneuth the Porhaps the finest work of the reign of Before if he erected a huge portruit statue

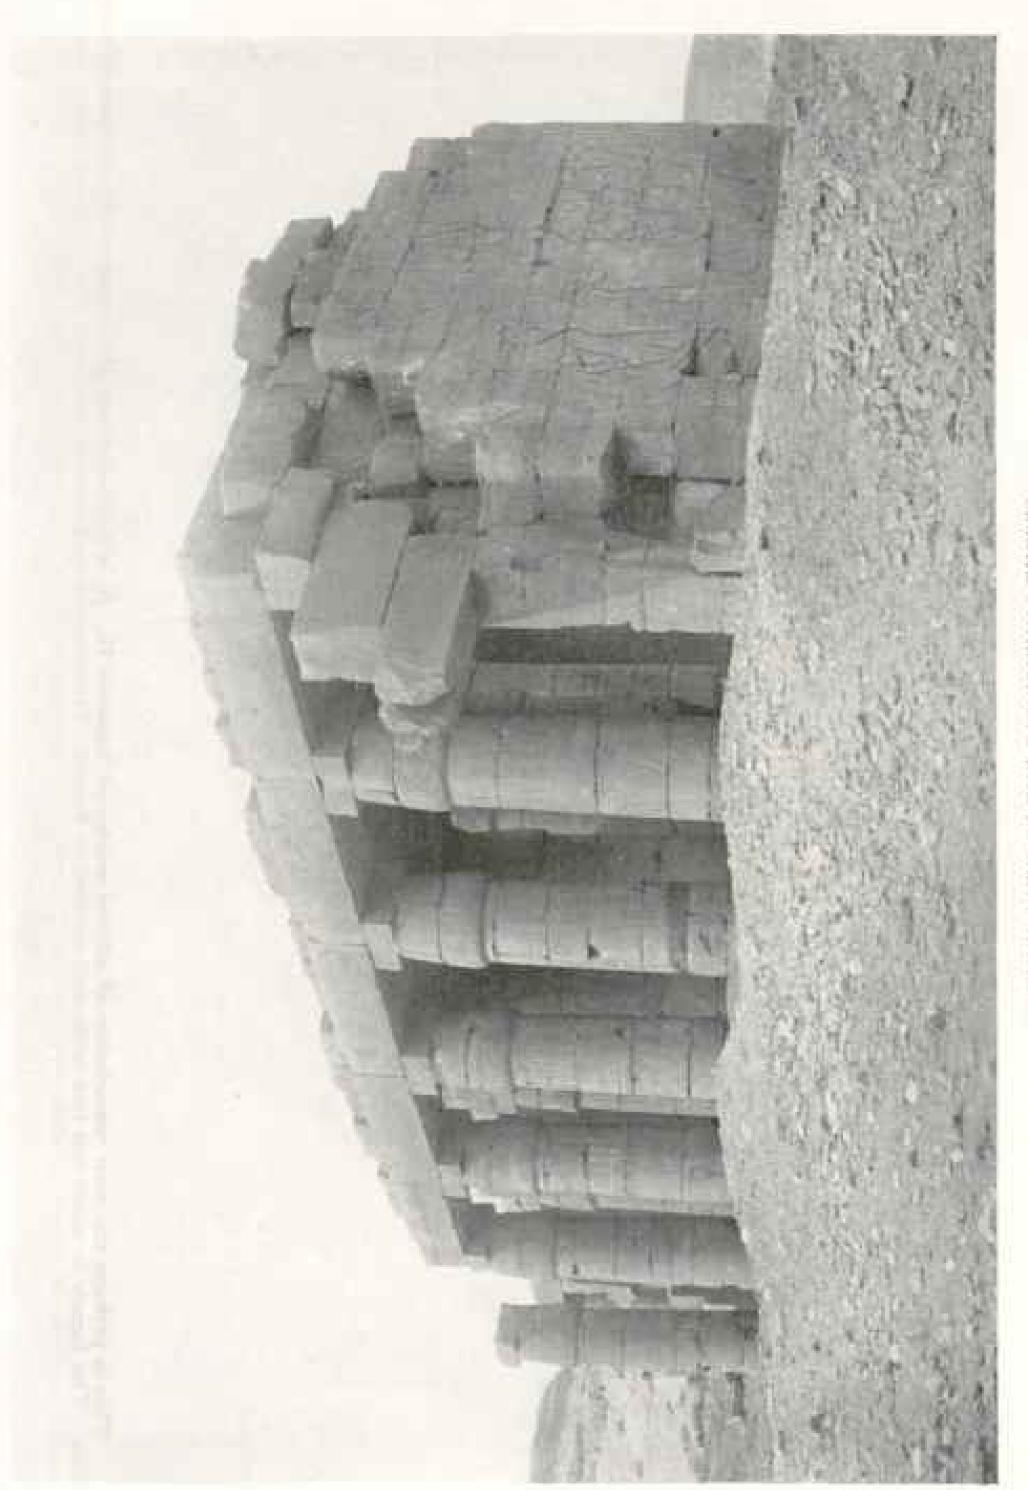


ANOTHER VIEW OF THE RAMESSHUM; TREDUS

the most gorgeous structures ever reared by precious stones and inlaid with lapis lazuli and mulaclific prilliantly colored, and the inscriptions inlaid with colored polished its coloring still undimmed, and its adormments of Baileie says: "The decoration of these temples was magnificent Men one of Egyptian sun, must have l incrusted with gold and adorn the walls were with all the richness of A great Theban temple in its primal magnitude, and malachite reflecting the brilliant Writing of the splendor of uncient Egypt, M cedar and brotize, the woodwork overlaid with go and of floors overlaid with silver; while the relief granite, lapts, and the hand of man," MALES.

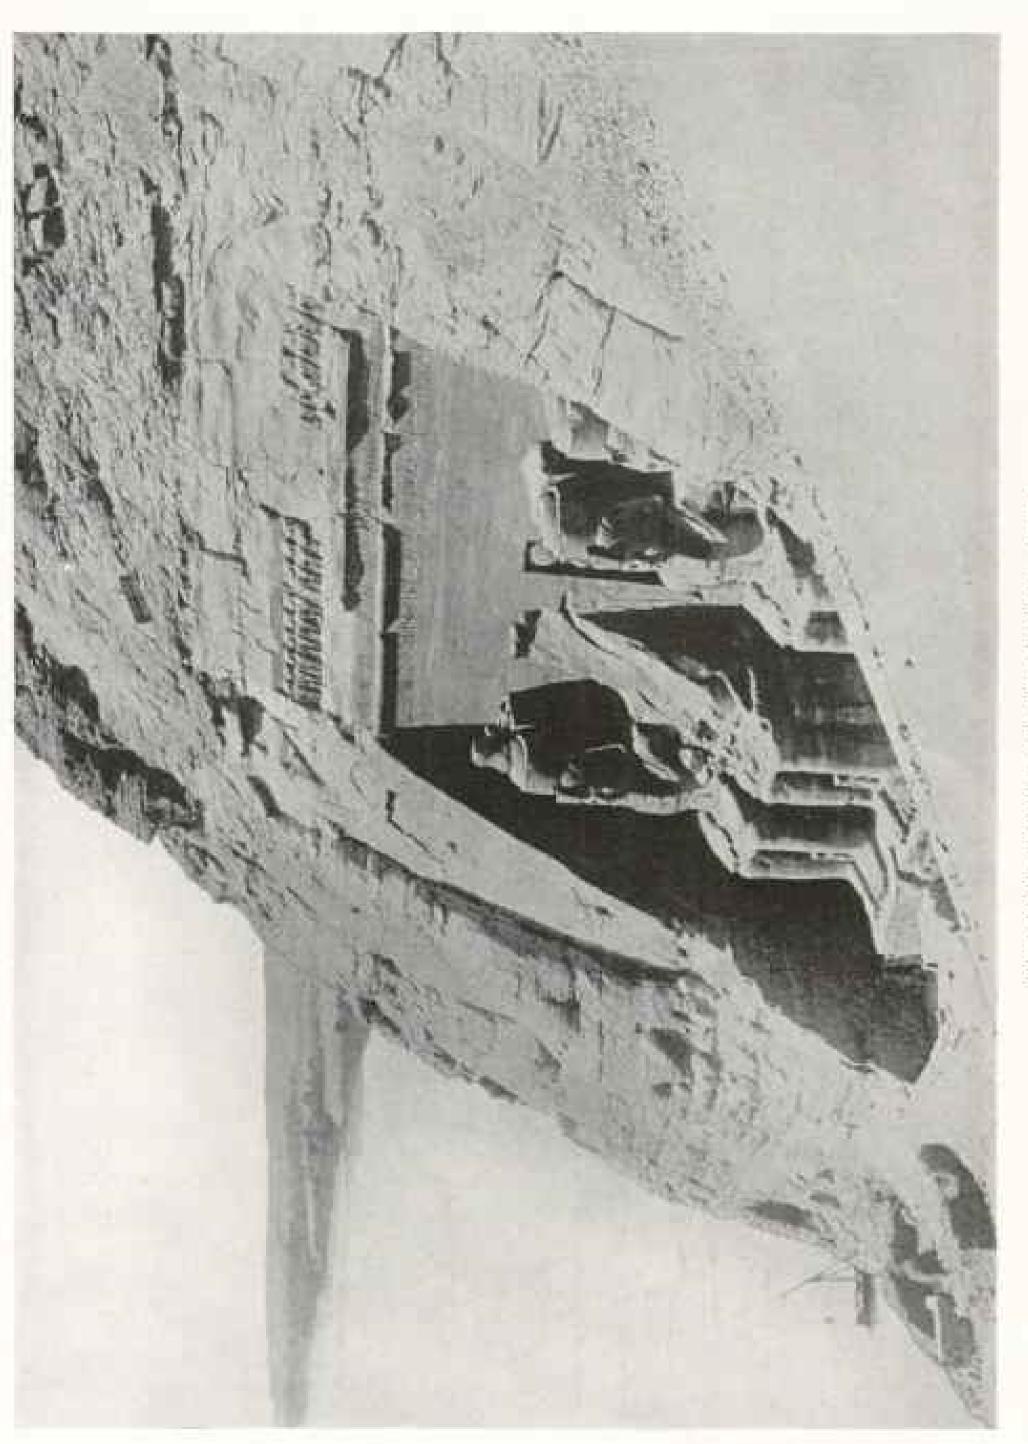


THE ROCK TEMPLE AT ARE STABLE, NUMA

works of Rameses II. It is hollowed out of a great rock promontory which juts out into the cert in height. The two colossal figures on either side of the doorway, each 65 feet high, are, as a the front is completed by a cornice of 21 dog-headed apes. Abu Simbel is situated on the at cataract of the Nile. m the front portruits of Rameses, while high alloye the bank of the river, 174 miles south of the fir factade is about 100 feet wide and perhaps the most remarkable usual, TEU S

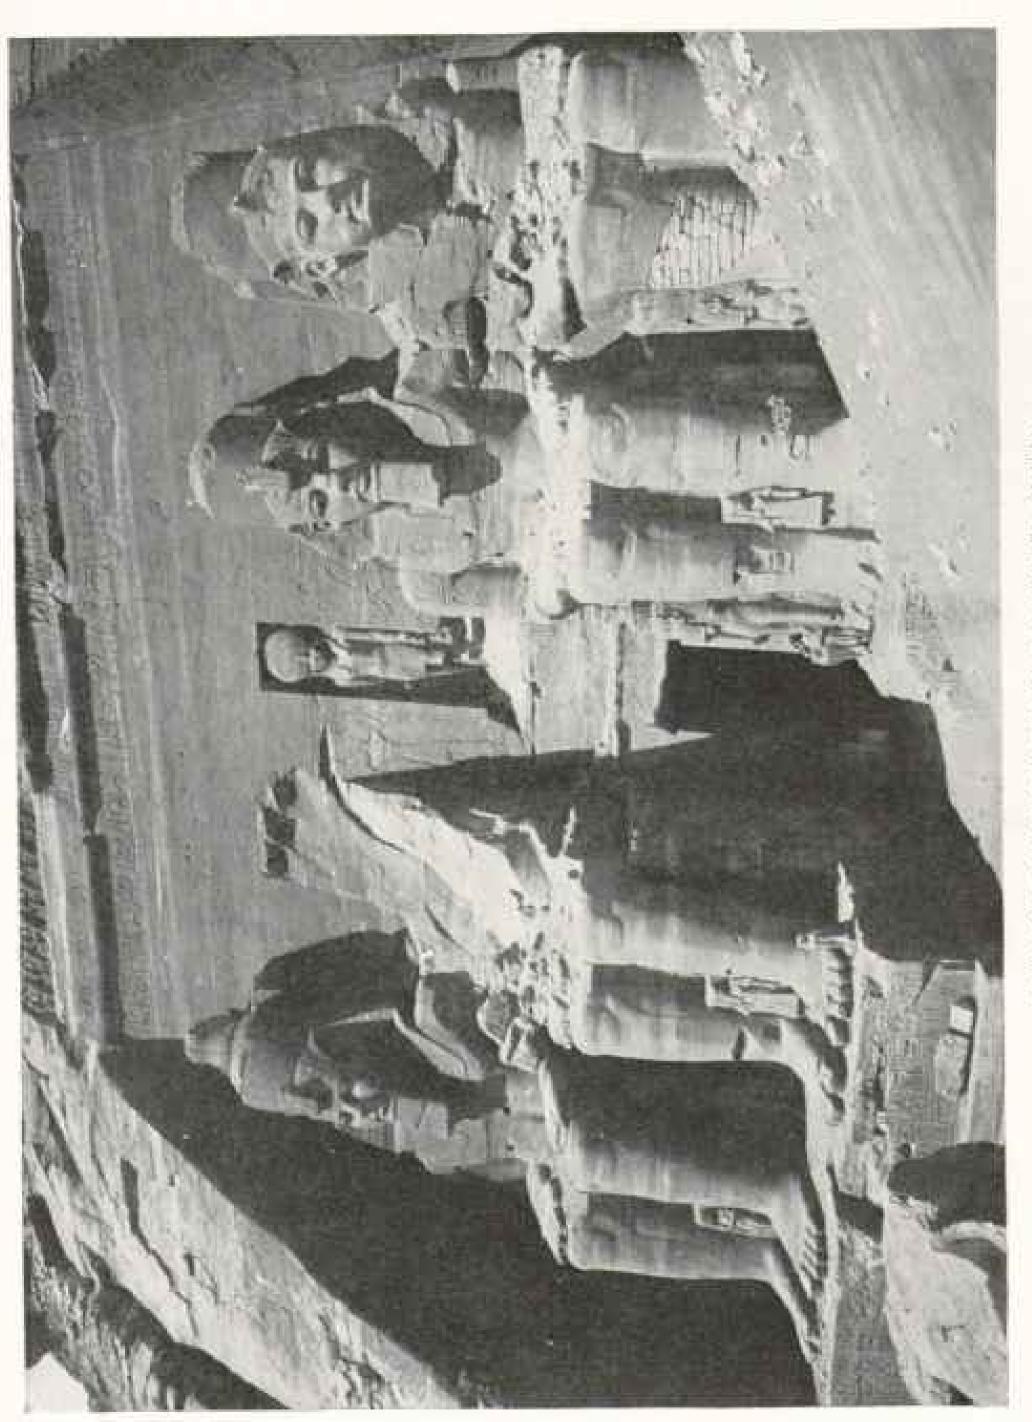

ENTHANCE TO THE TRAINER; AND STABEL, NUMBER

the hawk-headed god Horus, but the temple was dedicated to the great sun god of Egypt, Ameri-Ru, be morning sun entered the doorway and, illuminating the two great halls of the interior, fell directly By the side and between the feet of the colossit are portrait athress of various members of two of his daughters. On the legs of the colossus at the extreme left are inscriptions accatched One of these, in Creek, is of great interest, being reign of King Psantill, about 600 B. C. among the earliest specimens of Greek writing known to us and was so priented that the first rays of the mo-upon the images of the gods in the holy of holie the family of Rameses, including his wife, son, are by foreign soldiers in the Egyptian army during Over the entrance is seen the figure of

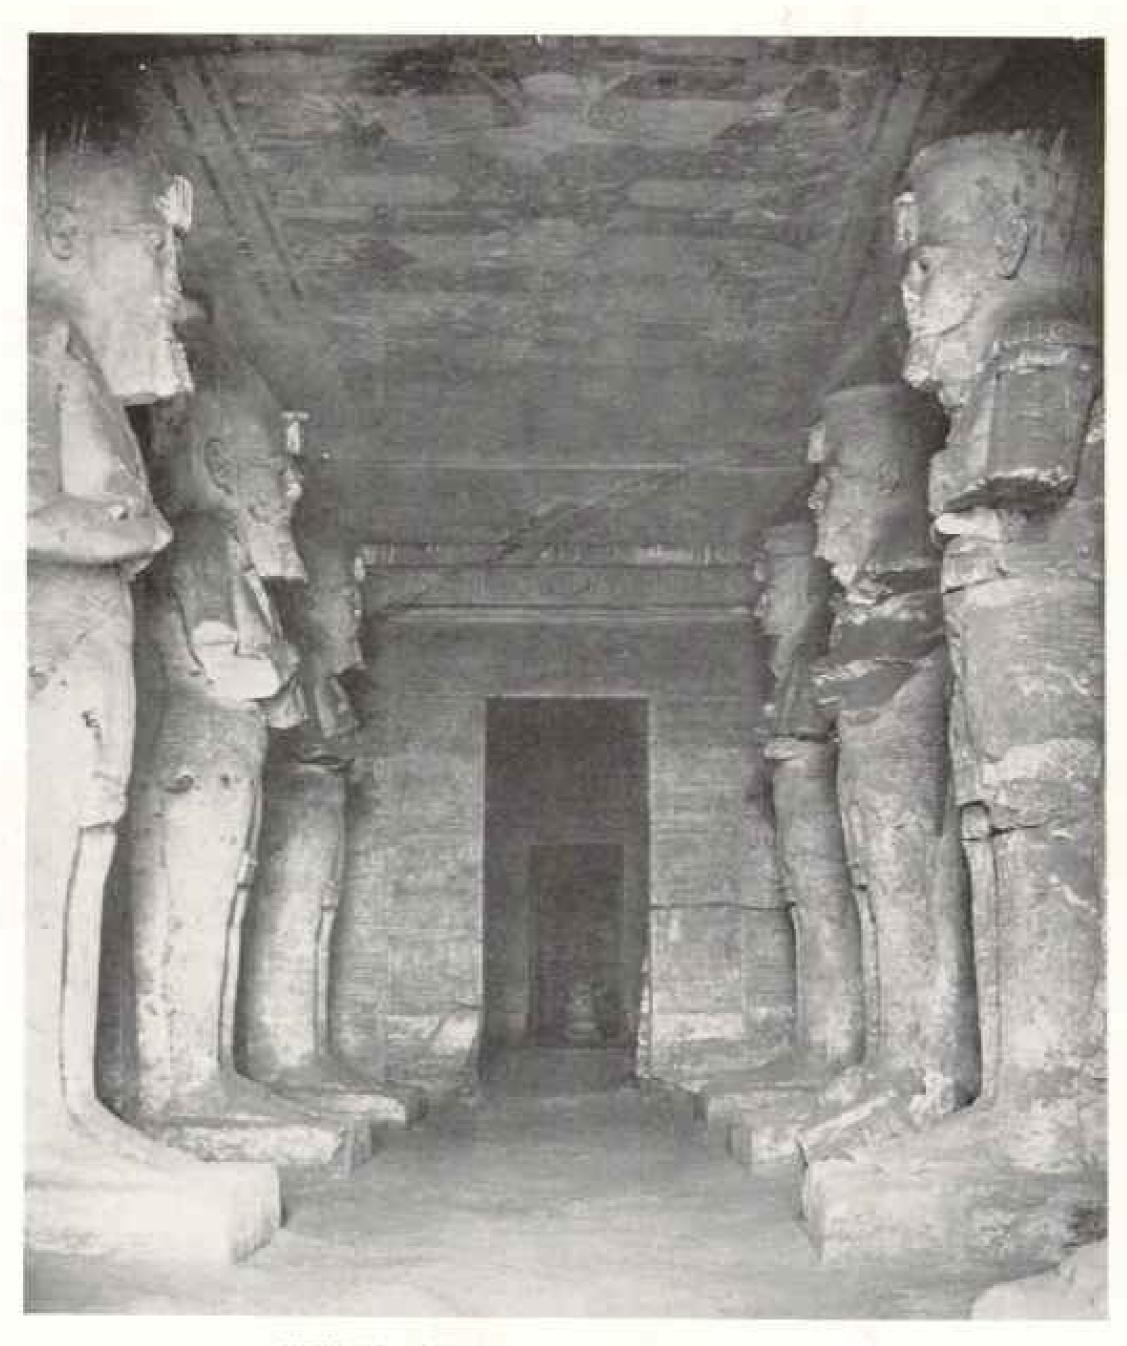

INTERIOR OF THE TEMPLE: AND SIMBLE, NUBLA

Two great halls; out of which open eight small chambers, and the hely of holies form the interior of the temple, which measures 180 feet at its greatest length. The roof of the vestibule hall is supported by eight colored statues of Rameses, with the emblems of the god Osiris; the walls are covered with exceptionally interesting religious and battle scenes in the most vivid colors. One of these exhibits the characteristic vanity of Rameses, as it depicts him, as king, making humble offerings to himself as god! In the holy of holies were the statues Amen-Ra, Raharkht, and Ptah, the gods and protectors of the great religious centers of Thebes, Heliopolis, and Memphis; and, finally, Rameses himself, as god and protector of Nubla. A few paces away to the south is another small temple of lesser interest.

have laughed over the well-worn jests whose theme is the affection subsisting between a man and his mother-in-law. To an Egyptian these jests would have had no point at all. To his mind it was the natural thing that the connections of his family by his wife's side should take a deeper interest in his affairs than his blood relations.

When a man succeeded in life it was his maternal grandfather, of all people in the world, who was supposed to take the deepest interest in his success. "When he is placed at the head of the court of justice, then the father of his mother thanks God." The same source was turned to when influence was wanted to secure a position for a young aspirant. A young officer is received into the royal stables "for the sake of the father of his mother." Strangest of all, when the same young soldier goes to the wars, he leaves his property "in the charge of the father of his mother of his mother."

Such importance being ascribed to the relation of motherhood, we naturally find that great importance was attached to the state of marriage. The oldest of Egyptian books, the Precepts of Ptahhotep (fifth dynasty) declares that he is wise "who founds for himself a house and takes a wife." Marriage was regarded as the only satisfactory condition of life, to be entered upon at an early age; and all the evidence, monumental and literary, suggests to us that the ideal of the relationship between man and wife was singularly high, and that the husband treated his wife, not as his servant, but as his equal.


Of course, there were differences between ideal and practice, in Egypt as elsewhere. Doubtless the Egyptian was no fonder than we are of washing his domestic dirty linen in public, and we are not obliged to accept the theory that the relations of man and wife were ideally perfect in Egypt merely because the documents give us no evidence to the contrary. Still, there is something very engaging and suggestive in the common representation of an Egyptian household—the wife sitting beside her husband with her arm affectionately round his neck, while the children stand beside their parents, and the youngest daughter crouches by her mother's chair. A race which habitually chose to have its family relationships so pictured can scarcely have been false all the time to so tender an ideal.

TWO WIVES CREATE AFFECTIONATE CONFUSION

Polygamy was the rare exception, and it is very uncommon to find two wives ruling in the same house at one time. Ameny, one of the princes of Beni-hasan and a man of much importance in the reign of Amenenhat II of the twelfth dynasty, had two wives at the same time, and, curiously enough, they seem to have been on very good terms with one another—at least the one wife named her daughter after the other, who returned the compliment, and, one fears, caused unbounded confusion in the household, by naming all her three daughters after her associate wife.

Want of means would naturally restrain the average Egyptian from such a
luxury as Prince Ameny could safely indulge in; but that this did not always operate is seen from an instance of polygamy at the other end of the social scale.
One of the tomb-robbers of the time of
the Ramesides possessed two wives, who
are gravely named in the legal documents
of his trial "The Lady Taruru and the
Lady Tasuey, his second wife." Evidently a hixurious as well as a light-fingered gentleman.

Men of the upper classes, as in all Eastern countries, had their barems. where the women of the house lived a more or less secluded life, though there appears to have been but little of that jealous seclusion of them which obtains in Mohamm:dan countries. In the tomb of the Divine Father Ay, a priest of the eighteenth dynasty who held the throne for awhile in the decadent period after the death of Akhennten, there is a representation of the women's apartments which shows how the members of the harem were supposed to occupy their time. We see them eating, dancing, playing music, or dressing one another's hair, while the rooms behind their living apartments

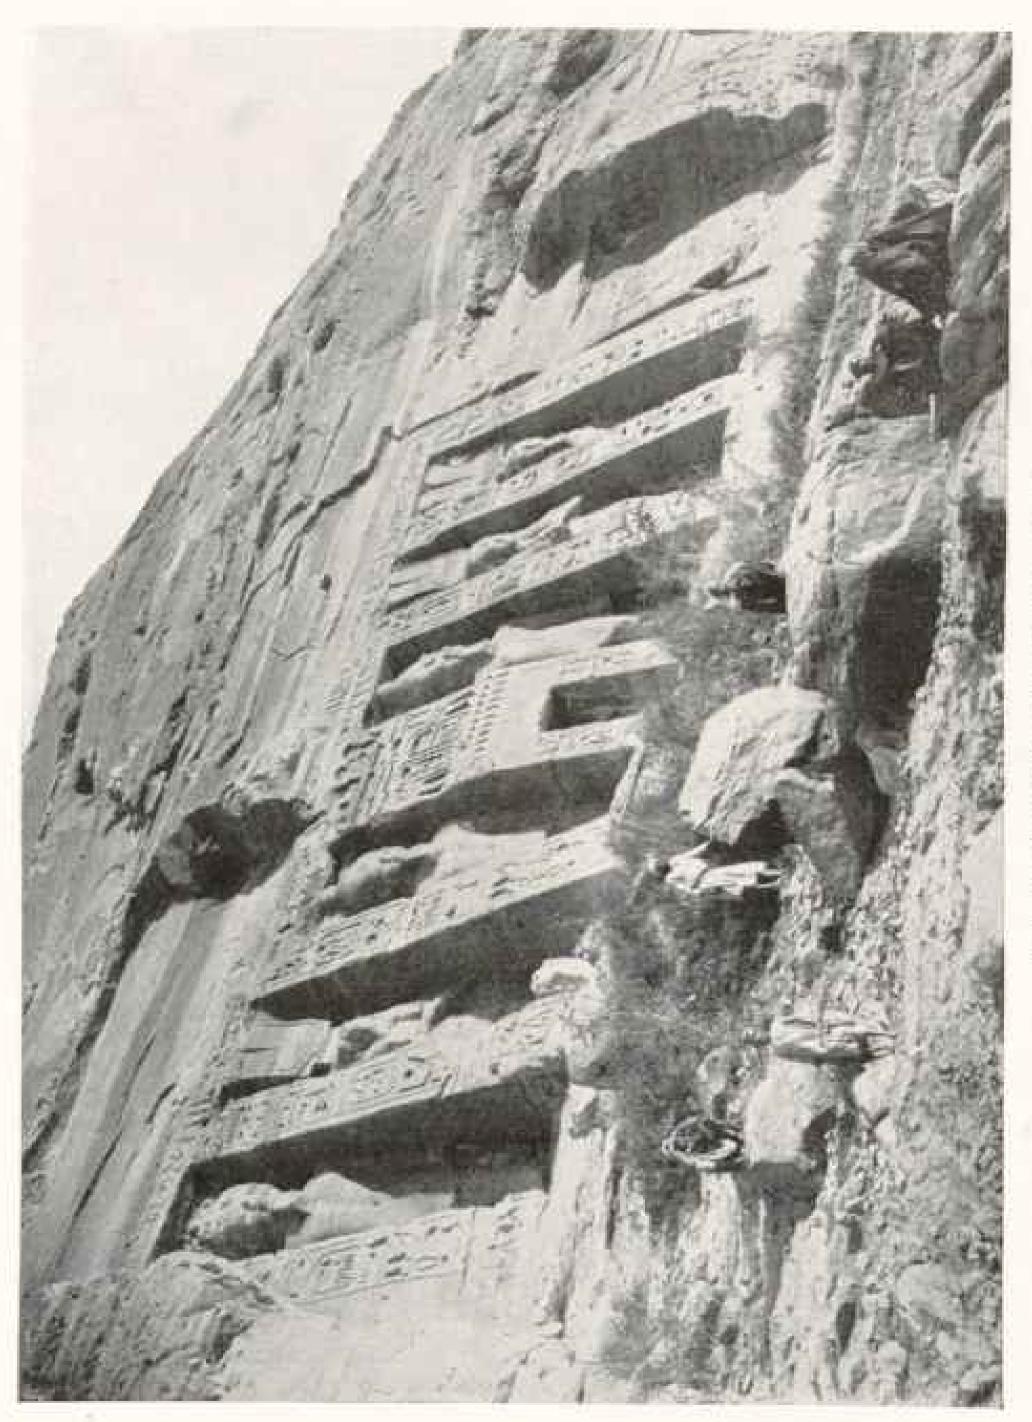

THE THIRD TEMPLE: AND STATIST, NUMBA

This temple, the most northerly of the group at Abu Simbel, is separated from its fellows by a deep ravine. It is on almost as large a scale as the temple of Amen-Ra, and was dedicated to the goddess Hathor. The portrait statues, 33 feet in height, which decorate the façade, represent Rameses II and his nister and favorite wife, Nefertari,

have plentiful stores of barps, lutes, mirrors, and wardrobes.

THE SIZE OF PHARAOH'S HAREM.

Pharaoh himself appears in all ages to have been the possessor of a large harem. In the wonder tale of the wizard Zazamankh, King Seneferu is recommended by the magician to select twenty of the fairest girls of his harem to row him in his boat on the lake; and no doubt succeeding monarchs were not behindhand in the number of female dependents who were attached to the royal household.

Under the empire the harem was supervised by an elderly matron, and was administered by high officials—"the governor of the royal harem," "the scribe of the royal harem," "the delegate for the harem"—while a number of slaves watched over the ladies and guarded them from undue intercourse with the outside world.

The inmates of the harem were drawn from many lands; and while some of them were Egyptian girls of noble rank, many were foreign slaves. The scale to which such an establishment could attain is illustrated by the case of Amenhotep III. When the King of Mitanni sent him his daughter Gilukhipa in marriage, the young lady was accompanied by a train of 317 maidens, who were no doubt added to the royal harem. This little army of attendants attached to a single queen out of several shows what a crowd of women must have been lodged beneath the palace roof.

The case of Amenhotep is not exceptional, though he was a monarch of very magnificent tastes. The fact that Rameses II has left lists of more than 100 sons and 50 daughters proves that, as Petrie remarks, "his concubines were probably as readily accumulated as those of an Arabian khalifa."

AN EARLY SUFFRAGETTE PLOT

In these enormous assemblages of idle women there lay a great source of danger to the state. The harem has always been a fertile ground for intrigues and plots. Favor shown to one wife or to ber children unites the others in a common grievance, and the result is generally some plot against the reigning king or an attempt to secure the succession for some one who is held to have been overlooked. Such plots were not want-

ing in ancient Egypt.

We have a very full record of the process against certain ladies and princes of the harem of King Rameses III of the twentieth dynasty, which exhibits the harem intrigue in all its familiar features. Officials of the barem are bribed. messages are sent out to officers of the troops from the secluded ladies, inviting the help of the army to overthrow the king and set up a pretender, and the resources of witchcraft are called in to insure the success of the scheme. In this case even the discovery of the plot did not put an end to the machinations of those concerned. The judges in the trial were tampered with, and the result was a highly discreditable exposure of the corruption of the Egyptian bench as well as that of the harem.

Of course, the great majority of these ladies were never regarded as the legitimate wives of the king. The title of "great royal wife" was reserved for the chief among them. Even though the king might, for reasons of state, contract an alliance on equal terms with the daughter of a foreign sovereign, his chief wife was still a native Egyptian—in most cases, though not invariably, of royal descent.

Gilukhipa, for example, Amenbotep's Mitannian queen, though doubtless a personage of great importance in the state, occupied an inferior position to the favorite wife, Tyi—a native Egyptian, not even of royal birth, whose influence over her husband and her son we have already seen to be supreme. Rameses II was married to a Hittite princess, "Maatneferu-ra," or "Dawn;" but his chief wife was the princess Nefertari, of the royal Egyptian line, while in addition he was married to several of his own numerous daughters.

INTERMARRIAGE WITH SISTERS

Such alliances, which seem utterly abhorrent to our minds, were by the Egyptian looked upon as both natural and de-

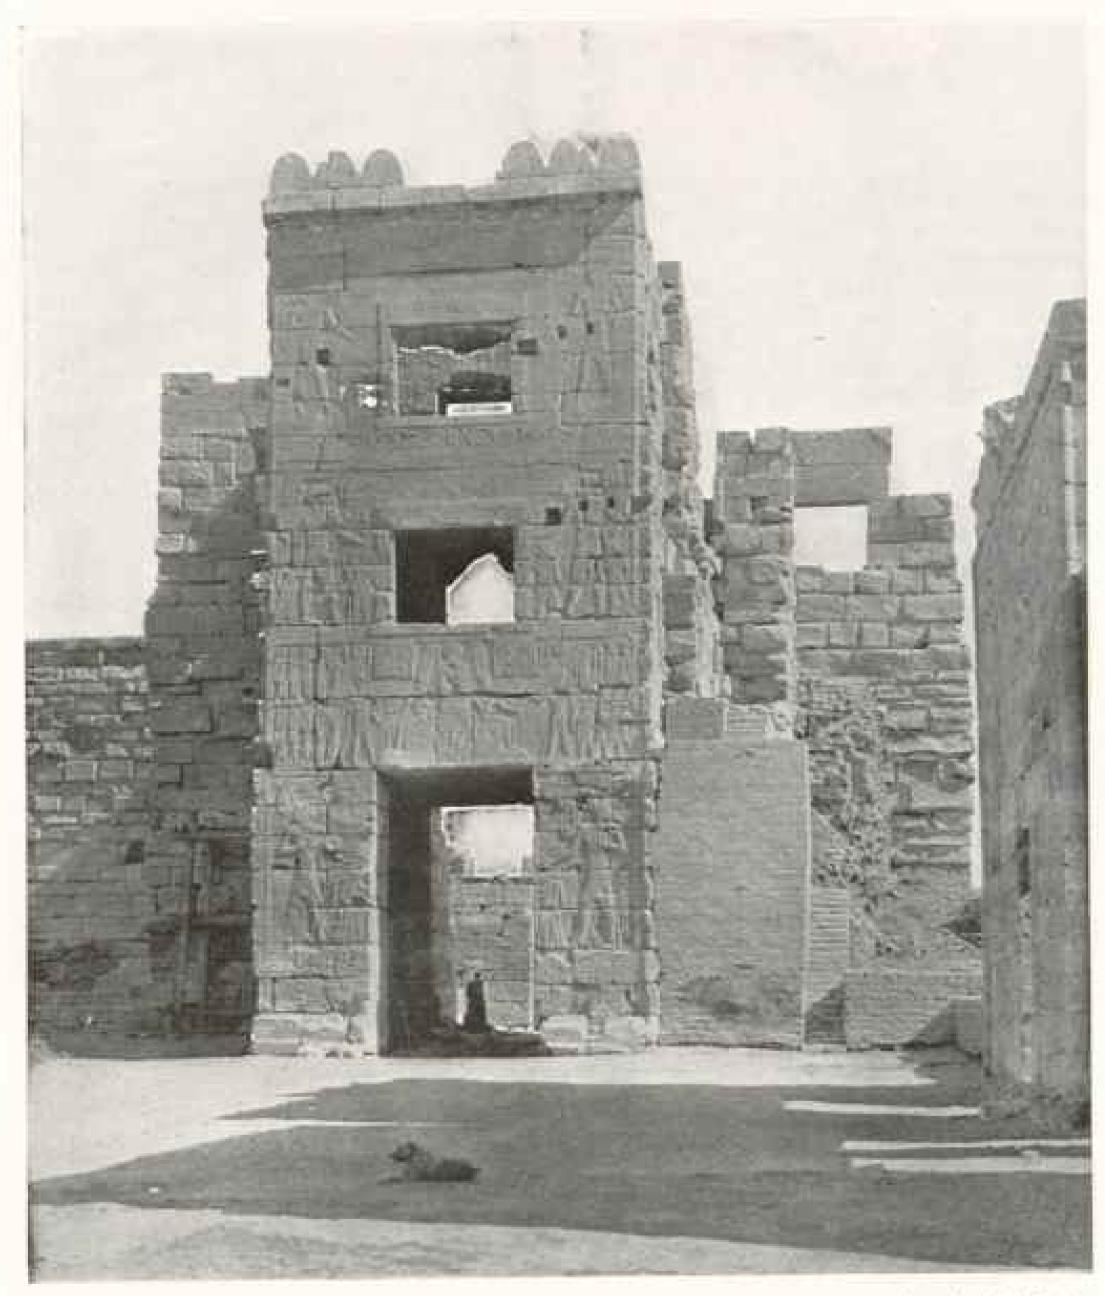


Photo by A. W. Cutler

THE PAVILION OF RAMESES III AT MEDINET HARD, PLAIN OF THERES, AS SEEN PROM THE FIRST COURT; DATE ABOUT 1200 H. C.


Hefore his temple at Medinet Halm, Rameses III built a palace of sun-dried brick, which has now disappeared, all that is left being the stone entrance tower usually known as the Pavilion. This edifice is unique in Egyptian architecture; its three stories, flat roof, and surrounding battlements suggest that it was copied from a Syrian migdol, or watch-tower, and may have been built as a memorial of some campaign against the Philistines and their allies. The walls of this pavilion are decorated with scenes showing the king in the privacy of his harem.



Photo by A. W. Cutler

ONE OF THE MOST SPIRITED EXAMPLES OF ANCIENT ART IN ALL EGYPT

This is one of the pylons of the Great Temple built by Rameses III at Medinet Habu, Plain of Thebes, about 1200 B. C. It shows Rameses in two hunting scenes. In the upper one he is hunting deer, in the lower one wild bulls. Below are the huntsmen who accompanied the king.

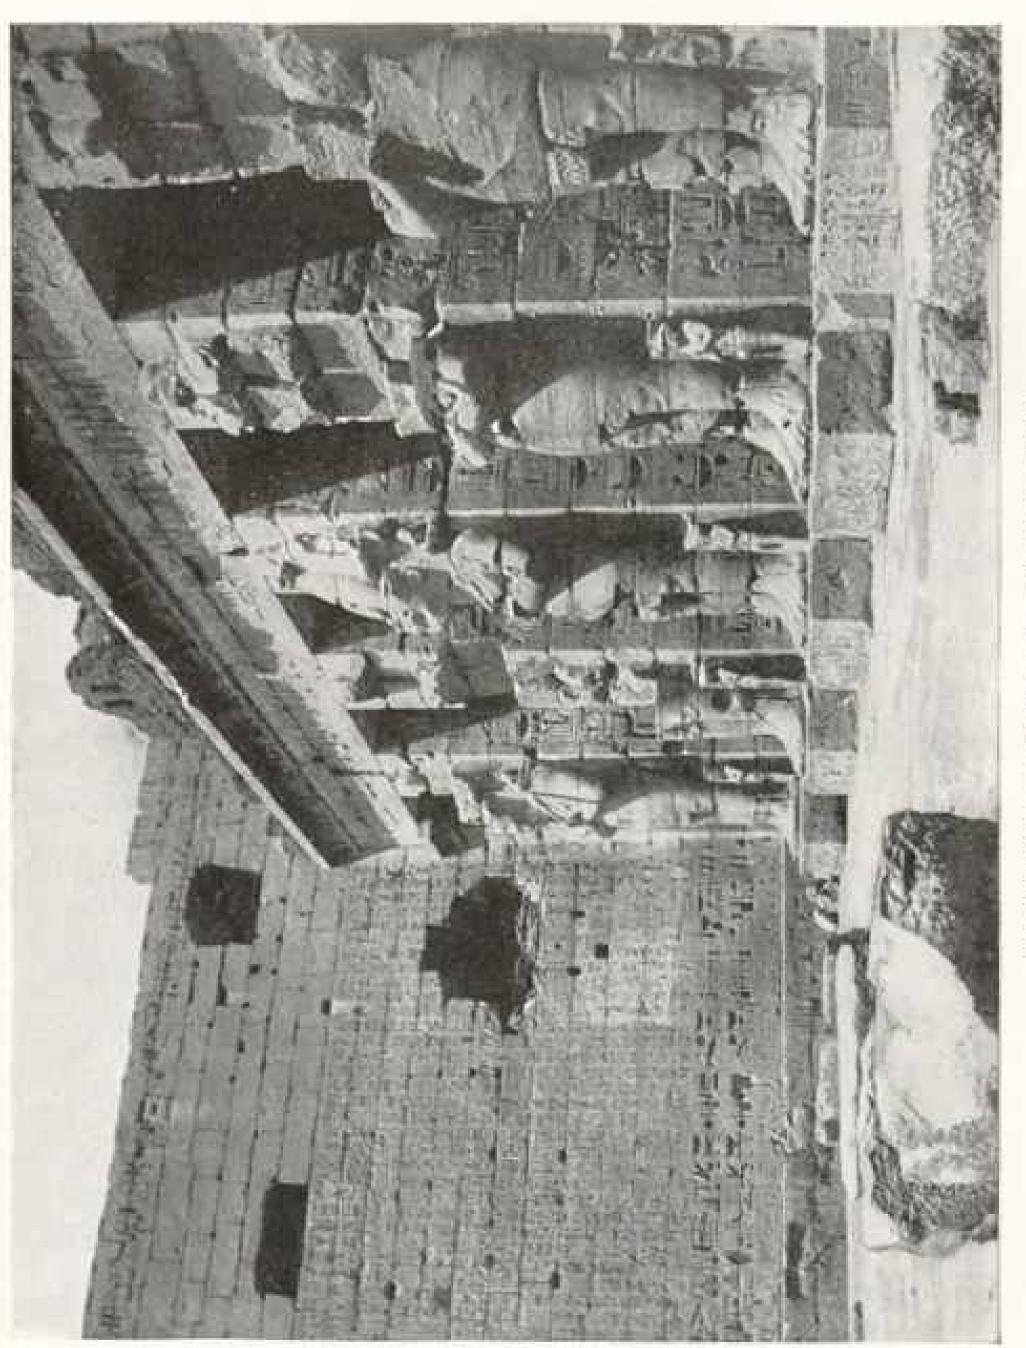

TEMPLE OF RASIESES III : MEDINET HARD, EGYPT

last achievement of the great builder kings. On the walls of the temple, which the war of Rameses against the Libyans, Syrinns, and the "People of the Sen," This forms the most complete historical summary of the reign of any Egyptian Erected as a mortuar This is one of the best preserved temples in Egypt, never having had to provide stone for buildings of later date. for the king, it is entirely the work of one reign and represents the is about 500 feet long and 160 feet wide, are inscribed a record of probably the Cretams, together with all the other events of his reign, king that has come down to us.

sirable. Marriage with a sister was held to be the sensible arrangement. gods themselves had set the example, for the brothers Osiris and Set were married to their sisters, Isis and Nephthys. Thus King Aahmes of the eighteenth dynasty married his sister, Aahmes Neferrari; Tahutmes I married his sister, another Ashmes, and Tahutmes IV contracted a similar alliance, while we have seen that our rules of consanguinity were even further disregarded by Rameses II in his marriages with his own daughters. How such continual inbreeding produced for hundreds of years successive lines of kings on the whole so virile and energetic as the average Pharaoh is somewhat of a problem.

In the strange alliances we have a reflection of the important position assigned by the Egyptians to women and the stress which was laid on the female line in the matter of inheritance. The royal title of a king was doubly confirmed by his marriage with his sister of the same royal solar stock as himself, and in the case of a king who was the offspring of a marriage with an inferior wife, his title was only held to be secure when he had married a lady of genuine royal descent on both sides—very often his half-sister by the father's side.

So great was the importance attached to the female line that even an usurper could legitimize his accession to the throne by marriage with a princess of the royal house. Thus after the dibacle which succeeded the disastrous reign of Akhenaten, when the successful general Horembeb seized the crown, he acquired a legal title to the throne by marriage with the princess Nezem-mut, sister of Akhenaten's queen. The royal lady was advanced in years, but she was still of the true solar stock, and his union with her was held to make Horembeb's succession quite legitimate.

WHAT DID THE BRIDE THINK OF IT?

The influence of the chief wife was evidently very great. Amenhotep III has left documentary evidence of his great attachment to his wife Tyi in the scarabs, which still record for us her name and descent and eloquently suggest the pride which he took in his clever


consort. "She is the wife of a mighty king, whose southern frontier is as far as Karoy, his northern as Naharina." More convincing still is the fact that, on the very scarab which records the king's marriage with the Mitannian princess Gilukhipa, "the royal wife, the mighty Lady Tyi, the divine one," is mentioned on equal terms with the king before the new queen is spoken of. What poor Gilukhipa thought of it is another story.

Even after the death of her husband, the chief queen still occupied her unquestioned position at court, was named "royal mother," and had her own special property, under separate management; while some of the queens, notably Anhhotep and Aahmes Nefertari, the found-resses of the eighteenth dynasty, had divine honors paid to them after death for many generations.

On the whole, though there are certain features, such as their loose ideas in the matter of consanguinity, which shock our modern sense of morality, the ideas and the practice of the ancient Egyptians in respect of the position of woman are remarkably advanced and rational, comparing very favorably with those of the great nations of classical antiquity. Woman was to the Egyptian not the slave of man or the minister of his pleasures; she was his companion, his fellow-worker on very equal terms, often his adviser, not infrequently his ruler.


Family life was accorded the position of importance which it deserves, and, as always where such a fact obtains, woman held her unassailable position of respect and usefulness in the eyes of all decent men. Especially the relation of parents and children presents one of the most pleasant and wholesome features of Egyptian life. There were dark shadows, of course, on the picture, and insmorality was not unknown in Egypt any more than in other lands; but the Land of the Nile has little to fear from a comparison with any other nation of antiquity in respect of its treatment of womankind.

Our survey of the results of modern exploration in Egypt must close with a brief mention of the light, such as it is, which has been cast upon the question

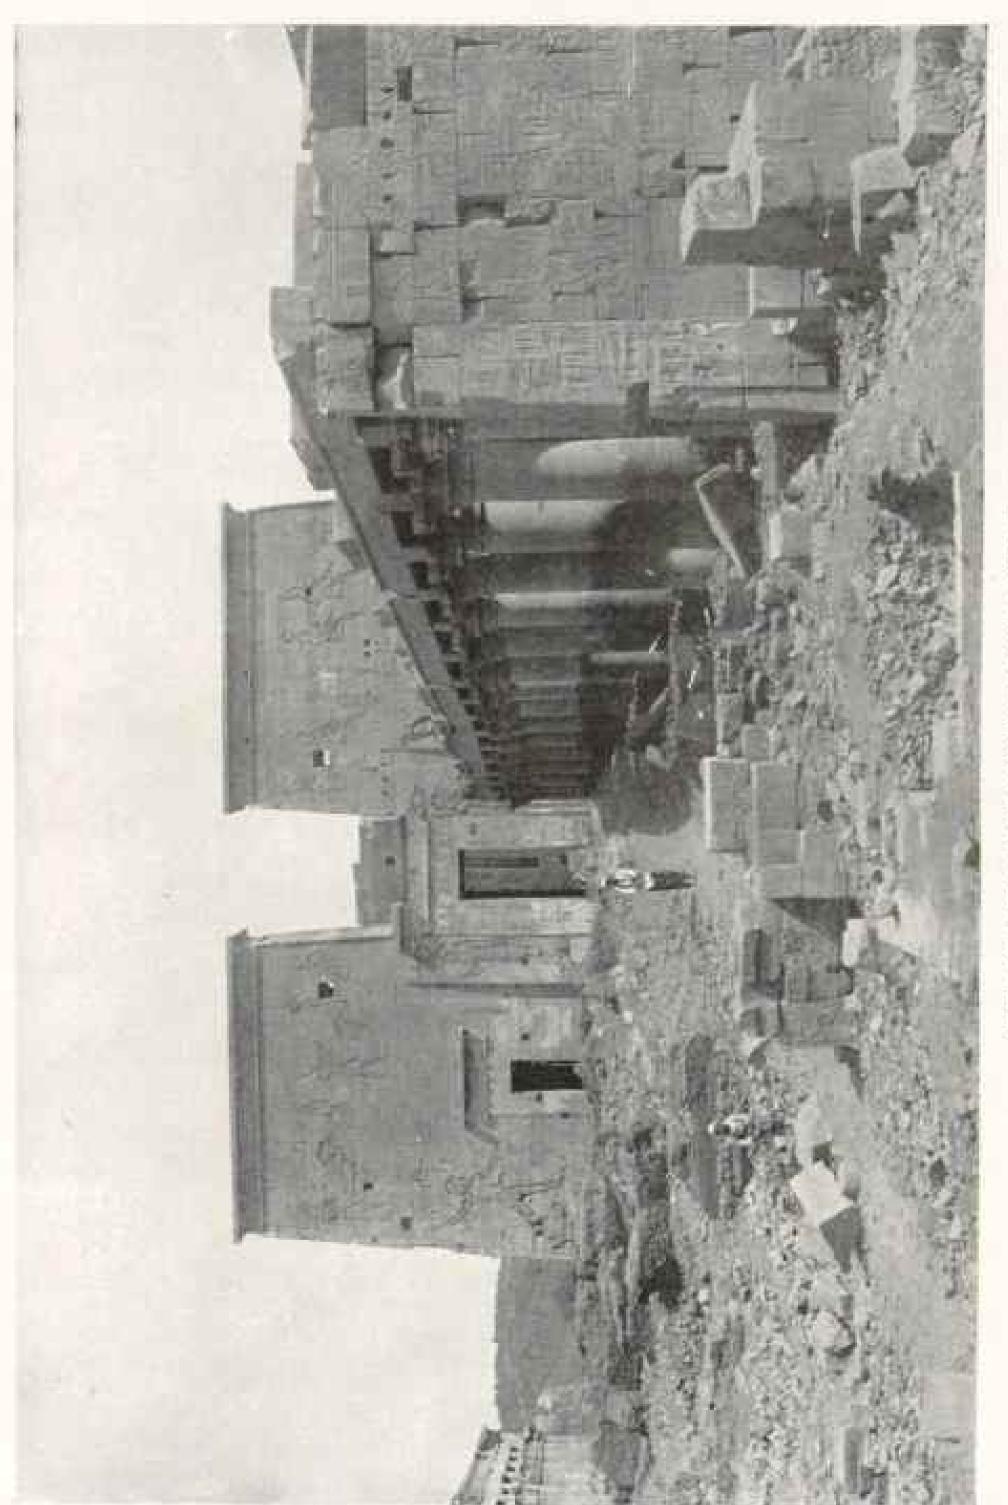


THE PYLONS OF THE TRMPHE OF 1815; PHILE

present structure is mainly the work of the Pholemies. The fine colounades leading up to complete, being goo feet long, with 31 columns, each 16 feet high; that on the right is ungateway can be seen a portion of a second pyloti leading into the boly of bulies. longs of Egypt, Neithtnebf, Juilt a temple to Itils on this beautiful island in the Nile, present structure is mainly the work of the Prolemies. About the year 350 B. C. the last of the native this temple, however, was destroyed by floods, and the temple date from Roman times; that on the left finished, having but 16 columns. Through the cent

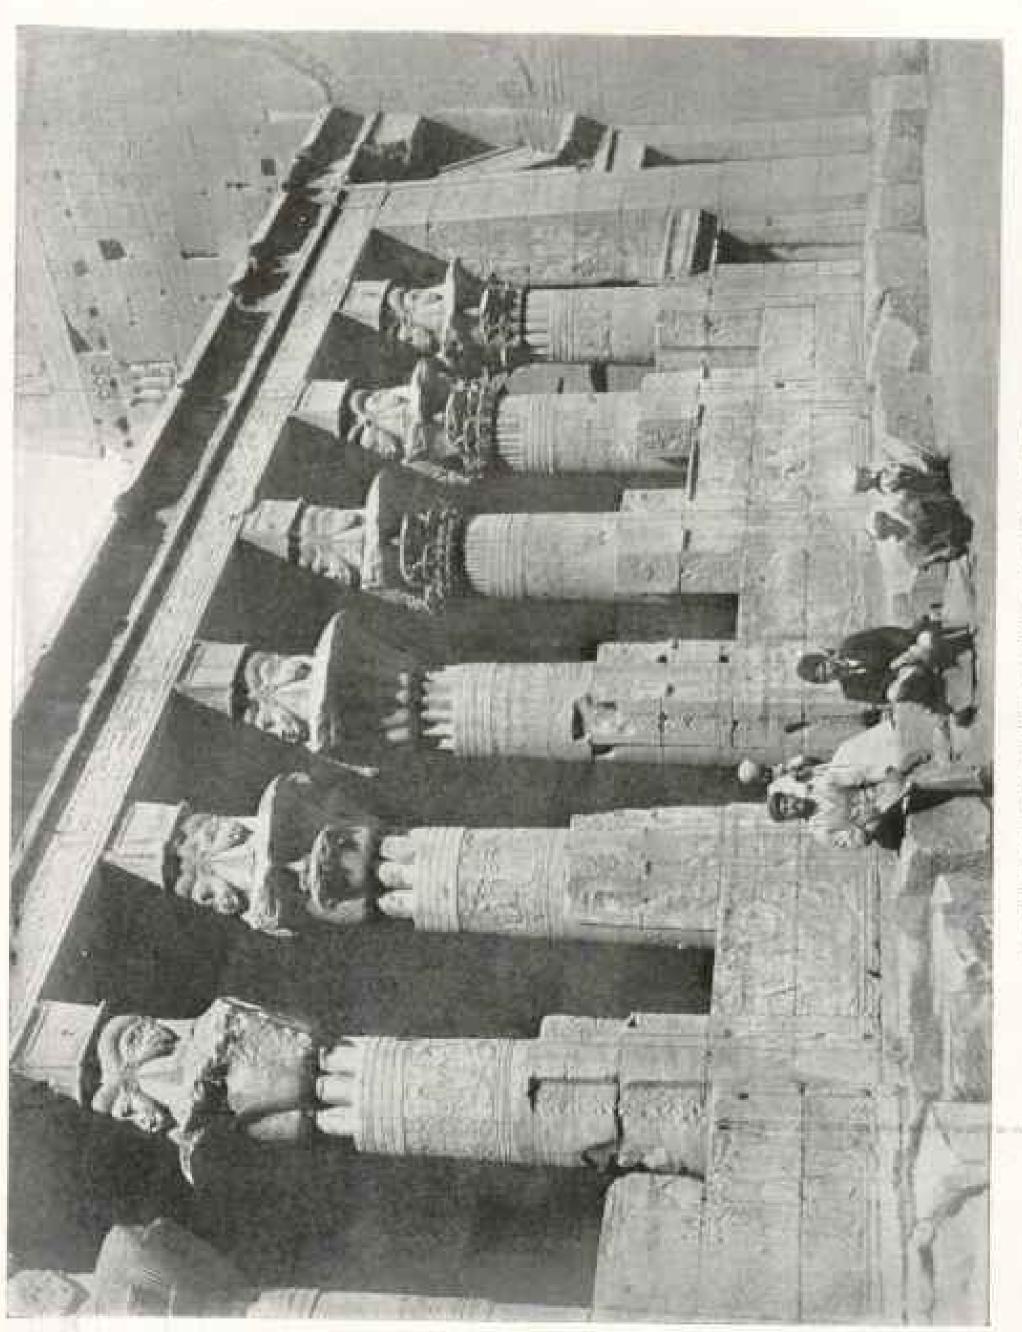

N THE COURT OF THE HRYH-HOUSE: PHILE

Opposite this row of heatstiful columns and between the two pylons stood the hirth-house, a small accessory chapel, deriving its name from the fact that one of its rooms contained reliefs of the birth of Herus, the son of Ish, and her brother and consect. Osiris, The worship of Ish centered in the island of Philip and was the most successful of the pagan religious in maintaining itself against Christianity. So powerful wore the prints of Ish fourished at Philip prints of Ish despite an edict of Theodosius in 378 forhidding pagan services in all the Egyptian temples, the cult of Ish flourished at Philip priests of Isis that, despite an edict of Theodosius until about 500, in reign of the Emperor Justitian.

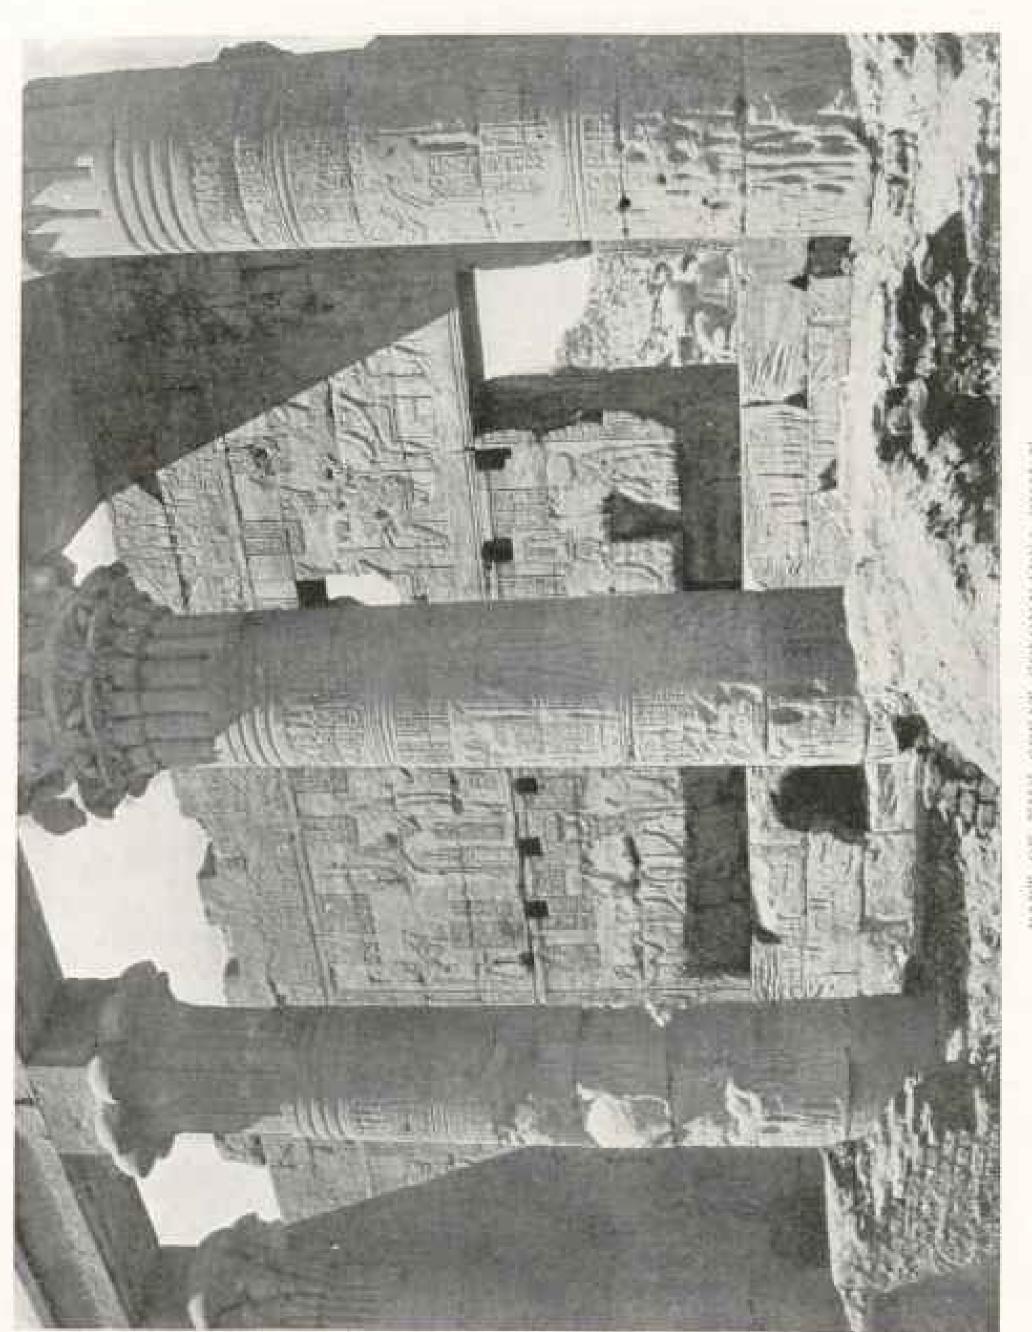

PART OF YHR GREAT COLONNADE: PITTER

Note the elaboration of the capitals of these pillars, so different from the severe simplicity of those at Karnak and Luxor. On the wall behind appear reliefs which at first sight seem characteristically Egyptian, yet they contain frequent references to Roman emperors, to Augustus and to Therine, in whose reign Christ was eracified. In Egyptian, Philz was known as Pilat-the angle island.

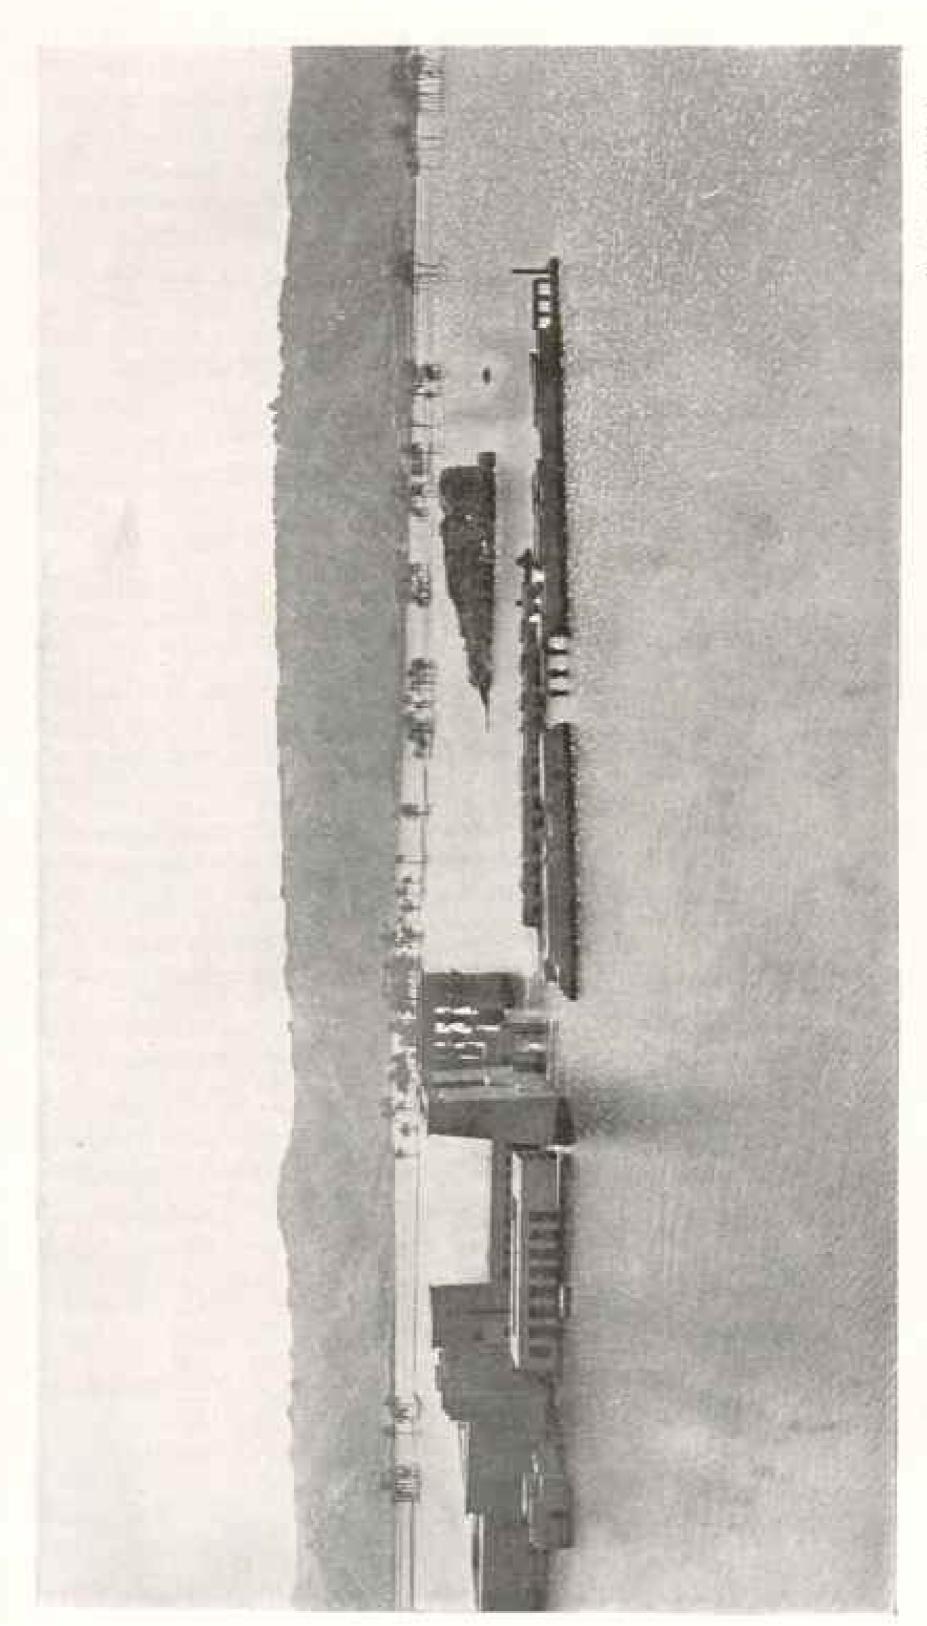


Photo by A. W. Cather.

THE SUBMERGIO RUINS OF THE TEMPLES OF PHILE, NEAR ASSOUAN

Art and sentiment have been sacrificed to the commercial welfare of modern Egypt. With the completion of the great dam at Assoum, the waters rose the sland of Philie. The tops of most of the buildings remained above the water level all the year round until the dam was raised another 25 feet, when—excepting from July to October—the temples were entirely submerged. Though this constitutes a great artistic loss, the gain to Egypt, through the conservation of these life-giving waters in a rainless land, is estimated at \$15,000,000 annually.

of the Exodus of the Israelites by the discovery of the famous Stele of Merenptah. It is well known that Merenptah, son and successor (1234-1214 B. C.) of the great Rameses II, is the king in whose reign the majority of Egyptologists have concurred in placing the Exodus, though the opinion is held by some that an earlier date, in the preceding dynasty, is preferable. Up till the year 1896 no unequivocal reference to the people of Israel had ever been found on the monuments, the earlier identification of the Hebrews with the Aperiu mentioned in the eighteenth dynasty inscriptions having been finally abandoned by general consent as untenable.

WHEN DID ISRAEL COME OUT OF EGYPT?

In 1896, however, the long-desired inscription came to light. In that year Professor Petrie excavated the remains of the funerary temple of Merenptah on the western plain of Thebes. Among other finds of greater or less importance, he discovered a large black granite stele (memorial pillar) of Amenhotep III, engraved with a description of the erection of his own funerary temple, now represented only by the well-known Colossi (see page 982). On the rough back of this stele Merenptah had engraved a long inscription, which proved to be of great historical importance.

It related to the victory which the king gained in the 5th year of his reign over the army of Libyan invaders which had been devastating western Egypt. The details of the story in the main follow lines already familiar from other sources; but evidence is added that the victorious king followed up his victory by a campaign in Syria, in which a number of towns in Palestine were captured and sacked. The part of the inscription in

question runs as follows:

"Seized is the Kanaan with every evil;

Led away is Askelon,

Taken is Gezer. Yenoam is brought to nought. The people of Israel is laid waste,

Their crops are not."

Unfortunately this inscription, so long sought for, only seems to add to the confusion. The mention of Israel in connection with Palestinian towns makes it evident that in the reign of Merenptah there were Israelites in Palestine, and the fact that their name occurs next to that of Yenoam suggests that they were in north Palestine; but, if the Exodus took place in the reign of Merenptah, no room is afforded for the wanderings of the Israelites in the desert, occupying, according to the biblical records, many years. On the other hand, no earlier date can be suggested for the Exodus which does not encounter insuperable objections on other grounds.

We are faced with the fact that the reign of Merenptah seems the only possible point at which the Exodus can be fitted into the historical scheme, while yet at that time there were already Israelites living in Palestine in sufficient numbers to render their overthrow a matter worthy of record in an important historical inscription. The only suggestion which seems in the least to meet the case is that offered by Petrie and Spiegelberg, namely, that when the family of Jacob came down into Egypt in the time of Joseph the migration was not so complete as we have supposed. Some members and dependents of the family must have remained behind in Palestine, and it was their descendants who were overthrown by Merenptah in his Syrian campaign. This supposition is not without its own obvious difficulties, but it seems to remain at present the only possible solution of the new enigma which has been raised by Professor Petrie's dis-COVETY.

Further exploration may yield us more light upon the subject. Meanwhile we have to be content with the bare fact that an unmistakable mention of the Israelites has at last been found on an Egyptian monument of the period in which the Exodus is believed to have occurred, though the mention is such as to puzzle rather than to enlighten us.

RECONSTRUCTING EGYPT'S HISTORY

The Work of the Egypt Exploration Fund

By Wallace N. Stearns

A THOUSAND miles of river in the midst of a valley of varying width—at the most 13,000 square miles of arable land. That was the physical basis of ancient Egypt. Nowhere is there to be found a finer instance of a country snatched from the sea by the gradual silting up of a channel: a flowing stream, a belt of green, a strip of upland, foothills and gullied slopes prefaced and interspersed by arid waste, the boundless desert.

Through the genius of the engineer Egypt is being born again. In her awakening the land of the Pharaohs is again to play a rôle among the nations. The filling up of the Assouan dam began November 26, 1906. Statistics attest the usefulness of the construction. In 1877, in which year low Nile occurred, over

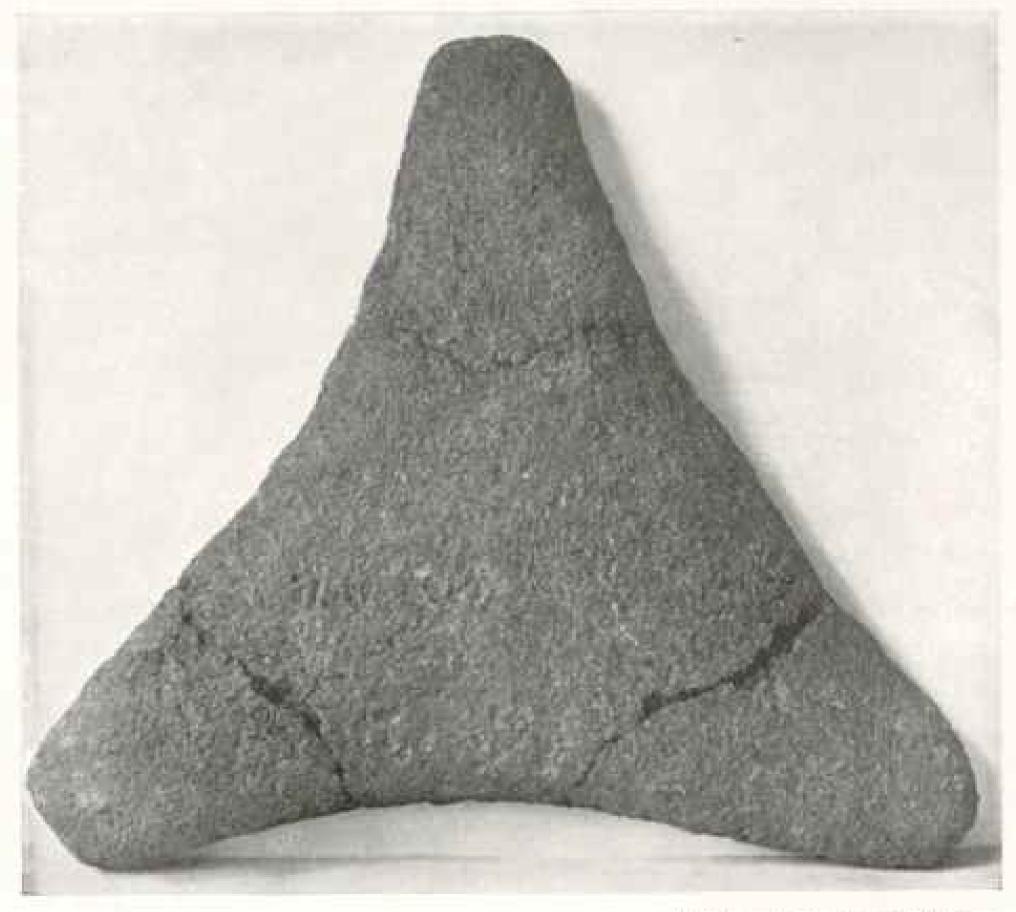


Photo from Egype Raplaration Famil

A CAKE OF BREAD, PROBABLY 3.500 TO 4.000 YEARS OLD, FROM DEIR-EL-BAHARI



Photo from Egypt Exploration Found

DEIR-EL-BAHARI

On the left is the great temple of Mentuhotep II of the eleventh dynasty, and on the right the even grander temple of Queen Hatshepsut, built 500 years later (see pages 980 and 981).

1,030,000 acres of tillable ground were left without water supply. In 1907, also a year of low Nile, only 115,750 acres were deprived of water—10 per cent of that so left 30 years before. The raising of the dam 16½ feet and a corresponding rise in the water level of 23 1/10 feet doubles the capacity of the dam and adds 1,000,000 acres to the tillable land of the delta; that is, water will be at hand in the summer months, when it is most needed.

The reclamation of the land, an economic necessity, has created an emergency for the archeologist. Sites of ancient culture are being submerged (see page 1019), and by infiltration the soil beneath is becoming saturated, to the detriment and ruin of priceless treasures yet undiscovered. The rapacity of robbers and curio-hunters is fast adding to this waste, though against the latter precautions are availing much.

REAL KNOWLEDGE ABOUT EGYPT A NEW THING

Our knowledge of the Egyptians is a recent acquisition. Judging from the Egypt's wise men for profundity of learning, and possibly from a misconception of their environment, we had come to regard the Egyptian as ever engaged in battles or triumphal processions, or delving in the mysteries of existence—at all times austere and taciturn. The pyramid of Khufu, massive and awe-inspiring (see page 900); the great temple of Karnak, the mightiest colonnaded hall ever erected by human hands—these had stood as the witnesses for ancient Egypt (see pages 902 and 993).

Pharaoli, noble, and priest we knew. The voice of the common man had not yet been heard. But now both prince and peasant, rich and poor, are made to live again. From the sands of Egypt, the dust-heaps and rubbish piles of deserted cities, from buried temples and forgotten necropoles, new evidence is steadily coming to light. From the towns of the Fayum up the Nile to the Cataracts ancient sites have been explored. Naucratis, Tanis, Dendereh, Deshashe, Ehnasya, El-Mahasna, Tebrunis, El-Amarna, Deir-el-Bahari, and

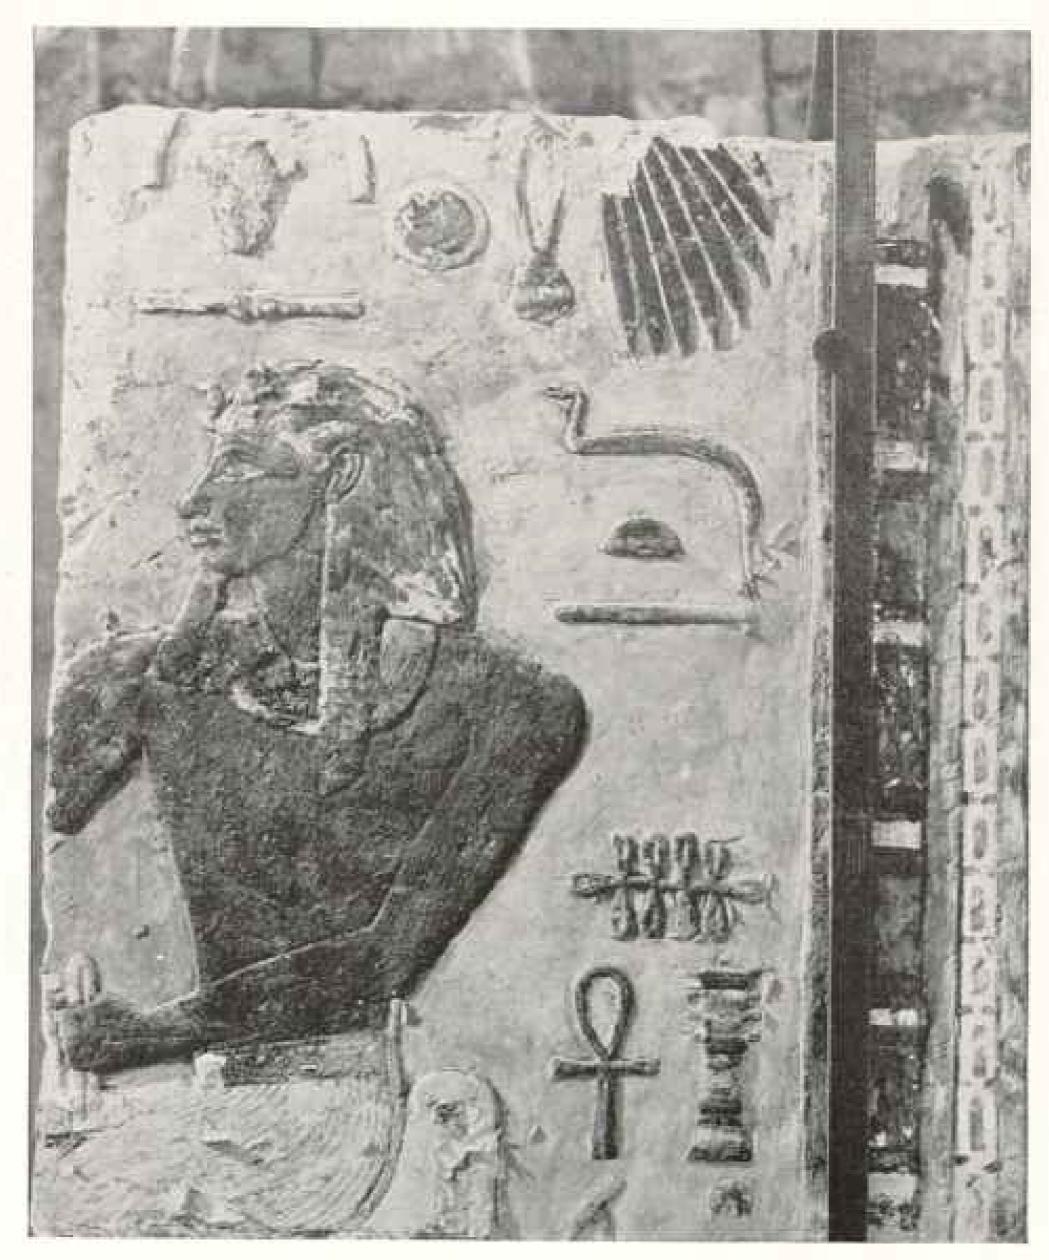


Photo from Egypt Exploration Fund

EGYPT'S GREATEST QUIEN, HATSHEFSUT

Her life is one long record of kingly deeds. She discarded feminine attire, wore the crown, and assumed an artificial beard at her chin (see text, page 1036)

Abydos, Philæ, Elephantine, Memphis, and Thebes are among the old cities thus discovered or brought out in sharper relief.


At present interest centers at Deir-el-Bahari. Located west of the Nile, at Thebes, this site has become a Mecca for tourists. Here side by side stand two dynastics respectively. The earlier, that of Mentuhotep II (see page 1024) antedates the splendid temple of Queen Hatshepsut by 500 years (see page 1025). Of the earlier structure, though now in ruins, enough remains for archeological restoration. Between the two temples



Photo from Layor Capieralies Pand

THE TEMPLE OF MENTUROTER II, OF THE BUILDING DYNASTY, AT DRIGH-HE-HAMMAN

S names and beautifully squared and a dummy. To the north and south were open courts, and the "On an artificially squared rectangular platform of natural rock about 15 feet high was reared the pyramid of the kingand was bordered by colonnades of 22 pillars, each inscribed with the king' tomb has not been found. Around the pyramid was an ambalatory, whose roof was supported by ocdecorated with scenes of religious festivals, processions, husbandry, and so forth. To the north and
risck platform were riveted with large blocks of white finestone, some of them measuring 6 feet by 3 for
sloping ramp led up to the platform of the temple, and was bordered by colounades of 22 pillars, each (see pages 380 and 981).

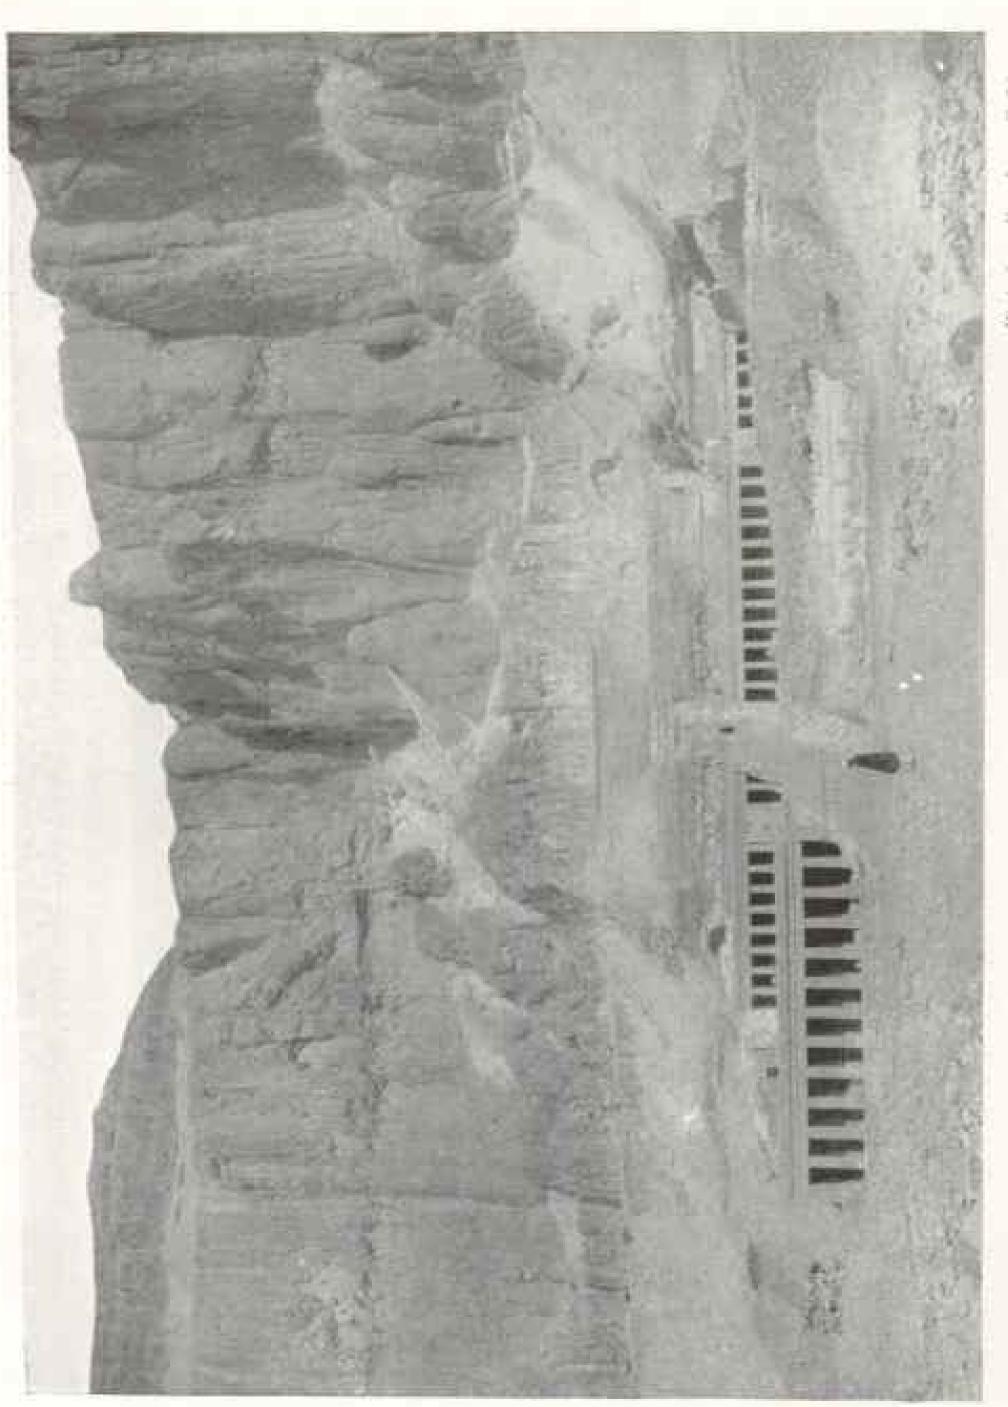

Phillia Trum Mey, James Maffale

HATSHEDSUY'S TERRACED TEMPLE AT DEIN-EL-HAHARI

teet and constructed in three terraces, where the hills slope gradually to the plain, the slender of cliffs overhead. Its own columns are whitish, like mellowed ivory. The whole material of the sun falls on it, still dazeling white in places of shule, and in citier instance providing a surfaced or vivid, are displayed in automahing beauty" (see page 1027). The whole material of t for the sculptures on its scalls, the temple hears no rescriblance to other sacred buildings, the cliffs overhead. "Withers fittingly says of this temple: "Excep-ing at the foot of hills that rise sheer upward for colournades appear to support the whole weight o face on which the rich pigments of Egyptian art, the temple is limestone, yellowed with age where



BAS-RELIEFS: HATSHEPSUP'S TEMPLE, DHIR-EL-BAHARI

increases of the royal personnges buried in the adjoining acquichers, . . . but Hataliepsut a of her family only the space strictly necessary. She called her temple "most splendid of all" alls she engraved and painted pictures illustrating in detail her principal acts. (see pages 1027 "Hatsbepant's temple is really a tomb-chapel in appropriated the entire edifice, allowing to the me and made it her biographer. Everywhere on its w and 1028). there is a striking similarity. Both were included within one enclosure, both had porticoes of marvelous beauty and proportion, both were dedicated to Hathor.

OF HATSHEPSUT

The larger temple, that of Queen Hatshepsut, is the product of an age great in achievement and noted for its beautiful creations. Withers fittingly says of this temple: "Except for the sculptures on its walls the temple bears no resemblance to other sacred buildings. Lying at the foot of hills that rise sheer upward for 400 feet, and constructed in three terraces, where the hills slope gradually to the plain, the slender colonnades appear to support the whole weight of the cliffs overhead. Its own columns are whitish, like mellowed ivory. The whole material of the temple is limestone, yellowed with age where the sun falls on it, still dazzling white in places of shade, and in either instance providing a surface on which the rich pigments of Egyptian art, faded or vivid, are displayed in astonishing beauty."

Hatshepsut's temple is really a tomb-chapel in memory of the royal personages buried in the adjoining sepulchers:
Thothmes (Tahutmes)
1: his daughter, the famous Hatshepsut; her brother and consort,
Thothmes II, and her successor, Thothmes III,
Thothmes I and Thothmes III,
Thothmes III really built by



Photo from Egypt Exploration Fund HATHOR SHRINE, FORIND AT DEIR-EL-BAHARI

"A perfect likeness of the living animal, reddish-brown in color, with spots shaped like a four-leaved clover. Traces yet remain of the gold that once covered head, neck, and horns. Between the curving horns is the lunar disk, surmounted by two plumes" (see page 1040).

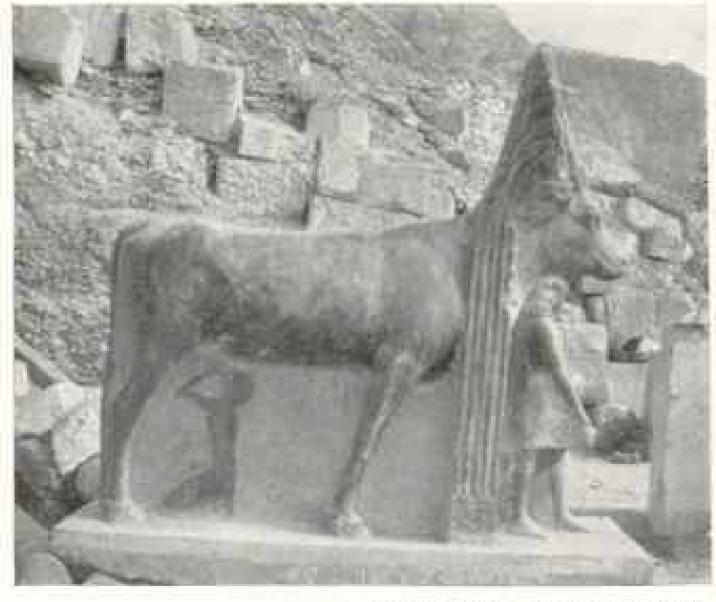


Photo from Egypt Exploration Fund HATHOR, THE COW GODDESS

"Beneath her head stands the dead king, whom she protects. The living king, whom she nourishes, kneels beneath her form. She is the nourishing mother of the young ruler as she is of the divine Horns" (see page 1041).


the men of her family only the space strictly necessary. She called her temple "most splendid of all," and made it her biographer. Everywhere on its walls she engraved and painted pictures illustrating in detail her principal acts. Each successive terrace maintains its own character.

With the rise to the upper platform we come to oratories and to records intimately pertaining to Hatshepsut, and naively revealing the forceful personality of this most dominant monarch of her dynasty.

THE SHRINE OF THE COW GODDESS

Here on this upper terrace, sheltered by another of the matchless porticoes, is a shrine of The covered Hathor. vestibule is guarded on either side by Elathorcrowned columns, keeping watch and ward over the secret of the speos. In the wall-painting within, Hathor herself is represented under the form of a cow suckling a boy, protecting a man standing before her, each bearing the Queen's mame.

Fragments of a most interesting sculpture were found on the lower platform of Queen Hat-shepsut's temple. The complete relief showed the method adopted by the ancient Egyptians in the transport of the large obelisks. Three rows of boats—owing to the disregard for perspective, apparently formed in platoons, three groups

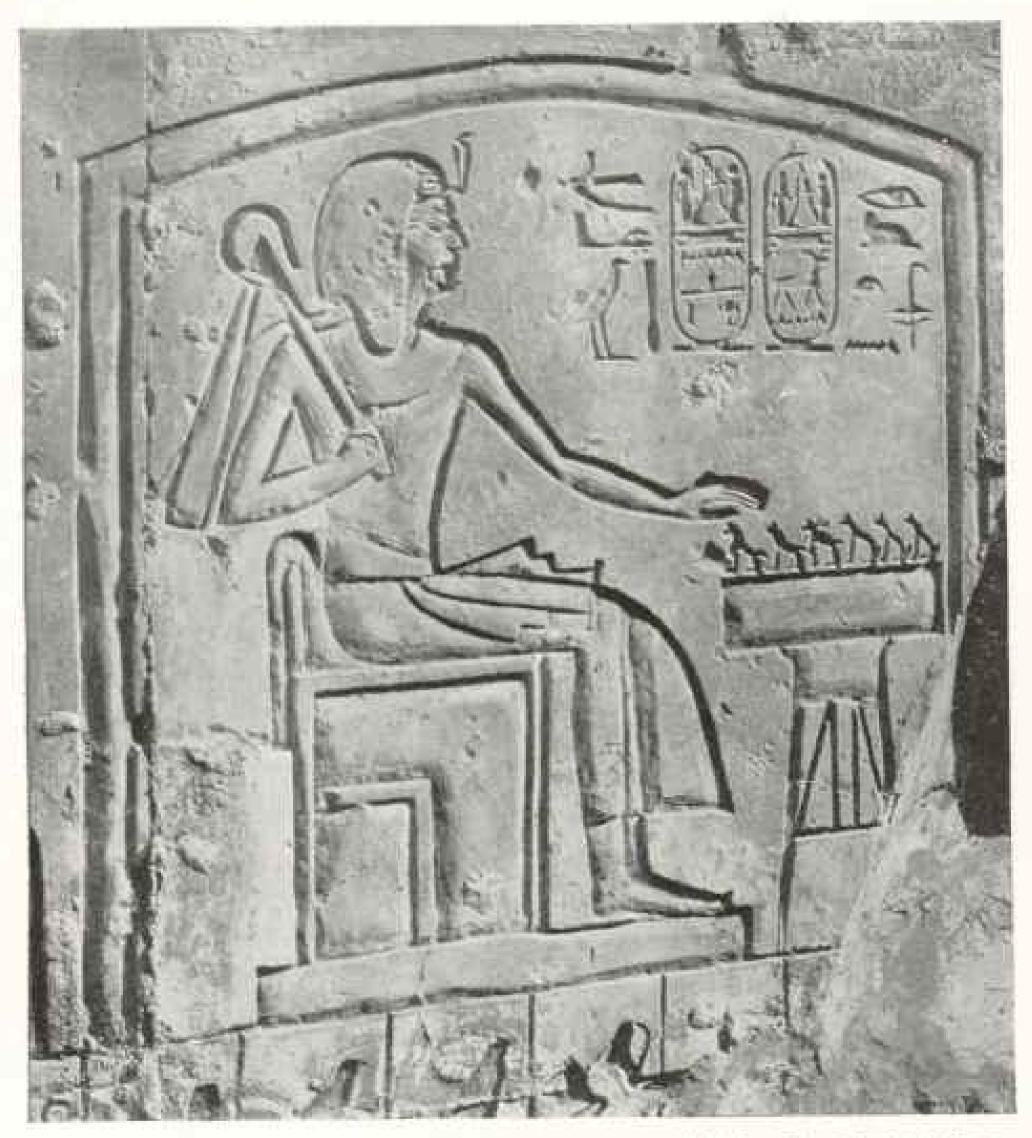

MERENPTAH, THE PHARAOH OF THE EXODUS, PLAYING DRAUGHTS: VIGNETTE ABOVE THE SEVENTHENTH CHAPTER, BOOK OF THE DEAD, FROM THE OSTREION

barge on which the obelisks are loaded. Despite efforts to restore the broken wall, large gaps yet appear, due to the fashion of the natives to quarry among the ruins of ancient buildings, to the defacement of Hatshepsut's work in the interest of later rulers, to the depredation of the Coptic monks, and to the ravages of time.

The delicately carved and colored relief is rich in details—the pilot-boxts riding free with their pilots taking the soundings, the taut cable, the swinging oars, the tender under the lee of the raft, and the rear line of craft carrying ministering priests and the royal emblens.

So under the conduct of more than a thousand men came in state to the abode of her father, Amen, at Karnak, the obelisk now standing and its fallen, broken mate, magnificent monoliths, of which the Queen says: "Their height pierces to heaven, illuminating the Two Lands like the sun disk. Never was done the like since the beginning."

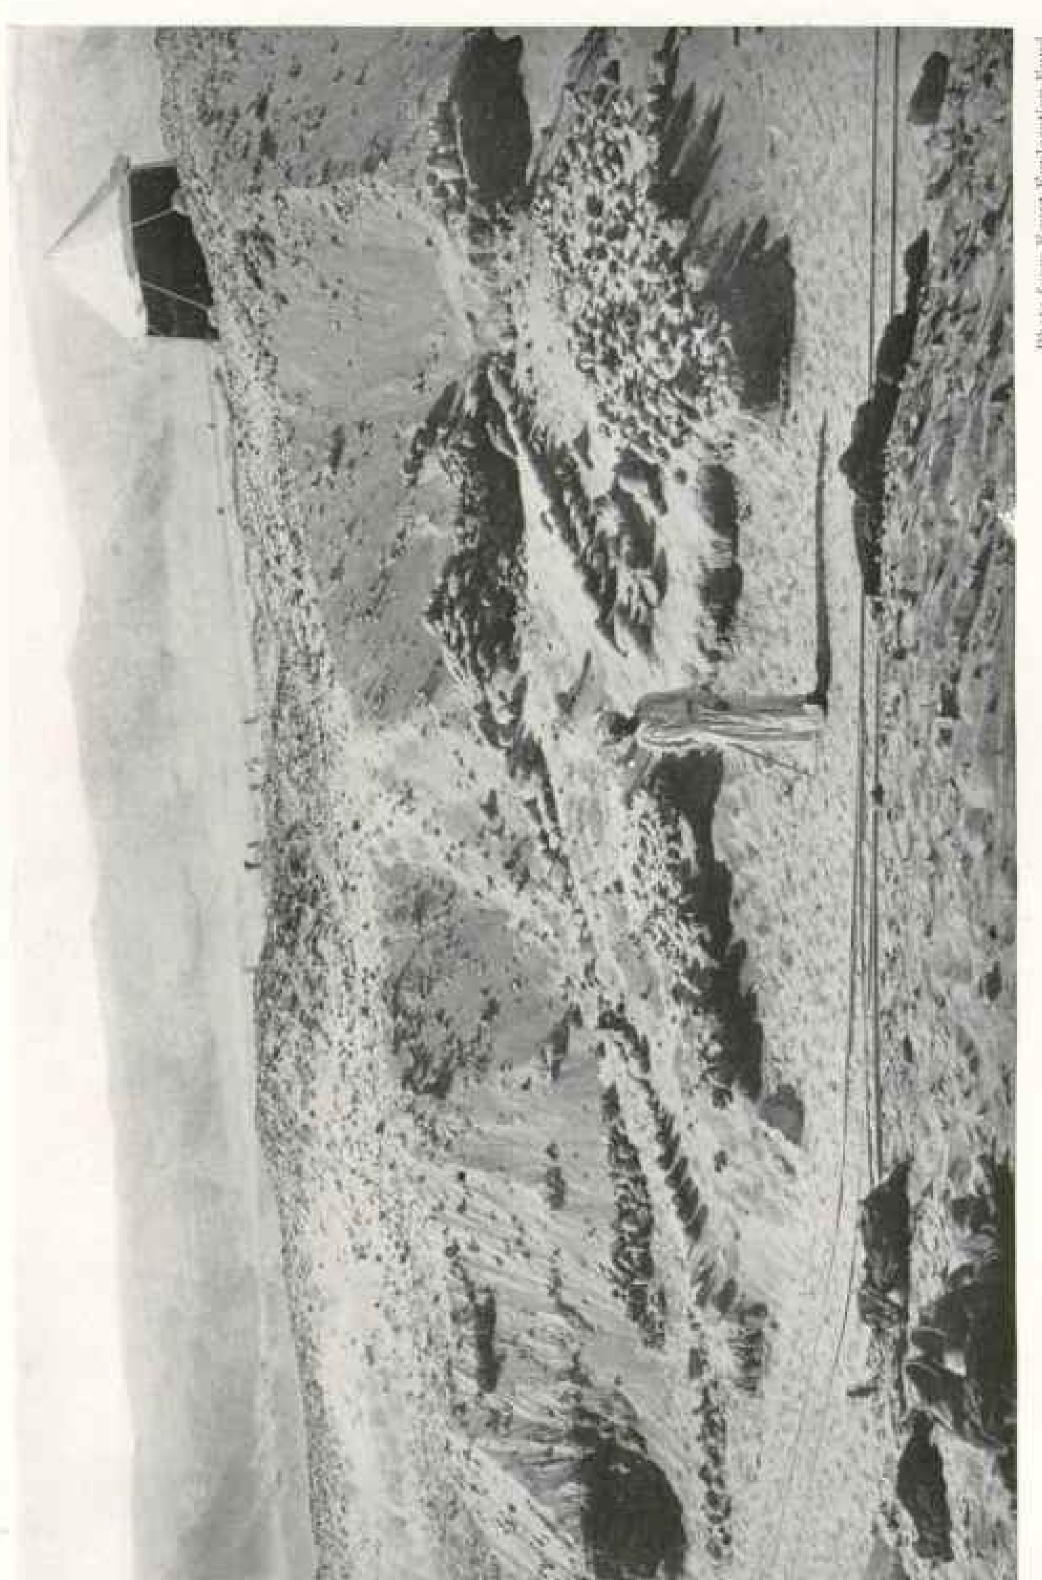


Photo From Egypt Exploration Fund

CINES OF POTTERY: ROYAL TOMBS, ASYDOS

neen painfully ridilled through a steve. The result of all this laborious investigation is that acts . . . we are gradually being presented with a colument picture of the history and stran mationality from its carliest days" hered, and studied, and the very earth and sand hisses instead of being confronted with a confused misse the life of the various periods of the ancient Egyp "Modern investigation

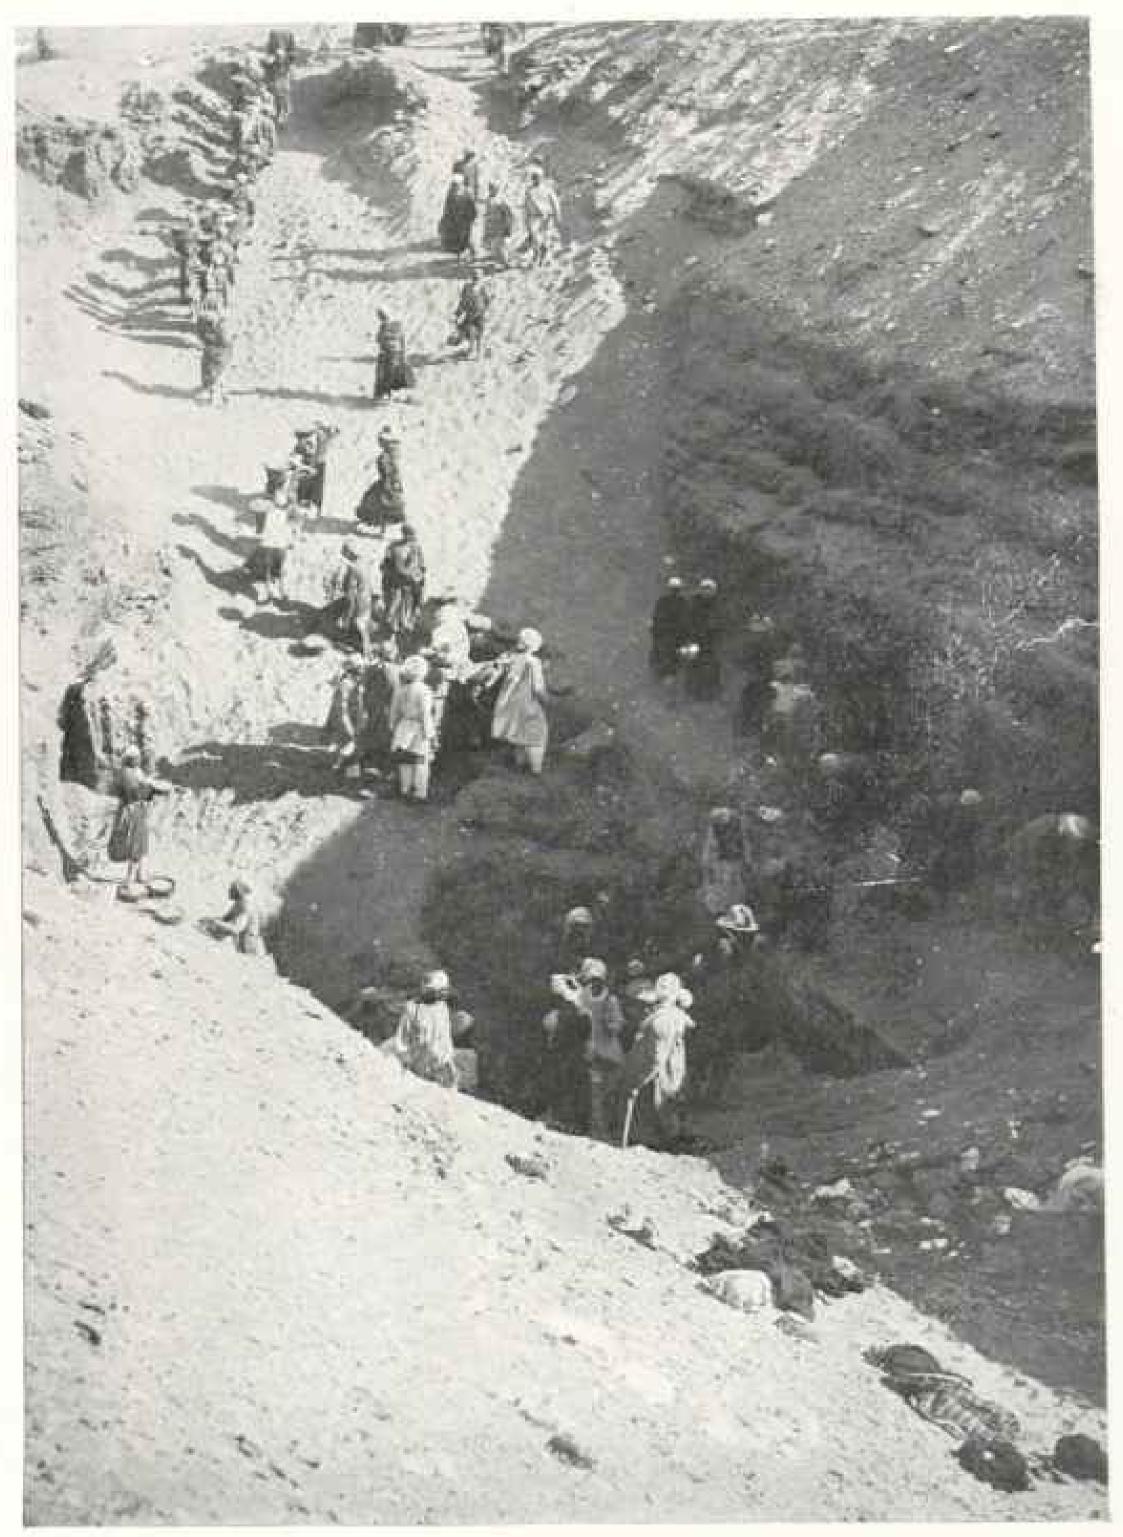


Photo from Egypt Explanation Fund

CLEARING THE OSIBEION

"Here was the entrance, by means of a deep shaft, into the underground waters leading to the heavenly Nile of the other world, and here, close to this deep shaft or well, was the National Chapel, or Temple of Kings, dedicated to Osiris, and close to it the celebrated Osirion, with its mysterious inclined passage leading to some unknown sacred goal beneath the National Chapel. The well leading to the underworld was discovered last year by Naville and Peet, under the auspices of the Egypt Exploration Fund" (see page 1052). M. Naville, in the white belinet, stands at the lintel, 40 feet below the desert level.



Photo from Eggyt Exploration Fund


VIGNETTE AND SEVENTERNET CHAPTER, BOOK OF THE BEAD, FROM SLOPING PASSAGE, OSTREION

noble portraits of the god Osiris and the texts contain constant homage for his cult of the resuras built in bonor of this god of the future life. On its walls are the very devorations which his father Osirin, and its inscriptions from the Book of the Iwad and Am-Tuat deal almost The walls of this building are decorated with noble portraits of the rection. No one doubts that the Osircion itself was built in honor of Horns is recorded as having made in the tonib of his father Osirii, and exclusively with this world of the after life,




Photo from Rev. James Balldle NAME WRITTEN BY THOTH ON THE TREE OF LIPE; TEMPLE OF SETY, ABYDOS SETY I ADORES THE CODS AND HAS HIS

They show each stage in the progbis son, Rameses II. Alydos, which, as centaining the temb of the god Osiris, was particularly sacred soil. information about Osiris and his associate gods, whom the Egyptians called the this duty being performed by reliefs, which are celebrated for their delicacy and bounty. but this not live to complete Sety I erected a great temple as his last resting place, walls of this temple are covered with mythological relieves of the soul in the afterlife and form a mine of a of Abydon. very great Egyptian desired to be buried at

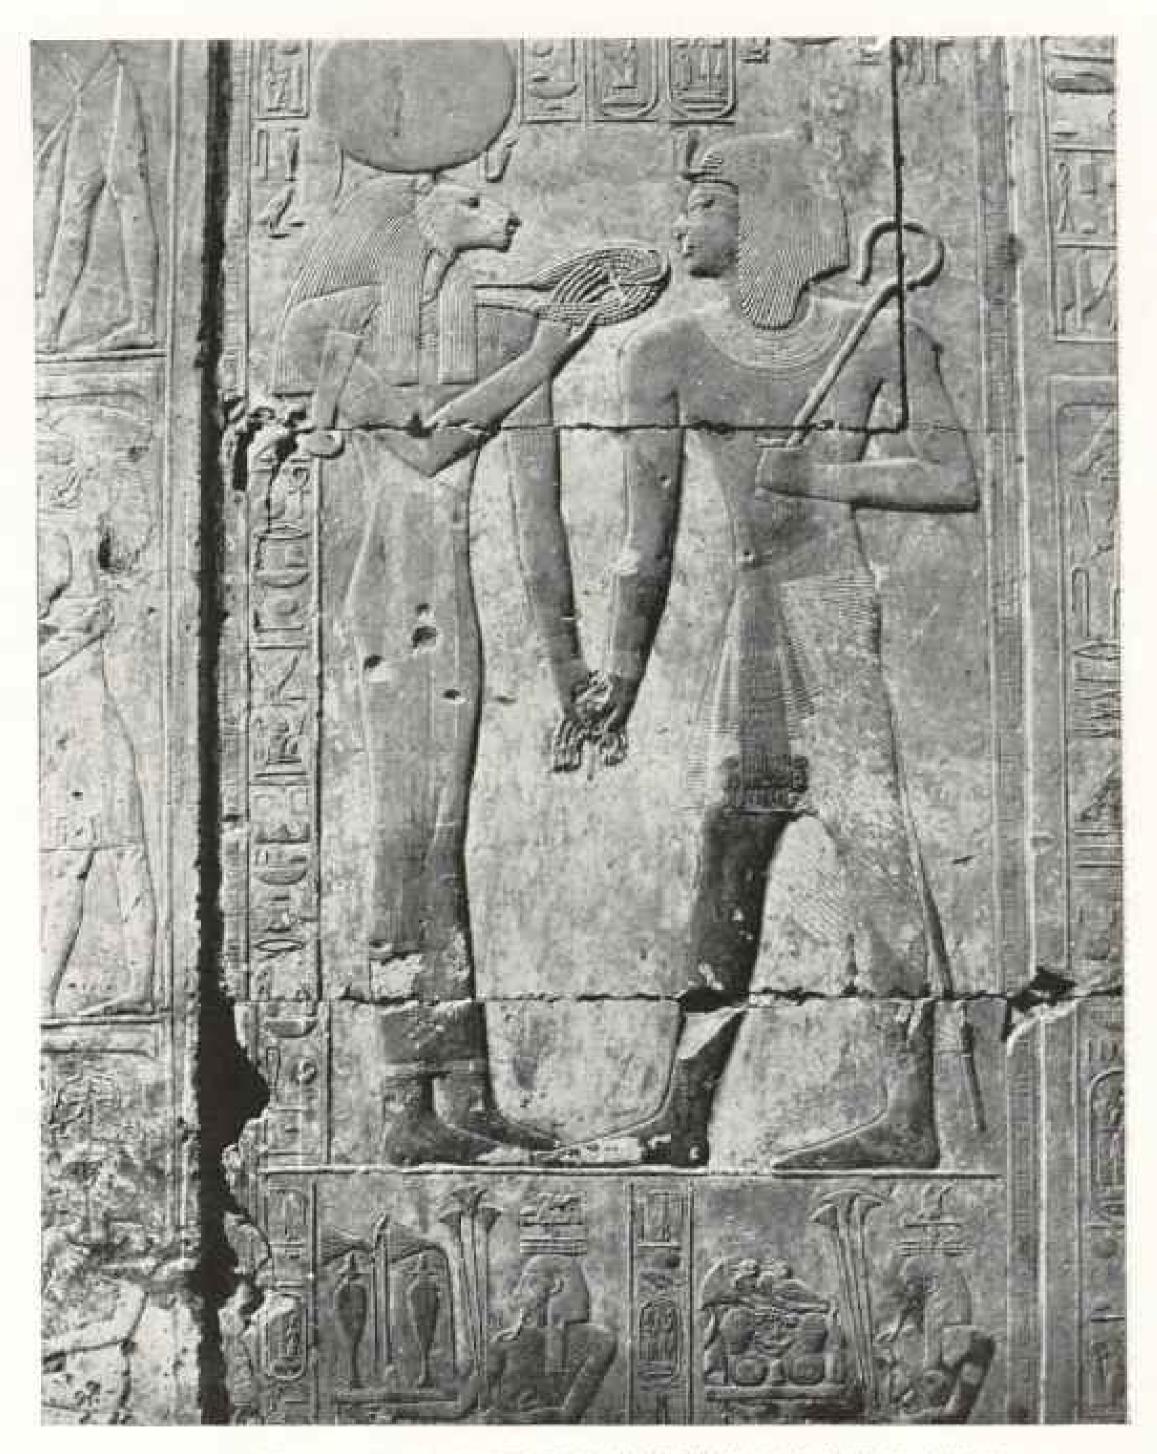

SEKHIMET AND OSLUS, RELIEFS FROM THE TEMPLE OF SETY 1: ABYDOS

Schimet or Pakht was a goddess with the head of a lieness or cat and is distinguishable only with difficulty from Bast, another cat-headed deity. She represented the herce heat of the sun, typified by the solar disk above her head, and was regarded as a bringer of misfortune. Osiris is here represented wearing royal garments and the crown of Upper Egypt, and carrying his symbol, the crook. He was one of the greatest of the Egyptian deities and the guardian of mankind in the state after death.

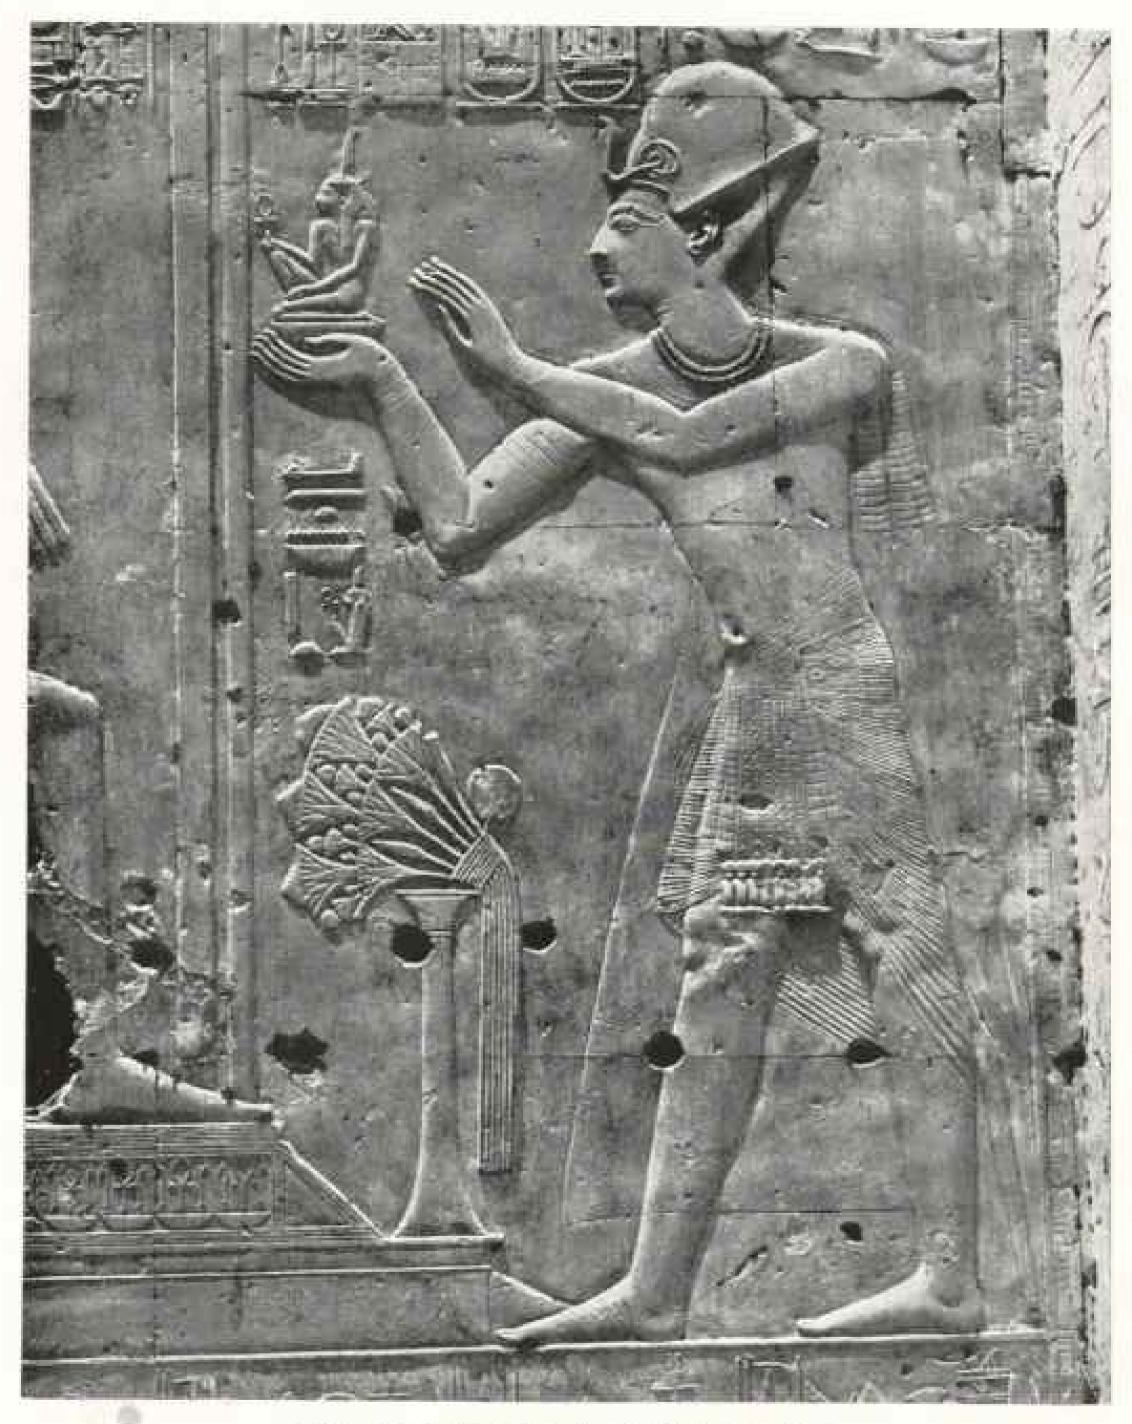

PORTRAIT OF SETY, TEMPLE OF SETY I: AUYDOS

Here we see Sety in the traditional costume of an Egyptian king. On his head is the royal helmet bearing the union, the serpent or asp sacred to the goddens Buto, protectress of the Pharaoha. The upper part of the body is bare but for the great golden necklace. The curious short kilt, peculiar to royalty, was worn either over or under a longer transparent skirt. This relief shows admirably the peculiar conventions of Egyptian art, which decreed that portraits must always be in profile, with the eye and the shoulders, however, in full-face view. The feet are always shown with the same side—that bearing the great toe—turned toward the viewer, while if an arm or leg is advanced it must be the one farther from the spectator.



Photo and copyright by Underwood and Underwood

THE MUMMY OF SETY 1, IN THE MUSEUM OF CATRO, EGYPT: HE LIVED EARLY IN THE FOURTEENTH CENTURY B. C.

"Most stately and kingly of all, Sety I, the father of Rameses, whose wonderfully preserved features, clear-cut and aristocratic, convey a remarkable impression of royal dignity" (see page 986).

THE QUEEN ELIZABETH OF EGYPT

of a king. Her life is one long record of kingly deeds. Her inscription declares: "Hatshepsut, the divine consort, adjusted the affairs of the two lands by reason of her designs; Egypt was made to labor with bowed head for her." She discarded feminine attire, wore the crown, assumed an artificial beard at her chin, and it is rumored an ambassador at her court had an open road to her

royal favor if the matter in hand were addressed to his majesty.

Hatshepsut is one of the great personages of history. Her sarcophagus, discovered in 1904 by Mr. Davis, now rests in the Cairo Museum. Hatshepsut belonged to the eighteenth dynasty, in which time Egypt was at the zenith. She possessed rare administrative power, tact, and diplomatic skill. She carried on the mines in the Sinaitic peninsula. She established potteries and glass facware and colored glass. Temples were built or restored.

A scientific expedition went to Punt, at the mouth of the Red Sea, or possibly across on the shore of Africa. On their return Theban troops went out to meet them; the royal flotilia escorted them to the landing stage of the temple, where the procession formed to bear the rich cargo, an offering to the god in thanksgiving for the successful outcome of so great a naval enterprise. And this was in the fifteenth century before Christ!

Collections were made of the fanna and flora of the land-giraffes, baboons, panthers, a hippopotamus, and horned cattle. Specimens of plants and trees were taken back. The precious trees were planted, or some of thera, at Deir-el-Bahari, on the lower terrace, and a sacred garden was planned for them. Square trenches were cut in the native rock and filled with earth. In the course of his excavations Naville found the drainage wells, the mud they contained, and the vegetable refuse heaped within them. Furthermore, artists accompanied the expedition to make drawings of strange animals, fish, and plants of the country.


THE DIFFICULTIES OF EXCA-VATION

Succeeding dynasties did little to change the Queen's temple at Deir-el-Bahari, aside from mutilations and some restorations. A landslide later buried a part of the site, and a Coptic convent on the highest terrace added to the débris. In 1800 scarcely a third of the great



TREASURE TROVE OF THE ARCTEOLOGIST: A MUMMY
COFFEE

The coffins or mummy cases of the Egyptians were made to represent the natural form of the body, and were brilliantly colored, often displaying craftsmanship of the highest order. In most cases the coffin exhibited a portrait of the deceased, and in later times, especially during the Roman period, these were striking works of art.

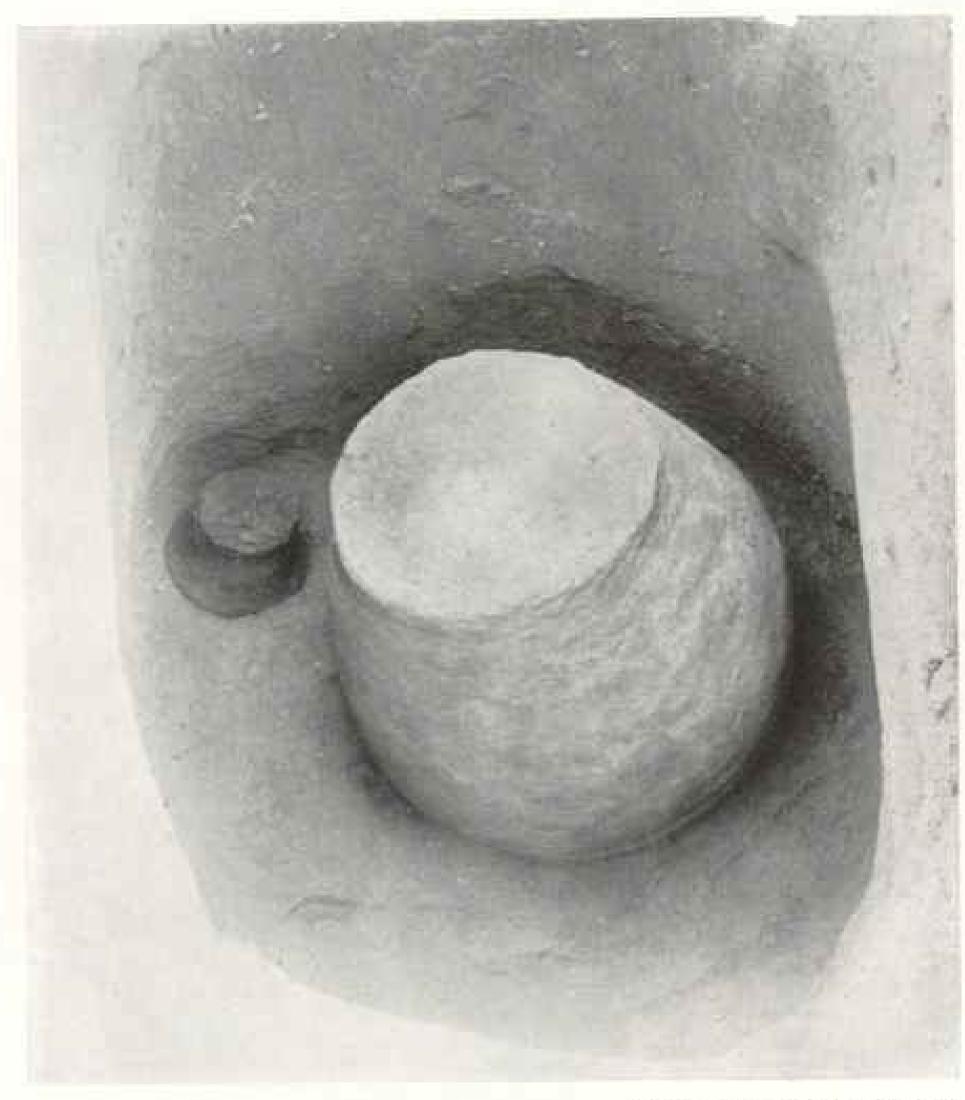

Plante from Egypt Engloration Fined.

THE LARGE BAKED POTTERY VESSEL OF THE FOURTH AND FIFTH DYNASTY SHOWN IN POSITION DEFORE IT IS REMOVED FROM THE BODY WHICH LIES BENEATH

The small pot of rough pottery was found with every burial, but no other objects except a few beads

temple of Hatshepsut was in view. The recovery of Deir-el-Bahari is due to the labors of the Egypt Exploration Fund and the genius of Edouard Naville. Due regard must be had also for the pioneer work of Mariette, 1858, 1862, and 1866, who got as far as the upper platform of Hatshepsut's temple.

In 1803 the Egypt Exploration Fund took up its work at Deir-el-Bahari. Here Mariette had carried out on a large scale his custom of heaping his rubbish close to the place from which it came. In this way unconsciously was buried deeper, under weighty rubbish heaps, a hall decorated with gigantic sculpture. Still less did he suspect that here, too, was the royal chapel of Thothmes (Tahutmes) I and the inner court, containing the inmense white altar, the finest ever found in Egypt. The work, commenced in 1893, required 14 years to complete. M. Naville has left nothing for future students to do.



Photo from Egypt Exploration Fund

THE BURLAL POT HAS BEEN REMOVED, SHOWING THE HUDDLED BODY

WHERE TO FIND REAL DUST

It was a difficult site. The excavator is almost invariably confronted with the difficulty of disposing of his rubbish, especially at such a site as Deir-el-Bahari, where the temple is shut in between hills and necropoles. Here the debris had to be carried to an old clay-pit in order to run no risk of covering either building or tomb. This precaution, heavy task though it proved, doubtless saved the eleventh dynasty temple from burial beyond any hope of resurrection. Any one who took part in the clearing of Deir-

el-Bahari will never see any dust worth mentioning elsewhere.

At a distance of 50 yards a visitor would bear a terrible hubbub, seeing nothing but an impenetrable haze of dust, from which would presently emerge a train, visible at 10 yards, under the direction of a dust imp—another, a third, a hundred. Over the high embankment would plunge the loads, and the train, once started, rolled all day ceaselessly on its double track, saye for the noon hour of rest.

The temple of Queen Hatshepsut has been reclaimed from the rubbish of ages

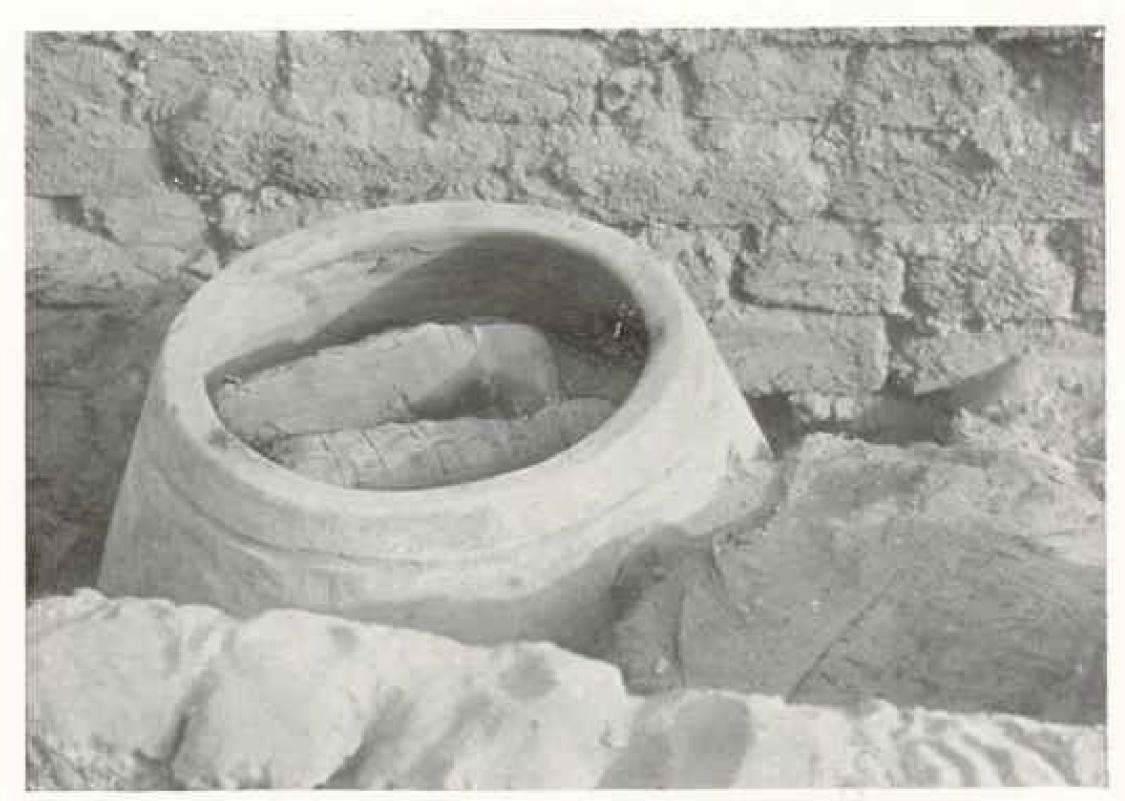


Photo from Egypt Exploration Fund.

LARGE VASE CONTAINING 73 MUMMIFIED CATS FOUND AT AHYDOS

and now stands clear—ramp, terraces, and courts—and in a measure restored. Scattered stones have been set back in place. The famous historical reliefs are protected from further damage. The large platform of white limestone stands out nearly complete against the background of the yellow cliff in which the tombs were excavated.

In 1903 was discovered the second temple, near that of Hatshepsut. Smaller, inferior to the first, it is the funerary temple of Mentuhotep Nebhapet Ra, of the eleventh dynasty. On a rectangular base stands a pyramid flanked by a colonnade, the entire structure surrounded by a second colonnade only partly intact (see page 1022).

THE MOST HEAUTIFUL CULT IMAGE VET DISCOVERED

It is from February 7, 1906, however, that the fame of Deir-el-Bahari really dates; at least, in popular esteem. In a shrine 10 by 5 feet and 8 feet high there was found a life-sized statue of the cowgoddess. Hathor, the largest and most beautiful cult image yet discovered intact in its shrine. The shrine was built and adorned by Thothmes III, but if we are to believe the cartoughe engraved between the lotuses, the two figures are of his son, Amenbotep II (see page 1027).

The shrine is lined inside with slabs of sculptured limestone, but the marvel of the tomb is the statue itself, cut from a stone the full thickness of the animal and high enough to reach the top of her lofty horns—a perfect likeness of the living animal, reddish brown in color, with spots shaped like a four-leaved clover. Traces yet remain of the gold that once covered head, neck, and horns. Between the curving horns is the lunar disk surmounted by two plumes. A heavy metal necklace hung about the neck (see page 1027).

This is the mountain goddess, who from her cave came to the marshes, where she suckled the god Horus. Be-

meath her head stands the dead king, whom she protects. The living king, whom she nourishes, kneels beneath her form. She is the nourishing mother of the roung ruler, as she is of the divine Horus.

About 30 miles north of Deir-el-Bahari is Abydos, remarkable for its location. The high cliffs form a deep recess some four miles across and two miles deep. Here are the temples and necropoles of Abydos. Heretofore Menes has stood a shadowy figure at the dawn of history, who merged the two kingdoms into one nation. Behind Menes other names have come to light. We see men, as trees, walking, yet we now know that Menes stands at the close of centuries and even millenniums of development.

EARLY BURIAL CUSTOMS

The earliest royal graves are simple, with no tumulus, and having two simple upright slabs, or stelle. Osiris, who as long taught his subjects the arts of civilization, was set upon by the god Set and his companions and brutally murdered. The mutilated body of Osiris (according to a later account, his head only) was buried at Abydos, the Greek form of Abdu (Abidu), "Mound of the Osirishead Emblem." Hence the early kings of the province of Thinis desired their burial to be at holy Abydos.

At Abydos are still earlier burials—oval tombs with crouched bodies surrounded by pots, some of which are very
coarse (see page 1038); others are of
better material, even with painted ornaments; most of them of red color with a
black rim, and perhaps a few slate palettes or flint instruments. These earliest
dwellers—with rude implements of stone,
simple ornaments of stone, ivory, bone,
flint, quartz, agate, and other like materials, living in dwellings of wattle—constitute one of the rarest finds in all the
records of archeology.

These stupendous excavations call for equipment on a considerable scale. Work must be rapid. December 1 to April 1 marks the working year. Every moment is precious. Every carload must count. Every shovelful of earth must be carefully sifted wherever there is a possibility of a find. Even a backet brigade is sometimes pressed into use. As soon as some apparently valuable piece is located, workmen are called off, experts are sent in; every man is on guard. Carefully every inch of soil is watched as the last few baskets of earth are removed. Every fragment must be saved and laid away until everything has been recovered.

Think of the disappointment when, for example, a magnificent statue comes out headless. Think of the conjectures as to the whereabouts of the missing piece and the furor when, perhaps weeks afterward, the lost is found. There is an air of husbed expectancy, a suppressed excitement hovering over, that keeps men up under the most tense strain under which the work is of necessity conducted.

WHAT THE EGYPT EXPLORATION FUND IS ACCOMPLISHING

America has joined hands with the Old World in prosecuting this work. An American secretary, Mrs. Marie N. Buckman, has been assigned to the direction of the American office of the Egypt Exploration Fund, located in Tremont Temple, Boston. Wonderful are the results attained. Every student of history and literature, every student of the Bible, is vitally concerned in the confirmations yearly coming to light from the sands of Egypt.

There is need of haste. To extend the arable district of Egypt is an economic necessity. Accordingly the British government has erected at Assouan the great dam, whose 95-foot head has sent the waters of the Nile back over great areas of hitherto dry ground. Already a dozen great temples have been flooded, and ere long will be forever lost to sight. Already beautiful Philæ, at the head of the first cataract, is gone. The soil is becoming infiltrated, and the stores of treasures, especially the papyrus manuscripts, are being ruined, even before the waters over the ground above.

Among the agencies engaged in the work of recovering Egypt, the Egypt Exploration Fund stands conspicuous. Headed by no less a world figure than the Earl of Cromer, with such names on its rolls as Grenfell, Sayce, Thompson, Naville, Peet, Griffith, Hunt, Hogarth, and, for some time, Petrie, and a bost of secretaries, this association has wonthe respect and confidence of governments and scholars. Their devotion to the work, their singleness of purpose, their sacrifice, their effective results, and the fact that no organization puts a larger per cent of its receipts into its work, all render the fund worthy of the esteem in which it is universally held.

THE SACRED IBIS CEMETERY AND JACKAL CATACOMBS AT ABYDOS

By Camden M. Cobern

Honorary Secretary Egypt Exploration Fund, in Egypt Season 1912-1913

 AM writing this in the Abydos camp. with six ibises under my cot and 16 I more covering the floor. There has been a great "find" here, differing from anything ever before made in the entire history of Egyptian exploration, and today was the climax of it. Some months ago, when one of the excavators of the Egypt Exploration Fund here, which is this year under the general direction of Mr. T. Eric Peet, struck an Ibis cemetery, built some 2,000 years ago over a sixth dynasty human cemetery, every one knew a unique discovery had been made, yet no one fully realized how surprising and entrancingly interesting it was. No other discovery of the year in Egypt can equal it. I think, in archeological value. Ibises have been found before, but no such wonderful cemetery ns titis:

Mr. Leonard Park Loat was the fortunate man who discovered and opened this strange and in some respects mysterious burial place, and as a special favor he allowed the writer to help him a little in his happy task of uncovering these surprising treasures. Undoubtedly. a worthy monograph may shortly be expected from his pen, authoritatively setting forth the history of the exploration and its bearings upon animal and bird worship among the ancient Egyptians; but meanwhile a little information concerning this astonishing discovery and a few suggestions which may sharpen interest in Mr. Loat's fuller report may not be inopportune.

Hypogeums of ibises have previously been found at various places in which some of the bodies were munmified, notably near Hermopolis Magna, an ancient city sacred to Thoth, and here at Shunet deb-hib, within the environs of this sacred city of Abydos, dedicated to Osiris, god of the Dead. But this particular burial place of the sacred ibis compares with all other burial places as the Tombs of the Kings compare with all other human cemeteries, and as the Apis Tombs compare with all other animal burial places.

HOW THE IBISES WERE BURGED

These ibises are as carefully mummified as the royal personages buried at Deir-el-Bahari, and if it had not been for the white ants, those most successful grave robbers of the earth, we should now be able to examine from this cemetery hundreds of these sacred birds in as perfect a state of preservation as when buried.

Their clay sarcophagi, which resemble in some respects canopic jars; but are much larger, are in many instances thoroughly well made and are exquisite in shape and quality of material. They are generally so large as to hold easily fifty or more full-grown birds, yet are symmetrical and smooth as vases—much better than the jars generally used in Palestine and elsewhere for child burials (see pages 1043 and 1045).

The burial wrappings, too, are really quite royal in the quality of material and

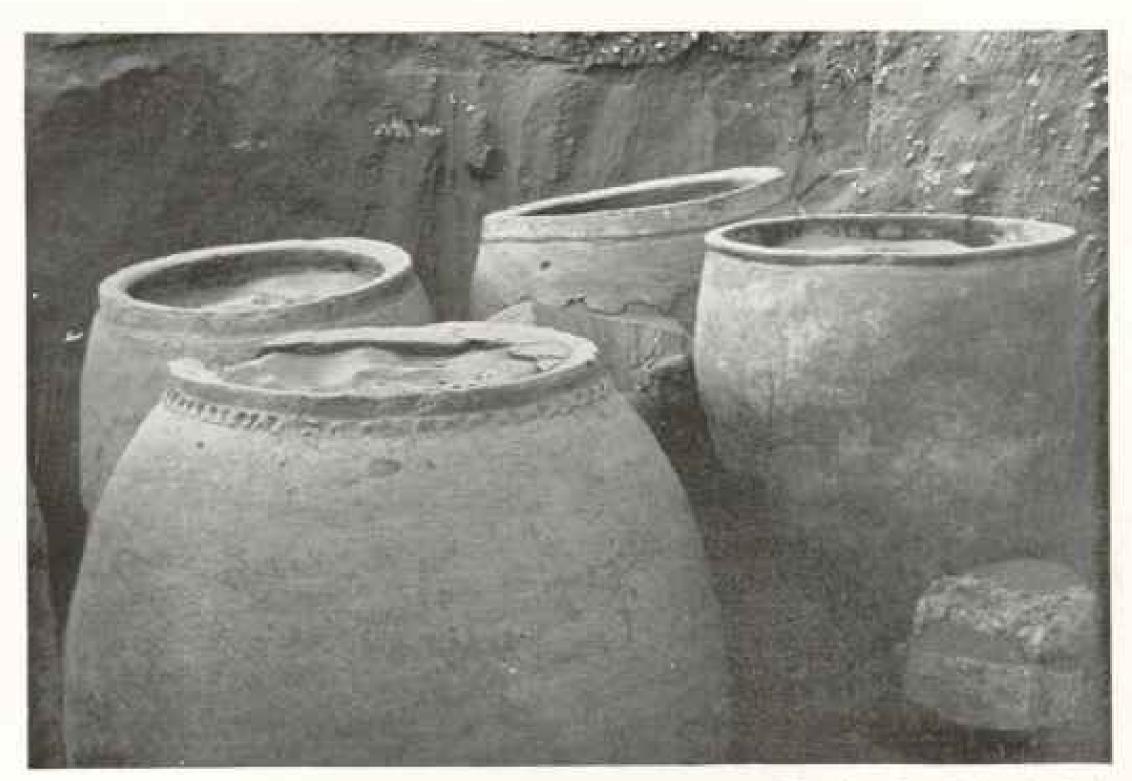


Photo from Egypt Exploration Fund

JARS PILLED WITH MUMMIFIED BIRDS IN POSITION IN THE IBIS CEMETERY

in the style and design of the outside interlaced minimy wrappings, and they are often made to represent the exact form of human minimies, even to the shape of the feet. These grave coverings are more carefully tailored and as handsomely and elaborately designed as the shrouds of Egyptian princesses. Very few, indeed, of the royal family ever possessed burial garments equal to some of them, the cloth being of finest texture and so perfectly manufactured that even its color is in some cases completely preserved (see page 1046).


These mummy wrappings have received the most elaborate and loving
decorations—rosettes and figures of
ibises, and royal crowns and other beautiful designs surprisingly artistic in their
color scheme, being worked upon these
"shrouds" by fingers expert in the finest
needlework. The intricate interlacing
of the black and white bands in geometrical designs recalls Plutarch's description, "The ibis was thought to bear
some relation to the moon, from its

feathers being so mixed and blended together, the black with the white, as to form a representation of the moon's gibbosity" (see page 1049).

GUILDS OF PRIESTLY UNDERTAKERS

These garments are so handsome and of such perfection of execution that the tapestries now sold in Egypt to adorn the walls of modern American homes cannot even compare with them. Only a guild of undertakers or tailors long trained to do this work could ever have succeeded in procuring such exquisite results. They could only have been made by a priestly or subpriestly guild, the members of which had after long experience acquired this perfection in their art. We see here that the undertakers connected with the bird-cult of Egypt had as careful training and were considered as important a part of the priesthood helpers as those who had oversight of the royal funerals.

This discovery opens up a new chapter in the history of bird worship in

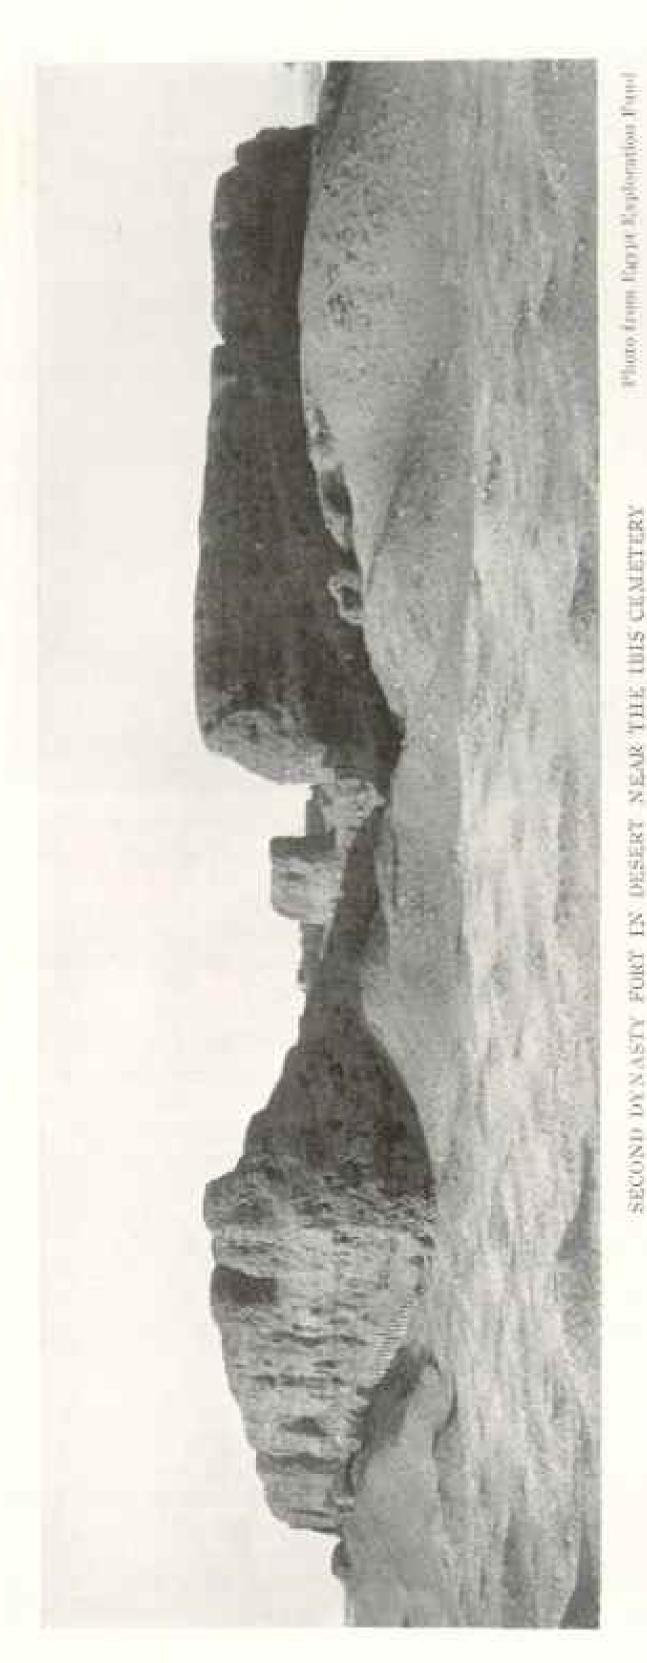

450 feet long by 250 feet wide, while its walls are 30 feet light-he second dynasty, and is therefore more than 5,000 years old

Egypt. It shows a tenderness of regard and loving homage entirely unexpected. Even the feathers, sometimes with the purple sheen still brilliant, and the scattered bones of these creatures were carefully gathered up and put in muumy form, although the body itself had been destroyed. In one the eggs were also carefully preserved. It is in the realm of the old Egyptian faith that we must look for the

explanation.

In the divine days after the reorganization of the heavens and the earth, when Ra left the earth to traverse in his golden barque the shining waters of the celestial ocean and to scatter his beams of light over the two lands, then the majesty of the god Ra spake unto Thoth: "Let us go, leaving heaven and my dwelling, for I will make something shining and resplendent in the underworld and in the land of the deep. There shalt thou register those who did wicked deeds as inhabitants, and there shalt thou imprison them. But thou art in my place and thou shalt be called Thoth, the representative of Ra. I also give unto thee power to send forth thy messengers." Thereupon the ibis, the messenger of Thoth, came into being.

THE VIRTUES OF THE IBIS

Such was the mythological creation of the divine bird. A twelfth dynasty artist has preserved for us his portrait of the ibis in the fourth of the Beni Hasan tombs. The plumage is white except head, neck, and extremity of the wings and tail, all which are quite black. The mi-

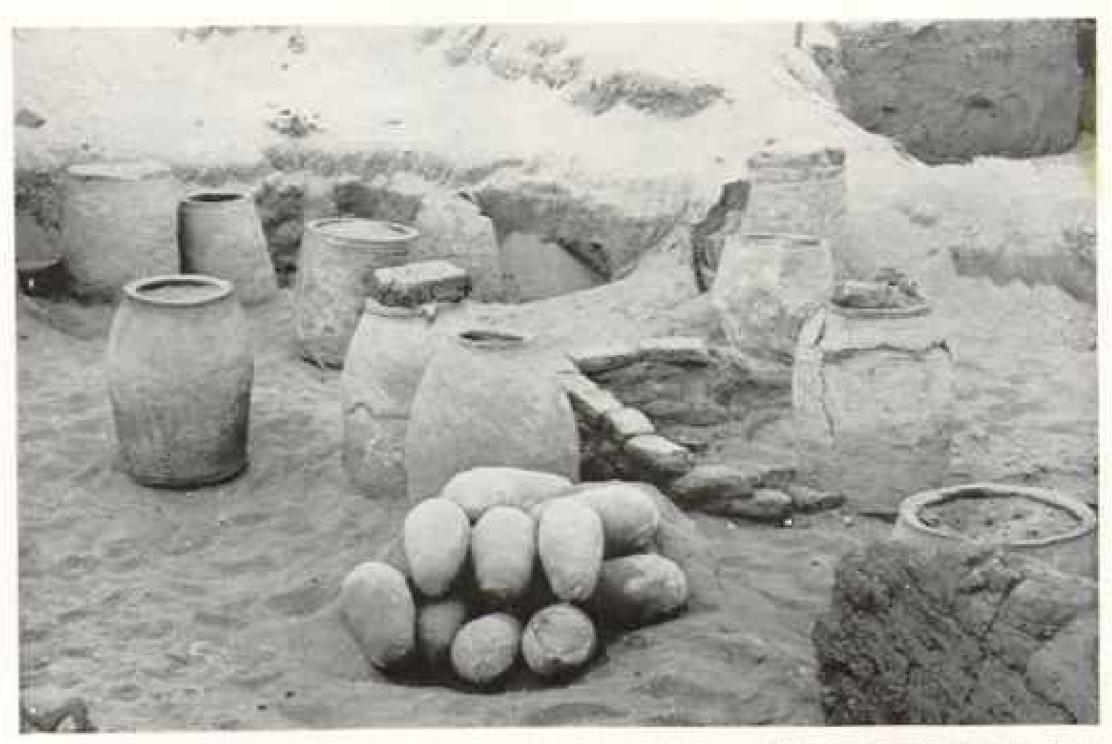


Photo from Egypt Exploration Food.

SECTION OF HIS CEMETERY AND ITS POTTERY VASES, ALL FILLED WITH HIRD MUMMIES

raculous bird was beneficent in all his ways, destroying locusts, scorpions, serpents, and the noxious creatures which infested the country, and its searching out and destruction of these enemies to the growing crops and to man himself led to the profound respect which this


messenger of a god enjoyed.

The 85th chapter of the Book of the Dead, called "The chapter of making the transformation into a living soul and of not entering into the Chamber of Torture," concludes: "I have done away with all my iniquity and I shall see my divine Father, the Lord of Eventide, whose body dwelleth with the god of light by the western region of the ibis." Hence this vast bird cemetery, 2,700 feet square, was established at Abydos, the vestibule on earth from whence to enter the kingdom sacred to Osiris and to the mysteries of the future world, and especially to the cult of the resurrection.

The discovery of the several crowns

of Osiris, wonderfully worked, above some of these mummies favors this conclusion. It is also favored by the position which the ibis held in the Egyptian religion and by the fact that the two chief burials of ibises previous to this have both been in cities dedicated to the Osiris cult.

Every hope of immortality held by the ancient Egyptians rested upon Osiris, who had been killed by Set and his 62 fellow-conspirators, but had been brought back to life by the efforts of his wife Isis and his son Horus. The same magic which had brought Osiris to life again, if it could be exactly reproduced, could bring others from death to life. All the funeral ceremonies, all the pictures on the tombs, and all the chapters copied there from the Book of the Dead and the Book of Am-Tuat are for the purpose of imitating correctly these successful magical ceremonies which revivified Osiris.

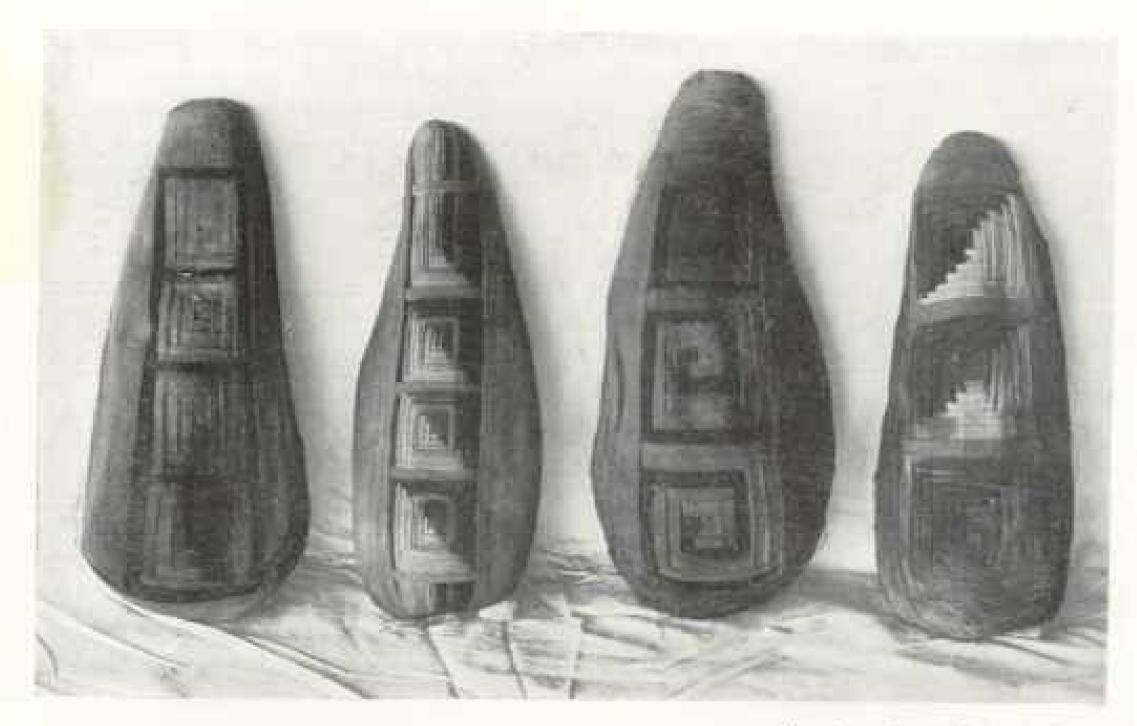

Planto from Egypt Exploration Fund

MUMMIFIED IBISES IN BLACK AND WHITE CEREMONIAL WRAPPINGS

These grave coverings are more carefully tailored and as handsomely and elaborately designed as the shrouds of higyptian princesses. Very few, indeed, of the royal family ever possessed burial garments equal to some of them, the cloth being of finest texture and so perfectly manufactured that even its color is in some cases completely preserved. These minimal wrappings have received the most elaborate and loving decorations—rosettes and figures of ibises, and royal crowns and other beautiful designs surprisingly artistic in their color scheme, being worked upon these 'shrouds' by fingers expert in the finest needlework' (see page 1043).

THE GOD WITH THE DIES HEAD

It was in the form of an ibis that Thoth, inventor of astrology and mathematics, the god of wisdom and magic, had escaped from Set, the evil god of the underworld. This bird was dedicated to him and was indeed the hieroglyphic of his name as well as the bieroglyphic for "the soul."

To kill an ibis, as Diodorus tells us, was to commit murder and bring upon one capital punishment. The reason for this is seen in this bird's identification with Thoth, through whose magical wisdom Osiris had been brought back to life. One of the common titles of Thoth was "He of the nose," referring to the ibis beak, and he is generally represented on the monuments with an ihis head (see page 1050). The ibis was his ordinary pictorial representative and its meaning

in religion can only be grasped as we understand Thoth's position among the gods, as the great magician who had invented the formulæ which, given to Isis, gathered together the scattered parts of the mutilated body of Osiris and worked the miracle of his revivification.

So when Horus was stung by a scorpion and died, Nephthys, sister of Isis, cried to Thoth, who came down from his sun boat and by his words of power brought him back to life again. What he did for Osiris and Horus he could do for all the myriads of the dead. If properly honored, he would assist these dead men each to become an Osiris, and underneath his bier, or close to the dead munimy form, we can always in the tomb pictures see this wonder-working, ibis-headed deity.

Why were hawks, shrews, jackals, and at least one beetle occasionally buried in this ibis cemetery? Because all of these were intimately connected with the myth of Osiris and the cult of the resurrection.

The hawk was always sacred to the sun-god ruler of the celestial world; the shrew was sacred to Horns, who, following the instructions of Thoth, tore out his own eye—the seat of the soul—and gave it to Osiris, his father, in order to renew his life; the jackal was the guide of the dead to the fields of the blessed; while the beetle was pre-eminently the living representative of a resurrection life.

THE JACKAL CEMETERY

Another surprise awaited us in the Catacomb of Jackals. This hypogeum of jackals was opened by the Egypt Exploration Fund last year and was reopened this year (see page 1051). Although deep underground, the stench was so great when it was first reopened that it was disagreeable at a hundred yards distant. The first man who attempted to enter the cave with me was almost asphyxiated, but we crawled out without harm.

To the writer, three days later, was assigned the odoriferous duty of finding among these tons of decayed or half mummified bodies a number of specimens fit for scientific examination, to settle the question as to the exact relation existing between the ancient and modern jackal and to discuss also whether these beasts thus honored with religious burial were all true jackals or whether wolves and dogs were included, for even yet the ordinary modern Arab dog seems half jackal.

worthy of comparison in size with certain famous catacombs of the early Christian period used for human cemeteries, while, so far as the number of burials was concerned, these rooms contained more bodies than were ever put in any other series of catacombs known to man. The central passage of this hypogeum I should estimate as being at least 150 feet long and perhaps 7 to 10 feet wide, and this was piled from end to end with corpses from 3 to 6 feet deep, while the many-sided chambers were packed at least equally full.

A CHASTLY SIGHT

All Egypt must have been searched for the hundreds of thousands of sacred animals which were crowded into this huge tomb dug for them in the boly ground of Abydos. Here were big and little, old and young, originally mummified and bandaged and sometimes with fine decorations wrought in needlework upon the minimal wrappings. But either because this was defectively accomplished because the burial place was not so well chosen as in the case of the ibises, or because of their brief opening to the air last year, these bodies were all partly decayed and the wrappings rotten.

Crawling on hands and knees for four hours over these piles of bodies, one sees many a ghastly sight—thousands of skulls or half-mummified heads; bodies broken and mashed; bones that crumble at a touch eyes staring wild or hollow sockets filled with black paste; mouths closed just as they had been reverently arranged by the priestly undertaker 2,000 years ago, or sprung wide open as if the creature had sent out a horrible wail in the last moment of its life. The sight of white, sharp teeth glinting everywhere in the light of the candle was indeed weird

and gruesome.
That four he

That four hours' experience can never forgotten; shoulders bent, back cramped, down almost with face and nose touching these grinning skulls, feet, hands, and knees crunching into a mass of putrifying bones which often fall to powder as you touch them or cause a cloud of mammy dust to envelop you, filling eyes and mouth and nostrils. Modern dust blown by the Khamsin is bad enough, but this is dust that no breath of wind has touched for 20 centuries. The eyes are inflamed as if by fever and the respiration is clogged and spasmodic. Let us be careful, too. If this munmification was with bitumen, it only needs a careless movement of the candle, and in a moment your body and those of the sacred beasts will be offered to the gods in a hecatomb of flame!

CARE FOR THE SACRAMENTALLY SLAIN

Think of the time and money and energy, the fear and reverence and per-

haps love, represented by the mummification and clothing of these hundreds of thousands of bodies, more than are contained in any human cemeters on the planet! That the overseer of the work thought of this as a religious task and had expected the very best care to be taken of these holy bones by his subordinates is proved from the fact that even scattered fragments of bodies were gathered up and munmified when the entire body could not be obtained.

That all these sacred beings were killed religiously and with sacrificial awe must be considered practically certain. To the ancient Egyptian to kill a sacred animal was not only murder, but sacrilege, except as it was put to death sacramentally. To care for a sick animal was as much a duty as to care for sick relatives. A hieroglyphic text from the Old Kingdom makes the dead man declare at the judgment: "I gave bread to the hungry, water to the thirsty, and clothing to the naked. I gave food to the ibis, the hawk, and the incleal."

Every preparation had been made to prepare this worthily as a "House of Eternity." The digging of the sepulcher was well done, and in the walls one could see the niches where the lamps of the hierophants must have stood when the bodies were carried into the tomb and the last rites of burial pronounced. What were those rites of burial? No one living can tell. We here touch the most mysterious fact of the old Egyptian religion, as in the ibis cemetery, the reverence for animals as the incarnation of

the life of deity.

WHY THE JACKAL WAS SACRED

Why was the jackal so revered and why was his burial place selected in the holy city of Abydos? The answer is exactly the same as in the case of the ibis.

The jackal was sacred to Anubis, who, in the myth of Osiris, was one of the chief deities concerned in winning immortality for the human race. Anubis was the friend of the righteons dead and guided the soul across the trackless desert to the fields of Aalu. According to Egyptian theology, the judgment came immediately after death and was held in the

Hall of Mant, where 42 judges listened to the plea of the deceased that he had been sinless, and where the heart of the dead man was weighed in the scales against the ostrich feather-symbol of

Maat-goddess of truth.

This weighing was conducted under the eye of Thoth, scribe of the gods, and of Anubis, the "Opener of the Ways," who stands close to the balance ready to start quickly on his journey with the justified dead, while a little further off crouches the monster Ament, "Devourer." waiting for his prey if the decision is adverse.

The reason why the jackal was chosen as symbol or incarnation of Anubis is perfectly plain. On each side Egypt is inclosed by mountains, beyond which lie limitless deserts. Kings may sometimes travel by the sun boat to the next world, but most of human kind must take their route over the Sahara if they ever reach this happy land of the west. The desert was always thought of as the land of Set—rocky, unproductive, hostile, a land of ghosts-dead souls that have lost their WILY.

A PICTURE OF THE DESERT

One day I climbed to the top of the gebel and started out over the Sahara toward the sunset to find out for myself what this region was that was regarded by the ancient Egyptians as the Shadow of Death. Before night I had become satisfied that the Egyptian symbolism could not be improved; dreary, limitless. with no hint of vegetation or life of any kind, no blade of grass, no bird or insect or beast to be seen, with its imitation wadys and deceptive mirages and endless stretches of bare sand curled into wild shapes; it looked like a demon land, and I did not wonder that the authorized version of the Old Testament translates "jackal," the one inhabitant of this realm of death, by "dragon." This is, peculiarly, the animal of the desert.

Practically every soul must pass through this wilderness before it can reach the blessed oasis, the kingdom of Osiris. The jackal's omniscience as to where any dead body is hidden, his wails in the night as if for lost souls, his cer-

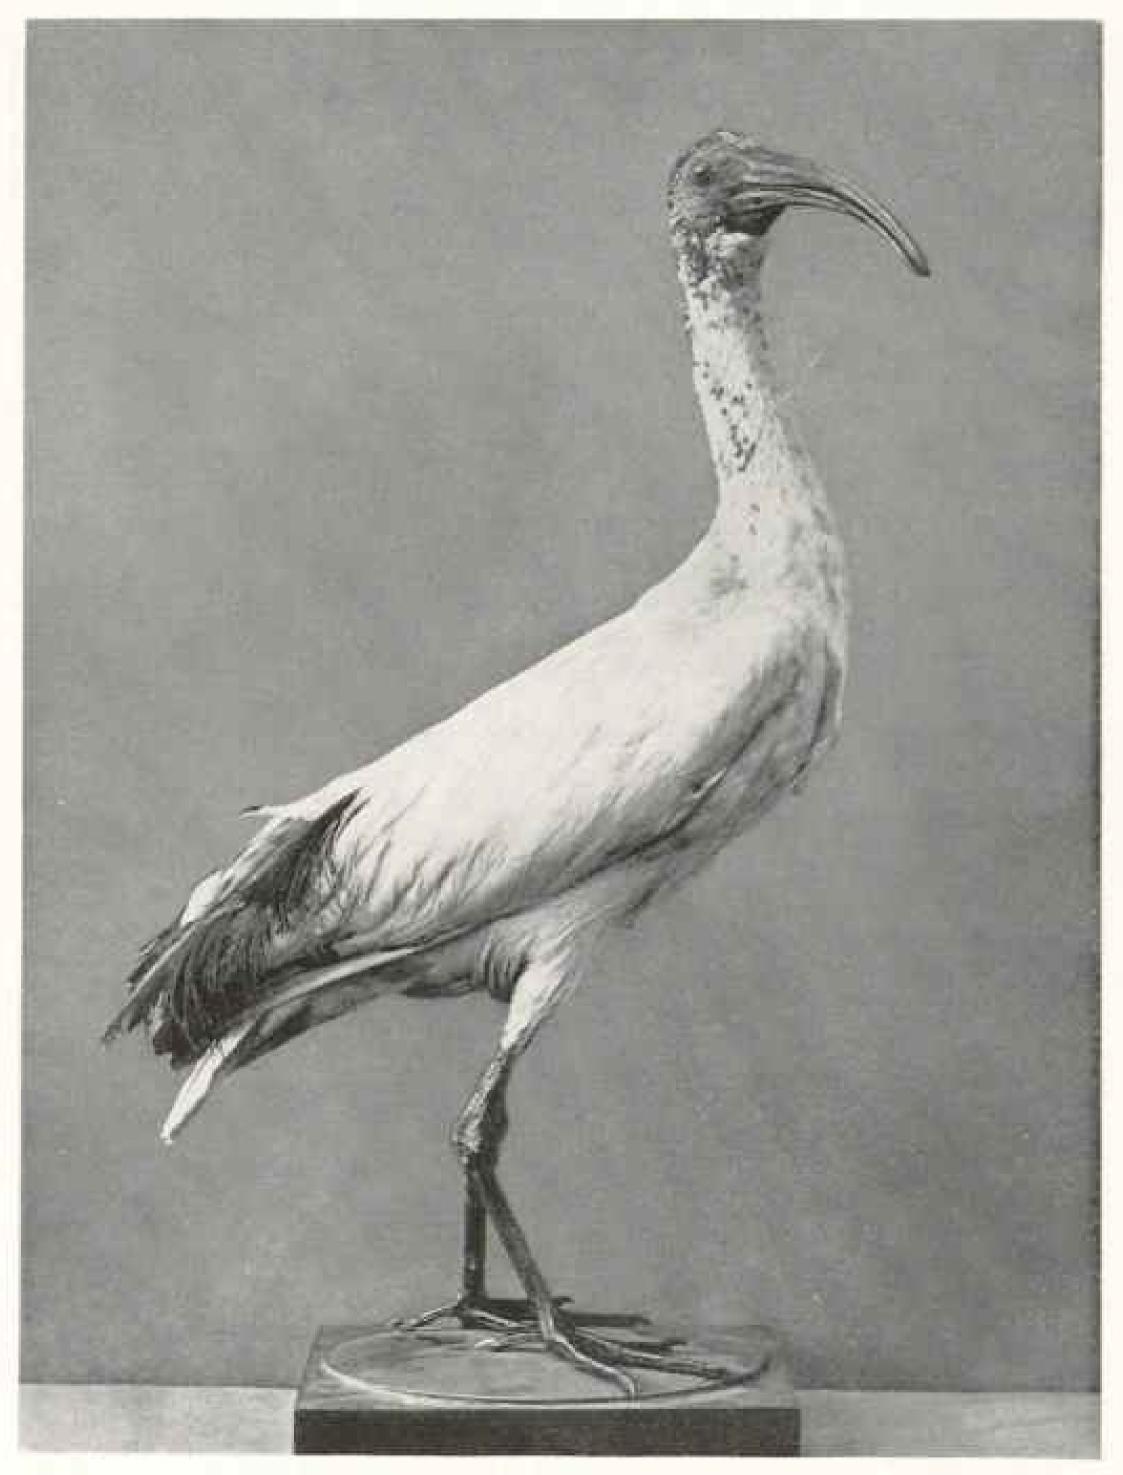


Photo from C. S. National Museum

MUMINY-IBIS RELIGIOSA-FROM NATURE

The intricate interlacing of the black and white bands in geometrical designs recalls Plutarch's description. The ibis was thought to bear some relation to the moon, from its feathers being so mixed and blended together, the black with the white, as to form a representation of the moon's gibbosity" (see page 1043).



Photo from Egypt Exploration Fund

THIS-HERADED THOTH GIVING LIFE TO SETY I. ABYDOS TEMPLE

"To kill an ibis, as Diodorus tells us, was to commit murder and bring upon one capital punishment. The reason for this is seen in this bird's identification with Thoth, through whose magical wisdom Osiris had been brought back to life. One of the common titles of Thoth was 'He of the nose,' referring to the ibis beak, and he is generally represented on the monuments with an ibis head" (see page 1046).

tainty of direction out in the limitless, trackless, demonic desert, and the fact that though his home is the desert, yet he is never far from an oasis, made this animal the best possible symbol of a guide for the dead.

Blessed even now is the lost traveler on these sands who sees a jackal track! It was only last year that a member of this very camp was lost on the gebel, and would have spent the night there had he not, by good fortune, found a jackal track, which guided him to the valley. Says the Book of the Dead: "I am the Jackal of Jackals, I am Shu, and I draw air from the presence of the God of Light to the bounds of Heaven and to the bounds of earth and to the bounds of the uttermost limits of the flight of the Nebeh bird. May air be given unto these young divine beings!"

Not folly, but religious devotion, caused the Egyptians to honor this animal and thus pictorially teach a great truth concerning the mystic journey from death to life and the soul's need of a

heavenly guide if it make the journey successfully. Yonder far to the west is Khargah, the longed for oasis, and Anubis is the only possible guide thither and the jackal is his embodiment. Let us give him honor!

THE SPHINX CITY OF THE EARTH

Abydos is the Sphinx city of the earth. Only three other places in Egypt can compare with it in the extent and majesty of its ruins, and no other possesses the deep mystery which glooms the strange and inexplicable constructions. Here was situated the oldest sanctuary known in human history, dedicated to Osiris and almost certainly dating back to the first dynasty.

Here is the largest and oldest necropolis of the world, where for 3,000 years the nobles of Egypt came for burial, and even when unable to find final resting place in this sacred ground, here they would lie in state under the shadow of the temple of the beautiful-faced Osiris and bury here some sacred images and

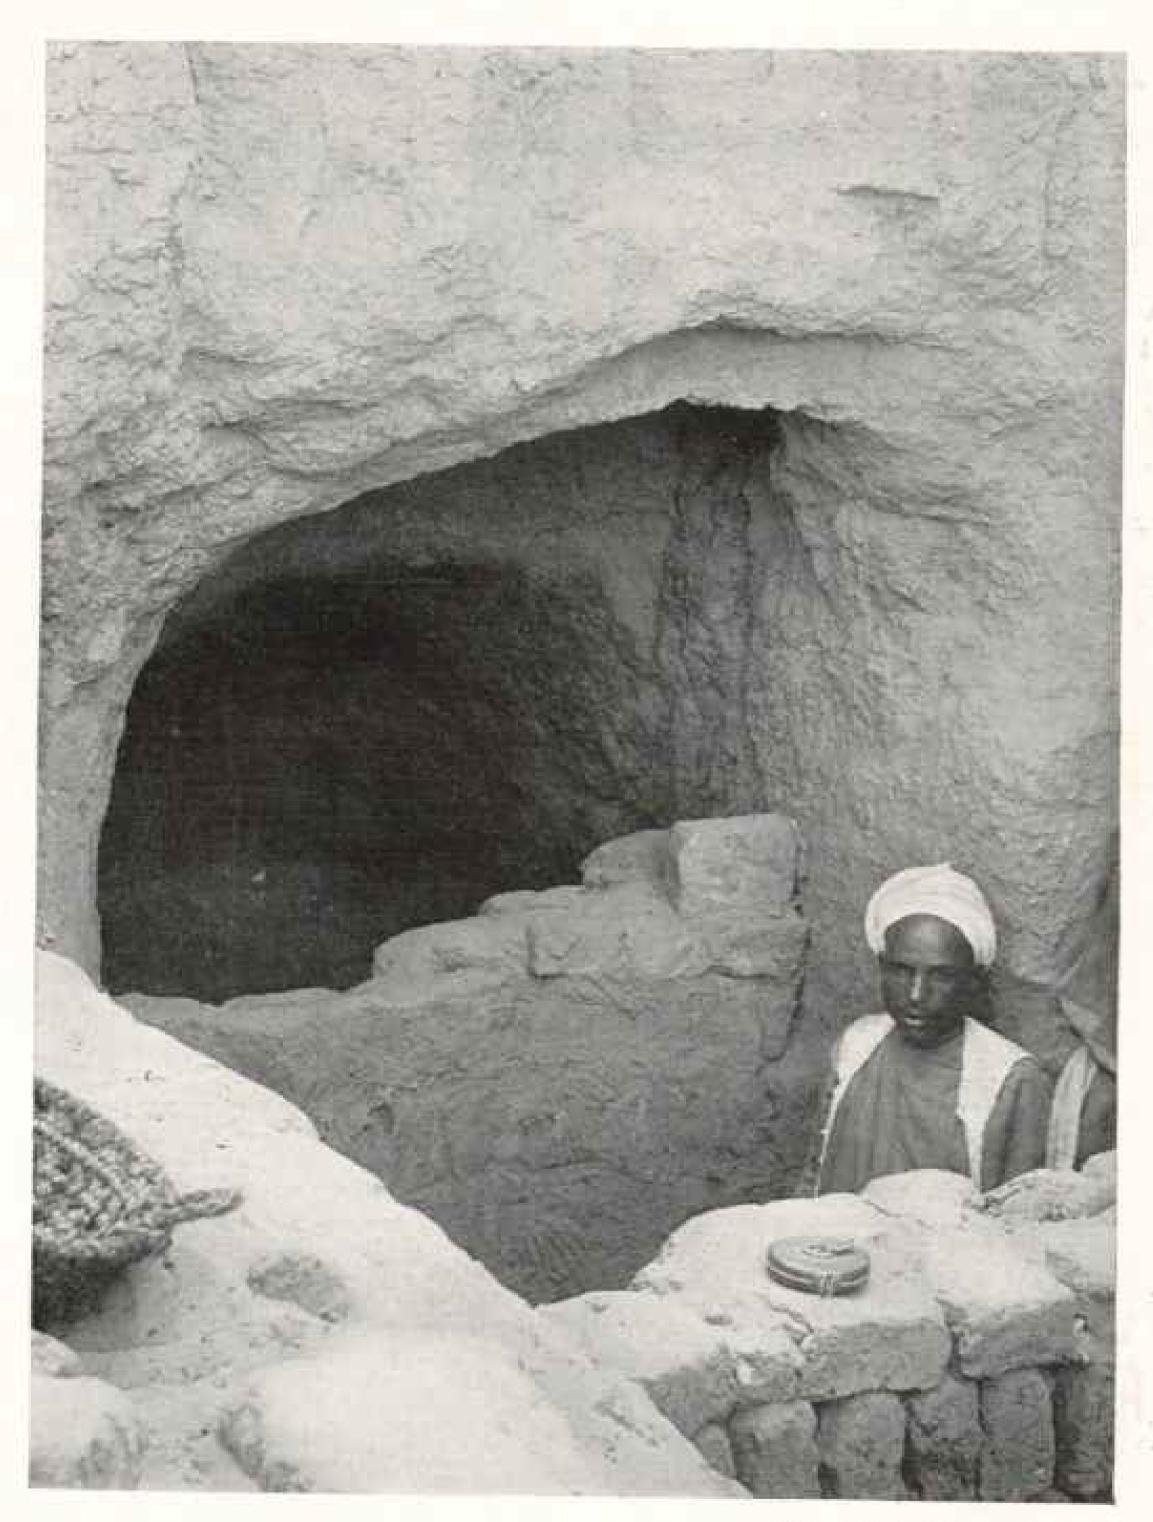


Photo from Egypt Exploration Fund

ENTRANCE TO JACKAL CAVE, WHERE HUNDREDS OF THOUSANDS OF JACKALS WERE BURIED

"Why was the jackal so revered and why was his burial place selected in the holy city of Abydos? The answer is exactly the same as in the case of the this. The jackal was sacred to Anuhis, who, in the myth of Osiris, was one of the chief deities concerned in winning immortality for the human race. Anuhis was the friend of the righteons dead and guided the soul across the trackless desert to the fields of Aalu" (see page 1048).

make acceptable offerings before being carried elsewhere to their tombs.

Here, according to all tradition, Osiris himself miraculously recovered life after his foul murder and mutilation by Set and his 62 fellow-conspirators. Here he was buried, and for thousands of years pilgrims visited this spot, which, long before the days of Moses, had become the Mecca of the entire ancient world. Here the great kings of the first dynasty built their tombs and filled them with fabulous treasures of art and gold, close to the Mountain of the West, which was the entrance into the kingdom of Osiris.

Here was the entrance, by means of a deep shaft, into the underground waters leading to the heavenly Nile of the other world, and here, close to this deep shaft or well, was the National Chapel, or Temple of Kings, dedicated to Osiris, and close to it the celebrated Osireion, with its mysterious inclined passage leading to some unknown sacred goal beneath the National Chapel. The well leading to the underworld was discovered last year by Naville and Peet, under the auspices of the Egypt Exploration Fund.

WILERE WAS THE MOUSE OF COLD?

The Osireion, with its strange underground hall, is now in process of excavation (see page 1031), and no man living can tell what may be found when the end of that granite-lined tunnel which slopes toward the underworld shall be reached.

As day after day I ask this question, walking around the Osireion and pondering upon its unique construction, the more I am inclined to believe that Naville may be right in supposing that here, within a hundred yards of where I write, there may be found that world-famous "Flouse of Gold," the original sanctuary of the best loved god of Egypt, where according to the ancient inscription, 104 anulets of gold and precious stones were preserved with other innumerable treasures.

I came here prejudiced against the theory that this was the entrance to an underground tomb or a sanctuary of Osiris. I still agree with those who do not see in the stones so far uncovered any signs of an age preceding the age of

Merenptah, and yet I find it more and more impossible to think of this merely as Merenptah's chapel or tomb. What we have already uncovered is undoubtedly a temple built or rebuilt by this Pharaoh—a temple in such state of preservation that it will be protected by the government and will hereafter be shown to tourists as one of the sights of Abydos.


If this subterranean tunnel only leads to a Ka-tornb of this famous Pharaoh of the Exodus, it will be well worth all the effort and expense it will involve to remove the hill and debris in which it is buried. Such tomb would, in such a location, undoubtedly seek to copy the oldest Osireion originals, and would almost certainly lead to most interesting results as regards the religion and the history of that most interesting epoch; but, personally, I am now inclined to hope for the discovery here of the most ancient sanctuary of Osiris.

THE MOST ANCIENT SANCTUARY OF OSURES ON THE VERGE OF DISCOVERY

It is certainly not an ordinary royal tomb to which this passage leads. Royal tombs in Egypt were never built under temples, and, besides, Merenptah's royal tomb was, as we know, splendidly built at Thebes, where his grave lay close to those of his illustrious ancestors. If it shall turn out to be the original underground sanctuary of Osiris, or even a subterranean chamber where, in the days of Moses, the mysteries of Osiris were celebrated, and if it shall be found even partially inviolate, then it must mark one of the most important discoveries ever made in its bearings upon the science of comparative religion (see page 1053).

It is hard to overestimate the influence of the Osiris cult upon ancient religions, and Abydos existed solely to exalt that cult. The royal tombs of the first dynasty kings were built on sacred ground and were dedicated to Osiris. The temples of Seti and Rameses would naturally be built over some sacred rite.


No one doubts that the sloping passage of the Osireion, diving into the earth as if in search of the underworld, is in a direct line with the axis of the Seti Temple, which lies above it and about 100 feet to the east, and that it also was

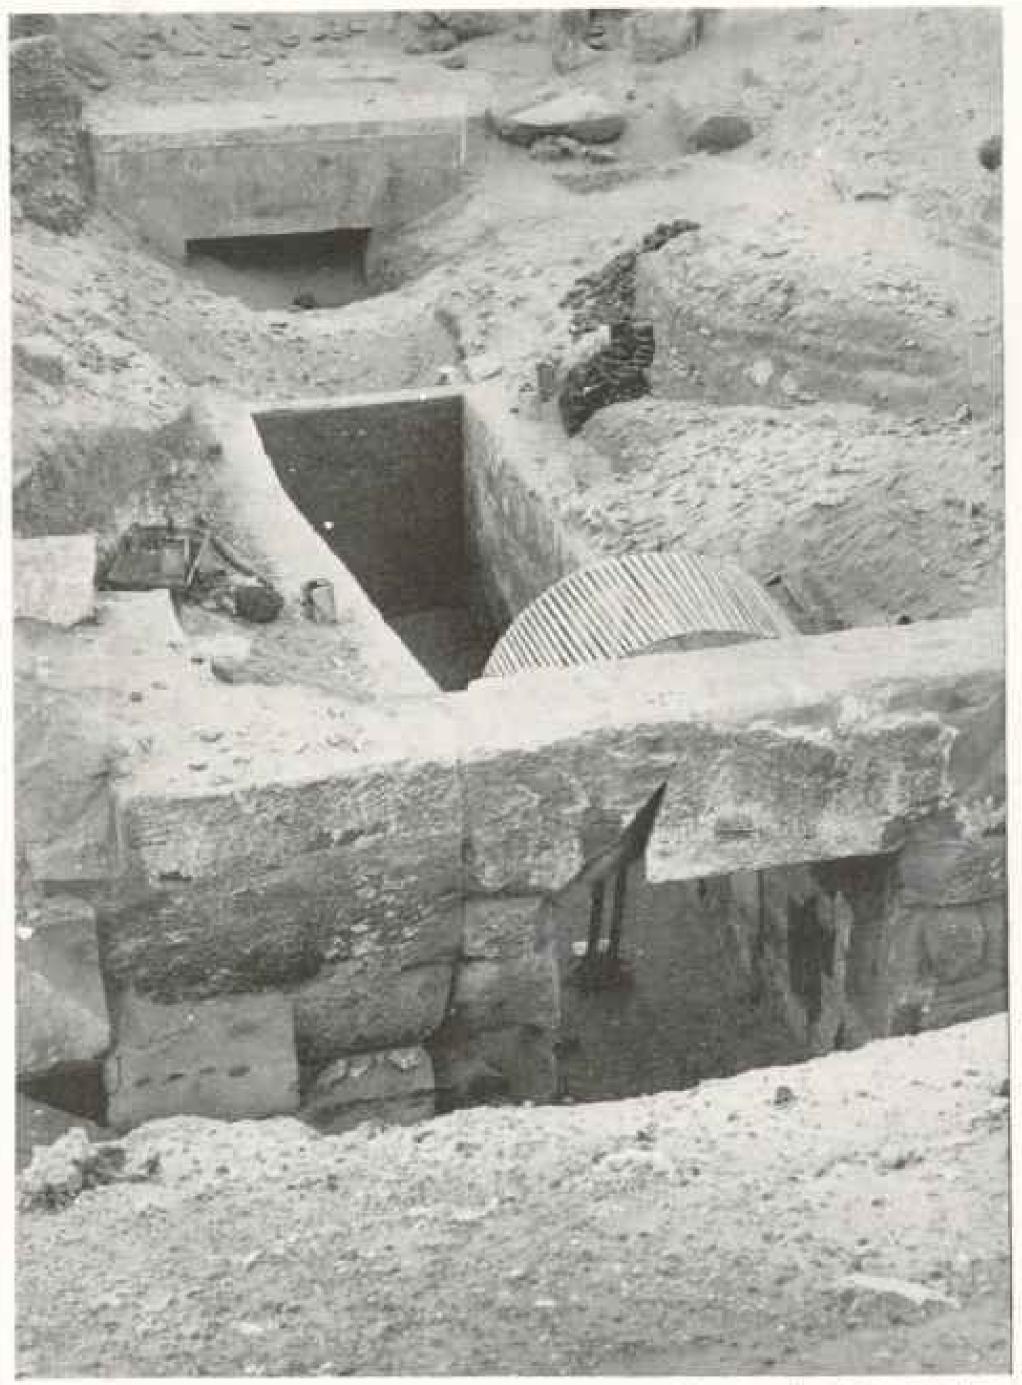

Phone from Egypt Exploration Fund.


THE MYSTERIOUS SLOPING PASSAGE IN THE OSTRETON

"It is certainly not an ordinary royal tomb to which this passage leads. . . . If it shall turn out to be the original underground sanctuary of Osiris, or even a subterrangual chamber where, in the days of Moses, the mysteries of Osiris were celebrated, and if it shall be found even partially inviolate, then it must mark one of the most important discoveries ever made in its bearings upon the science of comparative religion" (see page 1052).

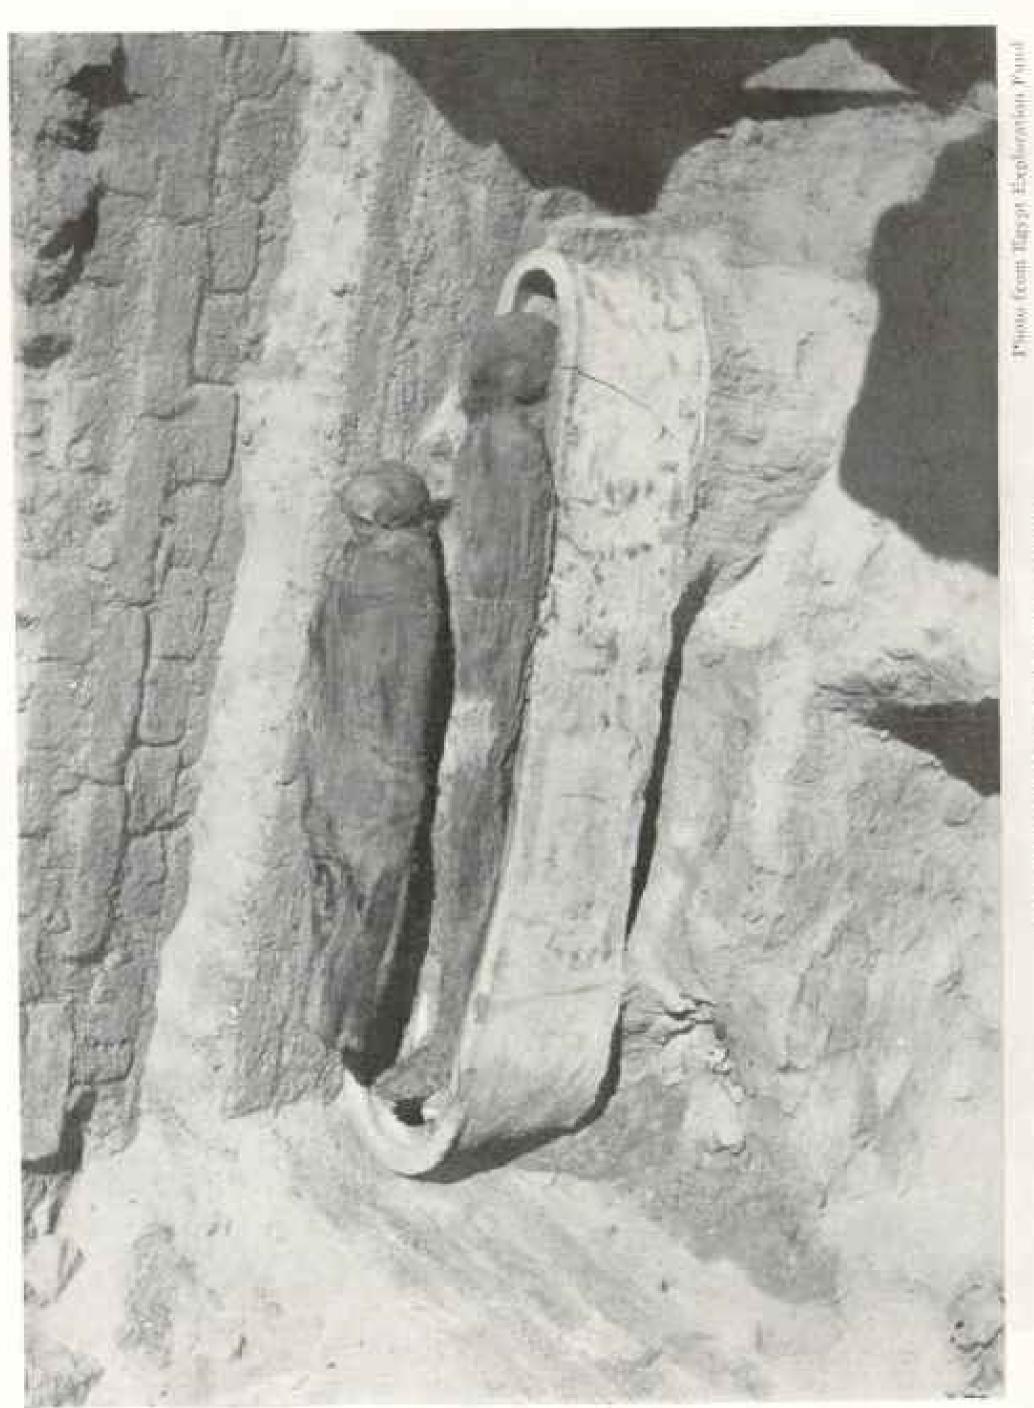

POTTERN COPPLY AND DOUBLE BUILDAY.

This picture shows a striking contrast to the method of burial shown on pages 1938 and 1939. There we see an example of burial from one of the earliest periods of ancient Egyptian history; here we have one from a very fate date. The coffin in both cases is of pottery, but the later forms is shaped to fit the body and is large enough to contain two munimies. This practice of double burial began about the end of the Ptolemaic period, and examples of it are not common.

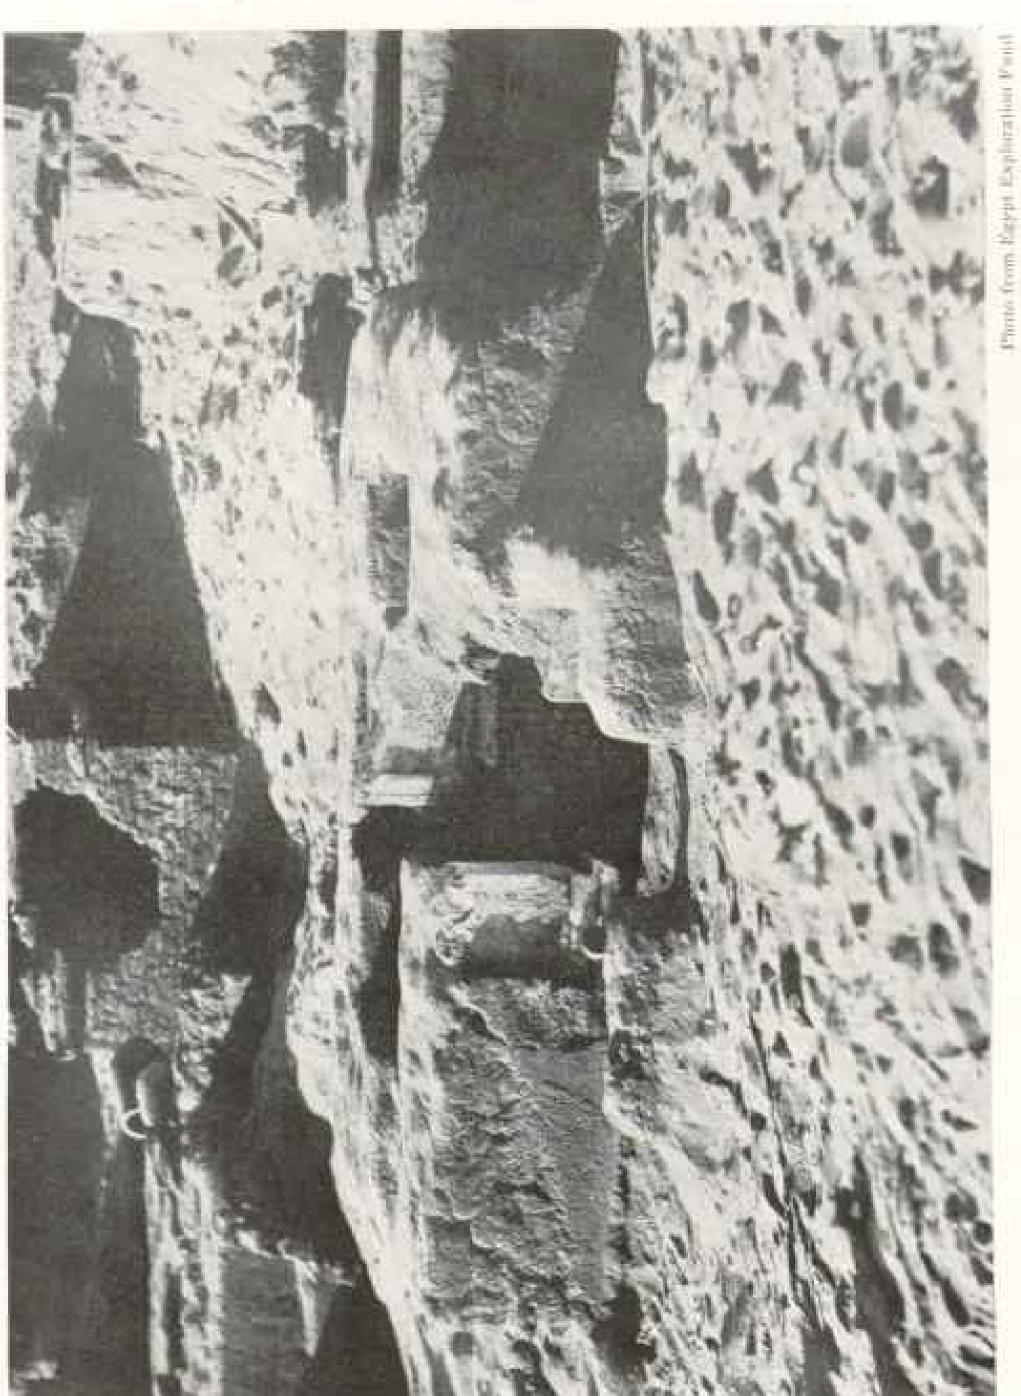

A MASTAILY

made of brick or stone, with sides sleping inward and the roof flat. Within were incense was burnt and offerings made; in the second was placed the arridal, or portrait to a well-like opening, was the chamber in which the actual minimus was deposited. The Mustaha is an early form of Egyptian tomb, made of brick or stone, with sides sleping inward rooms; in the first was a low stone bench on which incense was furrat and offerings made; in the second of the deceased; behind and below these, and reached by a well-like opening, was the chamber in which mame is derived from the Arabic word for the bench, which is a prominent feature in the first chamber. built in premeditated connection with the royal tombs, lying also above it and perhaps some half mile to the west. No one doubts that both the royal tombs and this vast complex of pillars and chambers, which we now call the National Chapel of Seti and Rameses, were both dedicated to Osiris. The walls of the latter building are decorated with noble portraits of this god and the texts contain constant homage for his cult of the resurrection.

No one doubts that the Osireion itself was built in honor of this god of the future life. On its walls are the very decorations which Horus is recorded as having made in the tomb of his father Osiris, and its inscriptions from the Book of the Dead and Am-Tuat deal almost exclusively with this world of the after-life.

OSIRIS WAS TO ABYDOS WHAT DIANA WAS

The Living One," preserved here and carried in all the great religious processions, was the chief glory of Abydos as truly as the image of Diana was the chief glory of Ephesus. No one doubts that the cult of Osiris Unefer, "The Good Being," dominated Egypt for thousands of years in a way scarcely paralleled else-

where in all history, for upon Osiris, "King of Amenti," "Ruler of the Underworld," "Lord of Might Smiting the Fiend," rested every hope of immortality which could be cherished by the hundred million Egyptians who died during the dynastic period.

No wonder the Egyptians loved him and buried the sacred sites at Abydos under tens of thousands of votive offerings and produced here millennium after millennium the first great Miracle Play of History, which presented in dramatic and realistic form the story of the death and revivincation of this "Golden One of

Millions of Years."

No one doubts that somewhere in connection with the temple or tombs of Abydos was celebrated, presumably underground, the "Mysteries of Osicis," famous throughout the entire ancient world, by which kings and nobles were so powerfully affected that the grave lost its borror and they could look without fear toward the setting sun of life.

No wonder that one dreams dreams and sees visions, sitting in the dusk close to the Osireion, with the mementos of the mighty dead all about one, and the hope of a future life written big in every text inscribed on every wall built upon these


sands.

Nove.—Through inadvertence on the part of the writer of the article in the March number of the National Geographic Magazine, entitled "Excavations at Quirigua, Guatemala," no mention was made of the financial support which rendered this work possible. The paragraph should have appeared as follows:

"During the months of February, March, and April the St. Louis Archeological Society and the United Fruit Company maintained in


the field at Quirigua. Guatemala, an archeological expedition, the work being under the direction of the School of American Archeology."

It is a matter of regret to all who have been connected with the work, and especially to the writer of the article, that no mention of it should have been made in the article of the NATIONAL GROSSAPHIC MARAZINE. Therefore it is hoped that this note will remedy the oversight.



HUDSON SIX 54-\$2250

SEVEN-PASSENGER

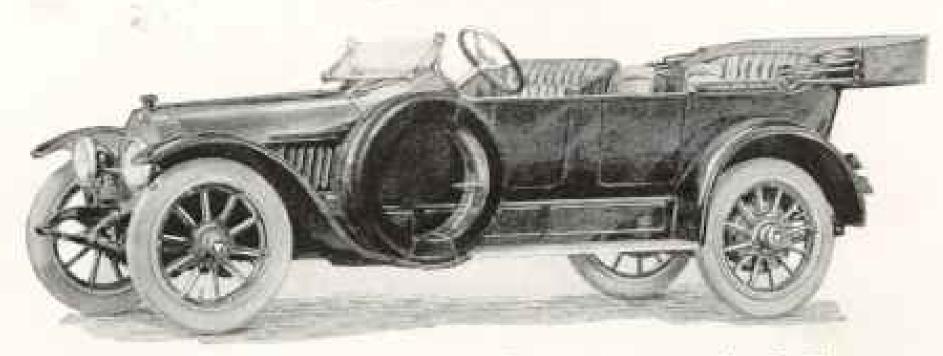

The New Ideal of a Distinguished Car

ERE now is a car which typifies the ideals of the time. This streamline body—this long, sloping bood this absence of angle at the dash, this low-hung chassis, these crowned fenders, this placing of extra tires so the front doors are left clear-these things belong to the car of today.

The commencer of the world's best opinion is that this type of hosty mearlis the coming ideal cur. These are radical changes, but they are coming as surely as forestones came and as suddenly.

All the best foreign cury English. French, and German will this year exhibit exclusively this new attenualine body. And all men con- that what they intogs in budy draign becomes the world-

Our designers have added a hundred minur effects. They have Americanters have Hudsonland the type. So the sur in distinctive. There will be no other but like it. But it entirelies what we sugged as the highest conception of the modern trend in Bestim.

And we believe that every composition will consider this new DV DVON fix the hundrement on exhibited.

Engineering Pauses

We can claim in this car no great advance so regards that engineering and no BUDSON owner express it. The engineering has itmired. For the good four years Woward E. Coffin and his able engineers havy given their hast to the HUDSON. Lot year they brought himes gretty close to perfection to close that the HUD-BON his jumped in one year like the forement rank among hires.

These mendage worked out in this new model car a rast meaher of militaring incetting improvements. They have added source of here parellatical testures ---- of them quite important but we next expect to boild a much befor chaose than we built in with fairt year's him.

This year's advances his mainly in heavity, in combart, in conreniences, in room. We have confident the best in liber, fixled, and equipment with the best in engineering. We have succeeded In making the HI/DNON Bla the more piece it is.

Now the Ideal Car

We may feel that this HUDSON 54 affect the utmost in every wanted feature. It has the examicliness of steel Pullmens. In has the constact of Turkish lounging chairs. It has the speed of express trains. It is free from all the troubles which appear the lise spert.

No man knows hose to build a cat more handware and improvsire. No conveniences are kinent, an modern bearance lacking,

And all these things are here included by a file \$4, with sevenpassenger leady, at the record print of \$2250 (f. m. h. Detroit, 3dichigno.)-

The New Features

These are assuing the work features we bring out in this model. No suration is here made of the countless features in previous HUDSON models which we still retain,

Seven-Passenger body.

335-inch wheelbase. Left side drive. Right hand control.

36 x 4 pench tires.

Extra tires carried as never before ahead of the front door. This leaves both front doors clear.

Four forward speeds. Pure streamline body.

Low-hung body. No angles at the dash,

Wide tonneau doors.

Gasoline tank in dash. Electric self-cranking, with the rapid type of the Delco system built especially for this car.

Powerful electric lights with dimming attachment for city driving. They also act as ordinance lights. Extra seats in tonneau fold into back of front seat,

entirely out of the way Jeweled magnetic speedometer in dash, with new

concealed naiseless gears.

Every operation and control placed within reach of the driver's hand. Gasoline and oil control. lights and starter.

Individual Yale lock on ignition control prevents theft of car.

Rain-vision windshield built as part of the car. Genuine Pantasote top. Curtains that are carried in the top can be instantly adjusted.

Electric born trunk rack tire holders license carriers everything.

Go See It-Go Today

Go to the local HUDSON dealer and see this new achievement. It is not merely an improved car-it's a real innovation. It will display to you all the best thought of the day in automobile designing.


> Go see it while it's new. Our extalog on request.

Hudson Motor Car Company

7692 Jefferson Avenue, Detroit, Michigan

Go see this car today everywhere HUDSONS are sold

WINTON SIX Long stroke motor, left drive, center control, electric lights, self-starter, finest mohair top, easily handled curtains, rais-vision glass front, best Warner speedometer, Waltham eight-day clock, Klaxon electric horn, tire carriers, four-cylinder tire pump, demountable rims, full set of tools, German silver radiator, metal parts nickel finished. Fully equipped,

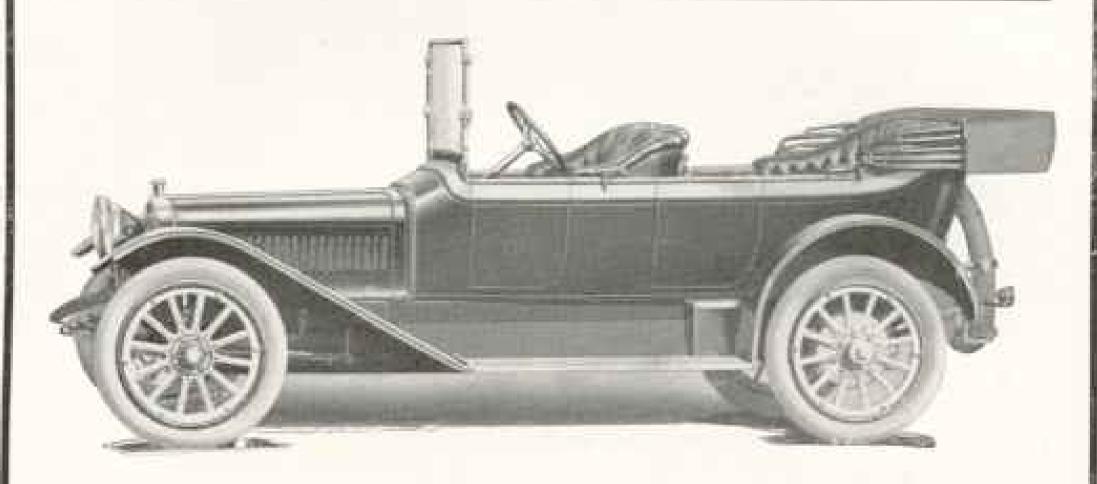

Every Car Needs a Maker

Not only to design and build it.

Not only to give it the right
features, the right material, and
the right workmanship, and to leave
out what should not go in. But, most of
all, every car needs a maker after it has
been sold—after you have bought it.

After you have put your faith and money into a car, then is when it needs a maker standing behind it with the financial strength and the moral determination to make good on every promise that his advertising or his salesmen held out to you before you bought.

How Owners Suffer

When a car loses its maker, through failure or otherwise, its market value drops 50 to 90 per cent instantly. That car becomes discredited, commanding neither price nor respect. Nobody wants it, least of all the unfortunate buyer.

More than 25 makes of cars have lost their makers within the year. Thousands of owners suffered financial loss and annoyance. Guarantees became worthless. Repair parts could be secured only with difficulty, even for cash in advance. And the maker's much boasted "service" proved to be a hollow promise, with nobody at the maker's plant to express regret, much less to make good.

What's Most Important


Find out, before you buy a car, whether the maker is solvent and is likely to stay solvent. That's more important than to know the specifications of his car. The maker who is solid, who will be in business next year and the year after, is invariably a maker whose car has the substance that gives satisfaction. But the best car in the world isn't worth having if its maker is in danger of being wiped out. Just keep that in mind.

You Need This Book

Look up the maker first. Then find out about cars. We have summed up the present situation in the automobile industry in a book-let that you ought to read before you buy any car. Ask for Book No. 17: it includes car description.

The Winton Motor Car Co.

12 Berea Road, Cleveland, Ohio.

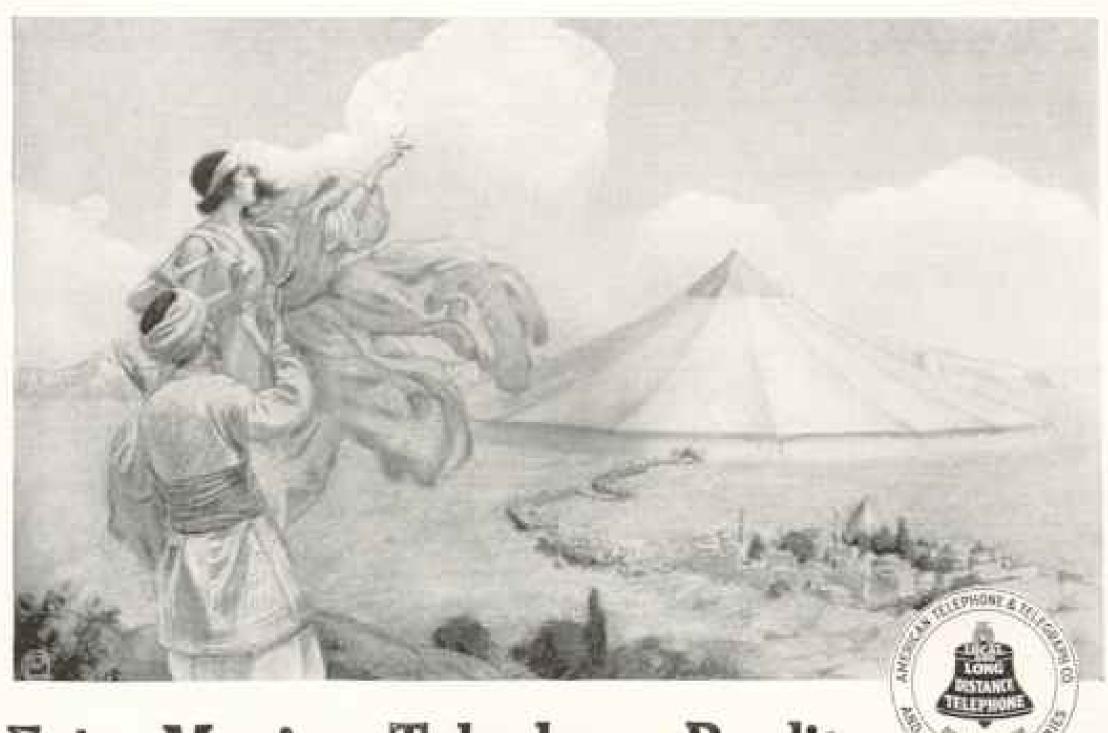

Fairy Magic—Telephone Reality

A tent large enough to shelter his vast army, yet so small that he could fold it in his hand, was the gift demanded by a certain sultan of India of his son, the prince who married the fairy Pari-Banou.

It was not difficult for the fairy to produce the tent. When it was stretched out, the sultan's army conveniently encamped under it and, as the army grew, the tent extended of its own accord.

A reality more wonderful than Prince Ahmed's magic tent is the Bell Telephone. It occupies but a few square inches of space on your desk or table, and yet extends over the entire country.

When you grasp it in your hand, it is as easily possible to talk a hundred or a thousand miles away as to the nearest town or city.

In the Bell System, 7,500,000 telephones are connected and work together to take care of the telephone needs of the people of this country.

As these needs grow, and as the number of telephone users increases, the system must inevitably expand. For the Bell System must always provide a service adequate to the demands of the people.

AMERICAN TELEPHONE AND TELEGRAPH COMPANY AND ASSOCIATED COMPANIES

One Policy

One System

Universal Service

SCRIBNER'S MAGAZINE

Important Announcement

for Next Year

Theodore Roosevelt will contribute to Scribner's Magazine the account of the trip which he will take in the early months of 1914 into the Paraguayan and Brazilian interior, where he expects to travel by canoe and on foot through the great South American tropical forest. His experiences, observations of the country, the people, and the animal life will appear solely in Scribner's Magazine.

In the September issue appears an article by Mr. Roosevelt on

The Life History of the African Lion

Fully Illustrated

the first of four articles on the Life Histories of the Great African Animals—the others being the Elephant, the Rhino and Hippo, the Buffalo and Giant Eland.

Of these articles he says: *This and the following articles are in no sense hunting articles. Far more interesting than the chase itself is the observation, the study of the life histories of the strange and wonderful creatures of the wilderness."

Begin your Subscription with this Number \$3.00 a Year, 25 Cents a Number.

CHARLES SCRIBNER'S SONS, NEW YORK

Educate Your Child at Home



Under the Direction of

CALVERT SCHOOL, Inc.

(Established 1892)

A majour system by means of which children from kindergarten to 12 years of age may be educated he the best modern methods and under the guidance and supervision of a school with a national reputation for training young children. For information write, stating age of child.

Normal Department for Training Teachers. Circular sire request,

THE CALVERT SCHOOL, 9 W. Chase St., Baltimere, Md. V. M. HILLYER, A. B. (Harvard), Hemimseter

FRENCH-GERMAN SPANISH-ITALIAN

Is Easily and Quickly Mastered by the

anguage-Phone METHOD


Combined with the ROSENTHAL METHOD OF PRACTICAL LINGUISTRY

This is the nation I way to tears a feedige language. You hear the firing enter of a nation Professor processor each word and please. Be square at you desire—states or nations at such that or day, for releases or hours at a time. It is a pleasure, Teachmology study to telline rules or momerating. It to not expendice—all members of the family can send. Temperate pro-line during space members or at our content times, and its a surprisingle short time you speak, read, and outercland a new language. Sound for Booklet and Terms for Essay Fixemens!

THE LANGUAGE-PHONE METHOD 980 Putnam Building.

2 West 45th Street, New York

Send for These



wonderful bealthproducing little capsules and know good health. Not a medicine nor a nostrum, but Nature's OWN remedy for constipation.

Royal-Olvules

soft, soluble, filled with the finest olive oil on earth. Just TRY them and see how soon you'll improve and build up. Royal-Olyules will do you good-97 % nutritive. Convenient to carry, easy to take. Send the quarter today and you'll be back for more.

Box of 24, 25c. Box of 120, \$1,00, carriage free.

References: Any bank in Philadelphia.

Thomas Martindale & Company, 991 Market St., (Est. 1869) Philadelphia

Calife address: MARTINDALE

"Mention the Geographic-It identifies you."

REPUBLIC

STAGGARD TREAD

TIRES

desiring the greatest mileage possible, regardless of the small extra cost. Experience has taught us that only the best rubber and fabric can stand the graeling tests a tire is put to.

Highest Quality Tires at the Lowest Possible Cost

Is what you get for your money when buying Republic Staggard Tread Tires. They are the thoroughbreds of tiredom today in appearance and endurance. The best proof of their class is furnished by the men who use them.

The Republic Rubber Co.

YOUNGSTOWN, OHIO

Branches and Agencies in the Principal Cities.



PADS:

6% BONDS

The security is real estate and a modern fireproof store and office building in the center of a prosperous, growing city.

The value of land alone is over So of the amount of the bond issue,

The total value of security is nearly twice entire bond issue.

The building is being erected to meet a known demand and will be occupied largely by companies controlled by the owners of the property.

Earnings will show substantial surplus over principal and interest requirements.

All leases will be assigned to the Trustee.

The ownership is in unusually strong hands.

Ask for Circular No. 807 D

Peabody, Houghteling & Co.

(Established)

10 S. La Salle St., Chicago

The Best Kind Of An Investment

is that bond which is a typical example of a general class of securities which is becoming stronger and stronger with succeeding years. We offer such a bond at a price to yield over 5%. This bond is legal for savings banks in three States.

Full details on application for Circular JE 34

A. B. Leach & Co.

Investment Securities

149 Broadway, New York

Chicago Boston Philadelphia London, Eug.

Buffalo Baltimure



Most Miles For The Least Money

The final guide in the purchase of a trunk is the Indestructo trade-mark.

The Indestructo Brand never appears on inferior luggage.

Indestructo means guaranteed safety—
guaranteed service—guaranteed value.

Suppose you pay \$25 for an ordinary trunk. The length of ordinary service is indefinite—It may be two trips or two years.

There is no assurance given you that your trunk will stand even the usual travel strains.

Perhaps at the best it will last through two years of steady service.

You have paid \$12.50 a year for your trunk.

An Indestructo costs \$25. It is guaranteed to travel for 5 years. It costs you \$5.00 per year.

You know when you buy just what you are getting and how long it will last.

You also know that should your trunk be destroyed by fire, accident, wreck or collision, you will get a new one—free.

Isn't this positive assurance and insurance worth the declaration that "the next trunk I buy will be an Indestructo"?

Write today for our Travel Book.

National Veneer Products Co.

2509 Beiger St., Mishawaka, Ind.



OF D TECT A KALEATT

As Illustrated by J. JAMES TISSOT

396 Tissot Pictures, 117 in Full Color

This Out Testament comprises two massive Royal Quarto volumes (if a 14 inches) of you pages each, simp-tunnily bound in three-quarters leather, with gold tops and decourtons. The type is large, clean, and new. The type is exceptionally heavy.

An Inspiration in Religion An Education in History A Revelation in Art

Think of it just for a moment—slatten years of a great artists life spent in making these hearliful pointings. Sixteen years of study and care and travel and work were devoted to making these pictures right—to make them tell us the Old Testament stories—to make the bible read to us.

It would be impossible, if the whole history of art was ransacked and every apt picture selected, to gather a set of paintings that would approach in completeness Tisast's work, for he has brought to it not only the skill and training of a great and famous artist, but the knowledge of a profound biblical scholar and the conviction of a derout and religious temperament.

The original paintings have been purchased by the N. V. Public Library and have been put on permanent exhibition.

Reduced from \$65.00 to \$20.00

Send Carriage Prepaid in U.S.

Order today. We cannot guarantee to fill at this price unless order is received at early date. Money refunded if not satisfactory.

THE TISSOT PICTURE SOCIETY

Care of National Geographic Magazine, Washington, D. C.



James Treast. Copyright by de dreshoft, 2004

JOSEPH AND HIS BRETHREN.





Do You Use Press Clippings?

It will move than pay you to secure our extensive service, covering all subjects, trade and personal, and get the benefit of the best and most systematic reading of all papers and periodicals, here and abroad, at minimum cost. Our service is taken by all progressive instance men, publishers, authors, collectors, etc., and is the eard ladex for securing what you want and need, as every article of interest to at your daily command.

Write for terms, or send your order for mostlippings at \$5 or 1,000 ellippings at \$55. Special Rates quoted on Large Orders.

THE MANHATTAN PRESS CLIPPING BUREAU

ARTHUR CASSOT, Proprietor

Cambridge Bldg., 334 Fifth Ave., Cor. 33d St., New York




BACHIA'S HAVANA CIGARS

FOR MEN OF MEANS

If your Club or dealer does not stock our brand, we will supply you at the regular retail price. Try fifty of our Panetelas, postpaid, for \$4.50; rich flavor, aromatic, yet mild. Our brand is made in over thirty sizes, from Cuba's choicest tobaccos, thoroughly matured and expertly blended. Strictly hand-made.

DEPT. C. R. A. BACHIA & CO., 43-47 West 16th St., New York City.

"Mention the Geographic-It identifies you."

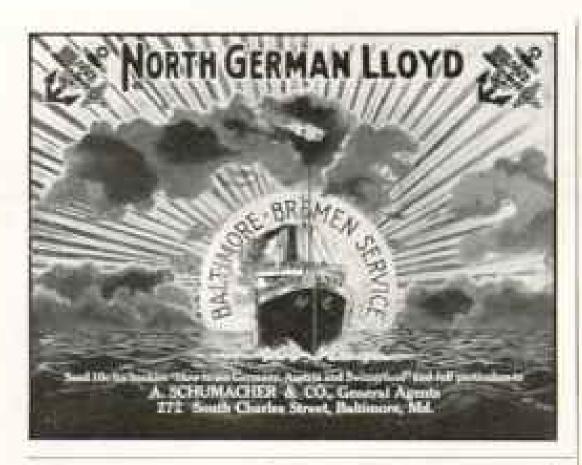

HARRISON GRANITE COMPANY



Linesard by Macrison Strendte Company. La Orkaniel Committee; By terrain

DESIGNERS AND BUILDERS OF HIGH-CLASS MEMORIALS

BOOKLET ON REQUEST

NEW YORK 200 FIFTH AVENUE ::

Map of Mexico

17x24 in printed in five colors. most complete and up-to-date map of this region in existence.

Price, Fifty Cents

Address, National Geographic Magazine WASHINGTON, D. C.

Department H



On Land or Sea

is Minimized "Jasco Tank" by the

Seamless-Leakless-Tested

JANNEY, STEINMETZ & CO.

Main Office: Philadelphia. New York to live: Hudson Terminal Bldg.

CHIBITHITITION OXYCEN TOOTH POWDER It is the Oxygen in Calox which makes it more valuable to you than any other dentifrice. It is the Oxygen which, by perfectly cleansing the teeth and sterilizing the entire month, conduces so greatly to better general health. It is the Oxygen which, by neutralizing destructive acids and dissolving mischievous deposits, whitens the teeth so wonderfully and wards off deemy. All Druggists, 25 Cents Sample and Booklet Free DM PUZNEST. McKESSON & ROBBINS NEW YORK Ash Yor the Cales Thoth Brack. Ill assets.



Wisconsin will ride on J. M. Shock Absorbers the entire distance. This decision was reached after continued experiment with various de-Witness. Convinced by Actual Experiment

The same reasons induced A. L. Westgard, veteran pathfinder of the A. A. A., to equip his car with J. M. Shock Absorbers for the important task of transcontinental route-making. Earle I. Ovington, famous Boston aviator and technical expert, arrived at the same conclusions after the most note-worthy experiments on shock absorption ever conducted. Send for booklet, giving complete results of the Ovington tests, Hustrated by graphic records made by the car itself. Free on request.

The J. M. SHOCK ABSORBER CO., Inc. 208 S. 17th St., Philadelphia, Pa.

Branches in New York, Chicago, Cincinnati, Buffala, Rochester, Atlantic City, Cleveland, St. Louis, Boston, Pittaburgh, Baltimore, Washington, Hartford, Los Angeles, San Francisco, Jacksonville, Syracose, Providence, Eric, Scattle, Portland, Ore., Orlando, Fla.

Branches in every civilized country

"Mention the Geographic-It identifies you."

Geographic Art

GRAPHIC MAGAZINE, not merely because they are beautiful pictures but by reason of the fact that they are both educational and artistic. They were selected from hundreds of others to convey to the mind the most comprehensive conception of curious and characteristic corners of the earth—the great Sahara, the matchless Matterborn, the Palms along the Nile, the wonders of Mt. Robson, in the Canadian Rockies, and the Frozen Desert.



THE MONARCH OF THE CANADIAN ROCKIES ROSSON PLACE

They are superbly produced on heavy art-mat board, in exactly the proper tones to bring out the real atmosphere and surroundings. These pictures can be obtained nowhere else, and will be forwarded unframed or framed, as desired.

Arrangements have been made to supply a limited number artistically framed, with specially selected moulding in perfect harmony with the subject. The best French glass is used and a high quality of work guaranteed.



THE HOUR OF PRAYER IN THE SAHARA DESERT.

7 x 18 miles, Pastogramore in Sain Sepin, ready for fraction, 50 cross, postpoid. Frames, \$1.00, express culture.

THE DELIVERY OF PICTURES IN PERFECT CONDITION ASSURED


"The Hour of Prayer," 7 x t8 inches, photogravure in Satin Sepia, on Art-Mat Board, ready for framing, postpaid, 50 cents. Framed, \$3.00 (Express Collect).

"The Palms," 10½ x 24 inches, photogravure in Satin Sepia, ready for framing, postpaid, 50 cents. Framed, \$3.00 (Express Collect).

"The Majesty of the Matterborn," 17 x 22 inches, ready for framing, postpaid, 50 cents. Framed, \$4.00 (Express Collect).
"The Lure of the Frozen Desert," 9 x 23 inches, photogravure, ready for framing, postpaid,

"The Monarch of the Canadian Rockies—Mt. Robson," 17 x 44 inches, 50 cents. Framed and boxed, \$6.00 (Express Collect).

Address, Department H. National Geographic Magazine, Washington, D. C.

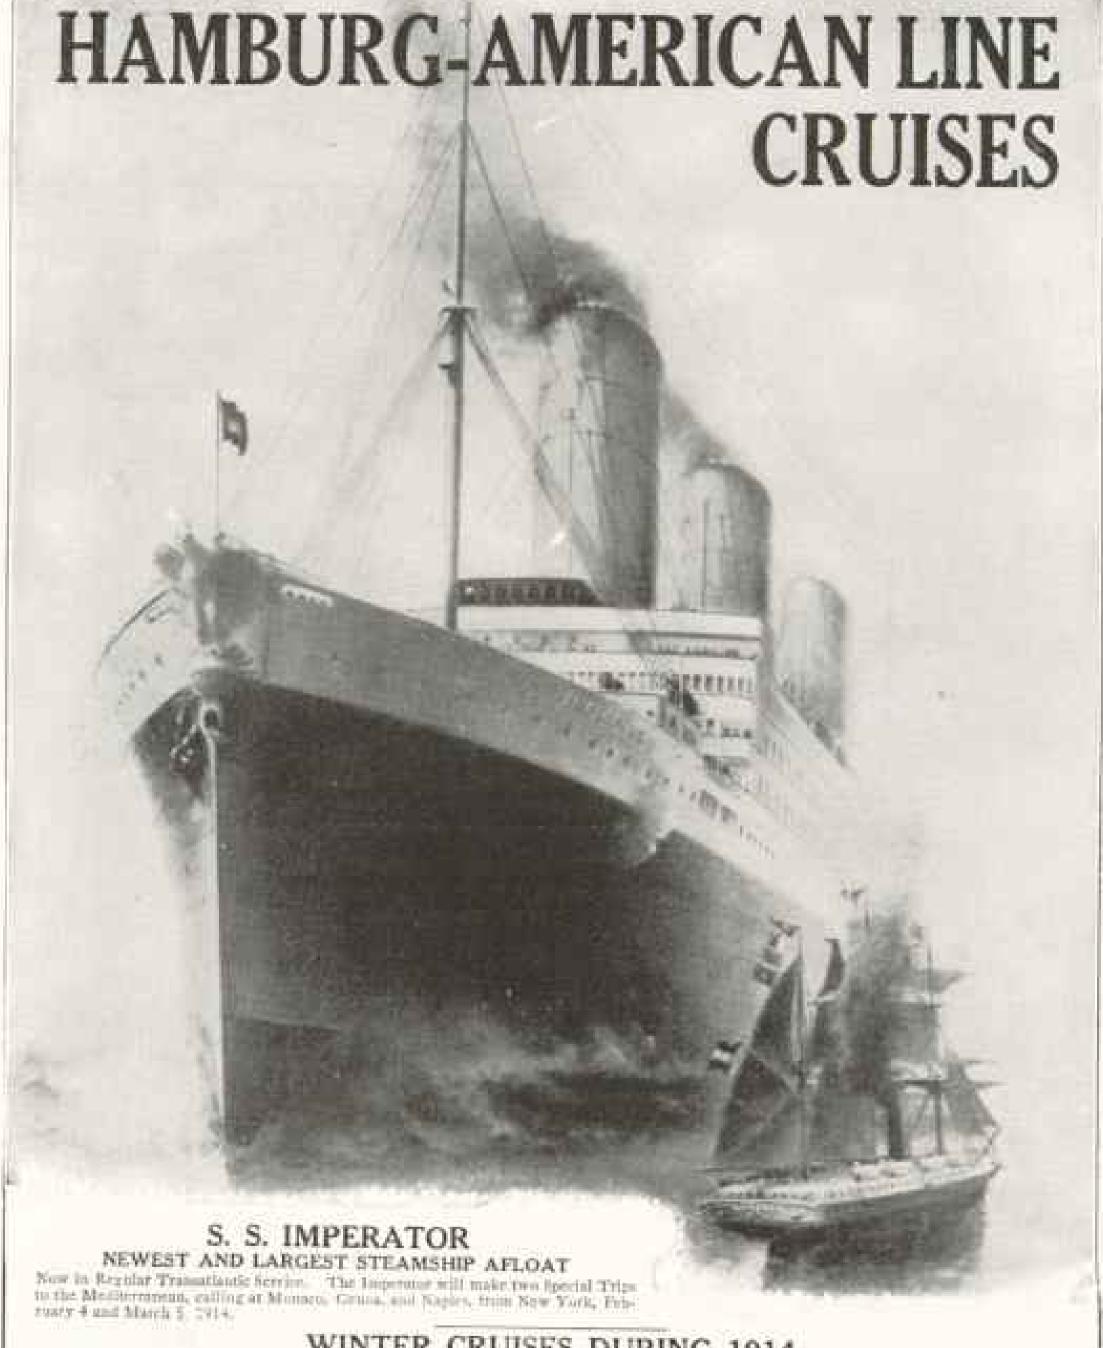

WINTER CRUISES DURING 1914

NEW CRUISE, ORIENT-INDIA

By the S. S. Cleveland (17,000 tons)

From New York January 15, 1914. Duration, 95 days. Cost, \$700 up. Including shore excurdons and necessary expenses.

NILE SERVICE

By expects steamers of the Hamburg and Anglo-American Nils. Communic.

Philadelphia

Boston

CRUISES TO WEST INDIES, VENEZUELA, and The PANAMA CANAL

S. S. America (22,500 tens) and Victoria Luise [16,500 tuns]

During January, Pebruary, Marish, April. Duration, 16 to 29 days. Clast. \$145 to \$175 up. Two 15-day Cruises from New Orleans during January and February. Above Trips optional.

Also regular Weekly millings by Prints Beamer of the Atlas Service.

St. Louis

San Francisco

Around the World and Through the Panama Canal, from New York, January 27, 1915, by S. S. Cleveland, 135 days, \$900 up. Write for Information

HAMBURG-AMERICAN LINE, 41-45 BROADWAY, NEW YORK CITY

Pittaburgh

"Mention the Geographic-It identifies you."

Chicago

Nuts shown in corner are Genuine Mantura

Pecan Trees for Zero Climates

If was plant Northern Grown Trees (the only kind we sell) you may ruse these delicious muts about your home. Rochester, N. Y., is just under the 45th parallel of latitude, with temperature way below zero at times; yet we grow Pecaus here.

SOBER PARAGON SWEET CHESTNUT

Paxines Orchard Crop Brought \$30,000

Plant for profit, for pleasure or for decoration—plant a thousand trees or a single one. A safe tree to plant in gero climates or in Act climates. Succeeds in grought, in frost, in poor soil, and upon steep hillsides—the roughest of lands.

Every Tree We Ship This Fall Bore Chestnuts Last Season

St. REGIS Ever-bearing Raspberry


Sober Paragon Yields first season all summer long June to Nov. Large, sugary, crimson berries. For market growing St. Regis is so profitable it is called the "mortgage lifter."

> Our 64-page Catalog and Planting Guide, with "Successful Nut Culture in the North," tells you how, when, and where to plant. Mailed FREE on request.

> > GLEN BROS., Inc.

2113 Main St., ROCHESTER, N. Y.

Glenwood Nursery Established 1866



THIS MAGAZINE IS FROM OUR PRESSES

JUDD & DETWEILER, INC.


MASTER PRINTERS

420-422 ELEVENTH STREET NORTHWEST

WASHINGTON, D. C.

OUT-OF-TOWN ORDERS SOLICITED



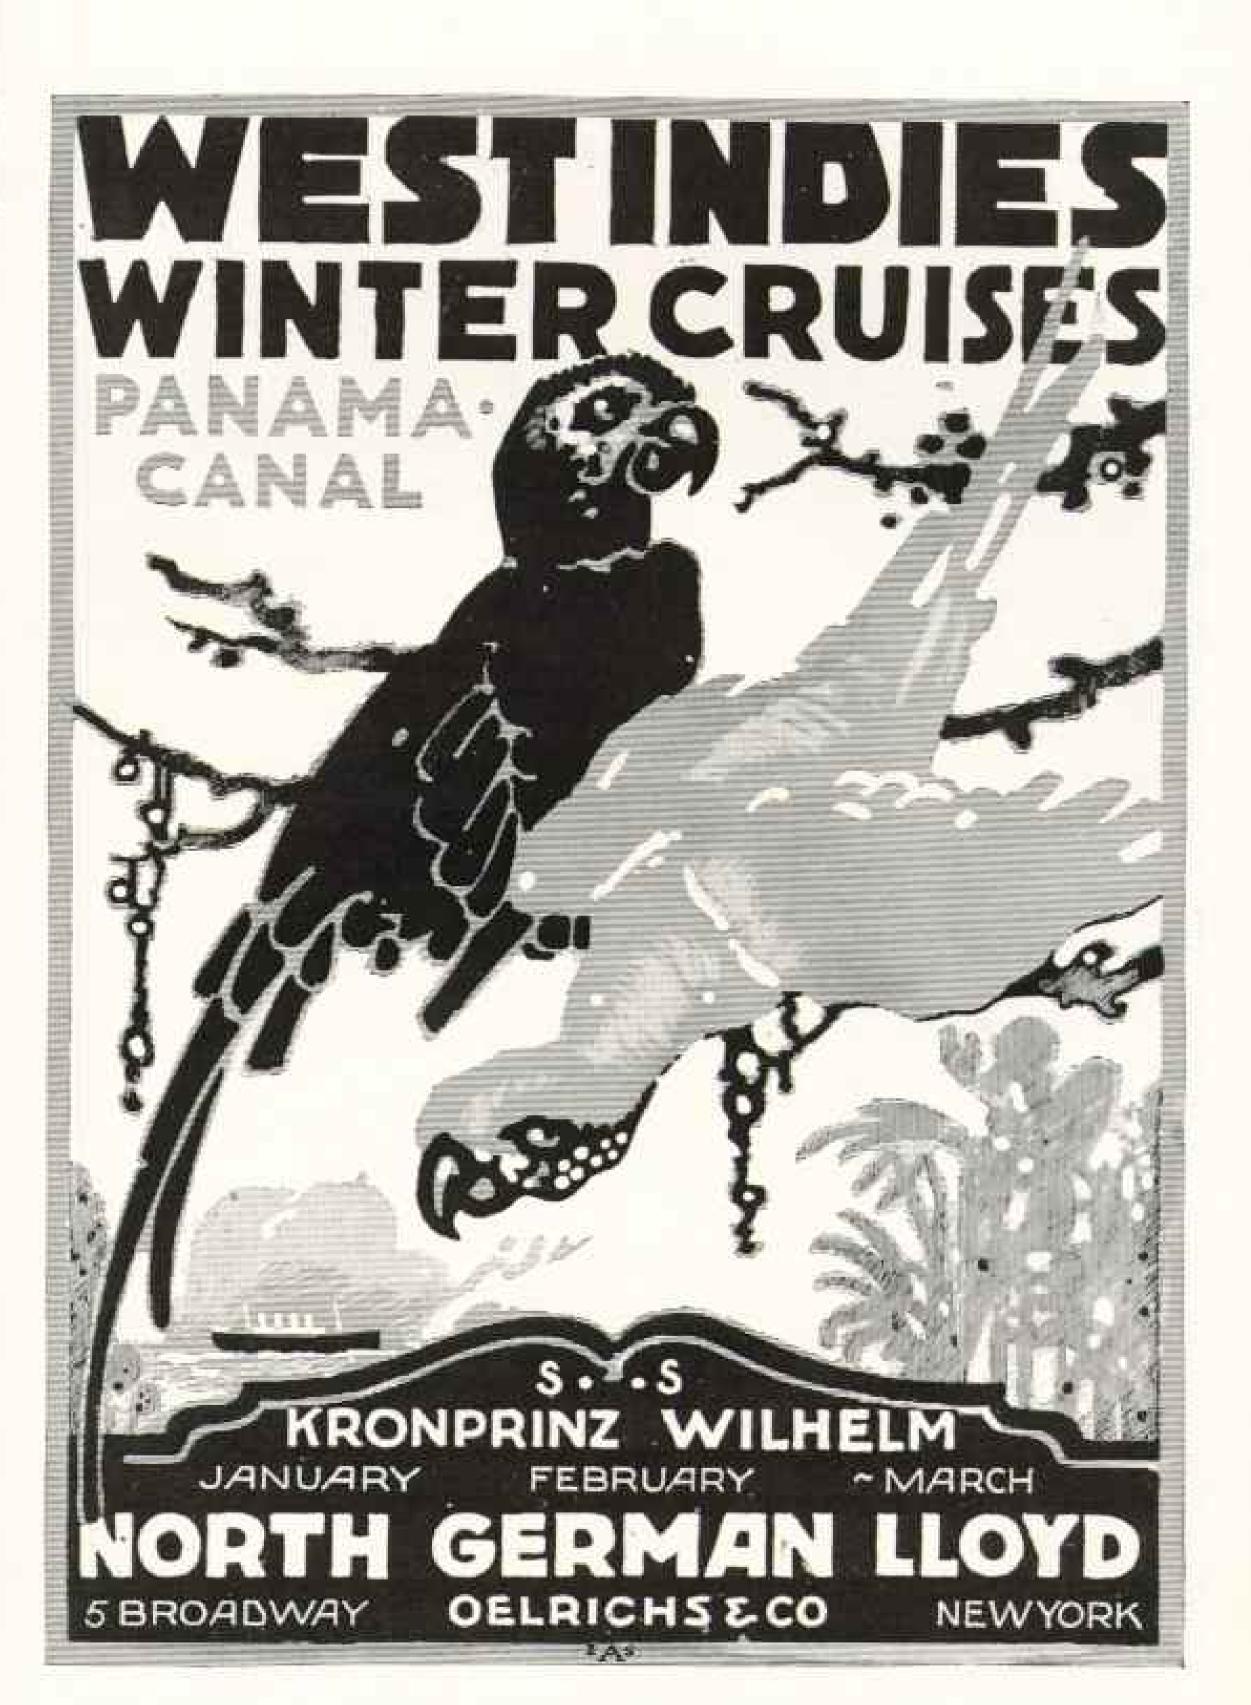

Hooking for the name

IN CUT GLASS, in rock crystal. L and in engraved crystal glass-nothing but Libber will meet your wants.

It is recognized as the world's best, the world over.

Look for the Libber name-plate engraved on every piece.

A. Libbey dealer in each city.

The Libbey Glass Company, Toledo, Ohio

Inks the point and not the fingers

5,000,000 pen-users now agree with me that the Parker is the cleanly fountain pen-made so by

the invention of the "Lucky Curve," which removes the leak and smear. This is the kind of a fountain pen you will decide on as soon as you take the time to make comparison. It inks the point and not the fingers.




Geo. S. Parker.

Fountain Pens

The "Lucky Curve" drains all the ink down and out of the feed tube before expanding air, caused by the heat of the body, drives the ink up into the cap and around nozzle. This is why Parker Pens do not leak.

The Lucky Curve

The big idea that has made Fountain Pens cleanly.







PARKER PEN COMPANY 18 Mill St., Janesville, Wis.

NEW YORK RETAIL STORK WOOLWORTH BUILDING

REMOVAL NOTICE

35,406

\$6.60

INCORPORATED UND

Stopic


the Louisia

FISHER & BRYANT, INC. CONSULTING FORESTERS

TIMBER-LAND EXPERTS

39 ASTICOU ROAD, FOREST STATION, BOSTON, MASS,, TWO MINUTES FROM FOREST HILLS RAILROAD AND ELEVATED STATIONS, DIRECTLY OFFOSITE THE BUSSEY INSTITUTION AND ADJACENT TO THE ARNOLD ARBORETUM OF HARVARD UNIVERSITY.

TELEPHONE, JAMAICA-270

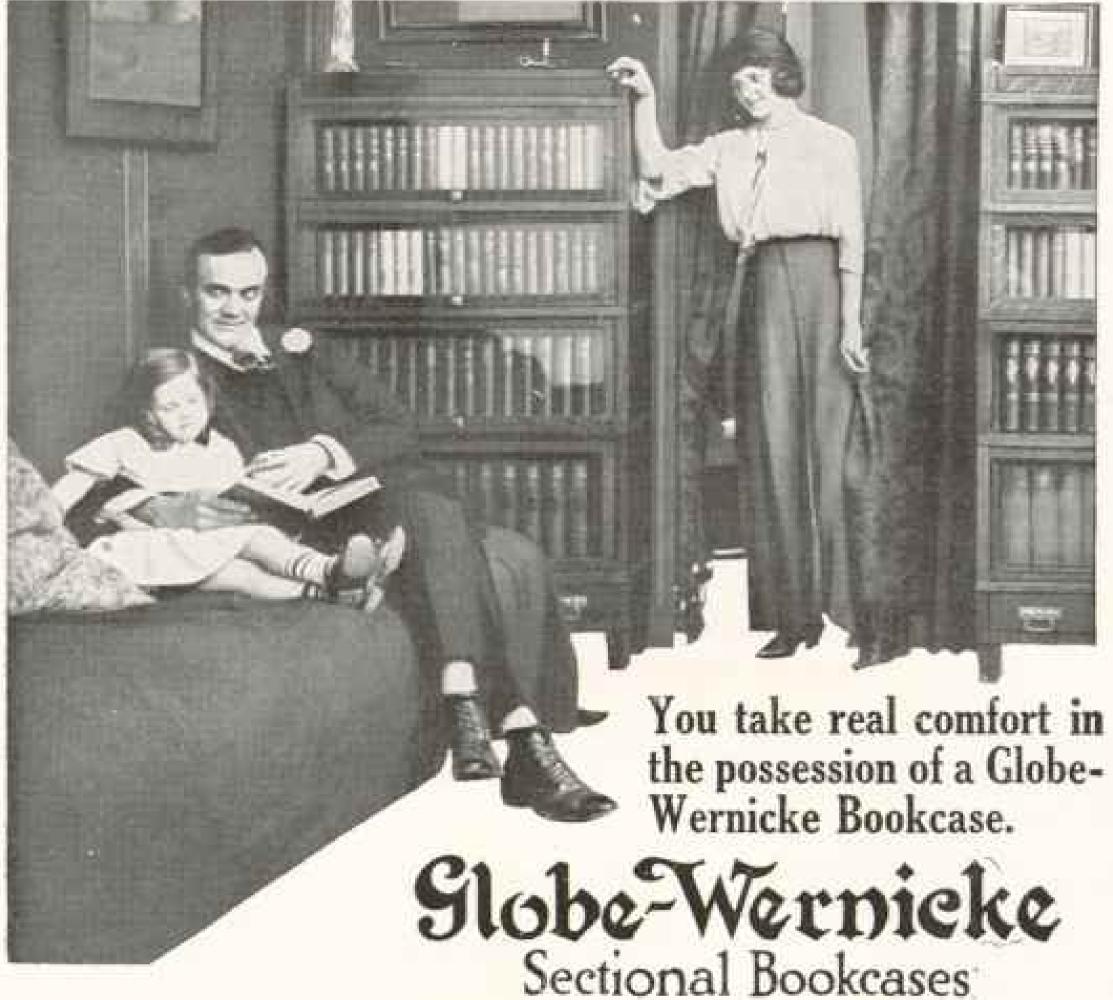

AGLOBE-WERNICKE Bookcase is a very satisfactory piece of furniture. Being beautifully finished and gracefully proportioned, a Globe-Wernicke Bookcase makes the home pleasanter and more inviting. Being sectionally constructed, a Globe-Wernicke Bookcase grows with your library and suits it to spaces of all shapes and sizes.

BEING made in many styles and finishes, there is a Globe-Wernicke Bookcase to harmonize with every furnishing trim. But if you want to know the all-around satisfaction of a Globe-Wernicke Bookcase, write for Catalog No. 362. Local representation nearly everywhere. Where not represented, goods shipped on approval, freight prepaid.

The Globe-Wernieke Co.

CINCINNATI


Makers of Sectional Bookcases and Filing Cabinets

Branch Stores: Philadelphia, Washington, Cincinnati, Chicago, Boston, New York

The Globe-Wernicke Co., Cincinnati:

| | CLE CE | 40 | | | | | | | | | | |
|---------|--|-----|--|-------|--------|-------|-----|----------------|-------------------|---------|------|----------|
| Without | obligating | the | undersigned, | WORL. | 333335 | send: | the | Globe-Wernicke | Bookimse | Catalog | Non! | "才的是"(4) |
| | COLUMN CONTRACTOR CONT | | A CONTRACTOR OF THE PARTY OF TH | | | | | | the second second | | | |

Address.

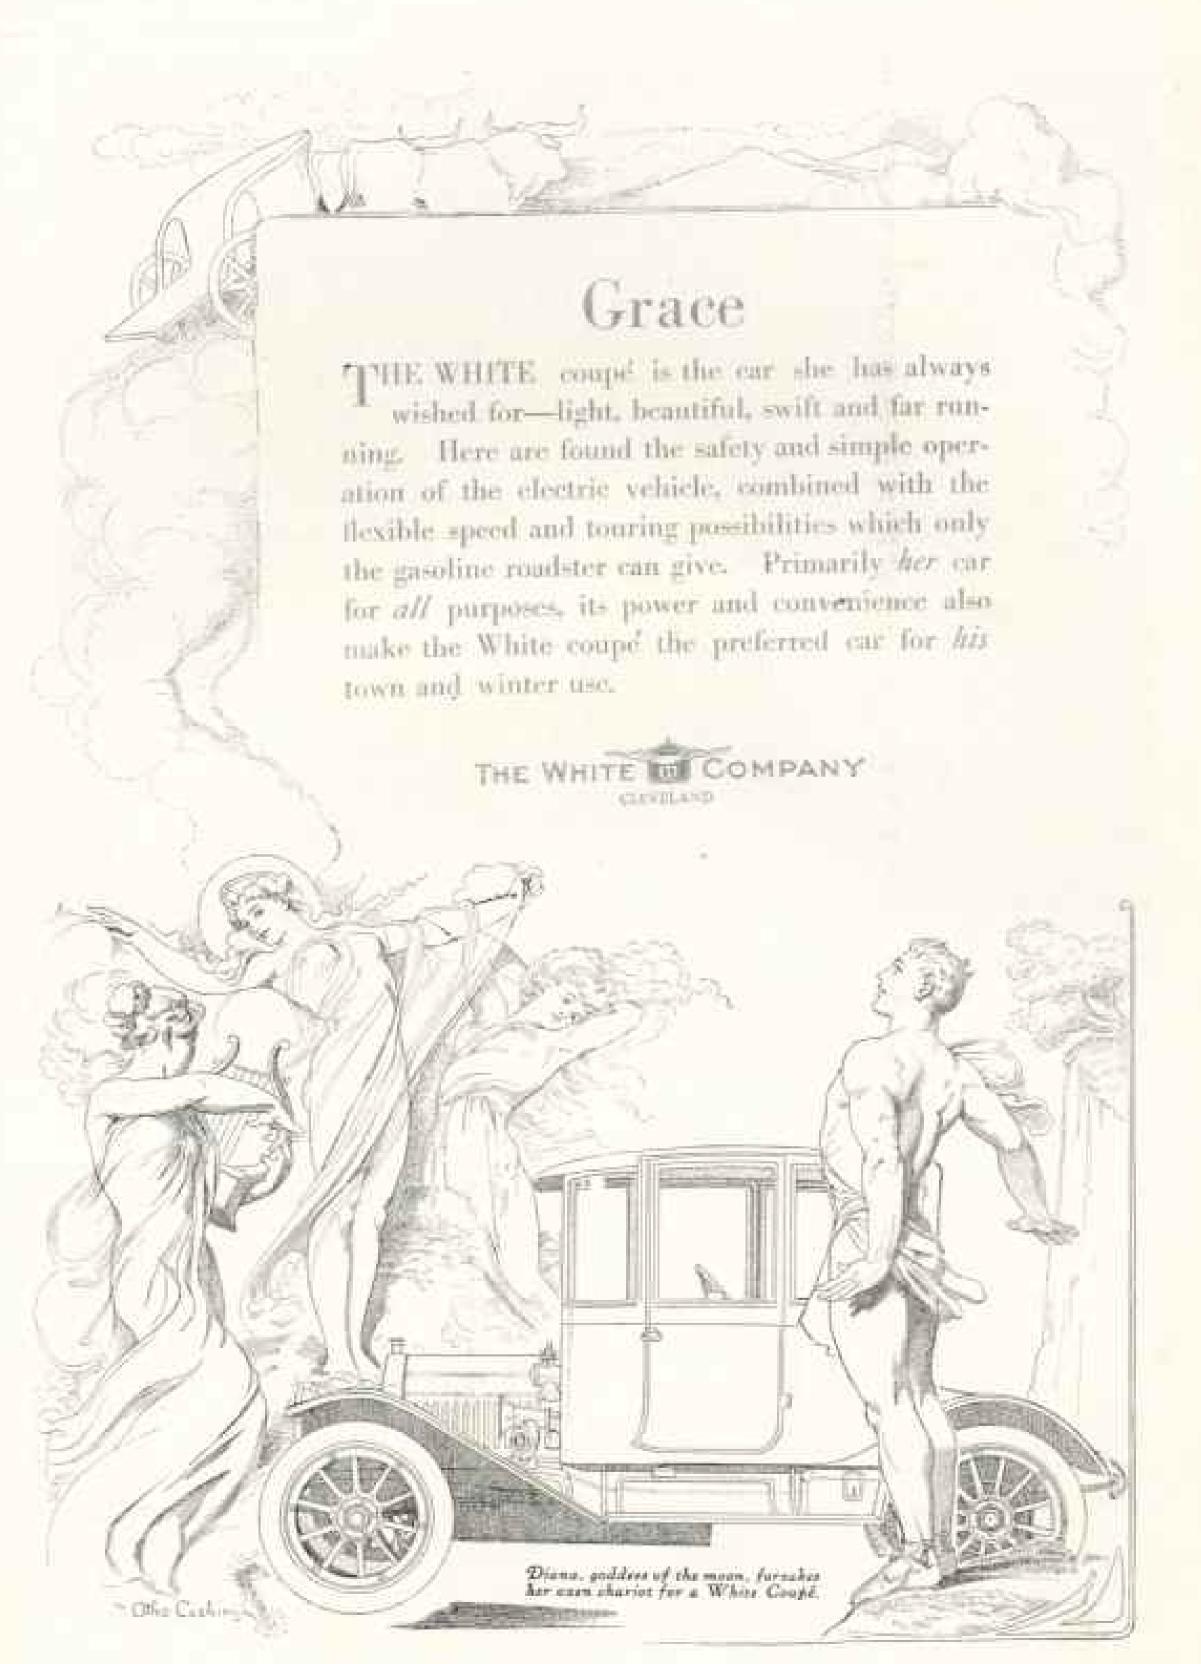

"Mention the Geographic-It identifies you."



Alba Shades at National Cash Register Co., Dayton, O.

2011 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 | 1912 |

How far-seeing managers are increasing profits

They hunt out the causes of "leaks". Poor light is one of these; it wastes labor, material, rent. They test their light and find out how Then they get better light and get more work with poor it is. fewer errors.

If this is good for other businesses, why not for yours? Why not test your light too-costs little and gives you the facts? Test with

Alba Shades and Globes

Alba Shades and Globes

Buy an Alba Shade from your dealer, place it on any lamp in your home or place of business instead of the shade you are using. Instantly you get better light and more of it. You then know that it will pay you to change to Alba on all of your lamps and stop money-leaks from poor light at once,

Our Illuminating Help Free

Our Engineering Department will plan your lighting. Send us your floor plans with helghis of calling, positions of benches, dosks, furniture, etc, showing size, number and present location of lamps.

For business lighting—write for Catalogue No. 47-V.

For home lighting—write for Catalogue No. 42-V.

Make a test and write for Catalogue No. 42-V.

Make a test and write for catalogue No. 42-V.

Make a test and write for catalogue No. 42-V.

Sales- and Show-rooms also in New York, Chicago, Philadelphia, Cincinnati St. Louis, Boston and Toronto



How proper lathering helps your razor

If you expect your razor to do its bestto cut clean, smooth and even-you must first soften your beard with the right lather.



STICK

The right lather has a double action on the beard, necessary to perfect softening. First the soap removes the natural oil which covers each hair; second, the water is thus allowed to reach the hair and thoroughly moisten the beard.

The right lather requires no mussy "rubbing in" with the fingers, because of this thorough moistening. The beard is quickly softened while the lather is being worked up on the face.



The right lather is Colgate's Shaving Lather, because it is based on these correct principles of shavingbecause it gives the right result—a cool, clean, comfortable shave.

STICK, POWDER, CREAM-Colgate's gives a wide choice of method and satisfies every shaver.

Buy your choice of the Colgate Shaving preparations at your dealer's. Or send us 4 cents in stamps for a trial size of the Stick, Powder, or Cream. Address: Colgate & Co., Dept. 66, 199 Fulton St., New York.



Colgate Preparations are most acceptable as Christmas Gifts.

SHAUING LATHER STICK - POWDER - CREAM